

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740619021

Status:

Active

Overview:

[vhdm](#)

Description:

2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, Lead Free, 80 Circuits, Pin Length 4.75mm (.187")

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Product Specification PS-74031-999 \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	74061
Application	Backplane
Application Tooling Documents	Tooling Manual
Comments	Keying Position B
Component Type	PCB Header
Overview	vhdm
Product Name	VHDM®
Style	N/A
Physical	
Circuits (Loaded)	80
Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Columns	N/A
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length (in)	0.098 In
PC Tail Length (mm)	2.50 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.070 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	30
Plating min: Termination (µm)	0.75
Polarized to PCB	Yes



image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

74061Series

Mates With

74040 VHDM® Board-to-Board Daughtercard Receptacle

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
VHDM® Signal Pin	0622015700
Insertion Repair Tool	
VHDM® 8 Row Pin	0622015900
and Shield Repair Tool	
VHDM® 8 Row	0622016100
Shield Extraction Tool	

Stackable	No	VHDM® Insertion <u>0622020205</u>
Surface Mount Compatible (SMC)	Yes	Module for Advanced
Temperature Range - Operating	105°C max	Mate Signal Header,
Termination Interface: Style	Through Hole - Compliant Pin	8 Row by 10 Wide,
		20.00mm (.787")
Electrical		VHDM® Insertion <u>0622020209</u>
Current - Maximum per Contact	1A	Module for Standard
Data Rate	3.125 Gbps	Shield Signal
Real Signals (per 25mm)	100	Header, 8 Row by
Shield Type	Ground Plane Shield	10 Wide, 20.00mm
Shielded	Yes	(.787")
Voltage - Maximum	120V AC (RMS)/DC	Flat Rock Tooling for <u>0622013700</u>
		Pneumatic Press
Material Info		
Reference - Drawing Numbers		
Product Specification	PS-74031-999	
Sales Drawing	SD-74061-002	
VHDM and Very High Density Metric are trademarks of Amphenol Corporation		

This document was generated on 06/01/2010




PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



BACKPLANE HOLE PATTERN RECOMMENDED DIMENSION

NOTES:

1. MATERIALS:
HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY
2. FINISHES:
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT
SPECIFICATION PS-74031-999
4. FOR MIXED CONTACT LENGTHS CONSULT
MOLEX FOR AVAILABILITY
5. FOR SPECIFIC MATERIAL NUMBERS & MATING
INFORMATION REFER TO SHEET 2
6. PACKAGE PER PK-74061-003
7. EITHER MARK PART WITH PART NUMBER & DATE
CODE APPROXIMATELY WHERE SHOWN OR PLACE
LABEL ON THE TUBE.

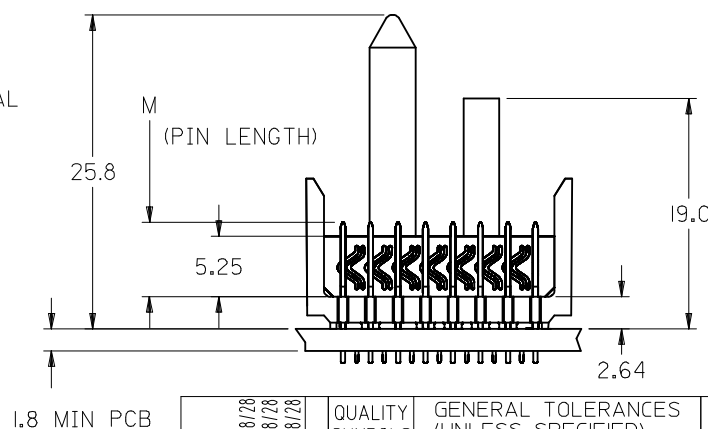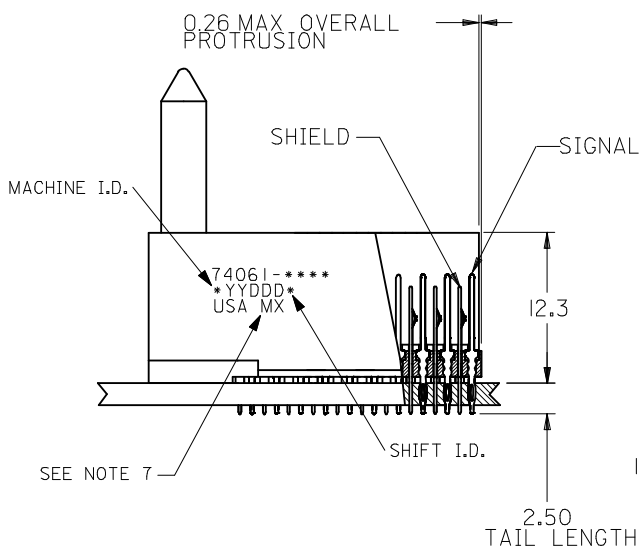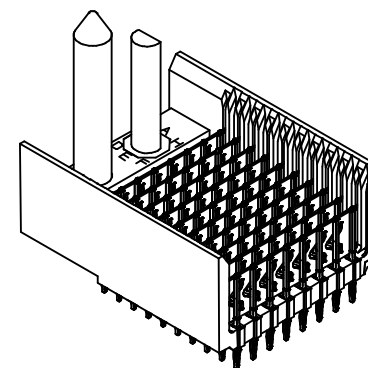

CORRECTED DIMS EC NO: UCP2008-0329 DRWN: JONI AK 2007/08/28 CHKD: JONI AK 2007/08/28 APPR: CBIXLER 2007/08/28			DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm			INCH	DRAWN BY DATE		TITLE			
		4 PLACES	± ---	± ---	MWANG		1998/11/09		VHDM 8 ROW		
		3 PLACES	± ---	± ---	CHECKED BY		DATE		SIGNAL END BACKPLANE		
		2 PLACES	± ---	± ---	JLAURX		1998/11/09		SALES ASSEMBLY		
		1 PLACE	± ---	± ---	APPROVED BY		DATE		MOLEX MOLEX INCORPORATED		
		ANGULAR ±1/2°			CIBIXER		1998/11/09		MOLEX MOLEX INCORPORATED		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
					SEE SHEET 2		SD-74061-002		1 OF 3		
N		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

F

M/N 74061-()	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
	O	A	B	C	D	E	F	G	H
KEYING PIN ORIENTATION									


74061 - * * * *

NUMBER OF COLUMNS/PLATING
 10 = 10 COLUMN TIN/LEAD
 12 = 12 COLUMN TIN/LEAD*
 25 = 25 COLUMN TIN/LEAD
 90 = 10 COLUMN MATTE TIN
 92 = 12 COLUMN MATTE TIN*
 85 = 25 COLUMN MATTE TIN

CONTACT LOAD
 (PIN LENGTH)
 1 & 6 = 4.75
 2 & 7 = 6.25
 3 & 8 = 4.25
 4 & 9 = 5.15

*12 COLUMN P/N'S ON SHEET 3

E

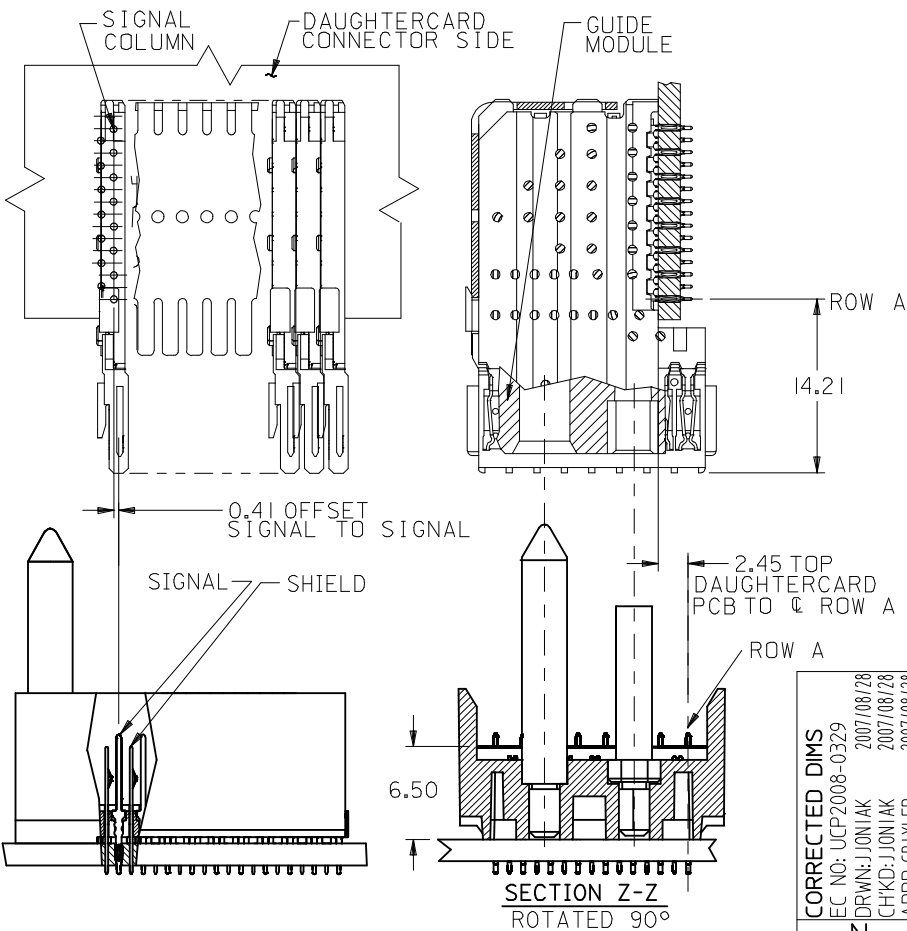

PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74061-0*1	10	80	10	27.00	18.00	4.75	0.76	0.76-1.52
74061-0*6							1.27	
74061-5*1	25	200	25	57.00	48.00	6.25	0.76	
74061-5*6							1.27	
74061-0*2	10	80	10	27.00	18.00	4.25	0.76	
74061-0*7							1.27	
74061-5*2	25	200	25	57.00	48.00	5.15	0.76	
74061-5*7							1.27	
74061-0*3	10	80	10	27.00	18.00	4.75	0.76	
74061-0*8							1.27	
74061-5*3	25	200	25	57.00	48.00	6.25	0.76	
74061-5*8							1.27	
74061-0*4	10	80	10	27.00	18.00	4.25	0.76	
74061-0*9							1.27	
74061-5*4	25	200	25	57.00	48.00	5.15	0.76	
74061-5*9							1.27	

B

A

CORRECTED DIMS
 EC NO: UCP2008-0329
 DRWN: JIONIAK 2007/08/28
 CHKD: JIONIAK 2007/08/28
 APPR: CBIXLER 2007/08/28

QUALITY SYMBOLS
 ▽=0
 ▽=0

GENERAL TOLERANCES
 (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

DIMENSION STYLE
 MM ONLY

DRAWN BY	DATE
MWANG	1998/11/09
CHECKED BY	DATE
JLAURX	1998/11/09
APPROVED BY	DATE
CBIXLER	1998/11/09

MATERIAL NO.

SCALE
 2.5:1

TITLE

DESIGN UNITS
 METRIC

THIRD ANGLE
 PROJECTION

VHDM 8 ROW
 SIGNAL END BACKPLANE
 SALES ASSEMBLY

MOLEX INCORPORATED

DOCUMENT NO.
 SD-74061-002

SHEET NO.
 2 OF 3

A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru