





**Flat Power-DIP4-pin type
with high capacity
up to 2A load current**

**PhotoMOS®
PD 1 Form A
(AQY27○)**

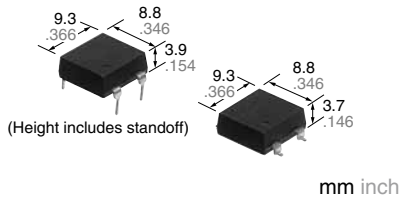

RoHS compliant

FEATURES

- 1. Flat-Packaged type**
(W) 8.8 × (D) 9.3 × (H) 3.9 mm
(W) .346 × (D) .366 × (H) .154 inch
- 2. High capacity of continuous load current 2A (AQY272)**
- 3. High sensitivity and low on-resistance**
Max. 2A load can be controlled with 5mA input current. The on-resistance is low at Typ. 0.11Ω (AQY272).

TYPICAL APPLICATIONS

- Measuring and Testing equipment
- IC Testers and Board Testers
- High speed inspection machines

TYPES

| Type | Output rating* | | Package | Part No. | | | | Packing quantity | |
|----------------|----------------|--------------|--------------------|-----------------------|------------------------------|------------------------------|----------|--|------------|
| | Load voltage | Load current | | Through hole terminal | Surface-mount terminal | | Tube | Tape and reel | |
| | | | | | Tape and reel packing style | | | | |
| | | | Tube packing style | | Picked from the 1/2-pin side | Picked from the 3/4-pin side | | | |
| AC/DC dual use | 60V | 2.0A | Power-DIP4-pin | AQY272 | AQY272A | AQY272AX | AQY272AZ | 1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs. | 1,000 pcs. |
| | 100V | 1.3A | | AQY275 | AQY275A | AQY275AX | AQY275AZ | | |
| | 200V | 0.65A | | AQY277 | AQY277A | AQY277AX | AQY277AZ | | |
| | 400V | 0.35A | | AQY274 | AQY274A | AQY274AX | AQY274AZ | | |

* Indicate the peak AC and DC values.
Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQY272(A) | AQY275(A) | AQY277(A) | AQY274(A) | Remarks |
|-------------------------|-------------------------|-------------------|-----------------------------|-----------|-----------|-----------|-------------------------------------|
| Input | LED forward current | I _F | 50 mA | | | | |
| | LED reverse voltage | V _R | 5 V | | | | |
| | Peak forward current | I _{FP} | 1 A | | | | f = 100 Hz, Duty factor = 0.1% |
| | Power dissipation | P _{in} | 75 mW | | | | |
| Output | Load voltage (peak AC) | V _L | 60 V | 100 V | 200 V | 400 V | |
| | Continuous load current | I _L | 2.0 A | 1.3 A | 0.65 A | 0.35 A | Peak AC, DC |
| | Peak load current | I _{peak} | 6.0 A | 4.0 A | 2.0 A | 1.0 A | 100ms (1 shot), V _L = DC |
| | Power dissipation | P _{out} | 700 mW | | | | |
| Total power dissipation | | P _T | 750 mW | | | | |
| I/O isolation voltage | | V _{iso} | 2,500 Vrms | | | | |
| Ambient temperature | Operating | T _{opr} | -40 to +85°C -40 to +185°F | | | | (Non-icing at low temperatures) |
| | Storage | T _{stg} | -40 to +100°C -40 to +212°F | | | | |

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQY272(A) | AQY275(A) | AQY277(A) | AQY274(A) | Condition |
|----------------------------------|---------------------------|---|-----------|-----------|-----------|-----------------------|--|
| Input | LED operate current | Typical | 1.0 mA | | | | $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ |
| | | Maximum | 3.0 mA | | | | |
| | LED turn off current | Minimum | 0.4 mA | | | | $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ |
| | | Typical | 0.9 mA | | | | |
| LED dropout voltage | Typical | 1.25 V (1.16 V at $I_F = 10 \text{ mA}$) | | | | $I_F = 50 \text{ mA}$ | |
| | Maximum | 1.5 V | | | | | |
| Output | On resistance | Typical | 0.11 Ω | 0.23 Ω | 0.7 Ω | 2.1 Ω | $I_F = 10 \text{ mA}$, $I_L = \text{Max.}$ Within 1 s |
| | | Maximum | 0.18 Ω | 0.34 Ω | 1.1 Ω | 3.2 Ω | |
| | Off state leakage current | Maximum | 10 μA | | | | $I_F = 0 \text{ mA}$, $V_L = \text{Max.}$ |
| Transfer characteristics | Turn on time* | Typical | 2.46 ms | 2.40 ms | 1.12 ms | 1.65 ms | $I_F = 10 \text{ mA}$, $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ |
| | | Maximum | 5.0 ms | | | | |
| | | Typical | 5.64 ms | 5.65 ms | 2.57 ms | 3.88 ms | $I_F = 5 \text{ mA}$, $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ |
| | | Maximum | 10.0 ms | | | | |
| | Turn off time* | Typical | 0.22 ms | 0.21 ms | 0.10 ms | 0.08 ms | $I_F = 5 \text{ mA}$ or 10 mA , $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ |
| | | Maximum | 3.0 ms | | | | |
| | I/O capacitance | Typical | 0.8 pF | | | | $f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$ |
| | | Maximum | 1.5 pF | | | | |
| Initial I/O isolation resistance | Minimum | R_{iso} | 1,000 MΩ | | | | 500 V DC |
| Max. operating frequency | Maximum | — | 0.5 cps | | | | $I_F = 10 \text{ mA}$, Duty factor = 50% $I_L = \text{Max.}$, $V_L = \text{Max.}$ |

*Turn on/Turn off time

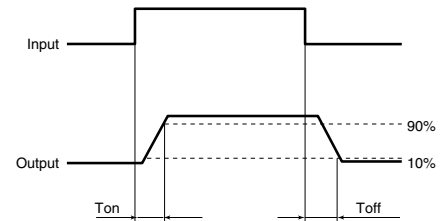

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | | Symbol | Min. | Max. | Unit |
|-------------|-------------------------|--------|------|------|------|
| LED current | | I_F | 5 | 30 | mA |
| AQY272(A) | Load voltage (Peak AC) | V_L | — | 48 | V |
| | Continuous load current | I_L | — | 2.0 | A |
| AQY275(A) | Load voltage (Peak AC) | V_L | — | 80 | V |
| | Continuous load current | I_L | — | 1.3 | A |
| AQY277(A) | Load voltage (Peak AC) | V_L | — | 160 | V |
| | Continuous load current | I_L | — | 0.65 | A |
| AQY274(A) | Load voltage (Peak AC) | V_L | — | 320 | V |
| | Continuous load current | I_L | — | 0.35 | A |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

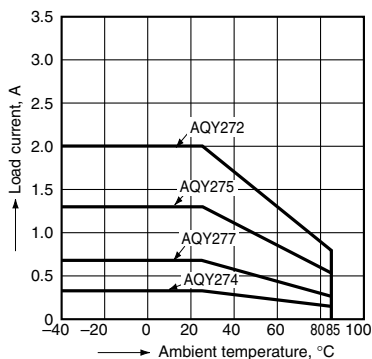


2.-(1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
Continuous load current: 2.0 A (DC) (AQY272),
1.3 A (DC) (AQY275)

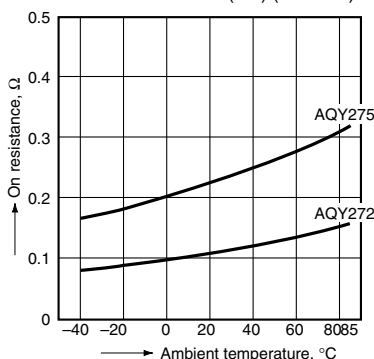


2.-(2) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
Continuous load current: 0.65 A (DC) (AQY277),
0.35 A (DC) (AQY274)

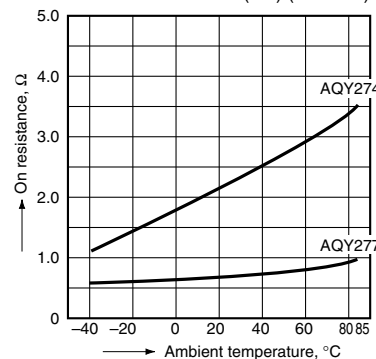


3. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

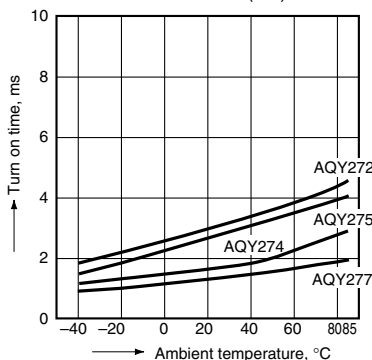


4. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

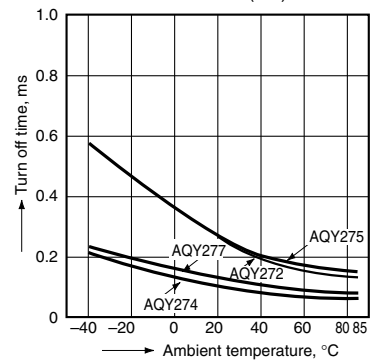


5. LED operate vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

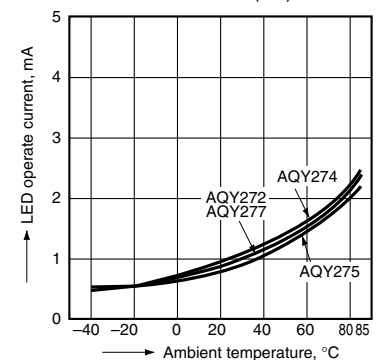


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

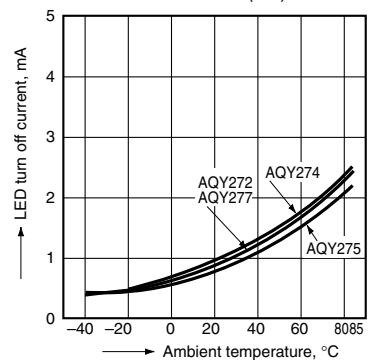


7. LED dropout voltage vs. ambient temperature characteristics

Sample: all types;
LED current: 5 to 50 mA

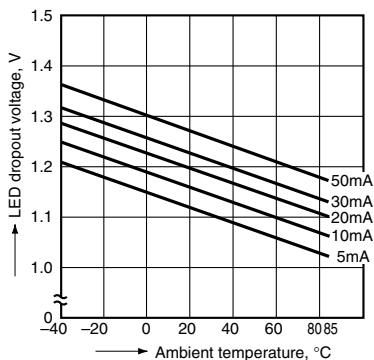


8. Current vs. voltage characteristics of output at MOS portion

Ambient temperature: 25°C 77°F

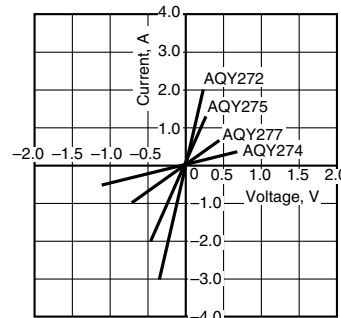


9.-(1) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

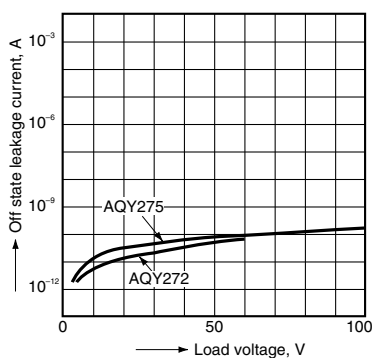


9.-(2) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

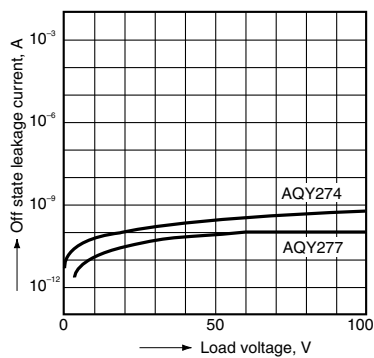


10. Turn on time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current:
100 mA (DC); Ambient temperature: 25°C 77°F

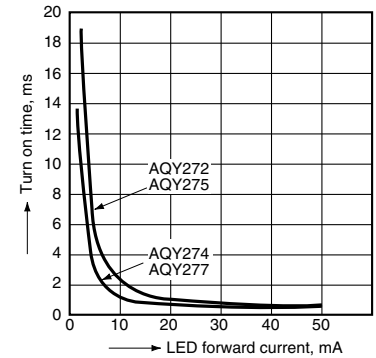


11. Turn off time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

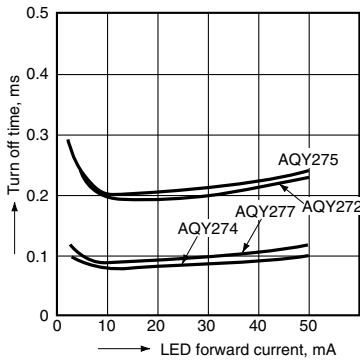


12.-(1) Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

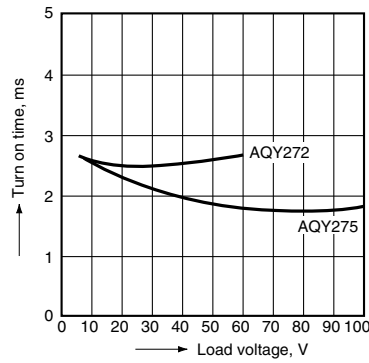


12.-(2) Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

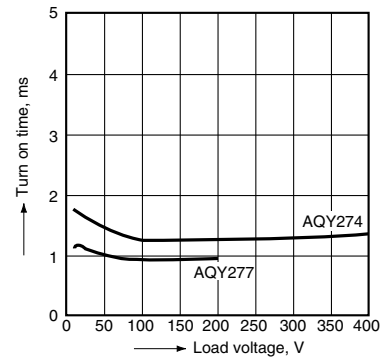


13.-(1) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

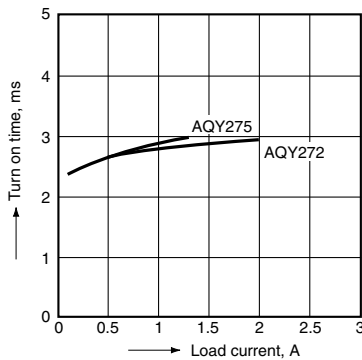


13.-(2) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

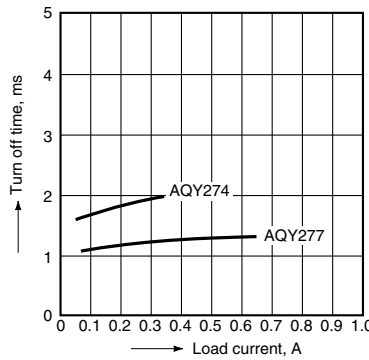


14.-(1) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

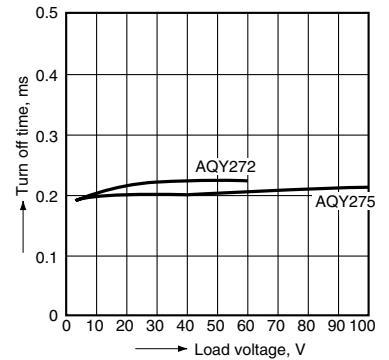


14.-(2) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

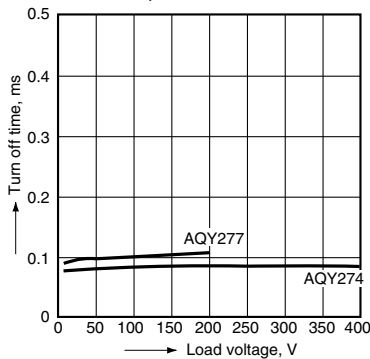


15.-(1) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

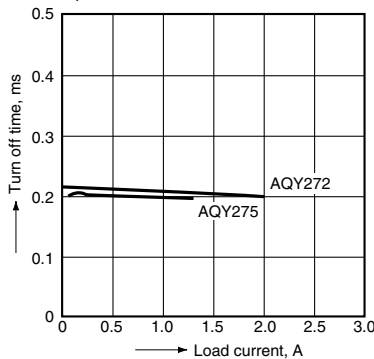

15.-(2) Turn off time vs. load current characteristics


LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

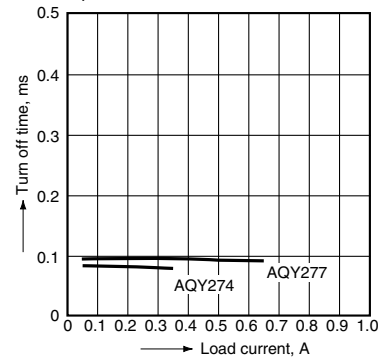

16. Max. operating frequency vs. load voltage/ current characteristics


Sample: All types; LED current: 10 mA; Ambient temperature: 25°C 77°F

V_L : Load voltage, V_L (Max.): Max. rated load voltage
 I_L : Load current, I_L (Max.): Max. rated continuous load current

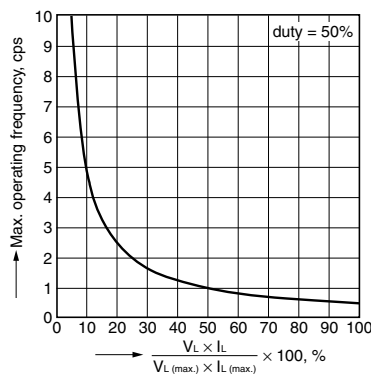

17. Output capacitance vs. applied voltage characteristics

Frequency: 1 MHz; Ambient temperature: 25°C 77°F

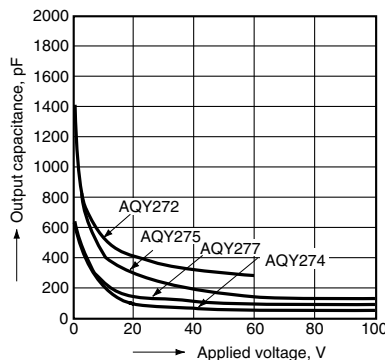

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQY272A](#) [AQY275A](#) [AQY277A](#) [AQY272](#) [AQY274](#) [AQY212FG2SX](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru