




Models: ESR901, ESR902 and ESR904 Industrial Ethernet Serial Servers

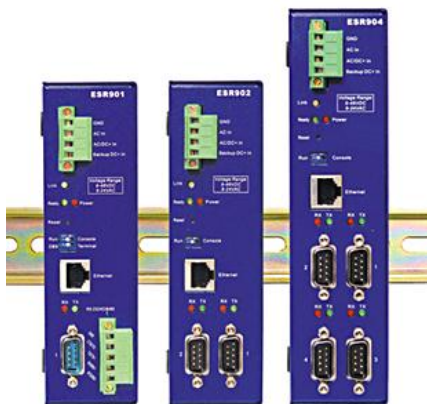

Features


- ✓ Ethernet Enable 1, 2, or 4 Serial Ports
- ✓ IP 30 DIN Rail Mountable Case
- ✓ RS-232/422/485 Full and Half-duplex
- ✓ Auto detect 10/100 Mbps Ethernet
- ✓ Virtual COM Drivers for Windows NT/98/ME/2000/2003/XP and Vista

Functional Description

Industrial and commercial measurement and control systems often have standalone devices with unused serial ports. B&B Electronics' ESR Serial Servers allow you to connect those ports into your existing LAN or WAN, giving you access to more information and the ability to configure, manage and troubleshoot those devices from a control room, office or even a distant location via a WAN. Save the cost, time and trouble of carrying a laptop out to devices located in distant, cold, dirty or uncomfortable environments.

ESR Serial Servers are built for use in industrial environments, featuring an IP30 approved slim line DIN rail mountable case. They operate from a range of voltages using AC or DC power, feature terminal block power connectors and even support redundant DC power.

Connect your serial device to the ESR's serial port and connect the ESR to your LAN. Your networked computer 'sees' the device over the network as a virtual serial connection. ESR serial servers support TCP or UDP protocols and allow transmitting to and receiving from multiple IP addresses. There are four methods of configuring ESR serial servers: via Vlinx Management Software, Web Server, Telnet or via a direct RS-232 console connection using a terminal program

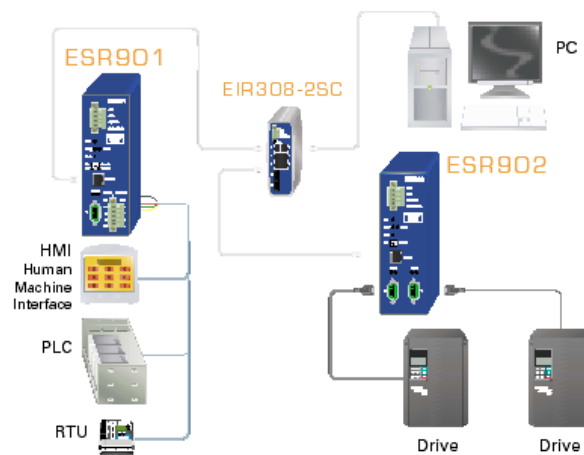

Ordering Information

Model Number	Description
ESR-901	1 Serial Port Industrial Ethernet Serial Server
ESR-902	2 Serial Port Industrial Ethernet Serial Server
ESR-904	4 Serial Port Industrial Ethernet Serial Server
Accessories	
MDR-40-12	Industrial Slim-line Power Supply

Operation

- A detailed operating manual is contained on the CD ROM which ships with the product.
- Vlinx™ Manager Software allows easy access to the serial server to configure the server and its ports, upgrade server firmware and monitor port status and activity. When the Vlinx Manager opens it will search for and display all serial servers on the network. The Monitor Port feature allows you to use any PC on the LAN/WAN to actively view and troubleshoot the communications status. It shows when there is a client connection to the server and the client IP address. It displays the number of bytes transmitted and received as well as the status of the hardware handshaking lines
- ESR serial servers can be accessed and configured from any web browser (such as Internet Explorer) on the LAN/WAN. This allows you to remotely manage the software and your serial device. It also allows off-site troubleshooting
- Vlinx Serial Servers provide automatic resumption of the TCP data connection in case of a power failure or loss of an Ethernet connection on either the client or server. Once the Heartbeat connection is established, the server sends a signal to the client every five seconds until communication is re-established. Without this feature a device that loses a connection and stops communicating would not be able to reconnect without a person attending to the problem. The Heartbeat feature works with virtual COM and TCP direct IP connections.

Specifications

Serial

Serial Interfaces: RS-232 (DTE), RS-422, RS-485 (2/4-Wire)
 Serial Connectors: ESR901: TB and DB9 M (selectable)
 ESR902: 2 x DB9 M
 ESR904: 4 x DB9 M
 Baud Rate: 110 to 230.4 kbps
 Parity: None, Even, Odd, Mark, Space
 Data Bits: 5, 6, 7, or 8
 Stop Bits: 1, 1.5, or 2
 Serial Buffer 8 kb per port

Note: Refer to the manual for pin-outs and signals.

Power

Voltage: 9 to 48 VDC or 8 to 24 VAC
 Power Consumption: ESR901: 320 mA @ 12 VDC
 ESR902: 340 mA @ 12 VDC
 ESR904: 326mA @ 12 VDC
 Connector: Removable Terminal Block

Ethernet

Connector: RJ-45 F
 Data Rate: 10/100 Mbps Auto-detecting 10BaseT or 1000BaseTx
 Protocols: TCP, IP, ARP, DHCP, Telnet, HTTP, UDP, ICMP

Configuration

Console: RS-232 w/ VT100 Emulation
 Telnet: HyperTerminal w/VT100 Emulation
 ESP Manager: Compatible w/Win98, ME, 2000, 2003, XP, NT, and Vista
 HTTP: Embedded Web Page

Environment

Operating Temp: -14 to 176 F (-10 to 80 C)
 Storage Temp: -4 to 185 F (-20 to 85 C)
 Humidity: 5 to 95% Non-condensing

Dimensions

ESR901/902: 1.75 x 6.1 x 4.1 in
 (4.46 x 15.52 x 10.46 cm)
 ESR904: 1.75 x 7.1 x 4.1 in
 (4.46 x 18.03 x 10.46 cm)
 Enclosure: IP 30
 Approvals: CE, FCC

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru