

FEATURES

Fixed gain of 17.4 dB
Broadband operation from 30 MHz to 6 GHz
Input/output internally matched to 50 Ω
Integrated bias control circuit
OIP3 of 34.9 dBm at 900 MHz
P1dB of 17.6 dBm at 900 MHz
Noise figure of 2.9 dB at 900 MHz
Single 5 V power supply
Low quiescent current of 55 mA
Wide operating temperature range of -40°C to $+105^{\circ}\text{C}$
Thermally efficient SOT-89 package
ESD rating of ± 1.5 kV (Class 1C)

GENERAL DESCRIPTION

The [ADL5544](#) is a single-ended RF/IF gain block amplifier that provides broadband operation from 30 MHz to 6 GHz. The [ADL5544](#) provides over 34 dBm of OIP3 using only 55 mA from a 5 V supply.

The [ADL5544](#) provides a gain of 17 dB, which is stable over frequency, temperature, power supply, and from device to device. The amplifier is offered in the industry-standard SOT-89 package and is internally matched to 50 Ω at the input and output, making the [ADL5544](#) very easy to implement in a wide variety of applications. The only external components required are the input/output ac coupling capacitors, power supply decoupling capacitors, and dc bias inductor.


FUNCTIONAL BLOCK DIAGRAM

Figure 1.

The [ADL5544](#) is fabricated on an InGaP HBT process and has a high ESD rating of ± 1.5 kV (Class 1C). The [ADL5544](#) is also fully specified for operation across the wide temperature range of -40°C to $+105^{\circ}\text{C}$. A fully populated RoHS-compliant evaluation board is available.

TABLE OF CONTENTS

| | | | |
|--|---|---|----|
| Features | 1 | 100 MHz to 500 MHz Frequency Band | 10 |
| Functional Block Diagram | 1 | 4 GHz to 6 GHz Frequency Band | 11 |
| General Description | 1 | General..... | 12 |
| Revision History | 2 | Applications Information | 14 |
| Specifications..... | 3 | Basic Connections..... | 14 |
| Typical Scattering Parameters (S-Parameters) | 5 | Soldering Information and Recommended | |
| Absolute Maximum Ratings..... | 7 | PCB Land Pattern..... | 15 |
| Thermal Resistance | 7 | Operation Down to 30 MHz..... | 16 |
| ESD Caution..... | 7 | W-CDMA ACPR Performance | 16 |
| Pin Configuration and Function Descriptions..... | 8 | Evaluation Board | 17 |
| Typical Performance Characteristics | 9 | Outline Dimensions | 18 |
| 500 MHz to 4 GHz Frequency Band..... | 9 | Ordering Guide | 18 |

REVISION HISTORY

4/13—Revision 0: Initial Version

SPECIFICATIONS

$V_{POS} = 5\text{ V}$ and $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

| Parameter | Test Conditions/Comments | Min | Typ | Max | Unit |
|-------------------------------|---|------|------------|------|------|
| OVERALL FUNCTION | | | | | |
| Frequency Range | | 30 | | 6000 | MHz |
| FREQUENCY = 30 MHz | | | | | |
| Gain | | | 18.5 | | dB |
| Output 1 dB Compression Point | | | 13.0 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 31.2 | | dBm |
| Noise Figure | | | 3.9 | | dB |
| FREQUENCY = 140 MHz | | | | | |
| Gain | | | 18.04 | | dB |
| vs. Frequency | $\pm 10\text{ MHz}$ | | ± 0.04 | | dB |
| vs. Temperature | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | ± 0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ± 0.05 | | dB |
| Output 1 dB Compression Point | | | 16.9 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 32.0 | | dBm |
| Noise Figure | | | 3.1 | | dB |
| FREQUENCY = 350 MHz | | | | | |
| Gain | | | 17.8 | | dB |
| vs. Frequency | $\pm 10\text{ MHz}$ | | ± 0.01 | | dB |
| vs. Temperature | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | ± 0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ± 0.06 | | dB |
| Output 1 dB Compression Point | | | 17.4 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 31.2 | | dBm |
| Noise Figure | | | 3.1 | | dB |
| FREQUENCY = 700 MHz | | | | | |
| Gain | | 17.1 | 17.6 | 18.0 | dB |
| vs. Frequency | $\pm 50\text{ MHz}$ | | ± 0.03 | | dB |
| vs. Temperature | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | ± 0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ± 0.02 | | dB |
| Output 1 dB Compression Point | | | 17.4 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 33.4 | | dBm |
| Noise Figure | | | 2.9 | | dB |
| FREQUENCY = 900 MHz | | | | | |
| Gain | | 17.0 | 17.4 | 17.8 | dB |
| vs. Frequency | $\pm 50\text{ MHz}$ | | ± 0.03 | | dB |
| vs. Temperature | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | ± 0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ± 0.02 | | dB |
| Output 1 dB Compression Point | | | 17.6 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 34.9 | | dBm |
| Noise Figure | | | 2.9 | | dB |
| FREQUENCY = 1900 MHz | | | | | |
| Gain | | 16.2 | 16.6 | 17.0 | dB |
| vs. Frequency | $\pm 50\text{ MHz}$ | | ± 0.05 | | dB |
| vs. Temperature | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ | | ± 0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ± 0.04 | | dB |
| Output 1 dB Compression Point | | | 15.4 | | dBm |
| Output Third-Order Intercept | $\Delta f = 1\text{ MHz}$, output power (P_{OUT}) = -7 dBm per tone | | 32.4 | | dBm |
| Noise Figure | | | 3.4 | | dB |

| Parameter | Test Conditions/Comments | Min | Typ | Max | Unit |
|-------------------------------|--|------|-------|------|------|
| FREQUENCY = 2140 MHz | | | | | |
| Gain | | 15.9 | 16.4 | 16.7 | dB |
| vs. Frequency | ±50 MHz | | ±0.04 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±0.4 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.05 | | dB |
| Output 1 dB Compression Point | | | 14.8 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 31.3 | | dBm |
| Noise Figure | | | 3.5 | | dB |
| FREQUENCY = 2600 MHz | | | | | |
| Gain | | 15.6 | 16.0 | 16.4 | dB |
| vs. Frequency | ±50 MHz | | ±0.03 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±0.3 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.05 | | dB |
| Output 1 dB Compression Point | | | 14.1 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 30.0 | | dBm |
| Noise Figure | | | 3.7 | | dB |
| FREQUENCY = 3500 MHz | | | | | |
| Gain | | 15.2 | 15.6 | 16.1 | dB |
| vs. Frequency | ±50 MHz | | ±0.05 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±0.4 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.03 | | dB |
| Output 1 dB Compression Point | | | 12.2 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 26.0 | | dBm |
| Noise Figure | | | 4.1 | | dB |
| FREQUENCY = 4000 MHz | | | | | |
| Gain | | 14.4 | 15.0 | 15.5 | dB |
| vs. Frequency | ±50 MHz | | ±0.10 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±0.6 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.08 | | dB |
| Output 1 dB Compression Point | | | 10.8 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 23.8 | | dBm |
| Noise Figure | | | 4.6 | | dB |
| FREQUENCY = 5000 MHz | | | | | |
| Gain | | | 14.0 | | dB |
| vs. Frequency | ±50 MHz | | ±0.04 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±0.6 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.10 | | dB |
| Output 1 dB Compression Point | | | 8.7 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 21.3 | | dBm |
| Noise Figure | | | 4.8 | | dB |
| FREQUENCY = 5800 MHz | | | | | |
| Gain | | | 14.5 | | dB |
| vs. Frequency | ±50 MHz | | ±0.15 | | dB |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | ±1.0 | | dB |
| vs. Supply | 4.75 V to 5.25 V | | ±0.10 | | dB |
| Output 1 dB Compression Point | | | 7.0 | | dBm |
| Output Third-Order Intercept | Δf = 1 MHz, output power (P _{OUT}) = −7 dBm per tone | | 18.7 | | dBm |
| Noise Figure | | | 5.4 | | dB |
| POWER INTERFACE | | | | | |
| Supply Voltage | V _{POS} | 4.75 | 5 | 5.25 | V |
| Supply Current | | | 55 | 69 | mA |
| vs. Temperature | −40°C ≤ T _A ≤ +85°C | | −5 | | mA |
| Power Dissipation | V _{POS} = 5 V | | 275 | | mW |

TYPICAL SCATTERING PARAMETERS (S-PARAMETERS)

$V_{POS} = 5\text{ V}$ and $T_A = 25^\circ\text{C}$. The effects of the test fixture have been deembedded up to the pins of the device.

Table 2.

| Frequency (MHz) | S11 | | S21 | | S12 | | S22 | |
|-----------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) |
| 30 | -9.75838 | -92.0495 | 19.91469 | 160.691 | -21.4134 | 19.08688 | -10.175 | -100.818 |
| 50 | -13.0161 | -114.478 | 18.9406 | 163.9441 | -21.1763 | 10.75632 | -12.7436 | -124.228 |
| 100 | -15.8296 | -142.951 | 18.34431 | 167.4073 | -21.0719 | 3.454046 | -14.8272 | -150.688 |
| 200 | -16.7468 | -164.185 | 18.13374 | 166.5362 | -21.059 | -2.10036 | -15.7366 | -169.056 |
| 300 | -16.7917 | -173.294 | 18.0488 | 163.4408 | -21.0741 | -5.56114 | -15.9476 | -177.5 |
| 400 | -16.7639 | -178.57 | 17.97824 | 159.7115 | -21.0901 | -8.54887 | -15.9985 | 177.0591 |
| 500 | -16.6368 | 176.8142 | 17.91669 | 155.6494 | -21.1284 | -11.3218 | -15.9997 | 172.8508 |
| 600 | -16.5495 | 172.727 | 17.85356 | 151.5874 | -21.1641 | -13.9309 | -15.9194 | 169.301 |
| 700 | -16.4931 | 169.7664 | 17.77106 | 147.4093 | -21.2044 | -16.5131 | -15.8227 | 166.4768 |
| 800 | -16.4227 | 166.4253 | 17.71131 | 143.3218 | -21.2438 | -19.0298 | -15.7257 | 163.7476 |
| 900 | -16.3553 | 163.4457 | 17.66826 | 139.1424 | -21.2871 | -21.5022 | -15.5947 | 162.0291 |
| 1000 | -16.4799 | 160.784 | 17.58888 | 134.9062 | -21.3302 | -23.9656 | -15.6619 | 160.4644 |
| 1100 | -16.4953 | 158.6829 | 17.53756 | 130.7521 | -21.3803 | -26.4082 | -15.644 | 159.4497 |
| 1200 | -16.7606 | 157.8074 | 17.47488 | 126.5829 | -21.4161 | -28.8192 | -15.8311 | 159.6244 |
| 1300 | -16.9103 | 157.3382 | 17.44318 | 122.3575 | -21.4674 | -31.2788 | -15.9907 | 159.7403 |
| 1400 | -17.2225 | 158.2929 | 17.38821 | 118.1946 | -21.5203 | -33.7399 | -16.21 | 160.9107 |
| 1500 | -17.6402 | 160.1629 | 17.33858 | 114.0765 | -21.5672 | -36.1081 | -16.539 | 162.8989 |
| 1600 | -18.0653 | 164.333 | 17.32871 | 109.7247 | -21.6024 | -38.6986 | -16.7579 | 165.3782 |
| 1700 | -18.5601 | 169.5526 | 17.27848 | 105.5495 | -21.6825 | -41.0309 | -17.0431 | 169.2425 |
| 1800 | -19.01 | 177.6071 | 17.22524 | 101.4425 | -21.7323 | -43.4108 | -17.1957 | 174.945 |
| 1900 | -19.1982 | -173.627 | 17.19407 | 97.28532 | -21.7873 | -45.7867 | -17.2297 | -179.104 |
| 2000 | -19.156 | -163.672 | 17.14779 | 93.09047 | -21.8417 | -48.1855 | -17.0968 | -171.974 |
| 2100 | -18.7447 | -154.484 | 17.1201 | 88.86399 | -21.8994 | -50.5584 | -16.8241 | -164.872 |
| 2200 | -18.2725 | -146.868 | 17.06239 | 84.78041 | -21.9604 | -52.8879 | -16.481 | -158.228 |
| 2300 | -17.5769 | -140.357 | 17.00071 | 80.71247 | -22.0229 | -55.1919 | -16.0694 | -152.253 |
| 2400 | -16.9363 | -136.067 | 16.97464 | 76.65373 | -22.0831 | -57.4478 | -15.6966 | -147.411 |
| 2500 | -16.3707 | -133.128 | 16.91632 | 72.6253 | -22.1477 | -59.6933 | -15.4361 | -143.919 |
| 2600 | -15.8425 | -131.025 | 16.84092 | 68.6308 | -22.2125 | -61.938 | -15.2228 | -141.803 |
| 2700 | -15.4474 | -130.097 | 16.80102 | 64.69363 | -22.2782 | -64.111 | -15.209 | -141.248 |
| 2800 | -15.1642 | -129.731 | 16.74106 | 60.74876 | -22.3485 | -66.3047 | -15.2585 | -142.511 |
| 2900 | -14.9231 | -130.057 | 16.68572 | 56.76032 | -22.4164 | -68.5093 | -15.3514 | -145.642 |
| 3000 | -14.8791 | -130.912 | 16.64527 | 52.71256 | -22.4858 | -70.6726 | -15.4628 | -150.396 |
| 3100 | -14.8847 | -132.738 | 16.56622 | 48.69909 | -22.5616 | -72.9343 | -15.4514 | -156.986 |
| 3200 | -14.9364 | -134.966 | 16.51404 | 44.62054 | -22.636 | -75.1868 | -15.2627 | -164.185 |
| 3300 | -15.1065 | -138.423 | 16.45702 | 40.56141 | -22.7184 | -77.4701 | -14.9704 | -171.492 |
| 3400 | -15.2148 | -142.265 | 16.38871 | 36.48298 | -22.8123 | -79.8304 | -14.4379 | -178.173 |
| 3500 | -15.2414 | -147.094 | 16.3331 | 32.32549 | -22.9021 | -82.0942 | -13.8431 | 175.3551 |
| 3600 | -15.0937 | -152.434 | 16.26873 | 28.0511 | -23.0024 | -84.4293 | -13.2863 | 169.8835 |
| 3700 | -14.8339 | -157.56 | 16.2039 | 23.84273 | -23.1015 | -86.7756 | -12.7034 | 164.8455 |
| 3800 | -14.3558 | -162.074 | 16.11548 | 19.63339 | -23.2085 | -89.1254 | -12.1263 | 160.5459 |
| 3900 | -13.7757 | -166.117 | 16.03442 | 15.32869 | -23.3318 | -91.426 | -11.5679 | 156.6935 |
| 4000 | -13.0504 | -169.18 | 15.92646 | 11.18556 | -23.4494 | -93.8454 | -10.9616 | 153.5414 |
| 4100 | -12.3247 | -171.219 | 15.82941 | 6.975896 | -23.577 | -96.1196 | -10.3638 | 151.0243 |
| 4200 | -11.6347 | -173.249 | 15.72571 | 2.726895 | -23.7138 | -98.3778 | -9.78722 | 149.3781 |
| 4300 | -10.9654 | -174.775 | 15.58441 | -1.36477 | -23.8541 | -100.612 | -9.23037 | 148.452 |
| 4440 | -10.2422 | -176.69 | 15.44684 | -7.08335 | -24.0446 | -103.673 | -8.61459 | 148.1682 |
| 4500 | -9.95152 | -177.613 | 15.38641 | -9.50947 | -24.1234 | -104.95 | -8.40319 | 148.3894 |
| 4600 | -9.51739 | -178.831 | 15.2557 | -13.503 | -24.2418 | -107.053 | -8.1407 | 148.9119 |

| Frequency (MHz) | S11 | | S21 | | S12 | | S22 | |
|-----------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) | Magnitude (dB) | Angle (°) |
| 4700 | -9.15961 | 179.4184 | 15.18857 | -17.5037 | -24.3599 | -109.077 | -8.00124 | 149.4702 |
| 4800 | -8.81402 | 177.4327 | 15.08704 | -21.4903 | -24.4618 | -111.079 | -7.96813 | 149.7089 |
| 4900 | -8.53104 | 175.2276 | 14.98061 | -25.462 | -24.5534 | -113.068 | -8.06461 | 149.4032 |
| 5000 | -8.30896 | 172.6355 | 14.92996 | -29.3613 | -24.6449 | -114.946 | -8.27561 | 148.5568 |
| 5100 | -8.09121 | 170.0194 | 14.84603 | -33.2282 | -24.7131 | -116.819 | -8.51734 | 146.6025 |
| 5200 | -7.92674 | 167.1306 | 14.7721 | -37.1236 | -24.7652 | -118.67 | -8.77718 | 143.5944 |
| 5300 | -7.79364 | 163.9153 | 14.72301 | -41.0236 | -24.8151 | -120.546 | -8.99346 | 139.518 |
| 5400 | -7.6793 | 160.6589 | 14.64549 | -45.0881 | -24.8399 | -122.534 | -9.12197 | 134.7305 |
| 5500 | -7.61523 | 156.9392 | 14.59131 | -49.1815 | -24.8628 | -124.569 | -9.17338 | 129.7103 |
| 5600 | -7.60815 | 152.7976 | 14.53579 | -53.2876 | -24.8758 | -126.604 | -9.15423 | 124.593 |
| 5700 | -7.54914 | 148.5617 | 14.47484 | -57.5187 | -24.8597 | -128.793 | -9.05211 | 119.5068 |
| 5800 | -7.51209 | 143.7768 | 14.45495 | -61.7253 | -24.8296 | -131.021 | -9.00726 | 114.4158 |
| 5900 | -7.46152 | 138.6641 | 14.42222 | -66.0417 | -24.7902 | -133.375 | -9.00598 | 109.1347 |
| 6000 | -7.35914 | 133.6743 | 14.38015 | -70.439 | -24.7398 | -135.849 | -9.00546 | 103.4141 |

ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter | Rating |
|--|-----------------|
| Supply Voltage, V_{POS} | 6.5 V |
| Input Power (50 Ω Impedance) | 18 dBm |
| Internal Power Dissipation (Pad Soldered to Ground) | 400 mW |
| Maximum Junction Temperature | 150°C |
| Operating Temperature Range | –40°C to +105°C |
| Storage Temperature Range | –65°C to +150°C |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

Table 4 lists the junction-to-air thermal resistance (θ_{JA}) and the junction-to-case thermal resistance (θ_{JC}) for the ADL5544.

Table 4. Thermal Resistance

| Package Type | θ_{JA} ¹ | θ_{JC} ² | Unit |
|----------------------|----------------------------|----------------------------|------|
| 3-Lead SOT-89 (RK-3) | 53 | 15 | °C/W |

¹ Measured on the ADL5544 evaluation board. For more information about board layout, see the Soldering Information and Recommended PCB Land Pattern section.


² Based on simulation with a standard JEDEC board per JESD51.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



NOTES

1. THE EXPOSED PAD ENCOMPASSES PIN 2 AND THE TAB AT THE TOP SIDE OF THE PACKAGE. SOLDER THE EXPOSED PAD TO A LOW IMPEDANCE GROUND PLANE FOR ELECTRICAL GROUNDING AND THERMAL TRANSFER.

11384-002

Figure 2. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---------|----------|--|
| 1 | RFIN | RF Input. This pin requires a dc blocking capacitor. |
| 2 | GND | Ground. Connect this pin to a low impedance ground plane. |
| 3 | RFOUT | RF Output and Supply Voltage. DC bias is provided to this pin through an inductor that is connected to the external power supply. The RF path requires a dc blocking capacitor. |
| | EPAD | Exposed Pad. The exposed pad encompasses Pin 2 and the tab at the top side of the package. Solder the exposed pad to a low impedance ground plane for electrical grounding and thermal transfer. |

TYPICAL PERFORMANCE CHARACTERISTICS

500 MHz TO 4 GHz FREQUENCY BAND

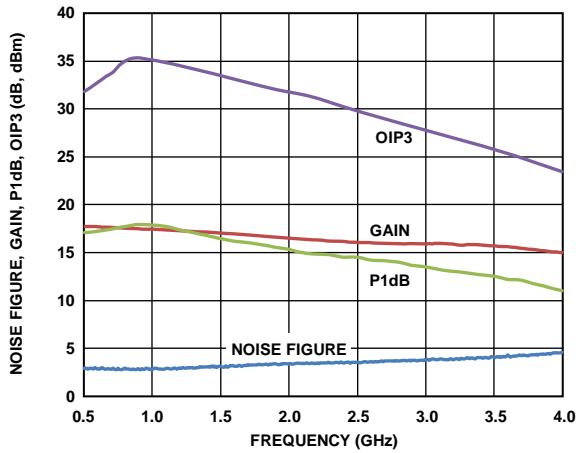


Figure 3. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency

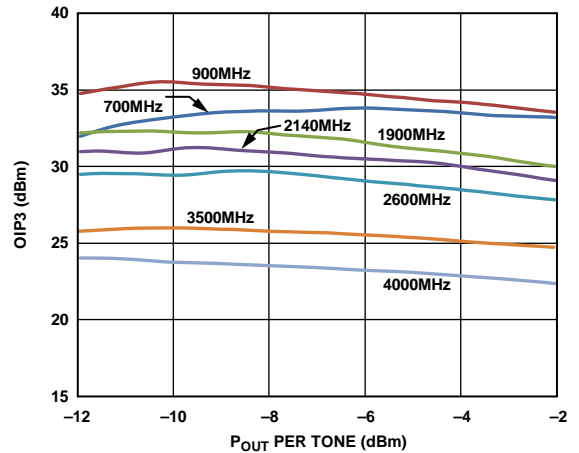


Figure 6. OIP3 vs. Output Power (P_{OUT}) and Frequency

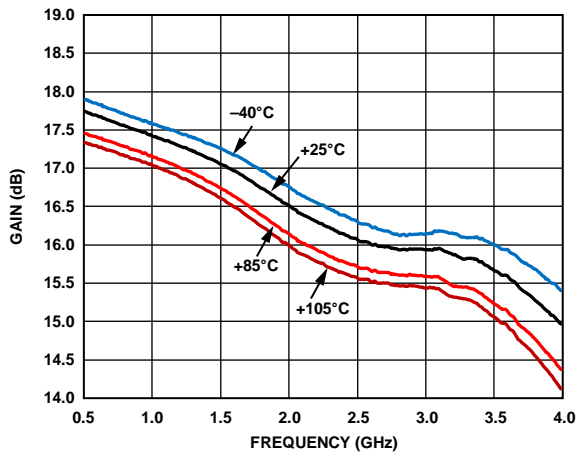


Figure 4. Gain vs. Frequency and Temperature

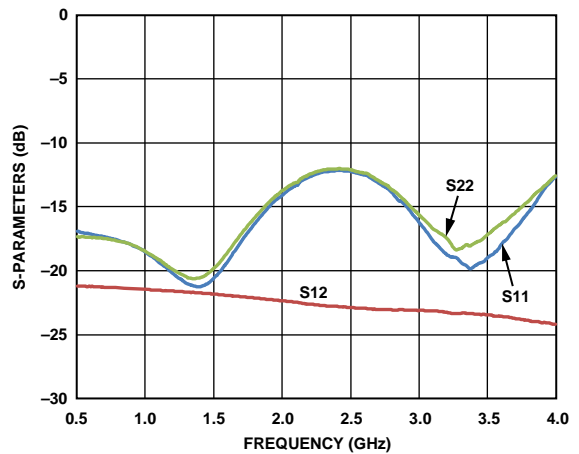


Figure 7. Input Return Loss (S_{11}), Output Return Loss (S_{22}), and Reverse Isolation (S_{12}) vs. Frequency

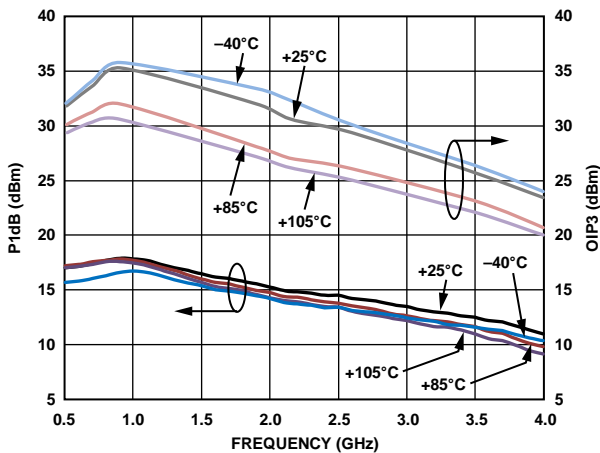


Figure 5. P1dB and OIP3 vs. Frequency and Temperature

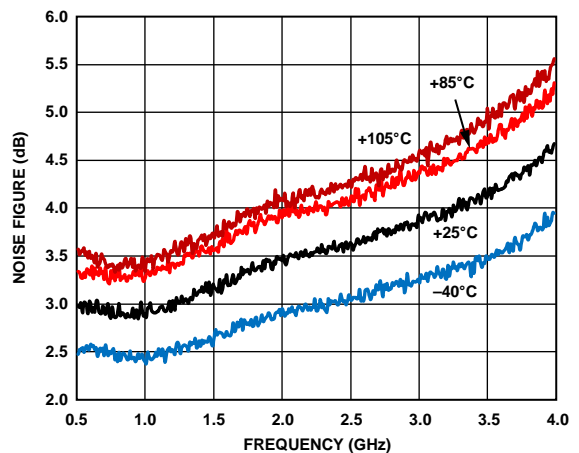


Figure 8. Noise Figure vs. Frequency and Temperature

100 MHz TO 500 MHz FREQUENCY BAND

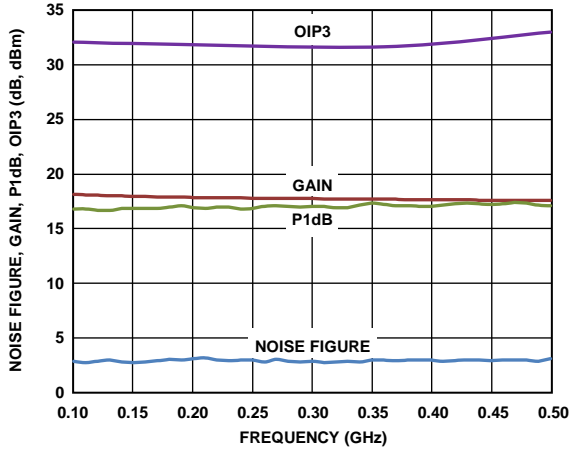


Figure 9. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency, Low Frequency Configuration

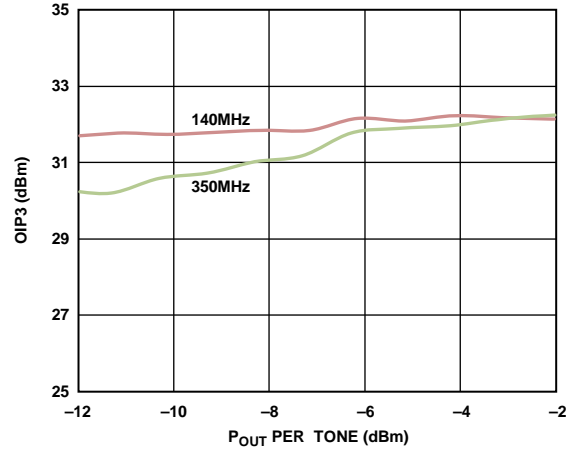


Figure 12. OIP3 vs. Output Power (P_{OUT}) and Frequency, Low Frequency Configuration

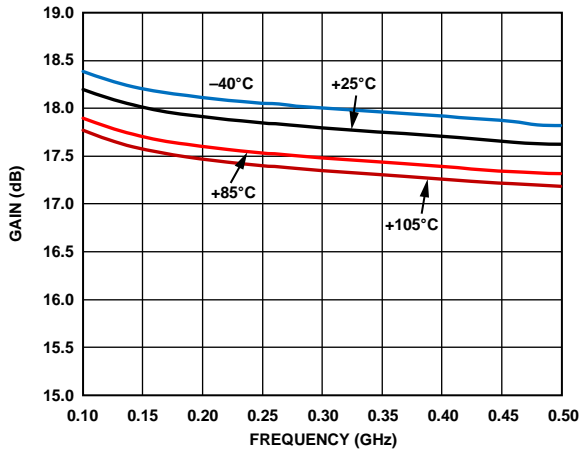


Figure 10. Gain vs. Frequency and Temperature, Low Frequency Configuration

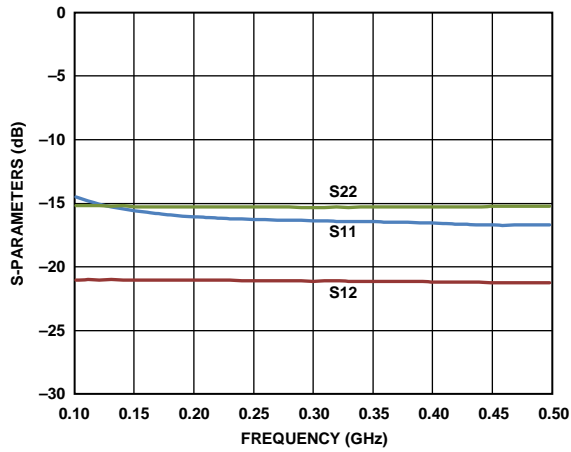


Figure 13. Input Return Loss (S_{11}), Output Return Loss (S_{22}), and Reverse Isolation (S_{12}) vs. Frequency, Low Frequency Configuration

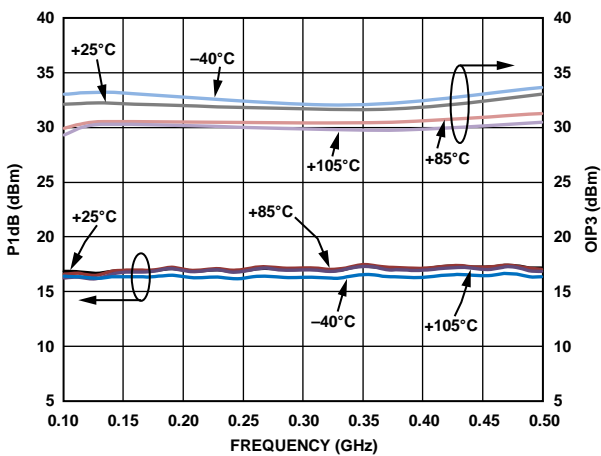


Figure 11. P1dB and OIP3 vs. Frequency and Temperature, Low Frequency Configuration

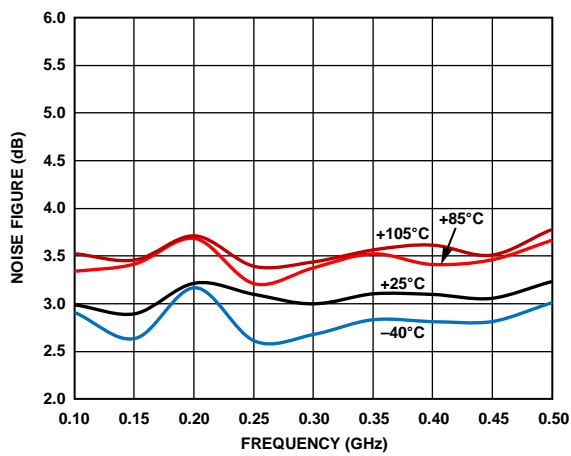


Figure 14. Noise Figure vs. Frequency and Temperature, Low Frequency Configuration

4 GHz TO 6 GHz FREQUENCY BAND

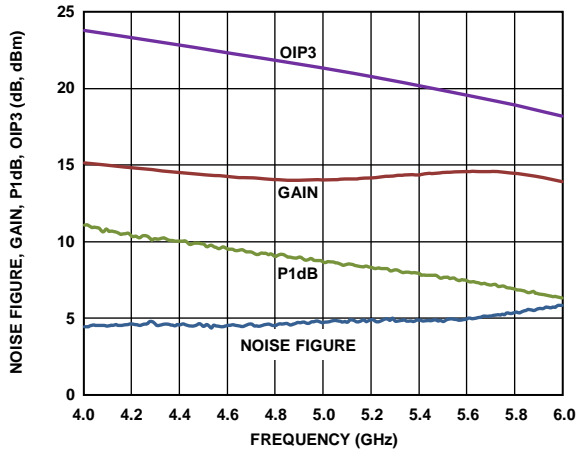


Figure 15. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency, High Frequency Configuration

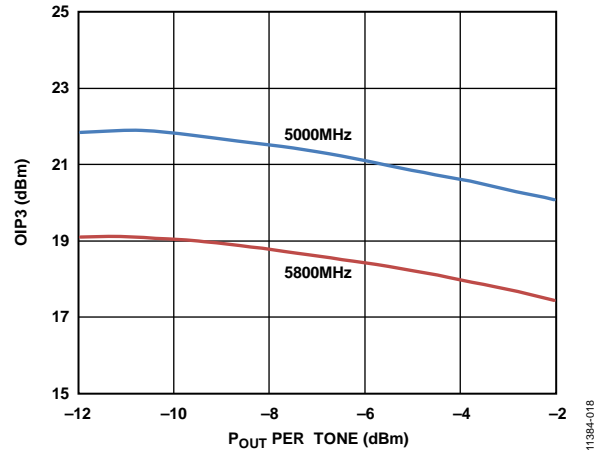


Figure 18. OIP3 vs. Output Power (P_{OUT}) and Frequency, High Frequency Configuration

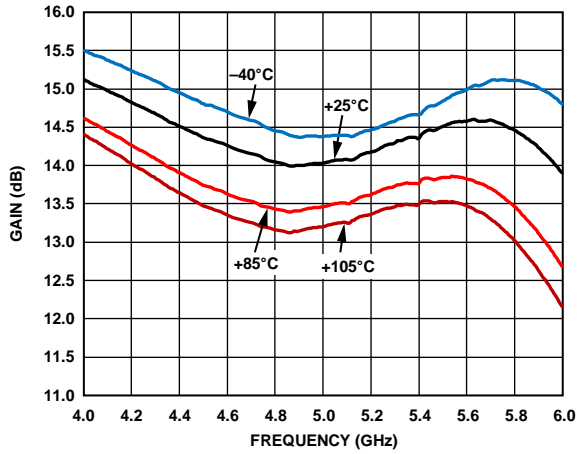


Figure 16. Gain vs. Frequency and Temperature, High Frequency Configuration

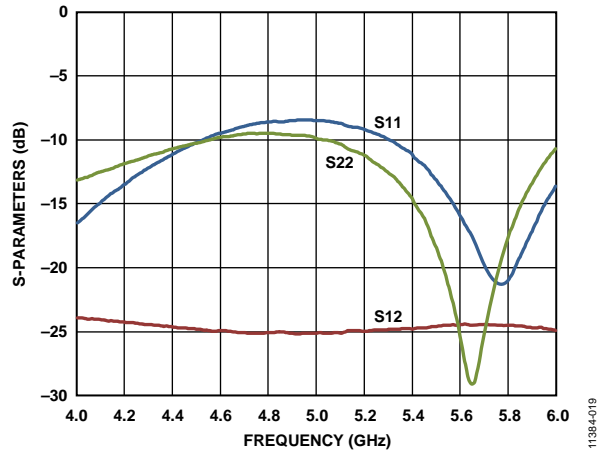


Figure 19. Input Return Loss (S11), Output Return Loss (S22), and Reverse Isolation (S12) vs. Frequency, High Frequency Configuration

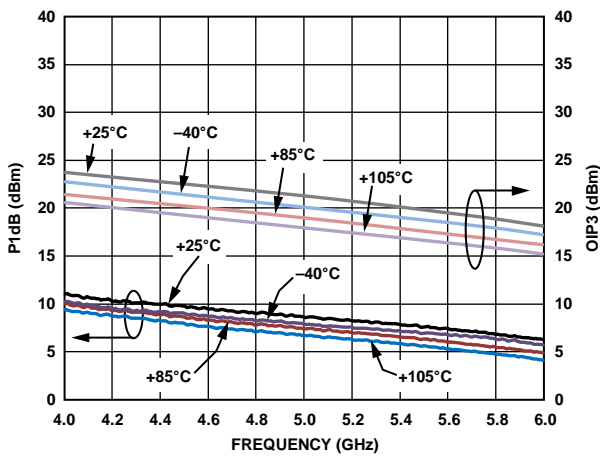


Figure 17. P1dB and OIP3 vs. Frequency and Temperature, High Frequency Configuration

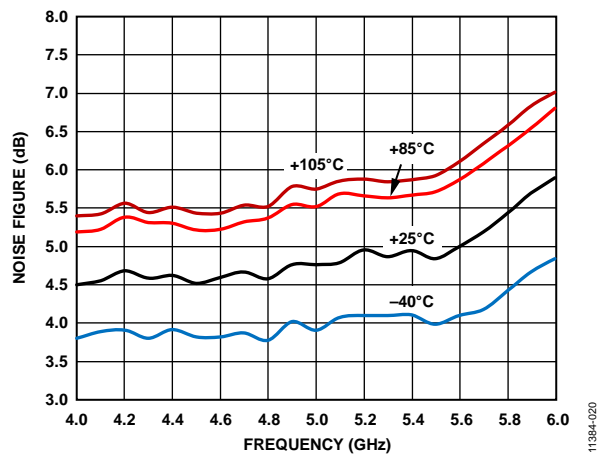


Figure 20. Noise Figure vs. Frequency and Temperature, High Frequency Configuration

GENERAL

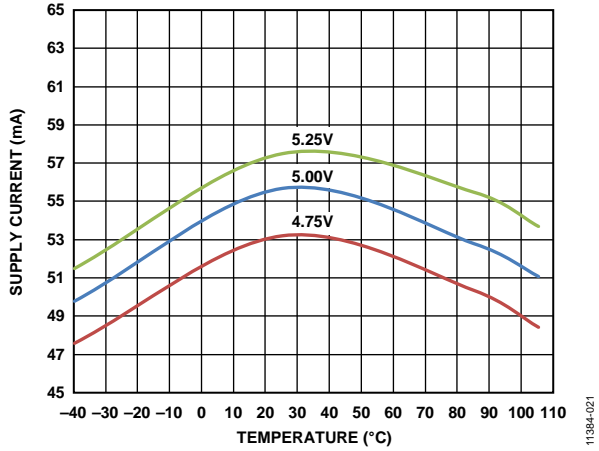


Figure 21. Supply Current vs. Temperature

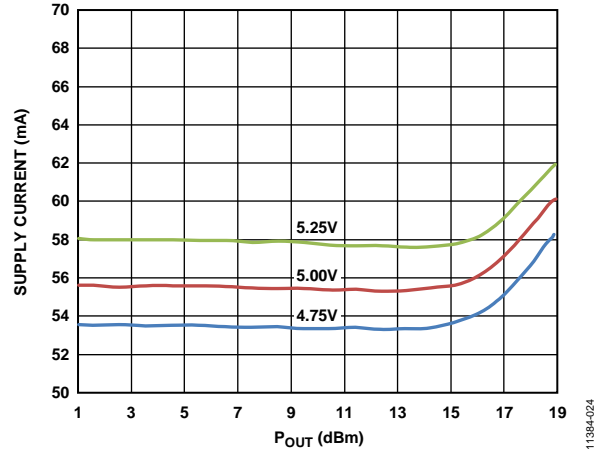


Figure 24. Supply Current vs. POUT at 900 MHz

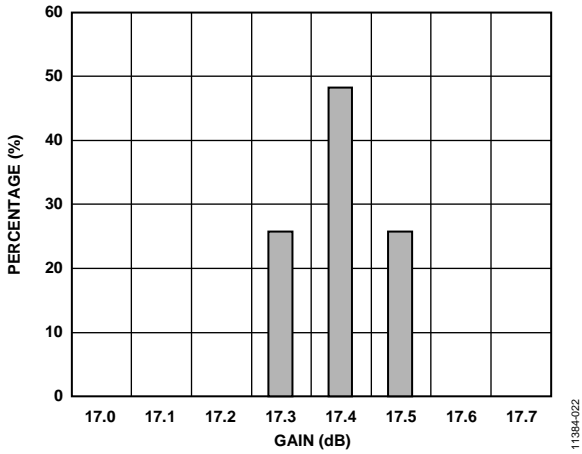


Figure 22. Gain Distribution at 900 MHz

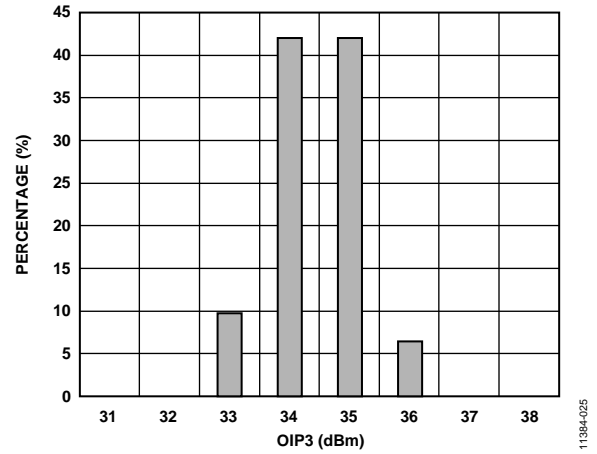


Figure 25. OIP3 Distribution at 900 MHz, POUT = -7 dBm per Tone

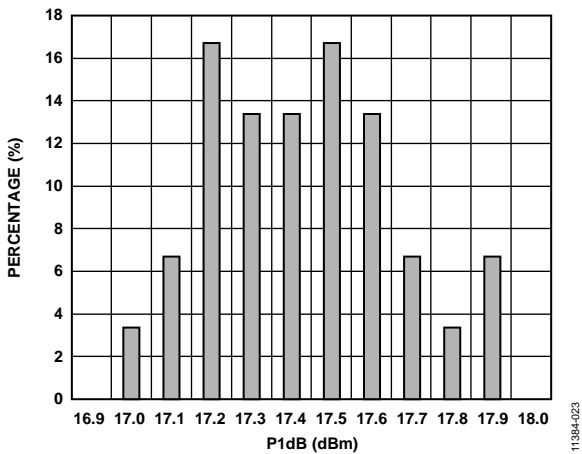


Figure 23. P1dB Distribution at 900 MHz

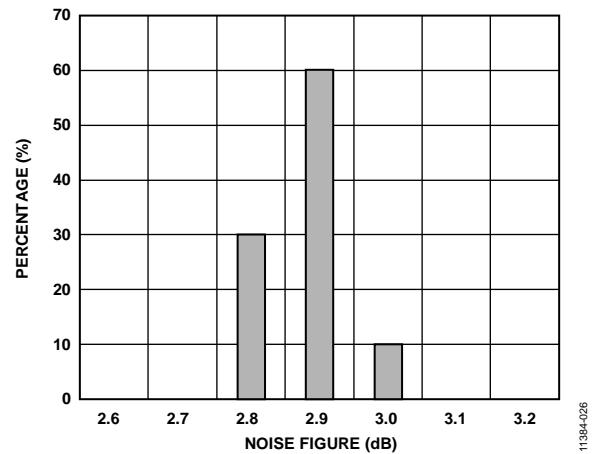


Figure 26. Noise Figure Distribution at 900 MHz

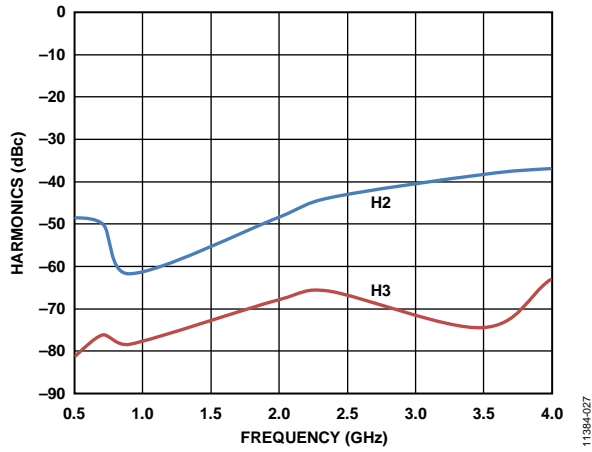


Figure 27. Single-Tone Harmonics vs. Frequency, $P_{OUT} = 0 \text{ dBm}$

APPLICATIONS INFORMATION

BASIC CONNECTIONS

Figure 28 shows the basic connections for operating the ADL5544. The device supports operation from 30 MHz to 6 GHz. However, for optimal performance at lower and higher frequency bands, the board configuration must be adjusted. Table 6 lists the recommended board configuration to operate the device at various frequency bands.

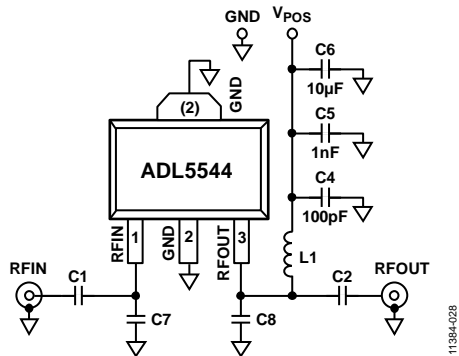


Figure 28. Basic Connections

A 5 V dc bias is supplied to the amplifier through the bias inductor connected to RFOUT (Pin 3). The bias voltage must be decoupled using 100 pF, 1 nF, and 10 μF power supply decoupling capacitors. The typical current consumption for the ADL5544 is 55 mA.

At low and high frequencies, the device exhibits improved performance with the suggested setup configuration listed in Table 6. Figure 29 to Figure 32 provide a comparison of the performance of the device at the 100 MHz to 500 MHz and 4 GHz to 6 GHz bands when driven with the optimal setup configuration and the default setup configuration.

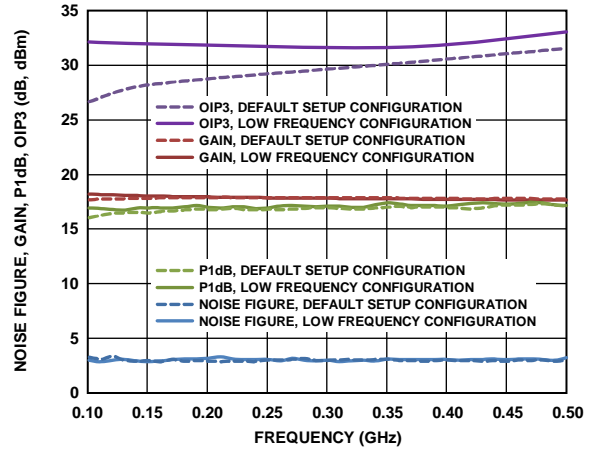


Figure 29. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency, 100 MHz to 500 MHz, Comparison of Performance with the Optimized Settings and the Default Configuration

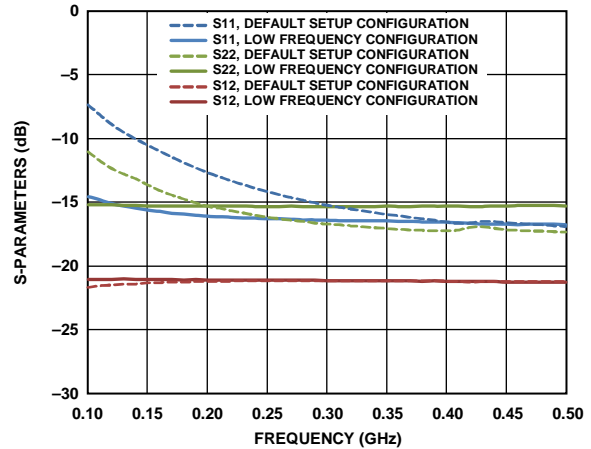


Figure 30. Return Loss and Reverse Isolation, 100 MHz to 500 MHz, Comparison of Performance with the Optimized Settings and the Default Configuration

Table 6. Recommended Components for Basic Connections

| Frequency Band | AC Coupling Capacitors (0402) | | DC Bias Inductor (0603HP) | High Frequency Matching Capacitors (0402) | |
|----------------------------|-------------------------------|--------|---------------------------|---|----------------|
| | C1 | C2 | L1 | C7 | C8 |
| 100 MHz to 500 MHz | 100 nF | 100 nF | 1000 nH | Do not install | Do not install |
| 500 MHz to 4 GHz (default) | 100 pF | 100 pF | 100 nH | Do not install | Do not install |
| 4 GHz to 6 GHz | 100 pF | 100 pF | 12 nH | 0.1 pF | 0.1 pF |

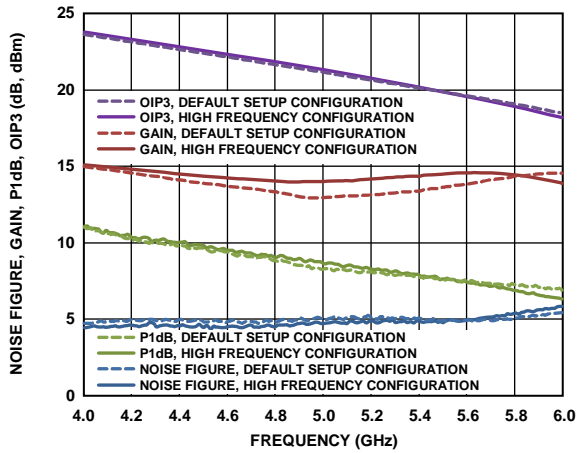


Figure 31. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency, 4 GHz to 6 GHz, Comparison of Performance with the Optimized Settings and the Default Configuration

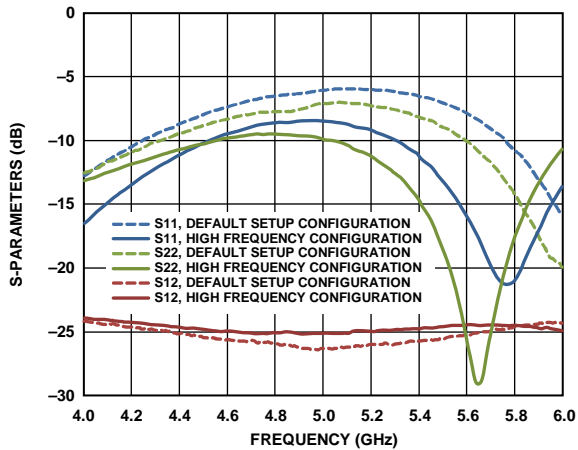


Figure 32. Return Loss and Reverse Isolation, 4 GHz to 6 GHz, Comparison of Performance with the Optimized Settings and the Default Configuration

SOLDERING INFORMATION AND RECOMMENDED PCB LAND PATTERN

Figure 33 shows the recommended land pattern for the ADL5544. To minimize thermal impedance, the exposed pad on the underside of the SOT-89 package is soldered to a ground plane, along with Pin 2. If multiple ground layers exist, stitch the layers together using vias.

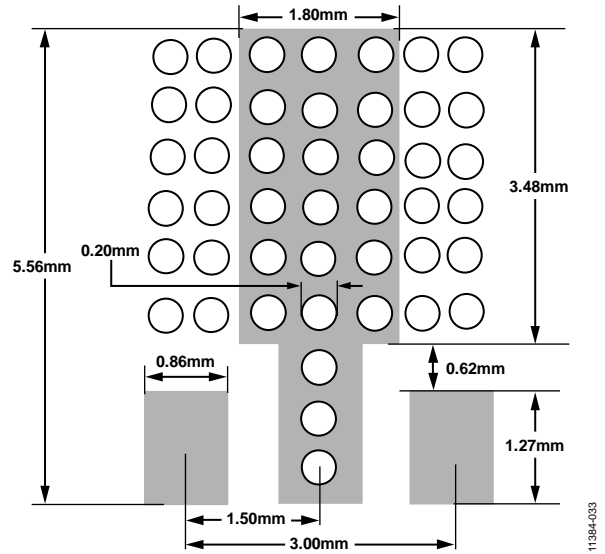


Figure 33. Recommended Land Pattern

The land pattern on the ADL5544 evaluation board provides a measured thermal resistance (θ_{JA}) of 53°C/W. To measure θ_{JA} , the temperature at the top of the SOT-89 package is found with an IR temperature gun. Thermal simulation suggests a junction temperature 10°C higher than the top-of-package temperature. With additional measurements of the ambient temperature and I/O power, θ_{JA} can be determined.

OPERATION DOWN TO 30 MHz

To operate the ADL5544 at frequencies below 100 MHz, a feedback network must be implemented between the input and output ports of the device to ensure stability. Figure 34 shows a sample configuration used to evaluate the device at frequencies below 100 MHz. Figure 35 to Figure 37 demonstrate the performance of the device in this configuration.

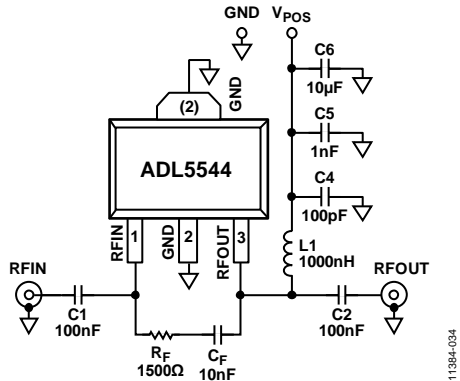


Figure 34. Setup for Low Frequency Operation Down to 30 MHz

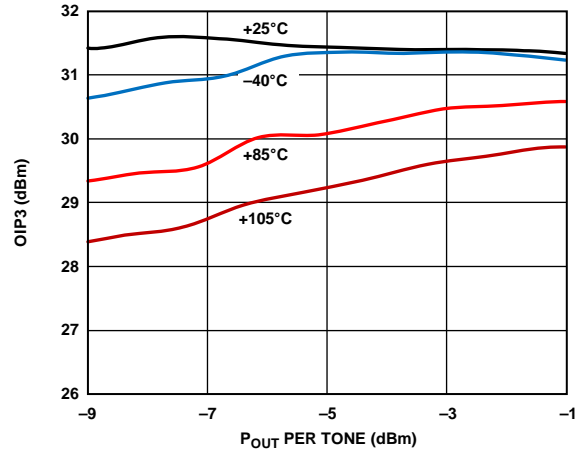


Figure 37. OIP3 vs. POUT at 30 MHz

W-CDMA ACPR PERFORMANCE

Figure 38 shows a plot of the adjacent channel power ratio (ACPR) vs. POUT for the ADL5544. The signal type used is a single wideband code division multiple access (W-CDMA) carrier (Test Model 1-64) at 2140 MHz. This signal is generated by a very low ACPR source. ACPR is measured at the output by a high dynamic range spectrum analyzer that incorporates an instrument noise-correction function.

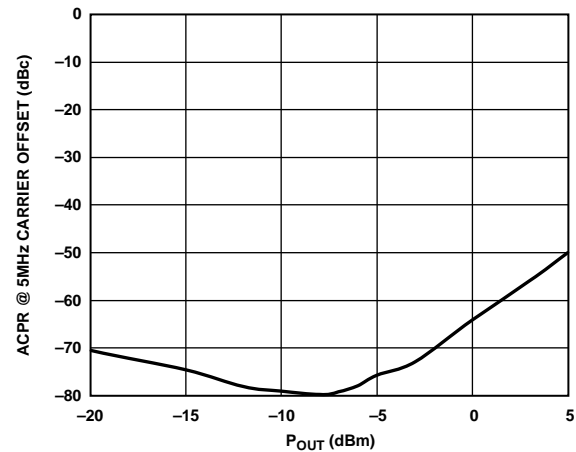


Figure 38. ACPR vs. POUT, Single W-CDMA Carrier (Test Model 1-64) at 2140 MHz

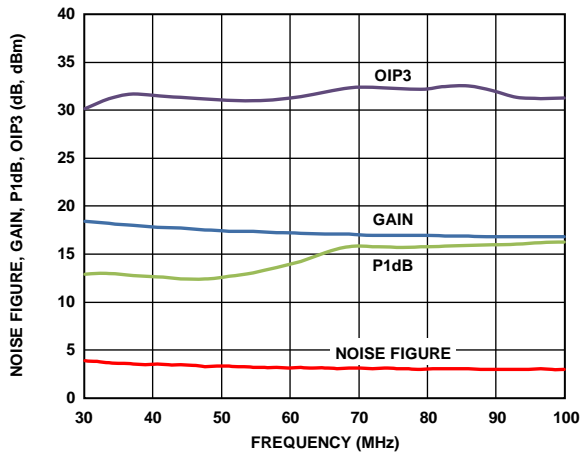


Figure 35. Noise Figure, Gain, P1dB, and OIP3 vs. Frequency, 30 MHz to 100 MHz

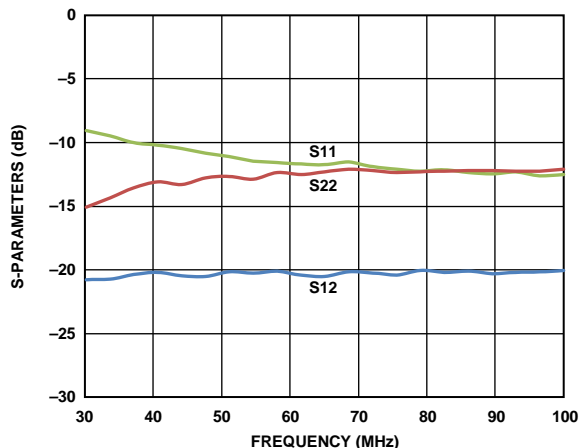


Figure 36. Return Loss and Reverse Isolation, 30 MHz to 100 MHz

The ADL5544 achieves an ACPR of -80 dBc at an output power level of -7 dBm, at which point device noise and not distortion begins to dominate the power in the adjacent channels. At an output power level of 0 dBm, ACPR is still very low at -63 dBc.

EVALUATION BOARD

Figure 39 shows the ADL5544 evaluation board layout. Figure 40 shows the schematic for the evaluation board. The board is powered by a single 5 V supply. Table 7 lists the components used on the evaluation board. Power can be applied to the board through clip-on leads (V_{SUP} , GND).

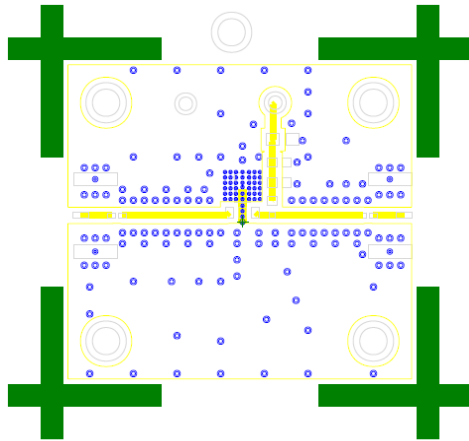


Figure 39. Evaluation Board Layout (Top)


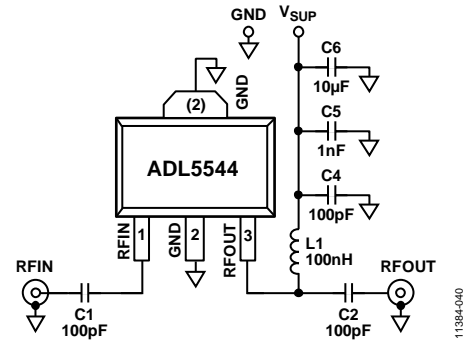


Figure 40. Evaluation Board Schematic

Table 7. Evaluation Board Configuration Options

| Component | Function | Default Value |
|-------------------|------------------------------------|---|
| C1, C2 | AC coupling capacitors | 100 pF, 0402 |
| L1 | DC bias inductor | 100 nH, 0603 (Coilcraft 0603HP or equivalent) |
| V_{SUP} and GND | Clip-on terminals for power supply | |
| C4, C5, C6 | Power supply decoupling capacitors | C4: 100 pF, 0603 C5: 1 nF, 0603 C6: 10 µF, 1206 |

OUTLINE DIMENSIONS

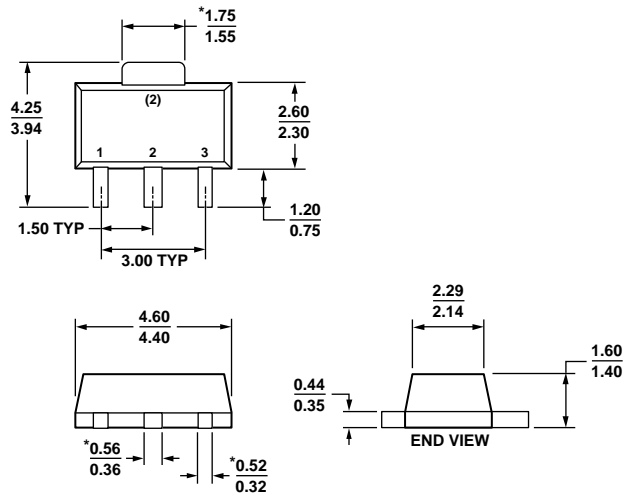

*COMPLIANT TO JEDEC STANDARDS TO-243 WITH THE EXCEPTION OF DIMENSIONS INDICATED BY AN ASTERISK.

Figure 41. 3-Lead Small Outline Transistor Package [SOT-89] (RK-3)

Dimensions shown in millimeters

12-18-2008-B

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|---------------------------------|----------------|
| ADL5544ARKZ-R7 | -40°C to +105°C | 3-Lead SOT-89, 7" Tape and Reel | RK-3 |
| ADL5544-EVALZ | -40°C to +105°C | Evaluation Board | |

¹ Z = RoHS Compliant Part.

NOTES

NOTES

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru