

### FEATURES

#### Low noise

- 2.1 nV/√Hz input voltage noise
- 2.1 pA/√Hz input current noise

#### Custom compensation

- Constant bandwidth from  $G = -1$  to  $G = -10$

#### High speed

- 200 MHz ( $G = -1$ )
- 190 MHz ( $G = -10$ )

#### Low power

- 34 mW or 6.7 mA typical for 5 V supply

#### Output disable feature, 1.3 mA

#### Low distortion

- 93 dBc second harmonic,  $f_c = 1$  MHz
- 108 dBc third harmonic,  $f_c = 1$  MHz

#### DC precision

- 1 mV maximum input offset voltage
- 0.5  $\mu$ V/°C input offset voltage drift

#### Wide supply range, 5 V to 24 V

#### Low price

#### Small packaging

- Available in SOIC-8 and MSOP-8

### APPLICATIONS

#### ADC preamps and drivers

#### Instrumentation preamps

##### Active filters

#### Portable instrumentation

#### Line receivers

#### Precision instruments

##### Ultrasound signal processing

##### High gain circuits

### GENERAL DESCRIPTION

The AD8021 is an exceptionally high performance, high speed voltage feedback amplifier that can be used in 16-bit resolution systems. It is designed to have both low voltage and low current noise (2.1 nV/√Hz typical and 2.1 pA/√Hz typical) while operating at the lowest quiescent supply current (7 mA @  $\pm 5$  V) among today's high speed, low noise op amps. The AD8021 operates over a wide range of supply voltages from  $\pm 2.25$  V to  $\pm 12$  V, as well as from single 5 V supplies, making it ideal for high speed, low power instruments. An output disable pin allows further reduction of the quiescent supply current to 1.3 mA.

### CONNECTION DIAGRAM

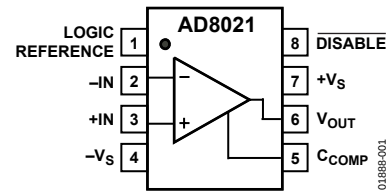


Figure 1. SOIC-8 (R-8) and MSOP-8 (RM-8)

The AD8021 allows the user to choose the gain bandwidth product that best suits the application. With a single capacitor, the user can compensate the AD8021 for the desired gain with little trade-off in bandwidth. The AD8021 is a well-behaved amplifier that settles to 0.01% in 23 ns for a 1 V step. It has a fast overload recovery of 50 ns.

The AD8021 is stable over temperature with low input offset voltage drift and input bias current drift, 0.5  $\mu$ V/°C and 10 nA/°C, respectively. The AD8021 is also capable of driving a 75  $\Omega$  line with  $\pm 3$  V video signals.

The AD8021 is both technically superior and priced considerably less than comparable amps drawing much higher quiescent current. The AD8021 is a high speed, general-purpose amplifier, ideal for a wide variety of gain configurations and can be used throughout a signal processing chain and in control loops. The AD8021 is available in both standard 8-lead SOIC and MSOP packages in the industrial temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

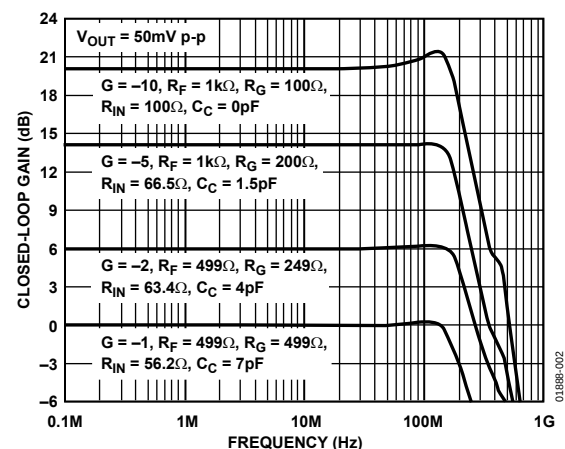


Figure 2. Small Signal Frequency Response

#### Rev. F

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                                  |    |                                          |    |
|--------------------------------------------------|----|------------------------------------------|----|
| Features .....                                   | 1  | Applications.....                        | 19 |
| Applications.....                                | 1  | Using the Disable Feature.....           | 20 |
| General Description .....                        | 1  | Theory of Operation .....                | 21 |
| Connection Diagram .....                         | 1  | PCB Layout Considerations.....           | 21 |
| Revision History .....                           | 2  | Driving 16-Bit ADCs .....                | 22 |
| Specifications.....                              | 3  | Differential Driver.....                 | 22 |
| Absolute Maximum Ratings.....                    | 7  | Using the AD8021 in Active Filters ..... | 23 |
| Maximum Power Dissipation .....                  | 7  | Driving Capacitive Loads.....            | 23 |
| ESD Caution.....                                 | 7  | Outline Dimensions .....                 | 25 |
| Pin Configuration and Function Descriptions..... | 8  | Ordering Guide .....                     | 25 |
| Typical Performance Characteristics .....        | 9  |                                          |    |
| Test Circuits.....                               | 17 |                                          |    |

## REVISION HISTORY

### 5/06—Rev. E to Rev. F

|                                      |           |
|--------------------------------------|-----------|
| Updated Format.....                  | Universal |
| Changes to General Description ..... | 1         |
| Changes to Figure 3.....             | 7         |
| Changes to Figure 60.....            | 19        |
| Changes to Table 9.....              | 23        |

### 3/05—Rev. D to Rev. E

|                                             |           |
|---------------------------------------------|-----------|
| Updated Format.....                         | Universal |
| Change to Figure 19 .....                   | 11        |
| Change to Figure 25 .....                   | 12        |
| Change to Table 7 and Table 8 .....         | 22        |
| Change to Driving 16-Bit ADCs Section ..... | 22        |

### 10/03—Rev. C to Rev. D

|                     |           |
|---------------------|-----------|
| Updated Format..... | Universal |
|---------------------|-----------|

### 7/03—Rev. B to Rev. C

|                                                 |           |
|-------------------------------------------------|-----------|
| Deleted All References to Evaluation Board..... | Universal |
| Replaced Figure 2 .....                         | 5         |
| Updated Outline Dimensions.....                 | 20        |

### 2/03—Rev. A to Rev. B

|                                             |    |
|---------------------------------------------|----|
| Edits to Evaluation Board Applications..... | 20 |
| Edits to Figure 17 .....                    | 20 |

### 6/02—Rev. 0 to Rev. A

|                               |   |
|-------------------------------|---|
| Edits to Specifications ..... | 2 |
|-------------------------------|---|

## SPECIFICATIONS

$V_S = \pm 5\text{ V}$ , @  $T_A = 25^\circ\text{C}$ ,  $R_L = 1\text{ k}\Omega$ , gain = +2, unless otherwise noted.

Table 1.

| Parameter                               | Conditions                                                  | AD8021AR/AD8021ARM |              |      | Unit    |
|-----------------------------------------|-------------------------------------------------------------|--------------------|--------------|------|---------|
|                                         |                                                             | Min                | Typ          | Max  |         |
| DYNAMIC PERFORMANCE                     |                                                             |                    |              |      |         |
| –3 dB Small Signal Bandwidth            | G = +1, C <sub>C</sub> = 10 pF, V <sub>O</sub> = 0.05 V p-p | 355                | 490          |      | MHz     |
|                                         | G = +2, C <sub>C</sub> = 7 pF, V <sub>O</sub> = 0.05 V p-p  | 160                | 205          |      | MHz     |
|                                         | G = +5, C <sub>C</sub> = 2 pF, V <sub>O</sub> = 0.05 V p-p  | 150                | 185          |      | MHz     |
|                                         | G = +10, C <sub>C</sub> = 0 pF, V <sub>O</sub> = 0.05 V p-p | 110                | 150          |      | MHz     |
| Slew Rate, 1 V Step                     | G = +1, C <sub>C</sub> = 10 pF                              | 95                 | 120          |      | V/μs    |
|                                         | G = +2, C <sub>C</sub> = 7 pF                               | 120                | 150          |      | V/μs    |
|                                         | G = +5, C <sub>C</sub> = 2 pF                               | 250                | 300          |      | V/μs    |
|                                         | G = +10, C <sub>C</sub> = 0 pF                              | 380                | 420          |      | V/μs    |
| Settling Time to 0.01%                  | V <sub>O</sub> = 1 V step, R <sub>L</sub> = 500 Ω           |                    | 23           |      | ns      |
| Overload Recovery (50%)                 | ±2.5 V input step, G = +2                                   |                    | 50           |      | ns      |
| DISTORTION/NOISE PERFORMANCE            |                                                             |                    |              |      |         |
| f = 1 MHz                               |                                                             |                    |              |      |         |
| HD2                                     | V <sub>O</sub> = 2 V p-p                                    |                    | –93          |      | dBc     |
| HD3                                     | V <sub>O</sub> = 2 V p-p                                    |                    | –108         |      | dBc     |
| f = 5 MHz                               |                                                             |                    |              |      |         |
| HD2                                     | V <sub>O</sub> = 2 V p-p                                    |                    | –70          |      | dBc     |
| HD3                                     | V <sub>O</sub> = 2 V p-p                                    |                    | –80          |      | dBc     |
| Input Voltage Noise                     | f = 50 kHz                                                  |                    | 2.1          | 2.6  | nV/√Hz  |
| Input Current Noise                     | f = 50 kHz                                                  |                    | 2.1          |      | pA/√Hz  |
| Differential Gain Error                 | NTSC, R <sub>L</sub> = 150 Ω                                |                    | 0.03         |      | %       |
| Differential Phase Error                | NTSC, R <sub>L</sub> = 150 Ω                                |                    | 0.04         |      | Degrees |
| DC PERFORMANCE                          |                                                             |                    |              |      |         |
| Input Offset Voltage                    |                                                             |                    | 0.4          | 1.0  | mV      |
| Input Offset Voltage Drift              | T <sub>MIN</sub> to T <sub>MAX</sub>                        |                    | 0.5          |      | μV/°C   |
| Input Bias Current                      | +Input or –input                                            |                    | 7.5          | 10.5 | μA      |
| Input Bias Current Drift                |                                                             |                    | 10           |      | nA/°C   |
| Input Offset Current                    |                                                             |                    | 0.1          | 0.5  | ±μA     |
| Open-Loop Gain                          |                                                             | 82                 | 86           |      | dB      |
| INPUT CHARACTERISTICS                   |                                                             |                    |              |      |         |
| Input Resistance                        |                                                             |                    | 10           |      | MΩ      |
| Common-Mode Input Capacitance           |                                                             |                    | 1            |      | pF      |
| Input Common-Mode Voltage Range         |                                                             |                    | –4.1 to +4.6 |      | V       |
| Common-Mode Rejection Ratio             | V <sub>CM</sub> = ±4 V                                      | –86                | –98          |      | dB      |
| OUTPUT CHARACTERISTICS                  |                                                             |                    |              |      |         |
| Output Voltage Swing                    |                                                             | –3.5 to +3.2       | –3.8 to +3.4 |      | V       |
| Linear Output Current                   |                                                             |                    | 60           |      | mA      |
| Short-Circuit Current                   |                                                             |                    | 75           |      | mA      |
| Capacitive Load Drive for 30% Overshoot | V <sub>O</sub> = 50 mV p-p/1 V p-p                          |                    | 15/120       |      | pF      |
| DISABLE CHARACTERISTICS                 |                                                             |                    |              |      |         |
| Off Isolation                           | f = 10 MHz                                                  |                    | –40          |      | dB      |
| Turn-On Time                            | V <sub>O</sub> = 0 V to 2 V, 50% logic to 50% output        |                    | 45           |      | ns      |
| Turn-Off Time                           | V <sub>O</sub> = 0 V to 2 V, 50% logic to 50% output        |                    | 50           |      | ns      |
| DISABLE Voltage—Off/On                  | V <sub>DISABLE</sub> – V <sub>LOGIC REFERENCE</sub>         |                    | 1.75/1.90    |      | V       |
| Enabled Leakage Current                 | LOGIC REFERENCE = 0.4 V                                     |                    | 70           |      | μA      |
|                                         | DISABLE = 4.0 V                                             |                    | 2            |      | μA      |

# AD8021

| Parameter                     | Conditions                                            | AD8021AR/AD8021ARM |     |       | Unit |
|-------------------------------|-------------------------------------------------------|--------------------|-----|-------|------|
|                               |                                                       | Min                | Typ | Max   |      |
| Disabled Leakage Current      | LOGIC REFERENCE = 0.4 V                               |                    | 30  |       | μA   |
|                               | DISABLE = 0.4 V                                       |                    | 33  |       | μA   |
| POWER SUPPLY                  |                                                       |                    |     |       |      |
| Operating Range               |                                                       | ±2.25              | ±5  | ±12.0 | V    |
| Quiescent Current             | Output enabled                                        |                    | 7.0 | 7.7   | mA   |
|                               | Output disabled                                       |                    | 1.3 | 1.6   | mA   |
| +Power Supply Rejection Ratio | V <sub>CC</sub> = 4 V to 6 V, V <sub>EE</sub> = −5 V  | −86                | −95 |       | dB   |
| −Power Supply Rejection Ratio | V <sub>CC</sub> = 5 V, V <sub>EE</sub> = −6 V to −4 V | −86                | −95 |       | dB   |

V<sub>S</sub> = ±12 V, @ T<sub>A</sub> = 25°C, R<sub>L</sub> = 1 kΩ, gain = +2, unless otherwise noted.

**Table 2.**

| Parameter                       | Conditions                                                  | AD8021AR/AD8021ARM |                |      | Unit    |
|---------------------------------|-------------------------------------------------------------|--------------------|----------------|------|---------|
|                                 |                                                             | Min                | Typ            | Max  |         |
| DYNAMIC PERFORMANCE             |                                                             |                    |                |      |         |
| −3 dB Small Signal Bandwidth    | G = +1, C <sub>c</sub> = 10 pF, V <sub>o</sub> = 0.05 V p-p | 520                | 560            |      | MHz     |
|                                 | G = +2, C <sub>c</sub> = 7 pF, V <sub>o</sub> = 0.05 V p-p  | 175                | 220            |      | MHz     |
|                                 | G = +5, C <sub>c</sub> = 2 pF, V <sub>o</sub> = 0.05 V p-p  | 170                | 200            |      | MHz     |
|                                 | G = +10, C <sub>c</sub> = 0 pF, V <sub>o</sub> = 0.05 V p-p | 125                | 165            |      | MHz     |
| Slew Rate, 1 V Step             | G = +1, C <sub>c</sub> = 10 pF                              | 105                | 130            |      | V/μs    |
|                                 | G = +2, C <sub>c</sub> = 7 pF                               | 140                | 170            |      | V/μs    |
|                                 | G = +5, C <sub>c</sub> = 2 pF                               | 265                | 340            |      | V/μs    |
|                                 | G = +10, C <sub>c</sub> = 0 pF                              | 400                | 460            |      | V/μs    |
| Settling Time to 0.01%          | V <sub>o</sub> = 1 V step, R <sub>L</sub> = 500 Ω           |                    | 21             |      | ns      |
| Overload Recovery (50%)         | ±6 V input step, G = +2                                     |                    | 90             |      | ns      |
| DISTORTION/NOISE PERFORMANCE    |                                                             |                    |                |      |         |
| f = 1 MHz                       |                                                             |                    |                |      |         |
| HD2                             | V <sub>o</sub> = 2 V p-p                                    |                    | −95            |      | dBc     |
| HD3                             | V <sub>o</sub> = 2 V p-p                                    |                    | −116           |      | dBc     |
| f = 5 MHz                       |                                                             |                    |                |      |         |
| HD2                             | V <sub>o</sub> = 2 V p-p                                    |                    | −71            |      | dBc     |
| HD3                             | V <sub>o</sub> = 2 V p-p                                    |                    | −83            |      | dBc     |
| Input Voltage Noise             | f = 50 kHz                                                  |                    | 2.1            | 2.6  | nV/√Hz  |
| Input Current Noise             | f = 50 kHz                                                  |                    | 2.1            |      | pA/√Hz  |
| Differential Gain Error         | NTSC, R <sub>L</sub> = 150 Ω                                |                    | 0.03           |      | %       |
| Differential Phase Error        | NTSC, R <sub>L</sub> = 150 Ω                                |                    | 0.04           |      | Degrees |
| DC PERFORMANCE                  |                                                             |                    |                |      |         |
| Input Offset Voltage            |                                                             |                    | 0.4            | 1.0  | mV      |
| Input Offset Voltage Drift      | T <sub>MIN</sub> to T <sub>MAX</sub>                        |                    | 0.2            |      | μV/°C   |
| Input Bias Current              | +Input or −input                                            |                    | 8              | 11.3 | μA      |
| Input Bias Current Drift        |                                                             |                    | 10             |      | nA/°C   |
| Input Offset Current            |                                                             |                    | 0.1            | 0.5  | ±μA     |
| Open-Loop Gain                  |                                                             | 84                 | 88             |      | dB      |
| INPUT CHARACTERISTICS           |                                                             |                    |                |      |         |
| Input Resistance                |                                                             |                    | 10             |      | MΩ      |
| Common-Mode Input Capacitance   |                                                             |                    | 1              |      | pF      |
| Input Common-Mode Voltage Range |                                                             |                    | −11.1 to +11.6 |      | V       |
| Common-Mode Rejection Ratio     | V <sub>CM</sub> = ±10 V                                     | −86                | −96            |      | dB      |

| Parameter                               | Conditions                                               | AD8021AR/AD8021ARM |                |       | Unit |
|-----------------------------------------|----------------------------------------------------------|--------------------|----------------|-------|------|
|                                         |                                                          | Min                | Typ            | Max   |      |
| OUTPUT CHARACTERISTICS                  |                                                          |                    |                |       |      |
| Output Voltage Swing                    |                                                          | −10.2 to +9.8      | −10.6 to +10.2 |       | V    |
| Linear Output Current                   |                                                          |                    | 70             |       | mA   |
| Short-Circuit Current                   |                                                          |                    | 115            |       | mA   |
| Capacitive Load Drive for 30% Overshoot | V <sub>O</sub> = 50 mV p-p/1 V p-p                       |                    | 15/120         |       | pF   |
| DISABLE CHARACTERISTICS                 |                                                          |                    |                |       |      |
| Off Isolation                           | f = 10 MHz                                               |                    | −40            |       | dB   |
| Turn-On Time                            | V <sub>O</sub> = 0 V to 2 V, 50% logic to 50% output     |                    | 45             |       | ns   |
| Turn-Off Time                           | V <sub>O</sub> = 0 V to 2 V, 50% logic to 50% output     |                    | 50             |       | ns   |
| <u>DISABLE</u> Voltage—Off/On           | V <sub>DISABLE</sub> − V <sub>LOGIC REFERENCE</sub>      |                    | 1.80/1.95      |       | V    |
| Enabled Leakage Current                 | <u>LOGIC REFERENCE</u> = 0.4 V                           |                    | 70             |       | μA   |
|                                         | <u>DISABLE</u> = 4.0 V                                   |                    | 2              |       | μA   |
| Disabled Leakage Current                | <u>LOGIC REFERENCE</u> = 0.4 V                           |                    | 30             |       | μA   |
|                                         | <u>DISABLE</u> = 0.4 V                                   |                    | 33             |       | μA   |
| POWER SUPPLY                            |                                                          |                    |                |       |      |
| Operating Range                         |                                                          | ±2.25              | ±5             | ±12.0 | V    |
| Quiescent Current                       | Output enabled                                           |                    | 7.8            | 8.6   | mA   |
|                                         | Output disabled                                          |                    | 1.7            | 2.0   | mA   |
| +Power Supply Rejection Ratio           | V <sub>CC</sub> = 11 V to 13 V, V <sub>EE</sub> = −12 V  | −86                | −96            |       | dB   |
| −Power Supply Rejection Ratio           | V <sub>CC</sub> = 12 V, V <sub>EE</sub> = −13 V to −11 V | −86                | −100           |       | dB   |

$V_S = 5 \text{ V}$ , @  $T_A = 25^\circ\text{C}$ ,  $R_L = 1 \text{ k}\Omega$ , gain = +2, unless otherwise noted.

Table 3.

| Parameter                    | Conditions                                                  | AD8021AR/AD8021ARM |     |     | Unit   |
|------------------------------|-------------------------------------------------------------|--------------------|-----|-----|--------|
|                              |                                                             | Min                | Typ | Max |        |
| DYNAMIC PERFORMANCE          |                                                             |                    |     |     |        |
| −3 dB Small Signal Bandwidth | G = +1, C <sub>C</sub> = 10 pF, V <sub>O</sub> = 0.05 V p-p | 270                | 305 |     | MHz    |
|                              | G = +2, C <sub>C</sub> = 7 pF, V <sub>O</sub> = 0.05 V p-p  | 155                | 190 |     | MHz    |
|                              | G = +5, C <sub>C</sub> = 2 pF, V <sub>O</sub> = 0.05 V p-p  | 135                | 165 |     | MHz    |
|                              | G = +10, C <sub>C</sub> = 0 pF, V <sub>O</sub> = 0.05 V p-p | 95                 | 130 |     | MHz    |
| Slew Rate, 1 V Step          | G = +1, C <sub>C</sub> = 10 pF                              | 80                 | 110 |     | V/μs   |
|                              | G = +2, C <sub>C</sub> = 7 pF                               | 110                | 140 |     | V/μs   |
|                              | G = +5, C <sub>C</sub> = 2 pF                               | 210                | 280 |     | V/μs   |
|                              | G = +10, C <sub>C</sub> = 0 pF                              | 290                | 390 |     | V/μs   |
| Settling Time to 0.01%       | V <sub>O</sub> = 1 V step, R <sub>L</sub> = 500 Ω           |                    | 28  |     | ns     |
| Overload Recovery (50%)      | 0 V to 2.5 V input step, G = +2                             |                    | 40  |     | ns     |
| DISTORTION/NOISE PERFORMANCE |                                                             |                    |     |     |        |
| f = 1 MHz                    |                                                             |                    |     |     |        |
| HD2                          | V <sub>O</sub> = 2 V p-p                                    |                    | −84 |     | dBc    |
| HD3                          | V <sub>O</sub> = 2 V p-p                                    |                    | −91 |     | dBc    |
| f = 5 MHz                    |                                                             |                    |     |     |        |
| HD2                          | V <sub>O</sub> = 2 V p-p                                    |                    | −68 |     | dBc    |
| HD3                          | V <sub>O</sub> = 2 V p-p                                    |                    | −81 |     | dBc    |
| Input Voltage Noise          | f = 50 kHz                                                  |                    | 2.1 | 2.6 | nV/√Hz |
| Input Current Noise          | f = 50 kHz                                                  |                    | 2.1 |     | pA/√Hz |

# AD8021

| Parameter                                  | Conditions                                                                       | AD8021AR/AD8021ARM |              |            | Unit                           |
|--------------------------------------------|----------------------------------------------------------------------------------|--------------------|--------------|------------|--------------------------------|
|                                            |                                                                                  | Min                | Typ          | Max        |                                |
| DC PERFORMANCE                             |                                                                                  |                    |              |            |                                |
| Input Offset Voltage                       | $T_{MIN}$ to $T_{MAX}$<br>+Input or –input                                       |                    | 0.4          | 1.0        | mV                             |
| Input Offset Voltage Drift                 |                                                                                  |                    | 0.8          |            | $\mu\text{V}/^{\circ}\text{C}$ |
| Input Bias Current                         |                                                                                  |                    | 7.5          | 10.3       | $\mu\text{A}$                  |
| Input Bias Current Drift                   |                                                                                  |                    | 10           |            | $\text{nA}/^{\circ}\text{C}$   |
| Input Offset Current                       |                                                                                  |                    | 0.1          | 0.5        | $\pm\mu\text{A}$               |
| Open-Loop Gain                             |                                                                                  | 72                 | 76           |            | dB                             |
| INPUT CHARACTERISTICS                      |                                                                                  |                    |              |            |                                |
| Input Resistance                           | 1.5 V to 3.5 V                                                                   |                    | 10           |            | $\text{M}\Omega$               |
| Common-Mode Input Capacitance              |                                                                                  |                    | 1            |            | pF                             |
| Input Common-Mode Voltage Range            |                                                                                  |                    | 0.9 to 4.6   |            | V                              |
| Common-Mode Rejection Ratio                |                                                                                  | –84                | –98          |            | dB                             |
| OUTPUT CHARACTERISTICS                     |                                                                                  |                    |              |            |                                |
| Output Voltage Swing                       | $V_O = 50 \text{ mV p-p}/1 \text{ V p-p}$                                        | 1.25 to 3.38       | 1.10 to 3.60 |            | V                              |
| Linear Output Current                      |                                                                                  |                    | 30           |            | mA                             |
| Short-Circuit Current                      |                                                                                  |                    | 50           |            | mA                             |
| Capacitive Load Drive for 30% Overshoot    |                                                                                  |                    | 10/120       |            | pF                             |
| DISABLE CHARACTERISTICS                    |                                                                                  |                    |              |            |                                |
| Off Isolation                              | $f = 10 \text{ MHz}$                                                             |                    | –40          |            | dB                             |
| Turn-On Time                               | $V_O = 0 \text{ V to } 1 \text{ V, } 50\% \text{ logic to } 50\% \text{ output}$ |                    | 45           |            | ns                             |
| Turn-Off Time                              | $V_O = 0 \text{ V to } 1 \text{ V, } 50\% \text{ logic to } 50\% \text{ output}$ |                    | 50           |            | ns                             |
| $\overline{\text{DISABLE}}$ Voltage—Off/On | $V_{\text{DISABLE}} - V_{\text{LOGIC REFERENCE}}$                                |                    | 1.55/1.70    |            | V                              |
| Enabled Leakage Current                    | LOGIC REFERENCE = 0.4 V                                                          |                    | 70           |            | $\mu\text{A}$                  |
|                                            | $\overline{\text{DISABLE}} = 4.0 \text{ V}$                                      |                    | 2            |            | $\mu\text{A}$                  |
| Disabled Leakage Current                   | LOGIC REFERENCE = 0.4 V                                                          |                    | 30           |            | $\mu\text{A}$                  |
|                                            | $\overline{\text{DISABLE}} = 0.4 \text{ V}$                                      |                    | 33           |            | $\mu\text{A}$                  |
| POWER SUPPLY                               |                                                                                  |                    |              |            |                                |
| Operating Range                            | Output enabled                                                                   | $\pm 2.25$         | $\pm 5$      | $\pm 12.0$ | V                              |
| Quiescent Current                          |                                                                                  |                    | 6.7          | 7.5        | mA                             |
|                                            |                                                                                  |                    | 1.2          | 1.5        | mA                             |
| +Power Supply Rejection Ratio              | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V, } V_{EE} = 0 \text{ V}$                | –74                | –82          |            | dB                             |
| –Power Supply Rejection Ratio              | $V_{CC} = 5 \text{ V, } V_{EE} = -0.5 \text{ V to } +0.5 \text{ V}$              | –76                | –84          |            | dB                             |

## ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter                               | Rating                                          |
|-----------------------------------------|-------------------------------------------------|
| Supply Voltage                          | 26.4 V                                          |
| Power Dissipation                       | Observed power derating curves                  |
| Input Voltage (Common Mode)             | $\pm V_S \pm 1$ V                               |
| Differential Input Voltage <sup>1</sup> | $\pm 0.8$ V                                     |
| Differential Input Current              | $\pm 10$ mA                                     |
| Output Short-Circuit Duration           | Observed power derating curves                  |
| Storage Temperature Range               | $-65^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| Operating Temperature Range             | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$  |
| Lead Temperature (Soldering, 10 sec)    | $300^{\circ}\text{C}$                           |


<sup>1</sup> The AD8021 inputs are protected by diodes. Current-limiting resistors are not used to preserve the low noise. If a differential input exceeds  $\pm 0.8$  V, the input current should be limited to  $\pm 10$  mA.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## MAXIMUM POWER DISSIPATION

The maximum power that can be safely dissipated by the AD8021 is limited by the associated rise in junction temperature. The maximum safe junction temperature for plastic encapsulated devices is determined by the glass transition temperature of the plastic, approximately  $150^{\circ}\text{C}$ . Temporarily exceeding this limit can cause a shift in parametric performance due to a change in the stresses exerted on the die by the package. Exceeding a junction temperature of  $175^{\circ}\text{C}$  for an extended period can result in device failure.

While the AD8021 is internally short-circuit protected, this can not be sufficient to guarantee that the maximum junction temperature ( $150^{\circ}\text{C}$ ) is not exceeded under all conditions. To ensure proper operation, it is necessary to observe the maximum power derating curves.

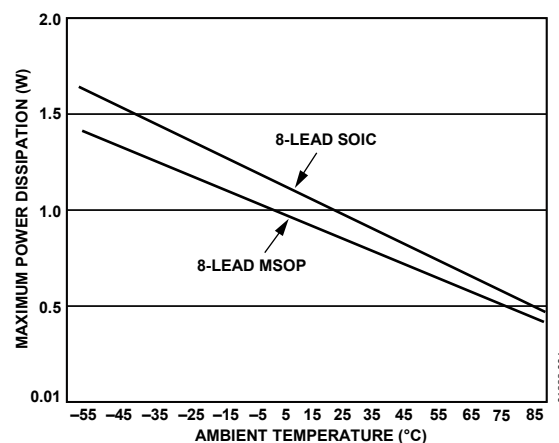Figure 3. Maximum Power Dissipation vs. Temperature<sup>1</sup>

<sup>1</sup> Specification is for device in free air: 8-lead SOIC:  $\theta_{JA} = 125^{\circ}\text{C}/\text{W}$ ; 8-lead MSOP:  $\theta_{JA} = 145^{\circ}\text{C}/\text{W}$ .

## ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

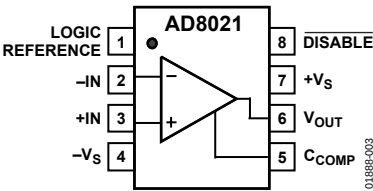


Figure 4. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic          | Description                                                                                |
|---------|-------------------|--------------------------------------------------------------------------------------------|
| 1       | LOGIC REFERENCE   | Reference for Pin 8 <sup>1</sup> Voltage Level. Connect to logic low supply.               |
| 2       | –IN               | Inverting Input.                                                                           |
| 3       | +IN               | Noninverting Input.                                                                        |
| 4       | –V <sub>S</sub>   | Negative Supply Voltage.                                                                   |
| 5       | C <sub>COMP</sub> | Compensation Capacitor. Tie to –V <sub>S</sub> . (See the Applications section for value.) |
| 6       | V <sub>OUT</sub>  | Output.                                                                                    |
| 7       | +V <sub>S</sub>   | Positive Supply Voltage.                                                                   |
| 8       | DISABLE           | Disable, Active Low.                                                                       |

<sup>1</sup> When Pin 8 (DISABLE) is higher than Pin 1 (LOGIC REFERENCE) by approximately 2 V or more, the part is enabled. When Pin 8 is brought down to within about 1.5 V of Pin 1, the part is disabled. (See the Specifications tables for exact disable and enable voltage levels.) If the disable feature is not going to be used, Pin 8 can be tied to +V<sub>S</sub> or a logic high source, and Pin 1 can be tied to ground or logic low. Alternatively, if Pin 1 and Pin 8 are not connected, the part is in an enabled state.

## TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5\text{ V}$ ,  $R_L = 1\text{ k}\Omega$ ,  $G = +2$ ,  $R_F = R_G = 499\text{ }\Omega$ ,  $R_S = 49.9\text{ }\Omega$ ,  $R_O = 976\text{ }\Omega$ ,  $R_D = 53.6\text{ }\Omega$ ,  $C_C = 7\text{ pF}$ ,  $C_L = 0$ ,  $C_F = 0$ ,  $V_{OUT} = 2\text{ V p-p}$ , frequency =  $1\text{ MHz}$ , unless otherwise noted.

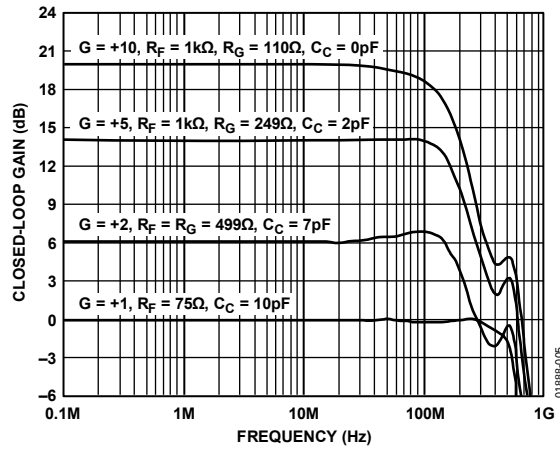


Figure 5. Small Signal Frequency Response vs. Frequency and Gain,  $V_{OUT} = 50\text{ mV p-p}$ , Noninverting (See Figure 48)

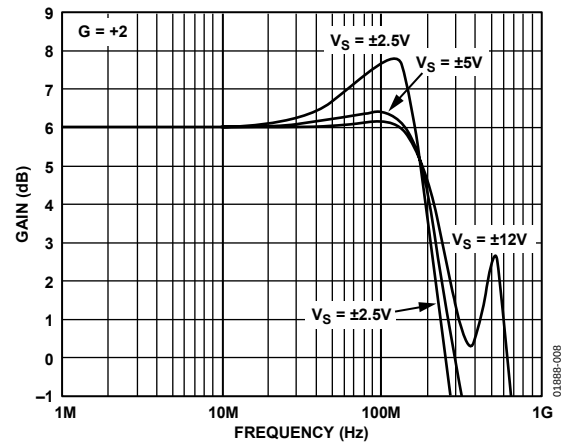


Figure 8. Small Signal Frequency Response vs. Frequency and Supply,  $V_{OUT} = 50\text{ mV p-p}$ , Noninverting (See Figure 48)

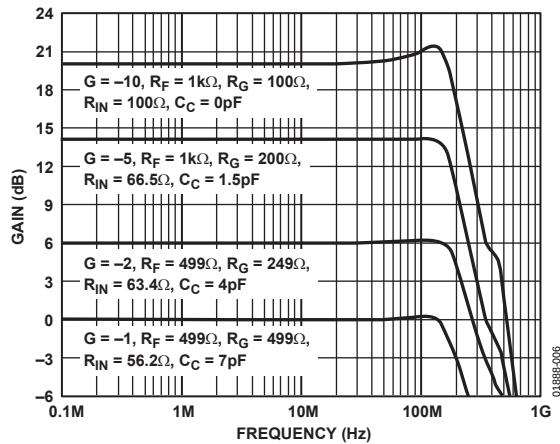


Figure 6. Small Signal Frequency Response vs. Frequency and Gain,  $V_{OUT} = 50\text{ mV p-p}$  Inverting (See Figure 48)

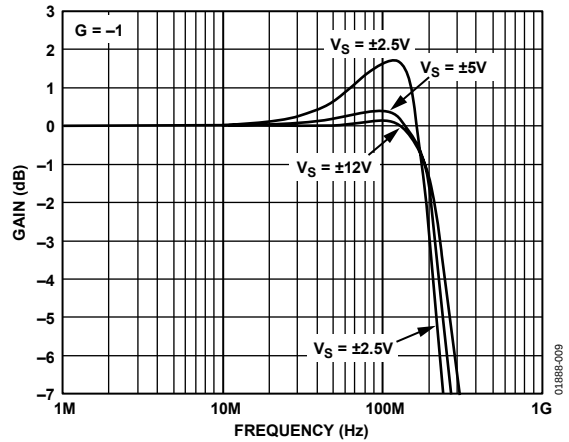


Figure 9. Small Signal Frequency Response vs. Frequency and Supply,  $V_{OUT} = 50\text{ mV p-p}$ , Inverting (See Figure 50)

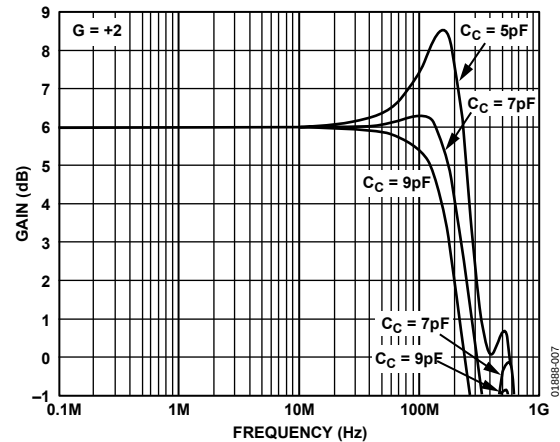


Figure 7. Small Signal Frequency Response vs. Frequency and Compensation Capacitor,  $V_{OUT} = 50\text{ mV p-p}$  (See Figure 48)

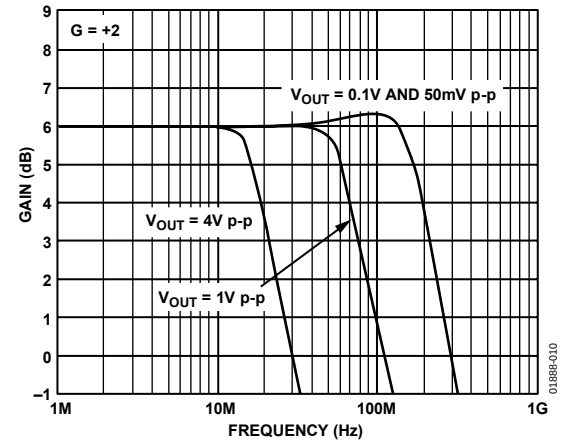


Figure 10. Frequency Response vs. Frequency and  $V_{OUT}$ , Noninverting (See Figure 48)

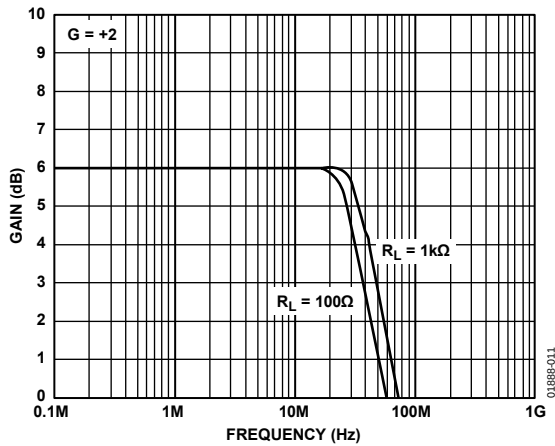


Figure 11. Large Signal Frequency Response vs. Frequency and Load, Noninverting (See Figure 49)

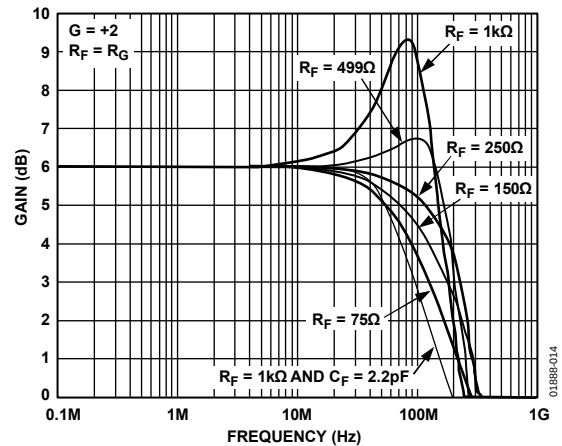


Figure 14. Small Signal Frequency Response vs. Frequency and  $R_F$ , Noninverting,  $V_{OUT} = 50 \text{ mV p-p}$  (See Figure 48)

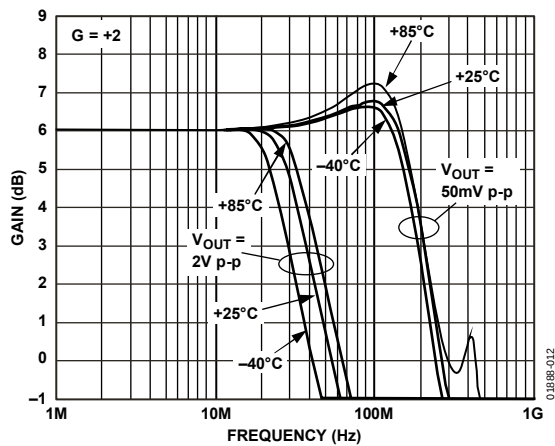


Figure 12. Frequency Response vs. Frequency, Temperature, and  $V_{OUT}$ , Noninverting (See Figure 48)

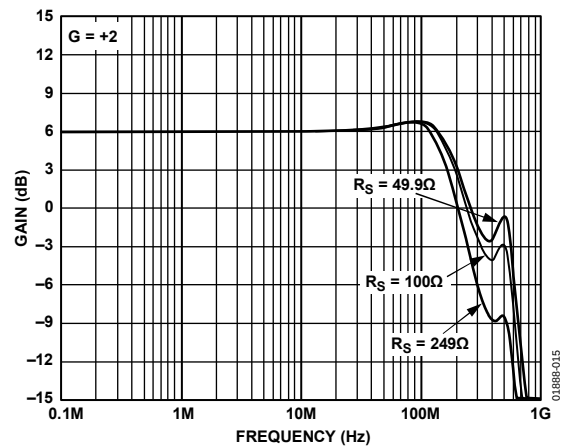


Figure 15. Small Signal Frequency Response vs. Frequency and  $R_S$ , Noninverting,  $V_{OUT} = 50 \text{ mV p-p}$  (See Figure 48)

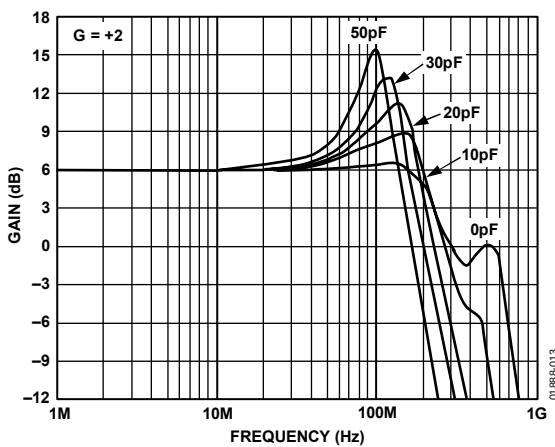


Figure 13. Small Signal Frequency Response vs. Frequency and Capacitive Load, Noninverting,  $V_{OUT} = 50 \text{ mV p-p}$  (See Figure 49 and Figure 71)

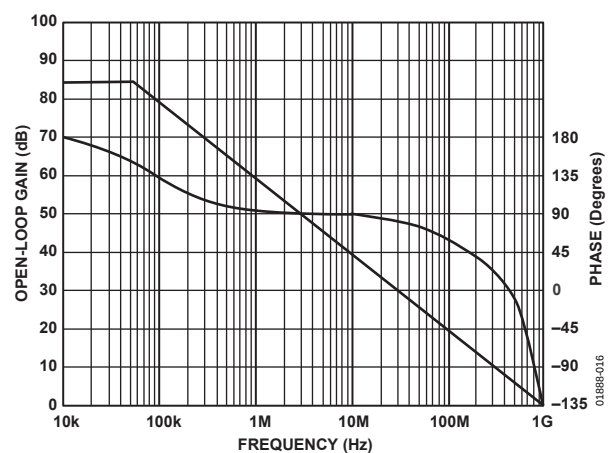


Figure 16. Open-Loop Gain and Phase vs. Frequency,  $R_G = 100 \Omega$ ,  $R_F = 1 \text{ k}\Omega$ ,  $R_O = 976 \Omega$ ,  $R_D = 53.6 \Omega$ ,  $C_C = 0 \text{ pF}$  (See Figure 50)

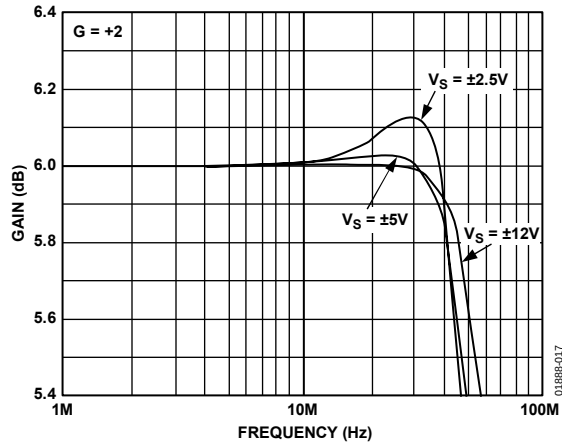


Figure 17. 0.1 dB Flatness vs. Frequency and Supply,  $V_{OUT} = 1\text{ V p-p}$ ,  $R_L = 150\ \Omega$ , Noninverting (See Figure 49)

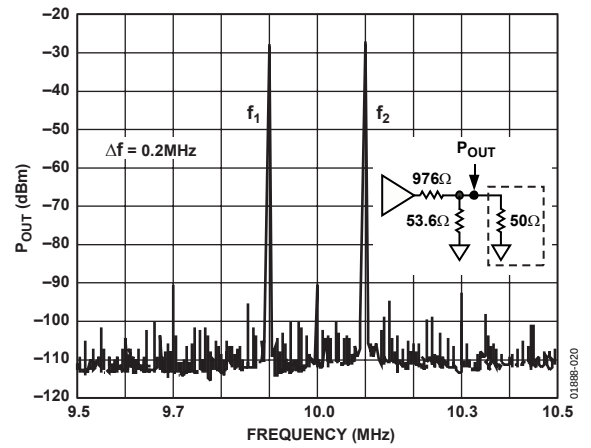


Figure 20. Intermodulation Distortion vs. Frequency

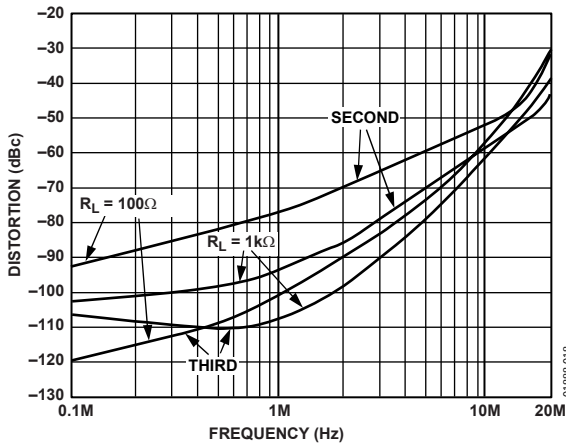


Figure 18. Second and Third Harmonic Distortion vs. Frequency and  $R_L$

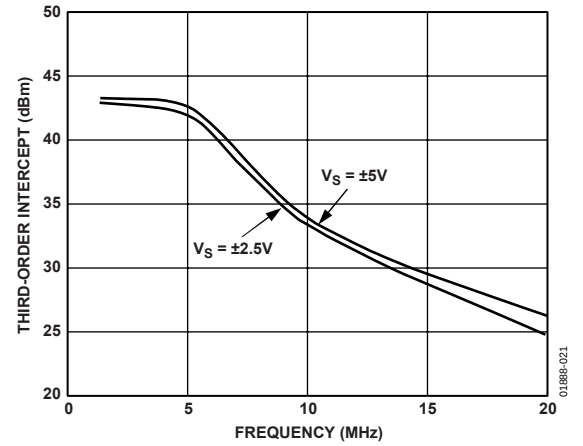


Figure 21. Third-Order Intercept vs. Frequency and Supply Voltage

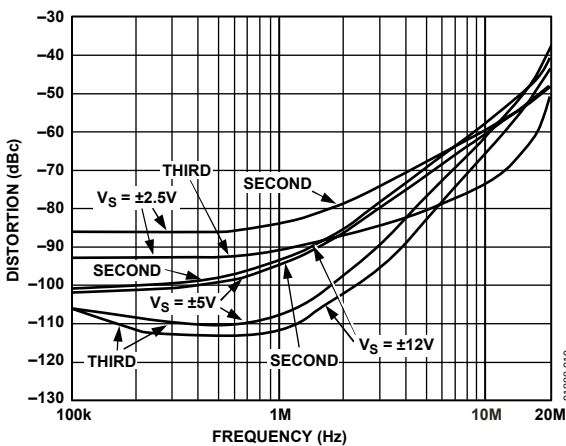


Figure 19. Second and Third Harmonic Distortion vs. Frequency and  $V_S$

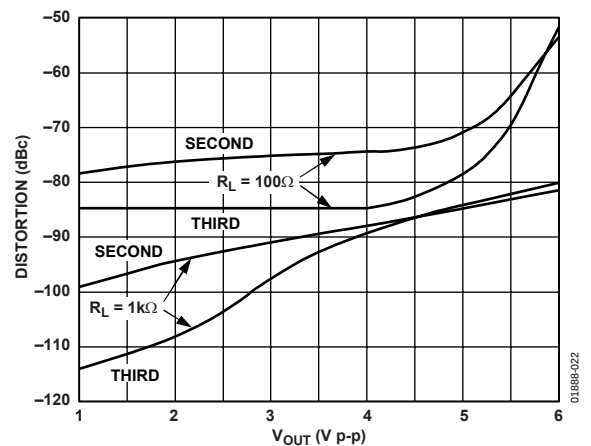


Figure 22. Second and Third Harmonic Distortion vs.  $V_{OUT}$  and  $R_L$

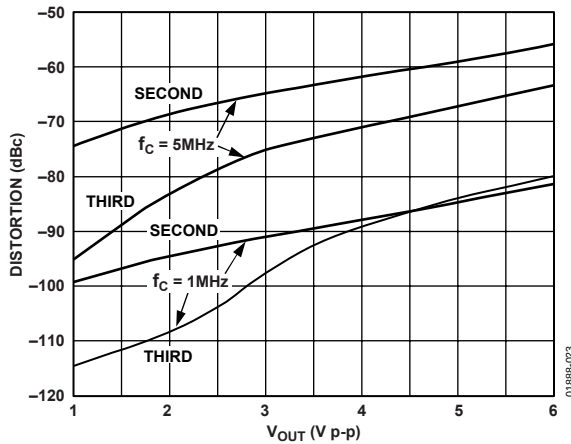


Figure 23. Second and Third Harmonic Distortion vs.  $V_{OUT}$  and Fundamental Frequency ( $f_C$ ),  $G = +2$

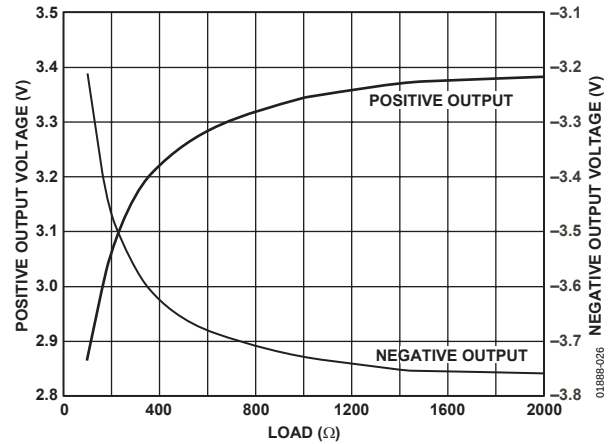


Figure 26. DC Output Voltages vs. Load (See Figure 48)

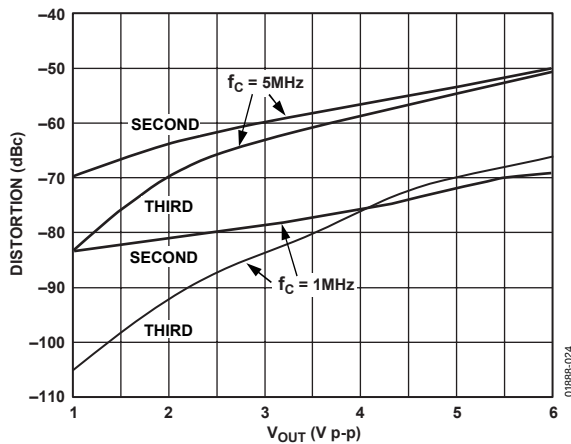


Figure 24. Second and Third Harmonic Distortion vs.  $V_{OUT}$  and Fundamental Frequency ( $f_C$ ),  $G = +10$

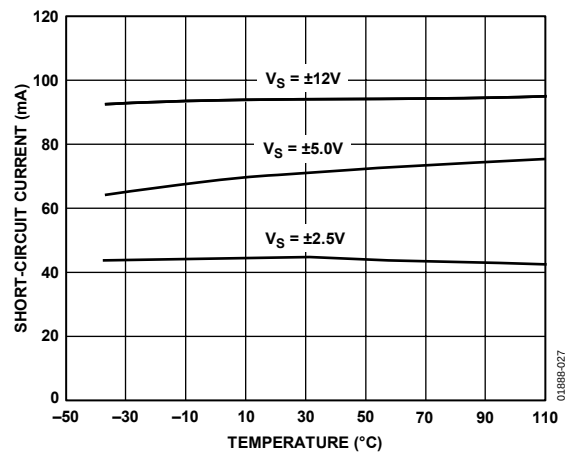


Figure 27. Short-Circuit Current to Ground vs. Temperature

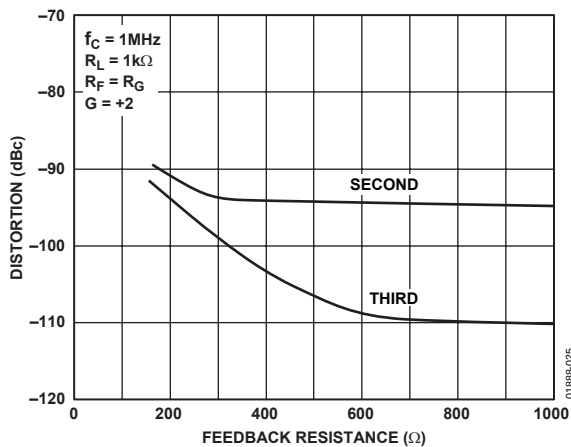


Figure 25. Second and Third Harmonic Distortion vs. Feedback Resistor ( $R_F$ )

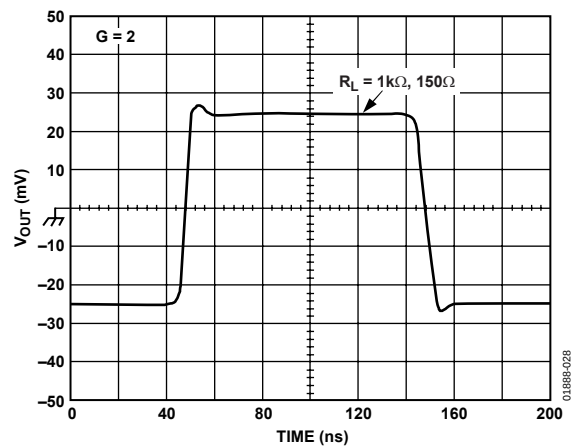


Figure 28. Small Signal Transient Response vs.  $R_L$ ,  $V_O = 50$  mV p-p, Noninverting (See Figure 49)

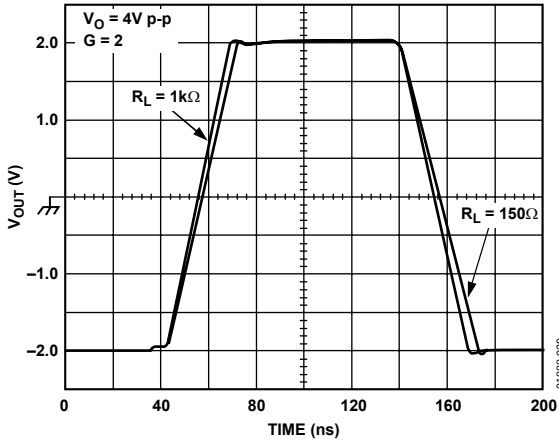


Figure 29. Large Signal Transient Response vs.  $R_L$ , Noninverting (See Figure 49)

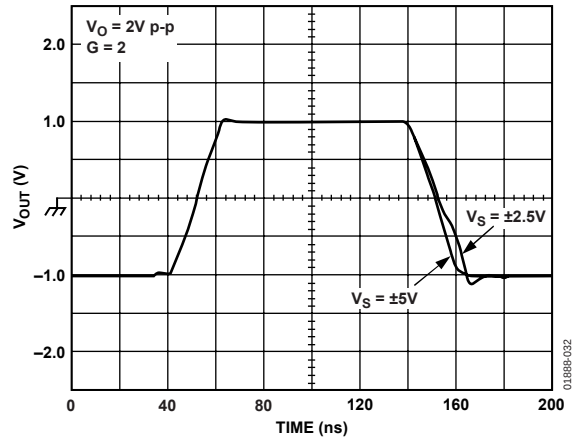


Figure 32. Large Signal Transient Response vs.  $V_S$  (See Figure 48)

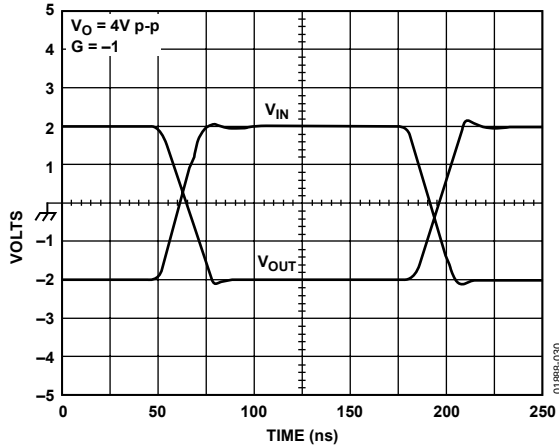


Figure 30. Large Signal Transient Response, Inverting (See Figure 50)

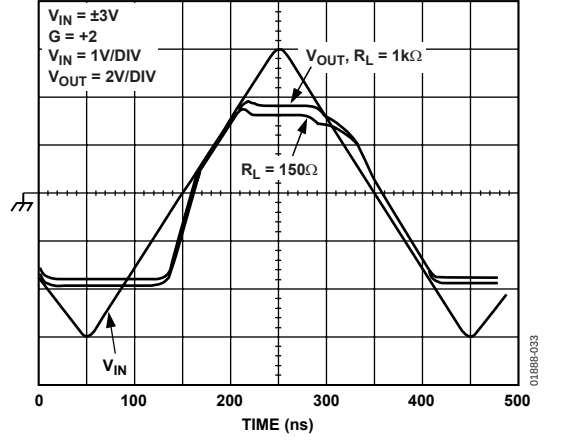


Figure 33. Overdrive Recovery vs.  $R_L$  (See Figure 49)

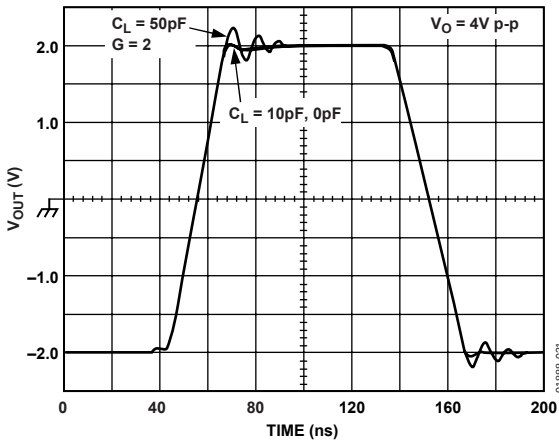


Figure 31. Large Signal Transient Response vs.  $C_L$  (See Figure 48)

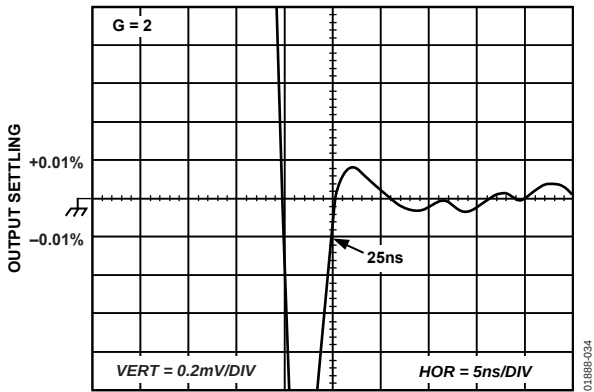


Figure 34. 0.01% Settling Time, 2 V Step

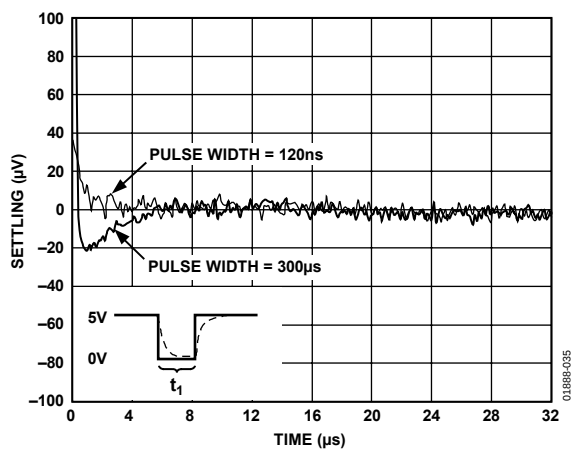


Figure 35. Long-Term Settling, 0 V to 5 V,  $V_S = \pm 12\text{ V}$ ,  $G = +13$

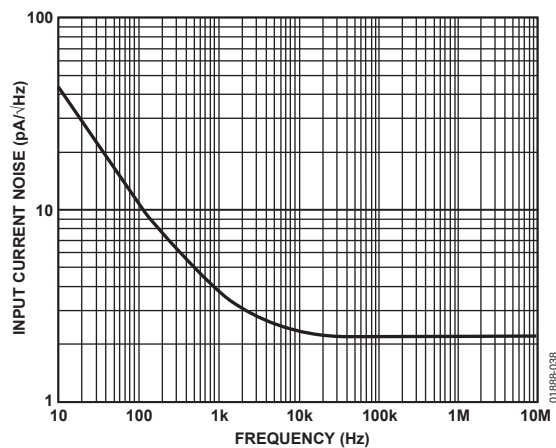


Figure 38. Input Current Noise vs. Frequency

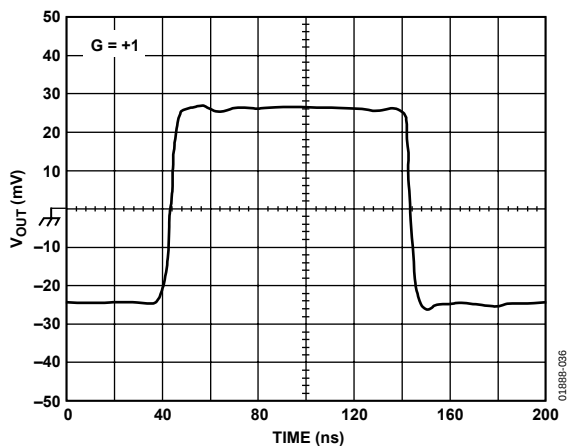


Figure 36. Small Signal Transient Response,  $V_O = 50\text{ mV p-p}$ ,  $G = +1$  (See Figure 48)

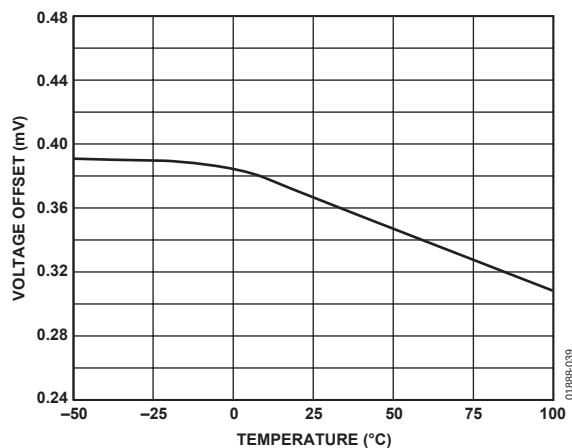


Figure 39.  $V_{\text{OS}}$  vs. Temperature

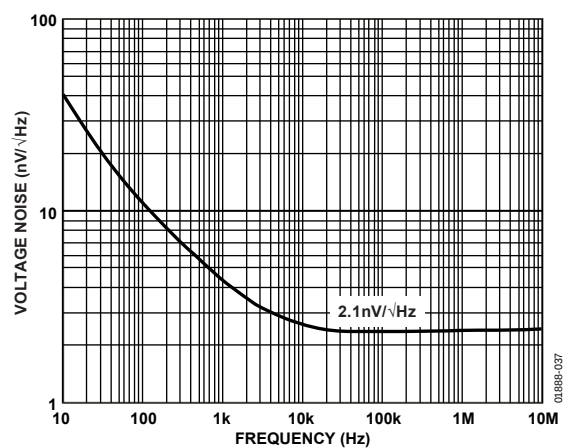


Figure 37. Input Voltage Noise vs. Frequency

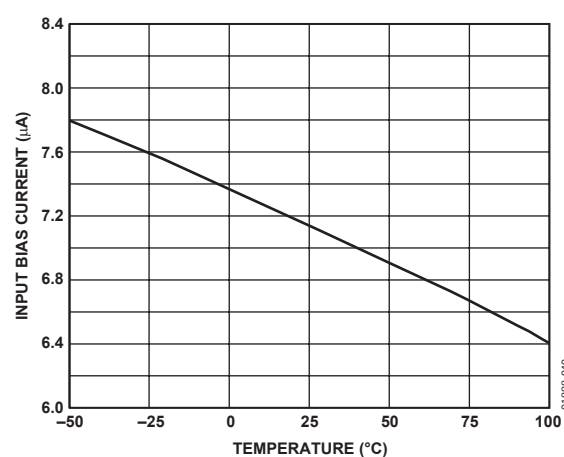


Figure 40. Input Bias Current vs. Temperature

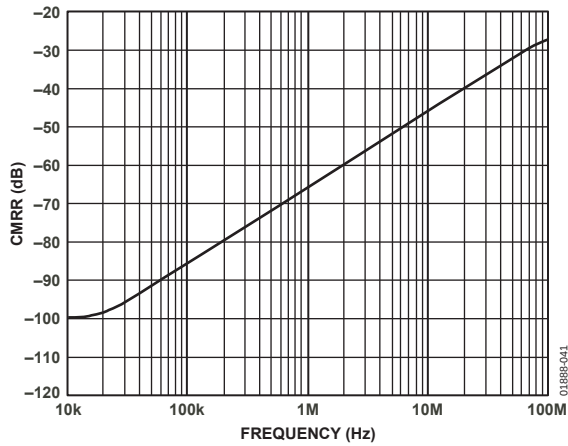


Figure 41. CMRR vs. Frequency (See Figure 51)

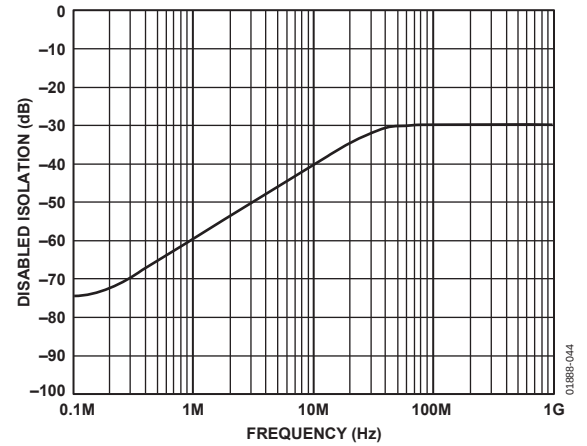


Figure 44. Input-to-Output Isolation, Chip Disabled (See Figure 54)

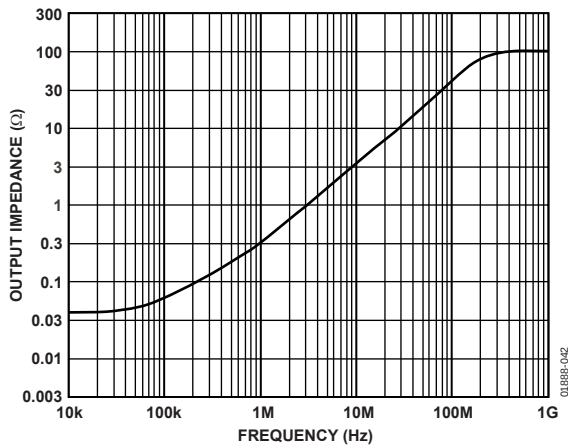


Figure 42. Output Impedance vs. Frequency, Chip Enabled (See Figure 52)

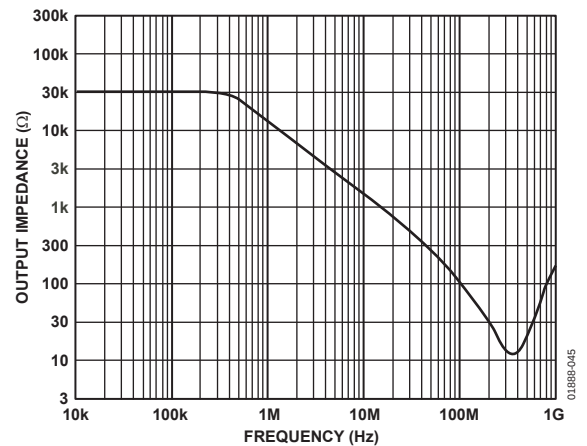


Figure 45. Output Impedance vs. Frequency, Chip Disabled (See Figure 55)

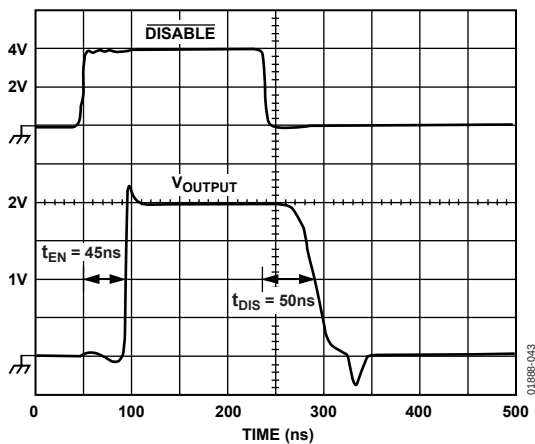


Figure 43. Enable ( $t_{EN}$ )/Disable ( $t_{DIS}$ ) Time vs.  $V_{OUT}$  (See Figure 53)

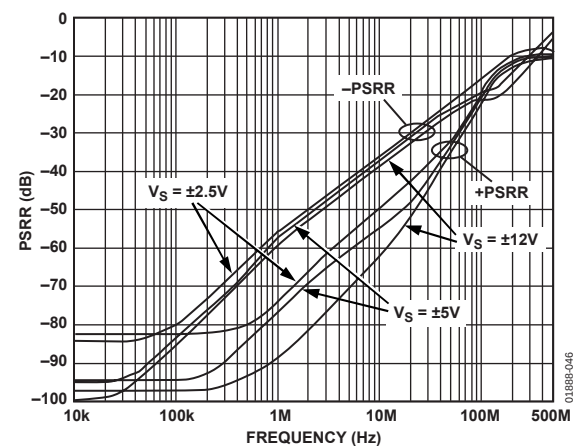


Figure 46. PSRR vs. Frequency and Supply Voltage (See Figure 56 and Figure 57)

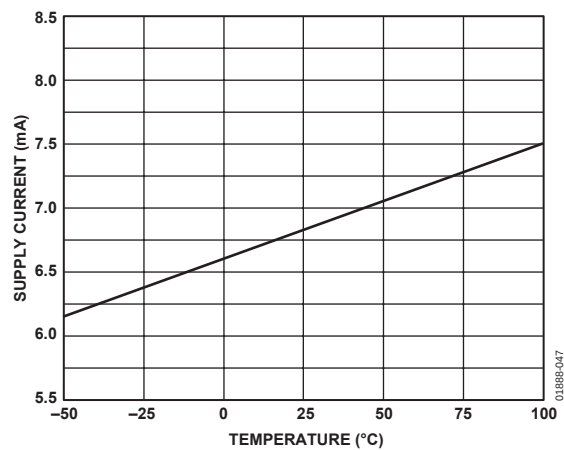


Figure 47. Quiescent Supply Current vs. Temperature



1000 070

01888-049

1000 062

01888-050

01888-051

Rev. F | Page 17 of 28

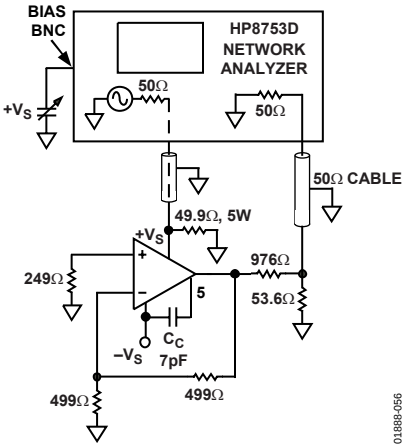


Figure 56. Positive PSRR

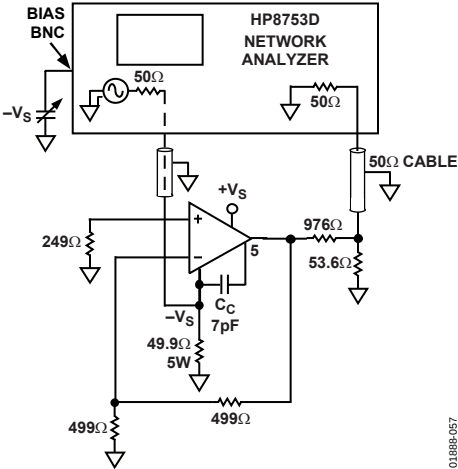


Figure 57. Negative PSRR

## APPLICATIONS

The typical voltage feedback op amp is frequency stabilized with a fixed internal capacitor,  $C_{INTERNAL}$ , using dominant pole compensation. To a first-order approximation, voltage feedback op amps have a fixed gain bandwidth product. For example, if its  $-3$  dB bandwidth is 200 MHz for a gain of  $G = +1$ ; at a gain of  $G = +10$ , its bandwidth is only about 20 MHz. The AD8021 is a voltage feedback op amp with a minimal  $C_{INTERNAL}$  of about 1.5 pF. By adding an external compensation capacitor,  $C_C$ , the user can circumvent the fixed gain bandwidth limitation of other voltage feedback op amps.

Unlike the typical op amp with fixed compensation, the AD8021 allows the user to:

- Maximize the amplifier bandwidth for closed-loop gains between 1 and 10, avoiding the usual loss of bandwidth and slew rate.
- Optimize the trade-off between bandwidth and phase margin for a particular application.
- Match bandwidth in gain blocks with different noise gains, such as when designing differential amplifiers (as shown in Figure 65).

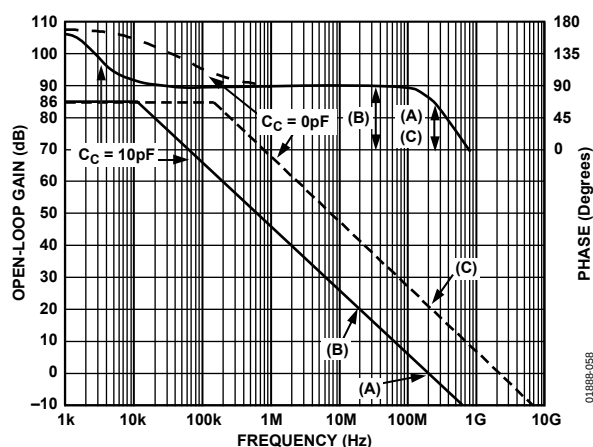


Figure 58. Simplified Diagram of Open-Loop Gain and Phase Response

Figure 58 is the AD8021 gain and phase plot that has been simplified for instructional purposes. Arrow A in Figure 58 shows a bandwidth of about 200 MHz and a phase margin at about  $60^\circ$  when the desired closed-loop gain is  $G = +1$  and the value chosen for the external compensation capacitor is  $C_C = 10$  pF. If the gain is changed to  $G = +10$  and  $C_C$  is fixed at 10 pF, then (as expected for a typical op amp) the bandwidth is

degraded to about 20 MHz and the phase margin increases to  $90^\circ$  (Arrow B). However, by reducing  $C_C$  to 0 pF, the bandwidth and phase margin return to about 200 MHz and  $60^\circ$  (Arrow C), respectively. In addition, the slew rate is dramatically increased, as it roughly varies with the inverse of  $C_C$ .

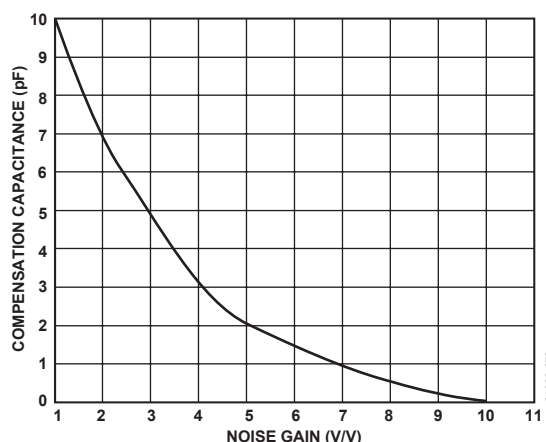


Figure 59. Suggested Compensation Capacitance vs. Gain for Maintaining 1 dB Peaking

Table 6 and Figure 59 provide recommended values of compensation capacitance at various gains and the corresponding slew rate, bandwidth, and noise. Note that the value of the compensation capacitor depends on the circuit noise gain, not the voltage gain. As shown in Figure 60, the noise gain,  $G_N$ , of an op amp gain block is equal to its noninverting voltage gain, regardless of whether it is actually used for inverting or noninverting gain. Thus,

$$\text{Noninverting } G_N = R_F/R_G + 1$$

$$\text{Inverting } G_N = R_F/R_G + 1$$

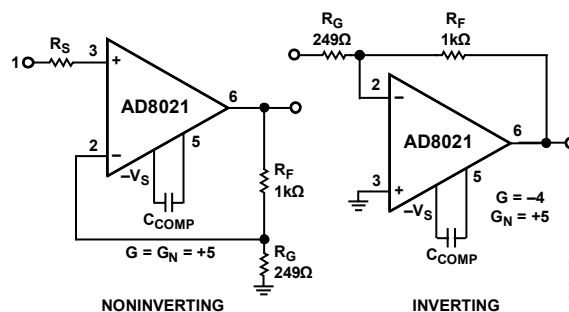


Figure 60. The Noise Gain of Both is 5

# AD8021

$C_F = C_L = 0$ ,  $R_L = 1 \text{ k}\Omega$ ,  $R_{IN} = 49.9 \text{ }\Omega$  (see Figure 49).

**Table 6. Recommended Component Values**

| Noise Gain<br>(Noninverting<br>Gain) | $R_S$ ( $\Omega$ ) | $R_F$ ( $\Omega$ ) | $R_G$ ( $\Omega$ ) | $C_{COMP}$ (pF) | Slew Rate (V/ $\mu$ s) | –3 dB<br>SS BW<br>(MHz) | Output Noise<br>(AD8021 Only)<br>(nV/ $\sqrt{\text{Hz}}$ ) | Output Noise<br>(AD8021 with Resistors)<br>(nV/ $\sqrt{\text{Hz}}$ ) |
|--------------------------------------|--------------------|--------------------|--------------------|-----------------|------------------------|-------------------------|------------------------------------------------------------|----------------------------------------------------------------------|
| 1                                    | 75                 | 75                 | NA                 | 10              | 120                    | 490                     | 2.1                                                        | 2.8                                                                  |
| 2                                    | 49.9               | 499                | 499                | 7               | 150                    | 205                     | 4.3                                                        | 8.2                                                                  |
| 5                                    | 49.9               | 1 k                | 249                | 2               | 300                    | 185                     | 10.7                                                       | 15.5                                                                 |
| 10                                   | 49.9               | 1 k                | 110                | 0               | 420                    | 150                     | 21.2                                                       | 27.9                                                                 |
| 20                                   | 49.9               | 1 k                | 52.3               | 0               | 200                    | 42                      | 42.2                                                       | 52.7                                                                 |
| 100                                  | 49.9               | 1 k                | 10                 | 0               | 34                     | 6                       | 211.1                                                      | 264.1                                                                |

With the AD8021, a variety of trade-offs can be made to fine-tune its dynamic performance. Sometimes more bandwidth or slew rate is needed at a particular gain. Reducing the compensation capacitance, as illustrated in Figure 7, increases the bandwidth and peaking due to a decrease in phase margin. On the other hand, if more stability is needed, increasing the compensation capacitor decreases the bandwidth while increasing the phase margin.

As with all high speed amplifiers, parasitic capacitance and inductance around the amplifier can affect its dynamic response. Often, the input capacitance (due to the op amp itself, as well as the PC board) has a significant effect. The feedback resistance, together with the input capacitance, can contribute to a loss of phase margin, thereby affecting the high frequency response, as shown in Figure 14. A capacitor ( $C_F$ ) in parallel with the feedback resistor can compensate for this phase loss.

Additionally, any resistance in series with the source creates a pole with the input capacitance (as well as dampen high frequency resonance due to package and board inductance and capacitance), the effect of which is shown in Figure 15.

It must also be noted that increasing resistor values increases the overall noise of the amplifier and that reducing the feedback resistor value increases the load on the output stage, thus increasing distortion (see Figure 22).

## USING THE DISABLE FEATURE

When Pin 8 ( $\overline{\text{DISABLE}}$ ) is higher than Pin 1 (LOGIC REFERENCE) by approximately 2 V or more, the part is enabled. When Pin 8 is brought down to within about 1.5 V of Pin 1, the part is disabled. See Table 1 for exact disable and enable voltage levels. If the disable feature is not used, Pin 8 can be tied to  $V_S$  or a logic high source, and Pin 1 can be tied to ground or logic low. Alternatively, if Pin 1 and Pin 8 are not connected, the part is in an enabled state.

## THEORY OF OPERATION

The AD8021 is fabricated on the second generation of Analog Devices proprietary High Voltage eXtra-Fast Complementary Bipolar (XFCB) process, which enables the construction of PNP and NPN transistors with similar  $f_T$ s in the 3 GHz region. The transistors are dielectrically isolated from the substrate (and each other), eliminating the parasitic and latch-up problems caused by junction isolation. It also reduces nonlinear capacitance (a source of distortion) and allows a higher transistor,  $f_T$ , for a given quiescent current. The supply current is trimmed, which results in less part-to-part variation of bandwidth, slew rate, distortion, and settling time.

As shown in Figure 61, the AD8021 input stage consists of an NPN differential pair in which each transistor operates at a 0.8 mA collector current. This allows the input devices a high transconductance; thus, the AD8021 has a low input noise of 2.1 nV/ $\sqrt{\text{Hz}}$  @ 50 kHz. The input stage drives a folded cascode that consists of a pair of PNP transistors. The folded cascode and current mirror provide a differential-to-single-ended conversion of signal current. This current then drives the high impedance node (Pin 5), where the  $C_C$  external capacitor is connected. The output stage preserves this high impedance with a current gain of 5000, so that the AD8021 can maintain a high open-loop gain even when driving heavy loads.

Two internal diode clamps across the inputs (Pin 2 and Pin 3) protect the input transistors from large voltages that could otherwise cause emitter-base breakdown, which would result in degradation of offset voltage and input bias current.

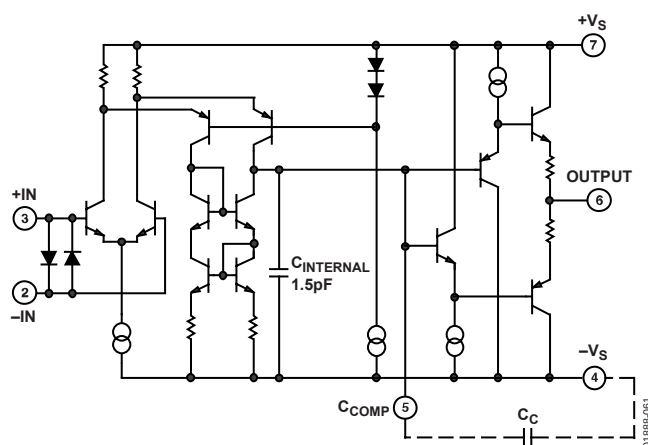


Figure 61. Simplified Schematic

## PCB LAYOUT CONSIDERATIONS

As with all high speed op amps, achieving optimum performance from the AD8021 requires careful attention to PC board layout. Particular care must be exercised to minimize lead lengths between the ground leads of the bypass capacitors and between the compensation capacitor and the negative supply. Otherwise, lead inductance can influence the frequency response and even cause high frequency oscillations. Use of a multilayer printed circuit board, with an internal ground plane, reduces ground noise and enables a compact component arrangement.

Due to the relatively high impedance of Pin 5 and low values of the compensation capacitor, a guard ring is recommended. The guard ring is simply a PC trace that encircles Pin 5 and is connected to the output, Pin 6, which is at the same potential as Pin 5. This serves two functions. It shields Pin 5 from any local circuit noise generated by surrounding circuitry. It also minimizes stray capacitance, which would tend to otherwise reduce the bandwidth. An example of a guard ring layout is shown in Figure 62.

Also shown in Figure 62, the compensation capacitor is located immediately adjacent to the edge of the AD8021 package, spanning Pin 4 and Pin 5. This capacitor must be a high quality surface-mount COG or NPO ceramic. The use of leaded capacitors is not recommended. The high frequency bypass capacitor(s) should be located immediately adjacent to the supplies, Pin 4 and Pin 7.

To achieve the shortest possible lead length at the inverting input, the feedback resistor  $R_F$  is located beneath the board and spans the distance from the output, Pin 6, to inverting input Pin 2. The return node of Resistor  $R_G$  should be situated as close as possible to the return node of the negative supply bypass capacitor connected to Pin 4.

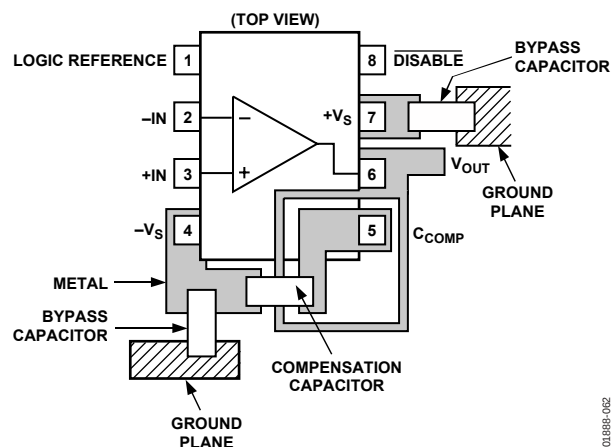


Figure 62. Recommended Location of Critical Components and Guard Ring

# AD8021

## DRIVING 16-BIT ADCs

Low noise and adjustable compensation make the AD8021 especially suitable as a buffer/driver for high resolution ADCs.

As seen in Figure 19, the harmonic distortion is better than 90 dBc at frequencies between 100 kHz and 1 MHz. This is an advantage for complex waveforms that contain high frequency information, because the phase and gain integrity of the sampled waveform can be preserved throughout the conversion process. The increase in loop gain results in improved output regulation and lower noise when the converter input changes state during a sample. This advantage is particularly apparent when using 16-bit high resolution ADCs with high sampling rates.

Figure 63 shows a typical ADC driver configuration. The AD8021 is in an inverting gain of  $-7.5$ ,  $f_c$  is 65 kHz, and its output voltage is 10 V p-p. The results are listed in Table 7.

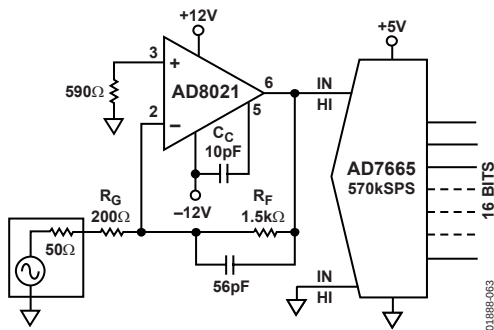


Figure 63. Inverting ADC Driver, Gain =  $-7.5$ ,  $f_c$  = 65 kHz

Table 7. Summary of ADC Driver Performance ( $f_c$  = 65 kHz,  $V_{OUT}$  = 10 V p-p)

| Parameter                  | Measurement | Unit |
|----------------------------|-------------|------|
| Second Harmonic Distortion | -101.3      | dBc  |
| Third Harmonic Distortion  | -109.5      | dBc  |
| THD                        | -100.0      | dBc  |
| SFDR                       | +100.3      | dBc  |

Figure 64 shows another ADC driver connection. The circuit was tested with a noninverting gain of 10.1 and an output voltage of approximately 20 V p-p for optimum resolution and noise performance. No filtering was used. An FFT was performed using Analog Devices evaluation software for the AD7665 16-bit converter. The results are listed in Table 8.

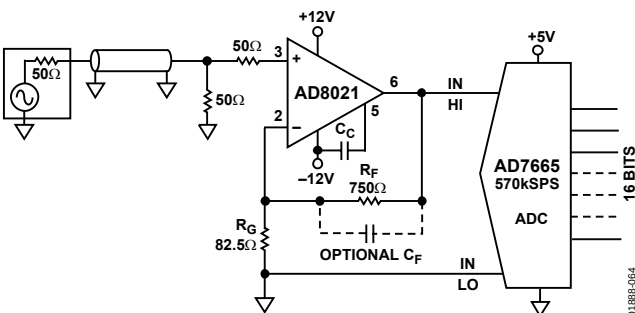


Figure 64. Noninverting ADC Driver, Gain = 10,  $f_c$  = 100 kHz

Table 8. Summary of ADC Driver Performance ( $f_c$  = 100 kHz,  $V_{OUT}$  = 20 V p-p)

| Parameter                  | Measurement | Unit |
|----------------------------|-------------|------|
| Second Harmonic Distortion | -92.6       | dBc  |
| Third Harmonic Distortion  | -86.4       | dBc  |
| THD                        | -84.4       | dBc  |
| SFDR                       | +5.4        | dBc  |

## DIFFERENTIAL DRIVER

The AD8021 is uniquely suited as a low noise differential driver for many ADCs, balanced lines, and other applications requiring differential drive. If pairs of internally compensated op amps are configured as inverter and follower, the noise gain of the inverter is higher than that of the follower section, resulting in an imbalance in the frequency response (see Figure 66).

A better solution takes advantage of the external compensation feature of the AD8021. By reducing the  $C_{COMP}$  value of the inverter, its bandwidth can be increased to match that of the follower, avoiding compromises in gain bandwidth and phase delay. The inverting and noninverting bandwidths can be closely matched using the compensation feature, thus minimizing distortion.

Figure 65 illustrates an inverter-follower driver circuit operating at a gain of 2, using individually compensated AD8021s. The values of feedback and load resistors were selected to provide a total load of less than 1 kΩ, and the equivalent resistances seen at each op amp's inputs were matched to minimize offset voltage and drift. Figure 67 is a plot of the resulting ac responses of driver halves.

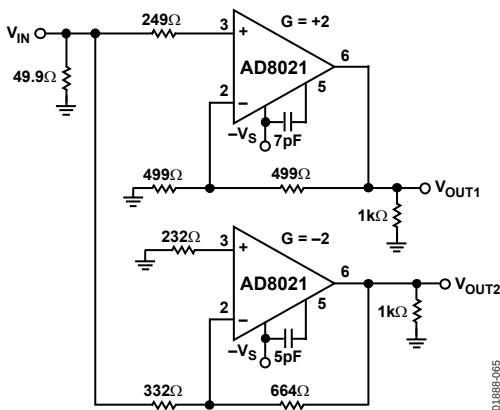


Figure 65. Differential Amplifier

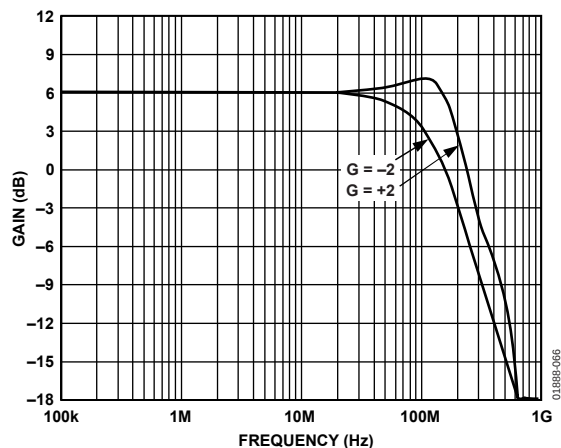


Figure 66. AC Response of Two Identically Compensated High Speed Op Amps Configured for a Gain of +2 and a Gain of -2

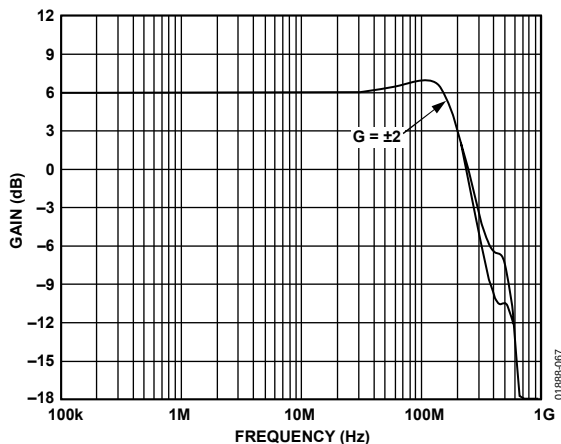


Figure 67. AC Response of Two Dissimilarly Compensated AD8021 Op Amps (Figure 66) Configured for a Gain of +2 and a Gain of -2, (Note the Close Gain Match)

USING THE AD8021 IN ACTIVE FILTERS

The low noise and high gain bandwidth of the AD8021 make it an excellent choice in active filter circuits. Most active filter literature provides resistor and capacitor values for various filters but neglects the effect of the op amp's finite bandwidth on filter performance; ideal filter response with infinite loop gain is implied. Unfortunately, real filters do not behave in this manner. Instead, they exhibit finite limits of attenuation, depending on the gain bandwidth of the active device. Good low-pass filter performance requires an op amp with high gain bandwidth for attenuation at high frequencies, and low noise and high dc gain for low frequency, pass-band performance.

Figure 68 shows the schematic of a 2-pole, low-pass active filter and lists typical component values for filters having a Bessel-type response with a gain of 2 and a gain of 5. Figure 69 is a network analyzer plot of this filter's performance.

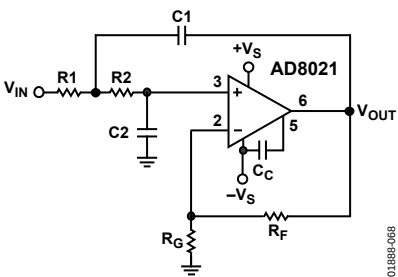


Figure 68. Schematic of a Second-Order, Low-Pass Active Filter

Table 9. Typical Component Values for Second-Order, Low-Pass Active Filter of Figure 68

| Gain | R1 (Ω) | R2 (Ω) | R <sub>F</sub> (Ω) | R <sub>G</sub> (Ω) | C1 (nF) | C2 (nF) | C <sub>C</sub> (pF) |
|------|--------|--------|--------------------|--------------------|---------|---------|---------------------|
| 2    | 71.5   | 215    | 499                | 499                | 10      | 10      | 7                   |
| 5    | 44.2   | 365    | 365                | 90.9               | 10      | 10      | 2                   |

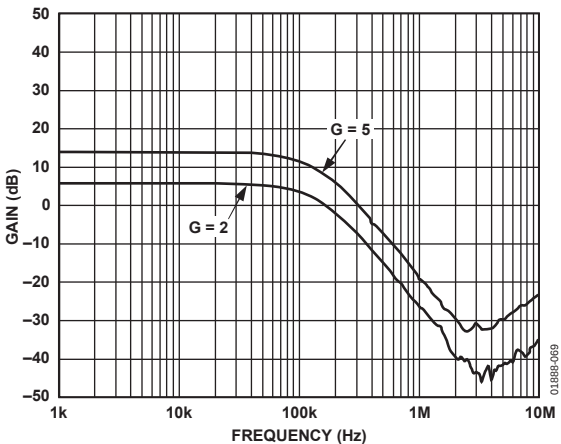


Figure 69. Frequency Response of the Filter Circuit of Figure 68 for Two Different Gains

DRIVING CAPACITIVE LOADS

When the AD8021 drives a capacitive load, the high frequency response can show excessive peaking before it rolls off. Two techniques can be used to improve stability at high frequency and reduce peaking. The first technique is to increase the compensation capacitor,  $C_C$ , which reduces the peaking while maintaining gain flatness at low frequencies. The second technique is to add a resistor,  $R_{SNUB}$ , in series between the output pin of the AD8021 and the capacitive load,  $C_L$ . Figure 70 shows the response of the AD8021 when both  $C_C$  and  $R_{SNUB}$  are used to reduce peaking. For a given  $C_L$ , Figure 71 can be used to determine the value of  $R_{SNUB}$  that maintains 2 dB of peaking in the frequency response. Note, however, that using  $R_{SNUB}$  attenuates the low frequency output by a factor of  $R_{LOAD}/(R_{SNUB} + R_{LOAD})$ .

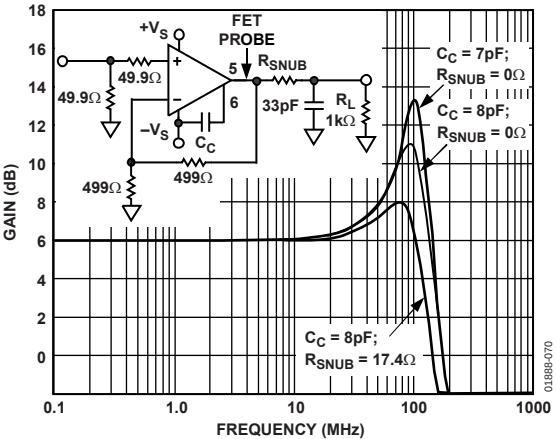


Figure 70. Peaking vs.  $R_{SNUB}$  and  $C_C$  for  $C_L = 33 pF$


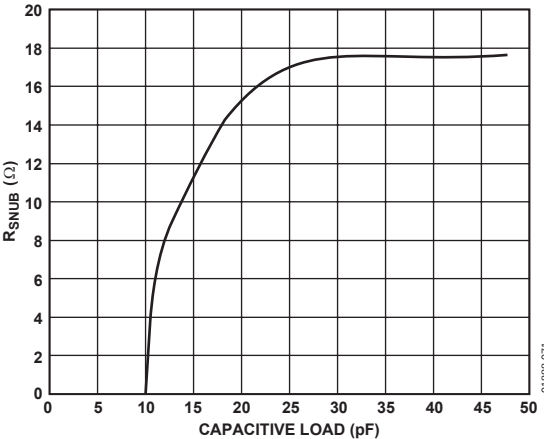


Figure 71. Relationship of  $R_{SNUB}$  vs.  $C_L$  for 2 dB Peaking at a Gain of +2

## OUTLINE DIMENSIONS

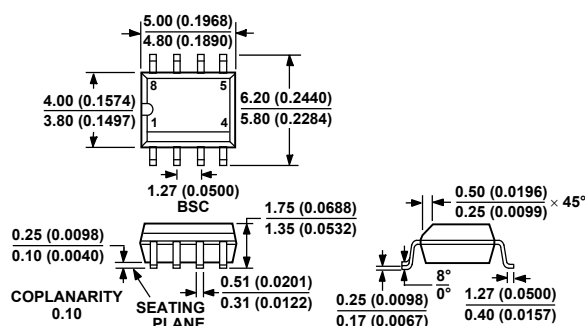


COMPLIANT TO JEDEC STANDARDS MS-012-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 72. 8-Lead Standard Small Outline Package [SOIC]

Narrow Body (R-8)

Dimensions shown in millimeters and (inches)

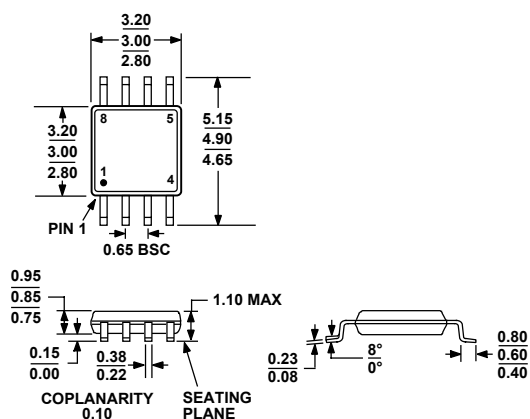

COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 73. 8-Lead Mini Small Outline Package [MSOP]

(RM-8)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model                         | Temperature Range | Package Description | Package Option | Branding |
|-------------------------------|-------------------|---------------------|----------------|----------|
| AD8021AR                      | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021AR-REEL                 | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021AR-REEL7                | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021ARZ <sup>1</sup>        | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021ARZ-REEL <sup>1</sup>   | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021ARZ-REEL7 <sup>1</sup>  | −40°C to +85°C    | 8-Lead SOIC         | R-8            |          |
| AD8021ARM                     | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA      |
| AD8021ARM-REEL                | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA      |
| AD8021ARM-REEL7               | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA      |
| AD8021ARMZ <sup>1</sup>       | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA#     |
| AD8021ARMZ-REEL <sup>1</sup>  | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA#     |
| AD8021ARMZ-REEL7 <sup>1</sup> | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | HNA#     |

<sup>1</sup>Z = Pb-free part, # denotes lead-free product may be top or bottom marked.

**AD8021**

**NOTES**

**NOTES**

**AD8021**

**NOTES**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)