

### Main

|                           |                              |
|---------------------------|------------------------------|
| Range of product          | Harmony XAC                  |
| Product or component type | Contact block                |
| Component name            | XESB                         |
| Electrical circuit type   | Control circuit              |
| Contact block application | Single speed                 |
| Contact block type        | Single                       |
| Type of operator          | Spring return                |
| Product compatibility     | XAB91...<br>XACB<br>XACM     |
| Mechanical interlocking   | Without mechanical interlock |
| Mounting of block         | Front mounting               |
| Contact operation         | Snap action                  |

### Complementary

|   |   |
|---|---|
| Connections - terminals                                   | Screw clamp terminals, connection capacity: 1 x 2.5 mm <sup>2</sup> with or without cable end<br>Screw clamp terminals, connection capacity: 2 x 1.5 mm <sup>2</sup> with or without cable end  |
| Mechanical durability                                     | 1000000 cycles  |
| Contact code designation                                  | A300 AC-15, U <sub>e</sub> = 240 V, I <sub>e</sub> = 3 A conforming to IEC 60947-5-1 appendix A<br>Q300 DC-13, U <sub>e</sub> = 250 V, I <sub>e</sub> = 0.27 A conforming to IEC 60947-5-1 appendix A   |
| [I <sub>th</sub> e] conventional enclosed thermal current | 10 A  |
| [U <sub>i</sub> ] rated insulation voltage                | 500 V (degree of pollution: 3) conforming to IEC 60947-1  |
| [U <sub>imp</sub> ] rated impulse withstand voltage       | 6 kV conforming to IEC 60947-1  |
| Resistance across terminals                               | <= 25 MOhm  |
| Operating force   | 15 N<br>25 N  |
| Short-circuit protection                                  | 10 A fuse protection by cartridge fuse type gG  |
| Rated operational power in W                              | 140 W DC-13 for 1000000 cycles, operating rate = 60 cyc/mn at 24 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C<br>140 W DC-13 for 1000000 cycles, operating rate = 60 cyc/mn at 48 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C<br>95 W DC-13 for 1000000 cycles, operating rate = 60 cyc/mn at 120 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C                               |
| Rated operational power in VA                             | 100 VA AC-15 for 1000000 cycles, operating rate = 60 cyc/mn at 48 V 50/60 Hz, load factor = 0.5 (inductive load)<br>450 VA AC-15 for 1000000 cycles, operating rate = 60 cyc/mn at 127 V 50/60 Hz, load factor = 0.5 (inductive load)<br>50 VA AC-15 for 1000000 cycles, operating rate = 60 cyc/mn at 24 V 50/60 Hz, load factor = 0.5 (inductive load)<br>750 VA AC-15 for 1000000 cycles, operating rate = 60 cyc/mn at 230 V 50/60 Hz, load factor = 0.5 (inductive load) |
| Terminals description ISO n°1                             | (3-4-1-2)OF   |
| Terminal identifier                                       | (11-12)NC<br>(13-14)NO  |
| Product weight  | 0.07 lb(US) (0.03 kg)   |

### Environment

|                                       |   |
|---------------------------------------|---|
| standards                             | EN 60947-5-1<br>IEC 60947-5-1<br>CSA C22.2 No 14    |
| ambient air temperature for operation | -13...158 °F (-25...70 °C)                          |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)                          |
| vibration resistance                  | 15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6 |
| shock resistance                      | 100 gn conforming to IEC 60068-2-27                 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

**Offer Sustainability**

WARNING: This product can expose you to chemicals including:

WARNING: This product can expose you to chemicals including:

Nickel compounds, which is known to the State of California to cause cancer, and

Nickel compounds, which is known to the State of California to cause cancer, and

Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.

Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

**Contractual warranty**


Warranty period

18 months

**Dimensions**

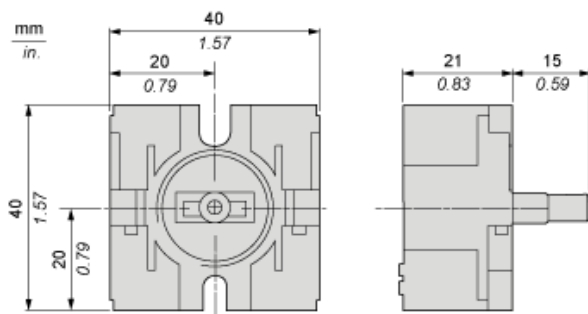

**Mounting**

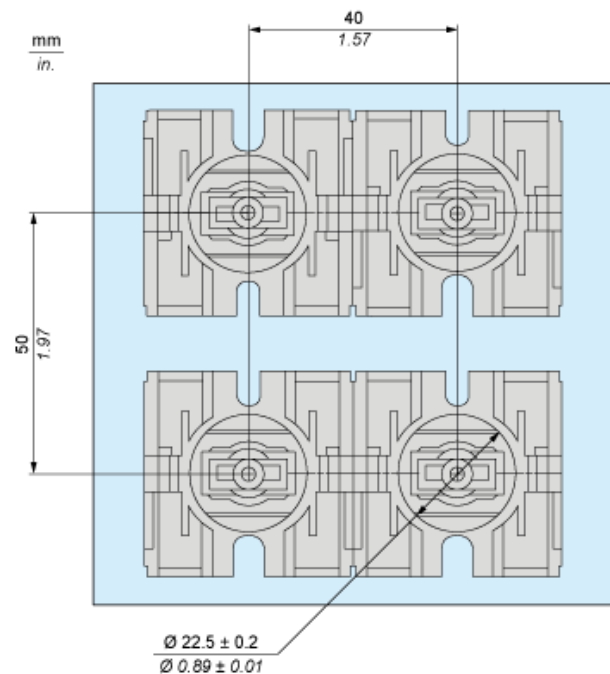

**Rated Operational Power**

**AC Supply 50/60 Hz**

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

Power broken in VA for 1 million operating cycles, AC-15 utilization category

| Voltage | V | 24 | 48 | 127 | 230 |
|---------|---|----|----|-----|-----|
|         |   |    |    |     |     |

|                   |   |    |     |     |     |
|-------------------|---|----|-----|-----|-----|
| Inductive circuit | W | 50 | 100 | 450 | 750 |
|-------------------|---|----|-----|-----|-----|

**DC Supply**

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

**Power broken in W for 1 million operating cycles, DC-13 utilization category**

| Voltage           | V | 24  | 48  | 120 |
|-------------------|---|-----|-----|-----|
| Inductive circuit | W | 140 | 140 | 95  |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)