

April 2008

rev 1.6

## Low Power EMI Reduction IC

### Features

- FCC approved method of EMI attenuation
- Provides up to 15dB EMI reduction
- Generates a 1x, 2x and 4x low EMI spread spectrum clock of the input frequency
  - 1x: ASM3P2811A/B
  - 2x: ASM3P2812A/B
  - 4x: ASM3P2814A/B
- Optimized for input frequency range from 10MHz to 40 MHz
- Internal loop filter minimizes external components and board space
- Selectable spread options:
  - Down Spread and Center Spread
- 8 frequency deviation selections:
  - $\pm 0.625\%$  to  $-3.5\%$
- Low inherent Cycle-to-Cycle Jitter
- 3.3V Operating Voltage
- CMOS/TTL compatible inputs and outputs.
- Pin-out compatible with Cypress CY25811, CY25812 and CY25814
- Commercial and Industrial temperature range
- Available in 8-pin SOIC and TSSOP Packages

and Center Spread, and percentage deviation range from  $\pm 0.625\%$  to  $-3.5\%$ .

The ASM3P28XX reduces electromagnetic interference (EMI) at the clock source, allowing system wide reduction of EMI of down stream clock and data dependent signals. The ASM3P28XX allows significant system cost savings by reducing the number of circuit board layers, ferrite beads, shielding, and other passive components that are traditionally required to pass EMI regulations.

The ASM3P28XX modulates the output of a single PLL in order to “spread” the bandwidth of a synthesized clock, and more importantly, decreases the peak amplitudes of its harmonics. This results in significantly lower system EMI compared to the typical narrow band signal produced by oscillators and most frequency generators. Lowering EMI by increasing a signal’s bandwidth is called ‘spread spectrum clock generation’.

The ASM3P28XX uses the most efficient and optimized modulation profile approved by the FCC and is implemented in a proprietary all-digital method.

### Product Description

The ASM3P28XX devices are versatile spread spectrum frequency modulators designed specifically for a wide range of input clock frequencies from 10MHz to 40MHz. Refer *Input / Output Frequency Range Selection Table*. The ASM3P28XX can generate an EMI reduced clock from crystal, ceramic resonator, or system clock. The ASM3P28XX-A and the ASM3P28XX-B offer various combinations of spread options and percentage deviations. Refer *Frequency Deviation and Spread Selection Table*. These combinations include Down


### Applications

The ASM3P28XX is targeted towards EMI management for memory and LVDS interfaces in mobile graphic chipsets and high-speed digital applications such as PC peripheral devices, consumer electronics, and embedded controller systems.


April 2008

rev 1.6

## Block Diagram

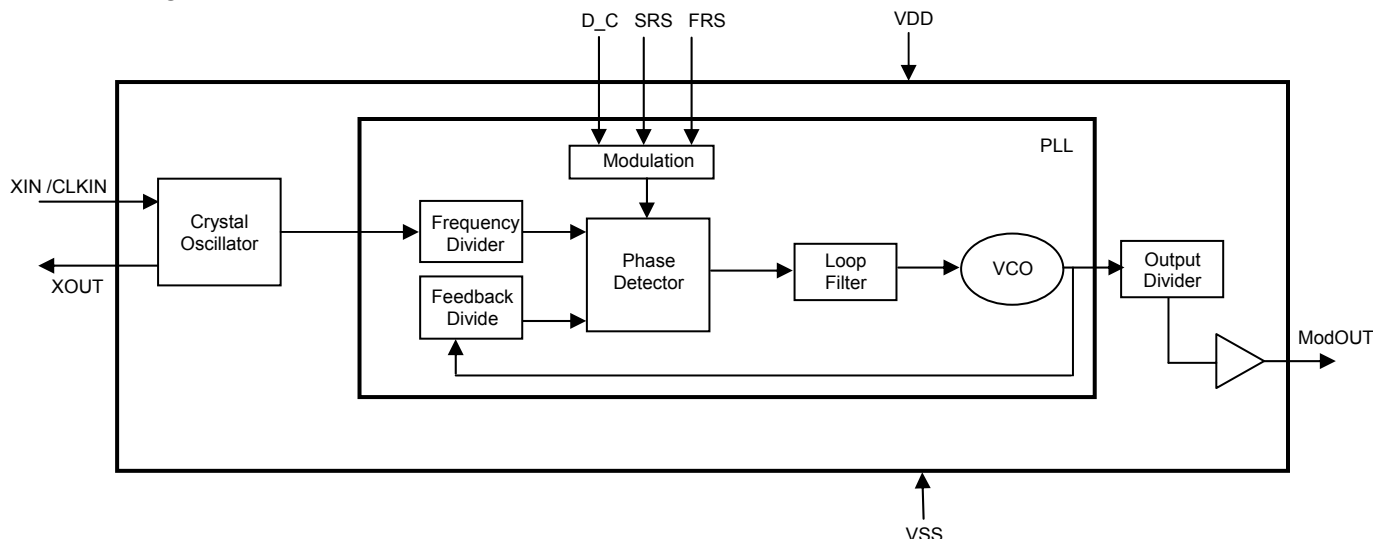

## Pin Configuration

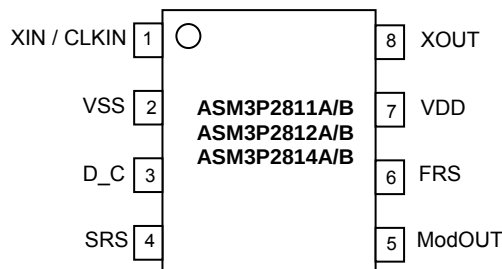

## Pin Description

| Pin# | Pin Name    | Type | Description                                                                                                                                                                               |
|------|-------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | XIN / CLKIN | I    | Crystal connection or external Clock input.                                                                                                                                               |
| 2    | VSS         | P    | Ground to entire chip.                                                                                                                                                                    |
| 3    | D_C         | I    | Digital logic input used to select Down (LOW) or Center (HIGH) spread options. (Refer <i>Frequency Deviation and Spread Selection Table</i> ). This pin has an internal pull-up resistor. |
| 4    | SRS         | I    | Spread range select. Digital logic input used to select frequency deviation (Refer <i>Frequency Deviation and Spread Selection Table</i> ). This pin has an internal pull-up resistor.    |
| 5    | ModOUT      | O    | Spread spectrum clock output                                                                                                                                                              |
| 6    | FRS         | I    | Frequency range select. Digital logic input used to select Input frequency range (Refer <i>Input/Output Frequency Range Selection Table</i> ). This pin has an internal pull-up resistor. |
| 7    | VDD         | P    | Power supply for the entire chip.                                                                                                                                                         |
| 8    | XOUT        | O    | Crystal connection. If using an external reference, this pin must be left unconnected.                                                                                                    |

April 2008

rev 1.6

### Input/Output Frequency Range Selection Table

| FRS (pin 6) | Part Number    |              |                |              |                |              | Modulation Rate       |
|-------------|----------------|--------------|----------------|--------------|----------------|--------------|-----------------------|
|             | ASM3P2811 (1x) |              | ASM3P2812 (2x) |              | ASM3P2814 (4x) |              |                       |
|             | Input (MHz)    | Output (MHz) | Input (MHz)    | Output (MHz) | Input (MHz)    | Output (MHz) |                       |
| 0           | 10-20          | 10-20        | 10-20          | 20-40        | 10-20          | 40-80        | Input Frequency / 448 |
| 1           | 20-40          | 20-40        | 20-40          | 40-80        | 20-40          | 80-160       | Input Frequency / 896 |

### Output Frequency Deviation and Spread Selection Table

| Part Number | D_C (pin 3) | SRS (pin 4) | Frequency Deviation* (%) |                |                |                 |
|-------------|-------------|-------------|--------------------------|----------------|----------------|-----------------|
|             |             |             | FS=0                     |                | FS=1           |                 |
|             |             |             | 10/20/40 (MHz)           | 20/40/80 (MHz) | 20/40/80 (MHz) | 40/80/160 (MHz) |
| ASM3P28XXA  | 0           | 0           | -3                       | -2.5           | -2.7           | -2.6            |
|             | 0           | 1           | -3.7                     | -3.4           | -3.8           | -3.6            |
|             | 1           | 0           | ±1.5                     | ±1.2           | ±1.5           | ±1.3            |
|             | 1           | 1           | ±1.8                     | ±1.6           | ±1.9           | ±1.8            |
| ASM3P28XXB  | 0           | 0           | -1.7                     | -1.0           | -1.5           | -1.4            |
|             | 0           | 1           | -2.0                     | -1.5           | -2.0           | -1.9            |
|             | 1           | 0           | ±0.75                    | ±0.6           | ±0.8           | ±0.7            |
|             | 1           | 1           | ±1.0                     | ±0.75          | ±1.0           | ±0.9            |

Note: Frequency Deviation given in the table is for the Output Frequency Range covering ASM3P2811x / 12x / 14x

### Absolute Maximum Ratings

| Symbol                            | Parameter                                                 | Rating       | Unit |
|-----------------------------------|-----------------------------------------------------------|--------------|------|
| V <sub>DD</sub> , V <sub>IN</sub> | Voltage on any pin with respect to Ground                 | -0.5 to +4.6 | V    |
| T <sub>STG</sub>                  | Storage temperature                                       | -65 to +125  | °C   |
| T <sub>s</sub>                    | Max. Soldering Temperature (10 sec)                       | 260          | °C   |
| T <sub>J</sub>                    | Junction Temperature                                      | 150          | °C   |
| T <sub>DV</sub>                   | Static Discharge Voltage<br>(As per JEDEC STD 22- A114-B) | 2            | KV   |

Note: These are stress ratings only and are not implied for functional use. Exposure to absolute maximum ratings for prolonged periods of time may affect device reliability.

April 2008

rev 1.6

## Operating Conditions

| Symbol          | Parameter                              | Min | Max | Unit |
|-----------------|----------------------------------------|-----|-----|------|
| VDD             | Voltage on any pin with respect to GND | 3.0 | 3.6 | V    |
| T <sub>A</sub>  | Operating temperature                  | -40 | +85 | °C   |
| C <sub>L</sub>  | Load Capacitance                       |     | 10  | pF   |
| C <sub>IN</sub> | Input Capacitance                      |     | 7   | pF   |

## DC Electrical Characteristics

| Symbol           | Parameter                                                                     | Min       | Typ | Max                   | Unit |
|------------------|-------------------------------------------------------------------------------|-----------|-----|-----------------------|------|
| V <sub>IL</sub>  | Input low voltage                                                             | VSS – 0.3 |     | 0.8                   | V    |
| V <sub>IH</sub>  | Input high voltage                                                            | 2         |     | V <sub>DD</sub> + 0.3 | V    |
| I <sub>IL</sub>  | Input low current<br>(Inputs D_C, SRS and FRS are pulled high internally)     |           |     | -50                   | µA   |
| I <sub>IH</sub>  | Input high current                                                            |           |     | 50                    | µA   |
| I <sub>XOL</sub> | XOUT Output low current<br>(V <sub>XOL</sub> @ 0.4V, V <sub>DD</sub> = 3.3V)  |           |     | 3                     | mA   |
| I <sub>XOH</sub> | XOUT Output high current<br>(V <sub>XOH</sub> @ 2.5V, V <sub>DD</sub> = 3.3V) |           |     | 3                     | mA   |
| V <sub>OL</sub>  | Output low voltage (V <sub>DD</sub> = 3.3V, I <sub>OL</sub> = 5mA)            |           |     | 0.4                   | V    |
| V <sub>OH</sub>  | Output high voltage (V <sub>DD</sub> = 3.3V, I <sub>OH</sub> = -5mA)          | 2.5       |     |                       | V    |
| I <sub>CC</sub>  | Dynamic supply current (Unloaded Output)                                      | 8         |     | 18                    | mA   |
| I <sub>DD</sub>  | Static supply current, Standby mode<br>(CLKIN pulled to GND)                  |           |     | 4.5                   | mA   |
| VDD              | Operating voltage                                                             | 3.0       | 3.3 | 3.6                   | V    |
| t <sub>ON</sub>  | Power up time (first locked clock cycle after power up)                       |           |     | 500                   | µS   |
| Z <sub>OUT</sub> | Clock out impedance                                                           |           | 76  |                       | Ω    |

## AC Electrical Characteristics


| Symbol            | Parameter                                   | Min | Typ  | Max | Unit |
|-------------------|---------------------------------------------|-----|------|-----|------|
| f <sub>IN</sub>   | Input frequency for ASM3P2811/12/13/14 A/B  | 10  |      | 40  | MHz  |
| f <sub>OUT</sub>  | Output frequency for ASM3P2811A/B           | 10  |      | 40  | MHz  |
|                   | Output frequency for ASM3P2812A/B           | 20  |      | 80  | MHz  |
|                   | Output frequency for ASM3P2814A/B           | 40  |      | 160 | MHz  |
| t <sub>LH</sub> * | Output rise time (measured at 0.8V to 2.0V) | 0.5 | 0.9  | 1.2 | nS   |
| t <sub>HL</sub> * | Output fall time (measured at 2.0V to 0.8V) | 0.8 | 1.0  | 1.3 | nS   |
| t <sub>JC</sub>   | Cycle to Cycle Jitter (Unloaded Output)     |     | ±250 |     | pS   |
| t <sub>D</sub>    | Output duty cycle                           | 45  | 50   | 55  | %    |

\* t<sub>LH</sub> and t<sub>HL</sub> are measured into a capacitive load of 10pF

April 2008

rev 1.6  
Package Information

### 8-Pin SOIC Package

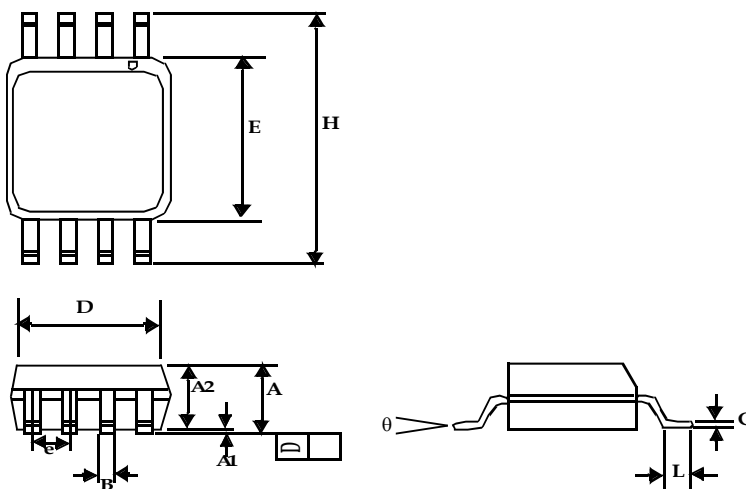


| Symbol | Dimensions |       |             |      |
|--------|------------|-------|-------------|------|
|        | Inches     |       | Millimeters |      |
|        | Min        | Max   | Min         | Max  |
| A1     | 0.004      | 0.010 | 0.10        | 0.25 |
| A      | 0.053      | 0.069 | 1.35        | 1.75 |
| A2     | 0.049      | 0.059 | 1.25        | 1.50 |
| B      | 0.012      | 0.020 | 0.31        | 0.51 |
| C      | 0.007      | 0.010 | 0.18        | 0.25 |
| D      | 0.193 BSC  |       | 4.90 BSC    |      |
| E      | 0.154 BSC  |       | 3.91 BSC    |      |
| e      | 0.050 BSC  |       | 1.27 BSC    |      |
| H      | 0.236 BSC  |       | 6.00 BSC    |      |
| L      | 0.016      | 0.050 | 0.41        | 1.27 |
| θ      | 0°         | 8°    | 0°          | 8°   |

Note: Controlling dimensions are millimeters.  
SOIC: 0.074 grams unit weight.

April 2008

rev 1.6

8-Pin TSSOP Package

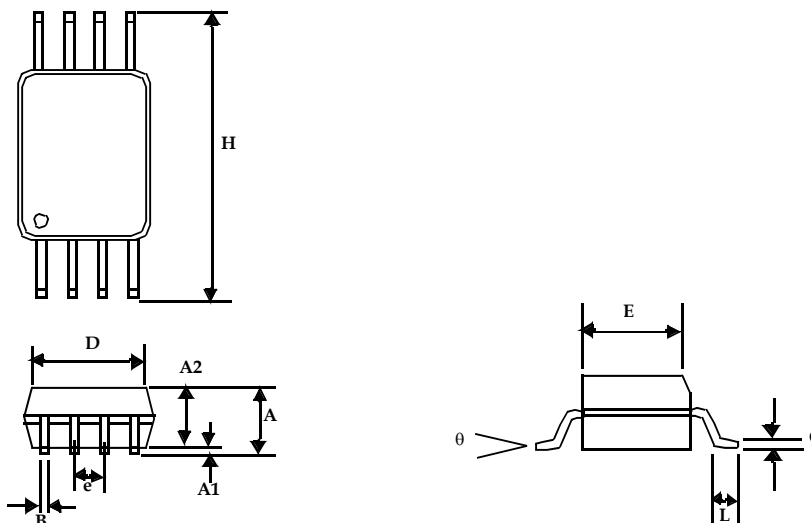

| Symbol | Dimensions |       |             |      |
|--------|------------|-------|-------------|------|
|        | Inches     |       | Millimeters |      |
|        | Min        | Max   | Min         | Max  |
| A      |            | 0.043 |             | 1.10 |
| A1     | 0.002      | 0.006 | 0.05        | 0.15 |
| A2     | 0.033      | 0.037 | 0.85        | 0.95 |
| B      | 0.008      | 0.012 | 0.19        | 0.30 |
| c      | 0.004      | 0.008 | 0.09        | 0.20 |
| D      | 0.114      | 0.122 | 2.90        | 3.10 |
| E      | 0.169      | 0.177 | 4.30        | 4.50 |
| e      | 0.026 BSC  |       | 0.65 BSC    |      |
| H      | 0.252 BSC  |       | 6.40 BSC    |      |
| L      | 0.020      | 0.028 | 0.50        | 0.70 |
| θ      | 0°         | 8°    | 0°          | 8°   |

Note: Controlling dimensions are millimeters.  
TSSOP: 0.0325 grams unit weight.

**April 2008**

**rev 1.6**

**Ordering Codes**

| Part Number      | Marking   | Package Type                 | Temperature |
|------------------|-----------|------------------------------|-------------|
| ASM3P2811AF-08SR | 3P2811AFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2811AF-08ST | 3P2811AFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2811AF-08TR | 3P2811AFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2811AF-08TT | 3P2811AFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3P2811BF-08SR | 3P2811BFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2811BF-08ST | 3P2811BFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2811BF-08TR | 3P2811BFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2811BF-08TT | 3P2811BFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3P2812AF-08SR | 3P2812AFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2812AF-08ST | 3P2812AFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2812AF-08TR | 3P2812AFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2812AF-08TT | 3P2812AFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3P2812BF-08SR | 3P2812BFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2812BF-08ST | 3P2812BFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2812BF-08TR | 3P2812BFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2812BF-08TT | 3P2812BFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3P2814AF-08SR | 3P2814AFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2814AF-08ST | 3P2814AFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2814AF-08TR | 3P2814AFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2814AF-08TT | 3P2814AFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3P2814BF-08SR | 3P2814BFS | SOIC – Tape & Reel, Pb free  | Commercial  |
| ASM3P2814BF-08ST | 3P2814BFS | SOIC – Tube, Pb free         | Commercial  |
| ASM3P2814BF-08TR | 3P2814BFT | TSSOP – Tape & Reel, Pb free | Commercial  |
| ASM3P2814BF-08TT | 3P2814BFT | TSSOP – Tube, Pb free        | Commercial  |
| ASM3I2811AF-08SR | 3I2811AFS | SOIC – Tape & Reel, Pb free  | Industrial  |
| ASM3I2811AF-08ST | 3I2811AFS | SOIC – Tube, Pb free         | Industrial  |
| ASM3I2811AF-08TR | 3I2811AFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2811AF-08TT | 3I2811AFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3I2811BF-08SR | 3I2811BFS | SOIC – Tape & Reel, Pb free  | Industrial  |
| ASM3I2811BF-08ST | 3I2811BFS | SOIC – Tube, Pb free         | Industrial  |
| ASM3I2811BF-08TR | 3I2811BFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2811BF-08TT | 3I2811BFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3I2812AF-08SR | 3I2812AFS | SOIC – Tape & Reel, Pb free  | Industrial  |
| ASM3I2812AF-08ST | 3I2812AFS | SOIC – Tube, Pb free         | Industrial  |
| ASM3I2812AF-08TR | 3I2812AFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2812AF-08TT | 3I2812AFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3I2812BF-08SR | 3I2812BFS | SOIC – Tape & Reel, Pb free  | Industrial  |

**April 2008**

**rev 1.6**

**Ordering Codes (cont'd)**

| Part Number      | Marking   | Package Type                 | Temperature |
|------------------|-----------|------------------------------|-------------|
| ASM3I2812BF-08ST | 3I2812BFS | SOIC - Tube, Pb free         | Industrial  |
| ASM3I2812BF-08TR | 3I2812BFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2812BF-08TT | 3I2812BFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3I2814AF-08SR | 3I2814AFS | SOIC - Tape & Reel, Pb free  | Industrial  |
| ASM3I2814AF-08ST | 3I2814AFS | SOIC - Tube, Pb free         | Industrial  |
| ASM3I2814AF-08TR | 3I2814AFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2814AF-08TT | 3I2814AFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3I2814BF-08SR | 3I2814BFS | SOIC - Tape & Reel, Pb free  | Industrial  |
| ASM3I2814BF-08ST | 3I2814BFS | SOIC - Tube, Pb free         | Industrial  |
| ASM3I2814BF-08TR | 3I2814BFT | TSSOP – Tape & Reel, Pb free | Industrial  |
| ASM3I2814BF-08TT | 3I2814BFT | TSSOP – Tube, Pb free        | Industrial  |
| ASM3P2811AG-08SR | 3P2811AGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2811AG-08ST | 3P2811AGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2811AG-08TR | 3P2811AGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2811AG-08TT | 3P2811AGT | TSSOP – Tube, Green          | Commercial  |
| ASM3P2811BG-08SR | 3P2811BGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2811BG-08ST | 3P2811BGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2811BG-08TR | 3P2811BGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2811BG-08TT | 3P2811BGT | TSSOP – Tube, Green          | Commercial  |
| ASM3P2812AG-08SR | 3P2812AGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2812AG-08ST | 3P2812AGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2812AG-08TR | 3P2812AGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2812AG-08TT | 3P2812AGT | TSSOP – Tube, Green          | Commercial  |
| ASM3P2812BG-08SR | 3P2812BGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2812BG-08ST | 3P2812BGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2812BG-08TR | 3P2812BGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2812BG-08TT | 3P2812BGT | TSSOP – Tube, Green          | Commercial  |
| ASM3P2814AG-08SR | 3P2814AGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2814AG-08ST | 3P2814AGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2814AG-08TR | 3P2814AGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2814AG-08TT | 3P2814AGT | TSSOP – Tube, Green          | Commercial  |
| ASM3P2814BG-08SR | 3P2814BGS | SOIC – Tape & Reel, Green    | Commercial  |
| ASM3P2814BG-08ST | 3P2814BGS | SOIC – Tube, Green           | Commercial  |
| ASM3P2814BG-08TR | 3P2814BGT | TSSOP – Tape & Reel, Green   | Commercial  |
| ASM3P2814BG-08TT | 3P2814BGT | TSSOP – Tube, Green          | Commercial  |
| ASM3I2811AG-08SR | 3I2811AGS | SOIC – Tape & Reel, Green    | Industrial  |
| ASM3I2811AG-08ST | 3I2811AGS | SOIC – Tube, Green           | Industrial  |

**April 2008**

**rev 1.6**

**Ordering Codes (cont'd)**

| <b>Part Number</b> | <b>Marking</b> | <b>Package Type</b>        | <b>Temperature</b> |
|--------------------|----------------|----------------------------|--------------------|
| ASM3I2811AG-08TR   | 3I2811AGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2811AG-08TT   | 3I2811AGT      | TSSOP – Tube, Green        | Industrial         |
| ASM3I2811BG-08SR   | 3I2811BGS      | SOIC – Tape & Reel, Green  | Industrial         |
| ASM3I2811BG-08ST   | 3I2811BGS      | SOIC – Tube, Green         | Industrial         |
| ASM3I2811BG-08TR   | 3I2811BGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2811BG-08TT   | 3I2811BGT      | TSSOP – Tube, Green        | Industrial         |
| ASM3I2812AG-08SR   | 3I2812AGS      | SOIC – Tape & Reel, Green  | Industrial         |
| ASM3I2812AG-08ST   | 3I2812AGS      | SOIC – Tube, Green         | Industrial         |
| ASM3I2812AG-08TR   | 3I2812AGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2812AG-08TT   | 3I2812AGT      | TSSOP – Tube, Green        | Industrial         |
| ASM3I2812BG-08SR   | 3I2812BGS      | SOIC – Tape & Reel, Green  | Industrial         |
| ASM3I2812BG-08ST   | 3I2812BGS      | SOIC – Tube, Green         | Industrial         |
| ASM3I2812BG-08TR   | 3I2812BGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2812BG-08TT   | 3I2812BGT      | TSSOP – Tube, Green        | Industrial         |
| ASM3I2814AG-08SR   | 3I2814AGS      | SOIC – Tape & Reel, Green  | Industrial         |
| ASM3I2814AG-08ST   | 3I2814AGS      | SOIC – Tube, Green         | Industrial         |
| ASM3I2814AG-08TR   | 3I2814AGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2814AG-08TT   | 3I2814AGT      | TSSOP – Tube, Green        | Industrial         |
| ASM3I2814BG-08SR   | 3I2814BGS      | SOIC – Tape & Reel, Green  | Industrial         |
| ASM3I2814BG-08ST   | 3I2814BGS      | SOIC – Tube, Green         | Industrial         |
| ASM3I2814BG-08TR   | 3I2814BGT      | TSSOP – Tape & Reel, Green | Industrial         |
| ASM3I2814BG-08TT   | 3I2814BGT      | TSSOP – Tube, Green        | Industrial         |

April 2008

rev 1.6

## Device Ordering Information

A S M 3 P 2 8 1 1 A G - 0 8 S R

R = Tape & Reel, T = Tube or Tray

|            |           |                  |
|------------|-----------|------------------|
| O = TSOT23 | U = MSOP  | J=TSOT26         |
| S = SOIC   | E = TQFP  | C=TDFN (2X2) COL |
| T = TSSOP  | L = LQFP  |                  |
| A = SSOP   | U = MSOP  |                  |
| V = TVSOP  | P = PDIP  |                  |
| B = BGA    | D = QSOP  |                  |
| O = OFN    | X = SC-70 |                  |

DEVICE PIN COUNT

F = LEAD FREE AND RoHS COMPLIANT PART  
G = GREEN PACKAGE, LEAD FREE, and RoHS

PART NUMBER

|                                  |                                 |                                       |
|----------------------------------|---------------------------------|---------------------------------------|
| X= Automotive<br>(-40C to +125C) | I= Industrial<br>(-40C to +85C) | P or n/c = Commercial<br>(0C to +70C) |
|----------------------------------|---------------------------------|---------------------------------------|

|                           |                      |
|---------------------------|----------------------|
| 1 = Clock Generator       | 6 = Power Management |
| 2 = Non PLL based         | 7 = Power Management |
| 3 = EMI Reduction         | 8 = Power Management |
| 4 = DDR support products  | 9 = Hi Performance   |
| 5 = STD Zero Delay Buffer | 0 = Reserved         |

PulseCore Semiconductor Mixed Signal Product

Licensed under US patent #5,488,627, #6,646,463 and #5,631,920

**April 2008**

**rev 1.6**



PulseCore Semiconductor Corporation  
1715 S. Bascom Ave Suite 200  
Campbell, CA 95008  
Tel: 408-879-9077  
Fax: 408-879-9018  
[www.pulsecoresemi.com](http://www.pulsecoresemi.com)

Copyright © PulseCore Semiconductor  
All Rights Reserved  
Part Numbers: ASM3P2811A/B  
ASM3P2812A/B  
ASM3P2814A/B  
Document Version: 1.6

Note: This product utilizes US Patent # 6,646,463 Impedance Emulator Patent issued to PulseCore Semiconductor, dated 11-11-2003  
**Many PulseCore Semiconductor products are protected by issued patents or by applications for patent**

© Copyright 2006 PulseCore Semiconductor Corporation. All rights reserved. Our logo and name are trademarks or registered trademarks of PulseCore Semiconductor. All other brand and product names may be the trademarks of their respective companies. PulseCore reserves the right to make changes to this document and its products at any time without notice. PulseCore assumes no responsibility for any errors that may appear in this document. The data contained herein represents PulseCore's best data and/or estimates at the time of issuance. PulseCore reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warrantee to any user or customer. PulseCore does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of PulseCore products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in PulseCore's Terms and Conditions of Sale (which are available from PulseCore). All sales of PulseCore products are made exclusively according to PulseCore's Terms and Conditions of Sale. The purchase of products from PulseCore does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of PulseCore or third parties. PulseCore does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of PulseCore products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify PulseCore against all claims arising from such use.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)