

IDP-31320W

100% flat projected capacitive touch industrial grade monitors. Ultra-thin profile, smooth rounded corners and rugged glass fronted for a totally contemporary outlook.

NEW



Features

- 32.0" wide LCD panel with LED backlight for long service life
- Operating temperature 0 to +40° C ; Storage temperature -20 to +60° C
- Regular brightness 500 CD/m²
- Resolution 1920 x 1080
- Contrast ratio 3000 : 1
- 89°/89°/89°/89° wide view-angle for portrait and landscape mode
- 10 points projected capacitive touch overlay
- VGA & DVI & HDMI & DisplayPort I/O interface
- No need for additional enclosures or metalwork
- True plug and play without any touch driver needed
- Pure flat surface, contemporary style, and thin profile



Introduction

The IDP-31320W ProFlat monitor responds to a requirement for contemporary styling in demanding applications such as public signage, front of house information, medical and point-of-sale. All IDP-31 series product features a truly-flat, easy to clean and maintain glass surface with long term product availability. Each model can be used in both portrait and landscape mode, also cleverly packaged in such a way that no further mechanical parts are needed other than a VESA mount to create a display system. The use of a metal chassis provides a rugged and stable platform to build solutions for the widest range of applications. 10 points multi-touch and the choice of either black or white finish create further opportunity for those seeking to differentiate their next product design.


Typical Applications

- Signage and public information
- Way-finder
- Kiosks and point of sale
- Medical
- Digital assistant

Specifications

Display Features	Spec	Notes
Model	IDP-31320W	
Backlight	LED	Light source
Resolution	1920 x 1080	Native resolution. Other resolutions supported by A/D card
Brightness	500 cd/m ²	Measured at typical operating voltage
Viewing Angle	89°/89°/89°/89°	Left/Right/Up/Down
Surface Treatment	6H	MoHS/Anti-glare
Contrast Ratio	3000 : 1	In laboratory measurement conditions
Max Colors	16.7M	6/8 bit per colour
Response Time	8ms	Typical
Backlight Lifetime	50,000 hours	Typ. time to half brightness in room temperature operation
Cover glass	5.3±0.3mm	
Operating Temp	0° to +40° C	Industrial use
Touch Screen	10 points PCT	Projected capacitive overlay
Input / Output	VGA,DVI,HDMI,DP	
IP Rating	IP51	Front & Side of the monitor

Dimensions

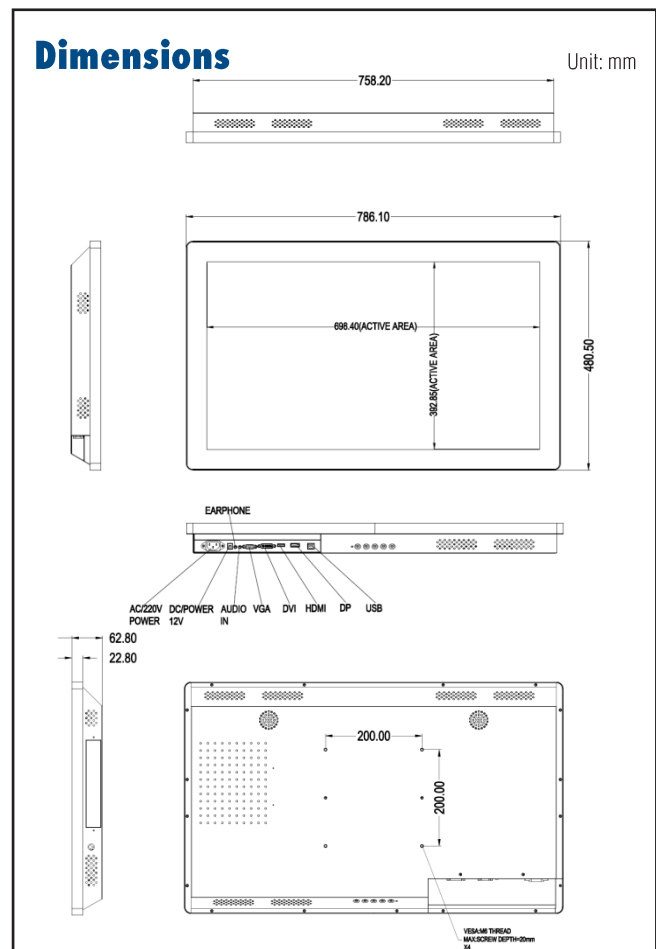

Touch Screen Options

Type 32.0" wide Screen	Cover glass (CG)	Analogue Resistive (AR)	Surface Acoustic Wave (SAW)	Surface Capacitive (SCAP)	Projected Capacitive (PCT)	Infra-red (IR)	Multi-touch
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Construction	5.3mm heat strengthened glass	ITO film to ITO coated glass	4mm pure glass sensor	Hard coat ITO pure glass	ITO film/film with Chemical strengthened glass	3mm tempered glass with infrared sensor	Either PCT or IR
Surface	6H	3H	7H	<4H	<4H	7H	-
Durability (no of touches)	-	> 1m	>5m	>1m	>1m	>1m	-
IP Rating (potential)	IP51	IP51	IP51	IP51	IP51	IP51	IP51
Touches	0	1	1	1	1/2/10/30	1040g/63.5mm	-
Transparency	93±2%	81%	90±5%	91±1.5%	82%	-	-
Drop Ball	500g / 50cm	227g/38Ø steel ball from 80cm height	1040g / 90cm	UL60950 (Tough touch only)	227g/38Ø steel ball from 80cm height	1040g/63.5mm ball dropped from height of 1.0m	227g/38Ø steel ball from 80cm height
Added thickness (typ.)	3/4/5/6/10/12mm	1.8mm	6mm	8mm	3/4/5/6mm	See drawing	See drawing
Custom Options	AR coating Optical bonding	Optical bonding	Dustproof, Waterproof, Anti-glare, Safe touch	Optical bonding, Tough touch	AR coating, Glass painting, Customer logo, 10points touch (21.5", 23", 24"), Optical bonding	2points, AR coating, Optical bonding	Extended cover glass Back printing Whole cutting

System/Electrical Features

System / Electrical	Spec	Unit / Notes
Power Consumption	45W	Typical consumption at standard brightness and temperature
Power Supply	100-240V AC 50-60Hz, 1.8A	External DC power brick (included) Input voltage : +12VDC±5% External Adapter: 100-240 VAC, 50-60 Hz
Video Input (available options)	<input checked="" type="checkbox"/> VGA <input checked="" type="checkbox"/> DVI <input checked="" type="checkbox"/> HDMI <input checked="" type="checkbox"/> COMPOSITE <input checked="" type="checkbox"/> USB <input checked="" type="checkbox"/> DisplayPort	Native resolution. Other resolutions supported by A/D card scaling
On-screen Display (OSD)	5- keys Menu Functions	Menu / up / down / enter / Power ON-OFF Brightness, Contrast, Screen Setting, Colour Temp, Language OSD Settings, VGA/DVI, Recall, Auto Adjust

Mechanical Features

Mechanical	Spec	Notes
Overall size	786.1 x 480.5 x 62.8mm	[ProFlat
Active Area Size	698.40 (H) x 392.85 (V) ± 0.5mm	
Case / Bezel color	Black or White powder coat	Custom colour and finishes available
Weight	17.13kg	Typ .inc touch
VESA Mounting Options:	200 x 200mm	For User defined mounting requirements contact rep

Environmental Features

Environmental	Spec
Operating Temp	0 to +40° C
Storage Temp	-20 to +60° C
Humidity	90% RH
Vibration	1.5G, (10~200Hz, P-P) 30 mins/axis (X, Y, Z)
Agency Approvals	CE, FCC, RoHS

Ordering Information

Model Name	Description
IDP-31320WP50DPB1G	32.0" wide industrial black ProFlat monitor with 10 points PCT touchscreen, 500 cd/m ² brightness, VGA & DVI & HDMI & DisplayPort input

Accessory Package

- UK/EU/US power cord, VGA cable, DVI cable, HDMI cable, DisplayPort cable, USB cable for touch function

All Advantech monitors are configurable to order. Use www.advantech.com for guidance on versions, pricing and deliver for all models

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru