

LENINA-XW

White version with ~75° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 74.0 mm
Height	40 mm
Fastening	socket
ROHS compliant	yes ⓘ

MATERIAL SPECIFICATIONS:

Component	Type	Material
LENINA-XW	Reflector	HRPC



Colour	Finish	Coating
white		


ORDERING INFORMATION:

Component

C12958_LENINA-XW

» Box size: 476 x 273 x 197 mm


Qty in box	MOQ	MPQ	Box weight (kg)
60	120	60	2.0

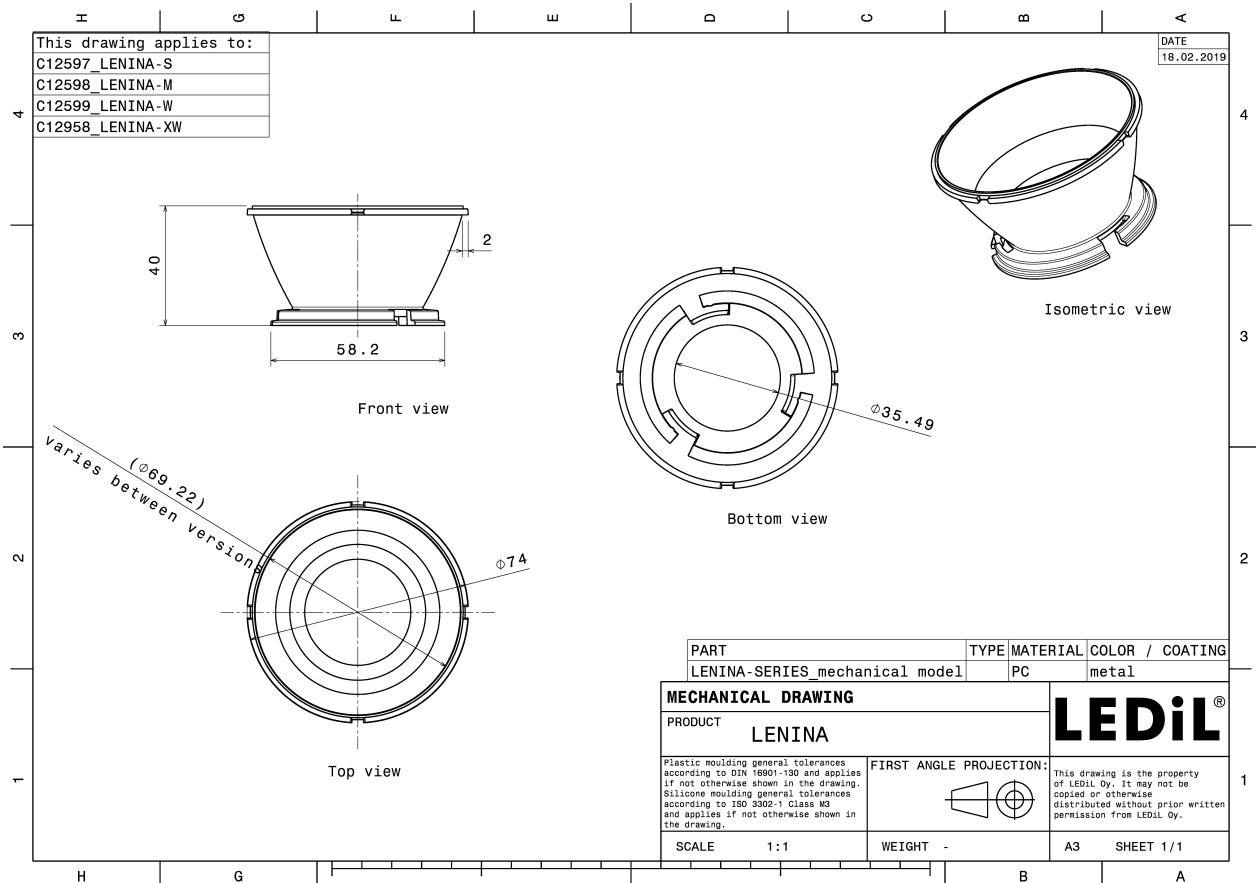


PHOTOMETRIC DATA (MEASURED):




LED BXRA ES Rectangle
FWHM 73.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12153_LENINA-STD-BASE-BXRA
C12606_LENINA-DL

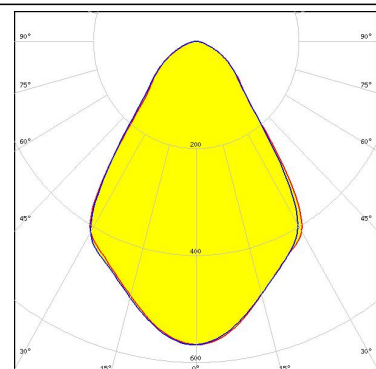


LED BXRA ES Rectangle
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12153_LENINA-STD-BASE-BXRA

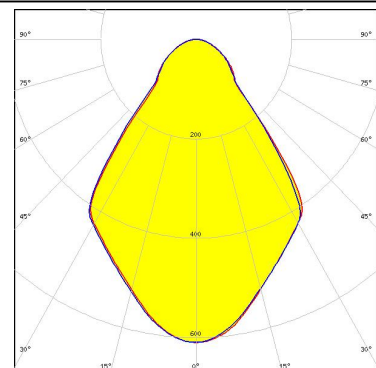

LED BXRA RS
FWHM 76.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12229_LENINA-STD-BASE-RS

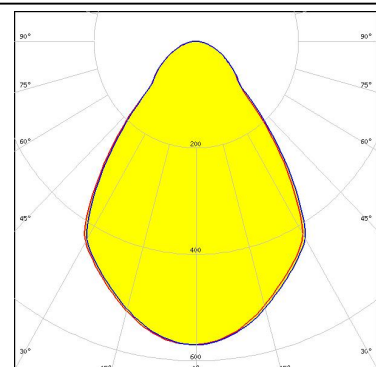


LED BXRA RS
FWHM 87.0°
Efficiency 87 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12229_LENINA-STD-BASE-RS
C12606_LENINA-DL

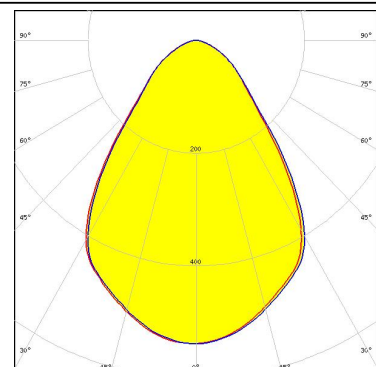

PHOTOMETRIC DATA (MEASURED):



bridgelux.

LED V10 Gen6
FWHM 69.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13186_LENINA-STD-BASE-CXA15
C12606_LENINA-DL

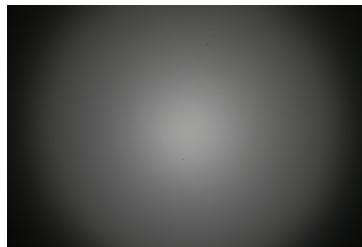



bridgelux.

LED V4 HD
FWHM 71.0°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14146_LENINA-STD-BASE-CXA18

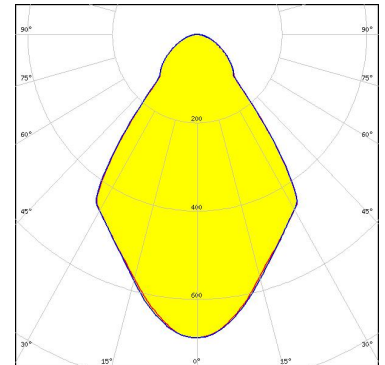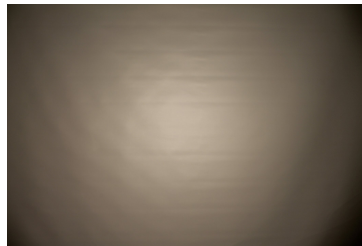



bridgelux.

LED Vero SE 29
FWHM 76.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C15083_LENINA-STD-BASE-VERO29

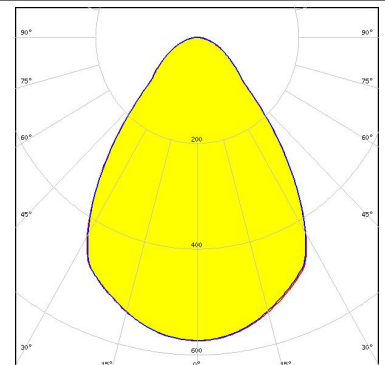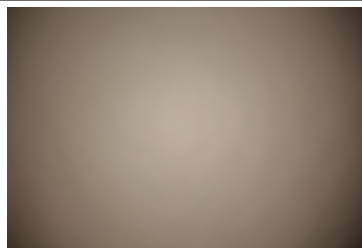

bridgelux.

LED VERO13
FWHM 75.0°
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL

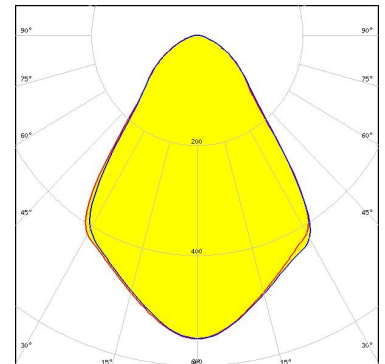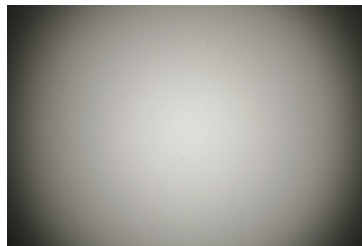



PHOTOMETRIC DATA (MEASURED):

bridgelux. LED VERO13 FWHM 76.0° Efficiency 91 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C13868_LENINA-STD-BASE-VERO13-18		
bridgelux. LED VERO18 FWHM 76.0° Efficiency 91 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C13868_LENINA-STD-BASE-VERO13-18		
bridgelux. LED VERO18 FWHM 75.0° Efficiency 87 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components: C13868_LENINA-STD-BASE-VERO13-18 C12606_LENINA-DL		
bridgelux. LED VERO29 FWHM 77.0° Efficiency 91 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components: C13867_LENINA-STD-BASE-VERO29		

PHOTOMETRIC DATA (MEASURED):




LED VERO29
FWHM 77.0°
Efficiency 87 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL

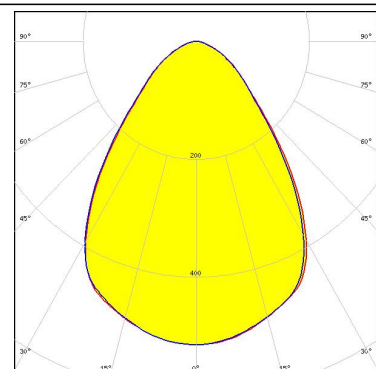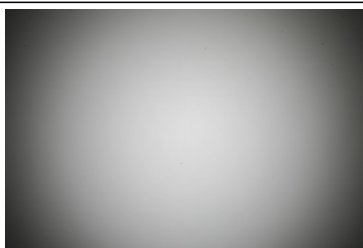


CITIZEN

LED CL-L340
FWHM 71.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C11995_LENINA-STD-BASE-CL340
C12606_LENINA-DL

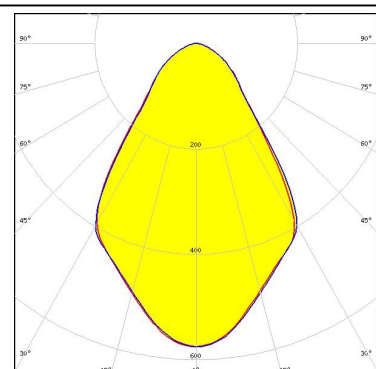



CITIZEN

LED CL-L340
FWHM 72.0°
Efficiency 86 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C11995_LENINA-STD-BASE-CL340

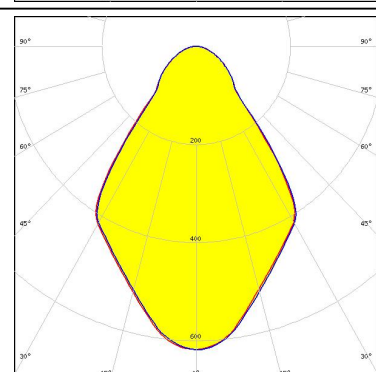

CITIZEN



LED CLL02x/CLU02x (LES10)
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 434 Typ L1

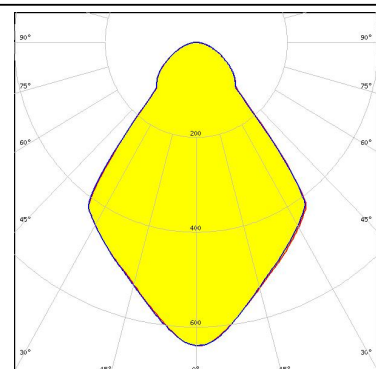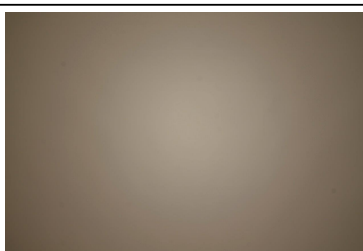

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL02x/CLU02x (LES10)
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 434 Typ L1

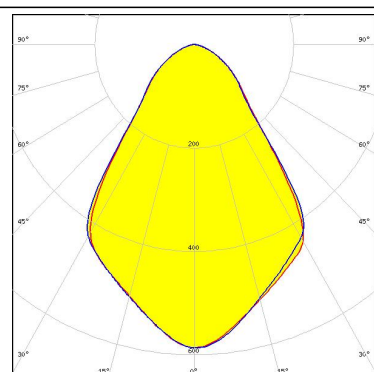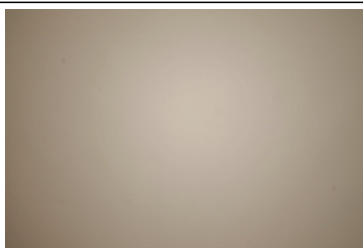



CITIZEN

LED CLL03x/CLU03x
FWHM 72.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030
C12606_LENINA-DL

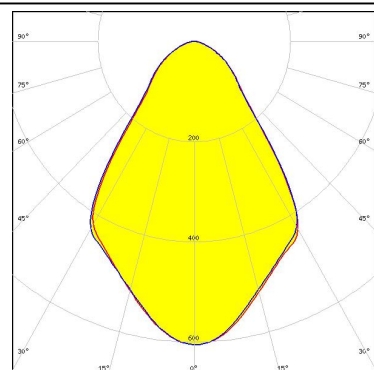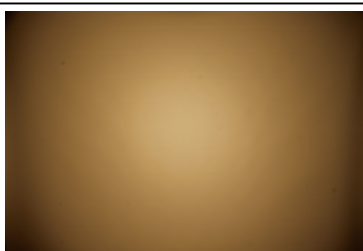



CITIZEN

LED CLL03x/CLU03x
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 433 Typ L1

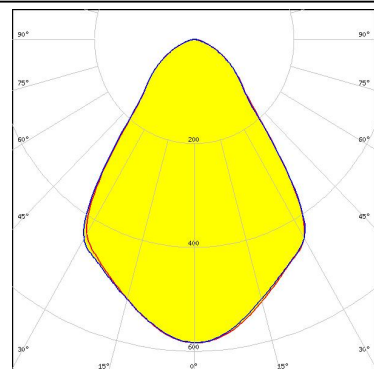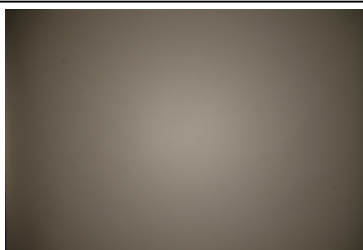

CITIZEN



LED CLL03x/CLU03x
FWHM 74.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

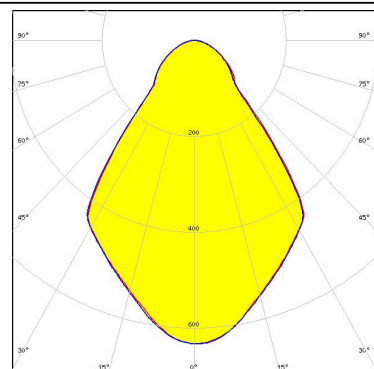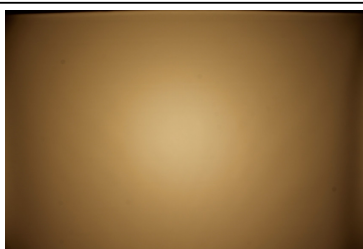

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL03x/CLU03x
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENASTD-BASE-VERO13-18
Bender Wirth: 433 Typ L1

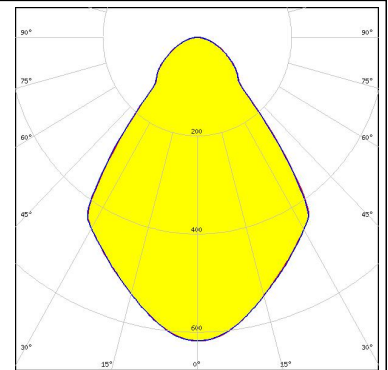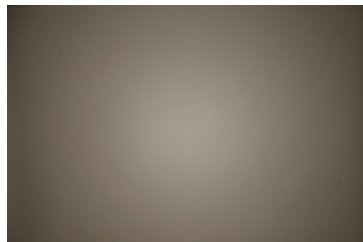


CITIZEN

LED CLL04x/CLU04x
FWHM 75.0°
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENASTD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 431 Typ L3

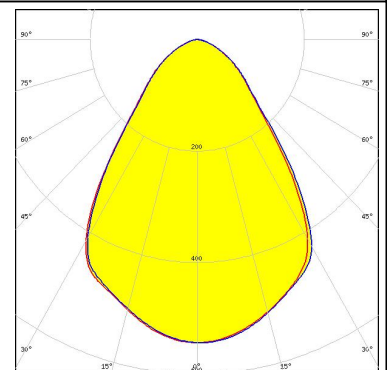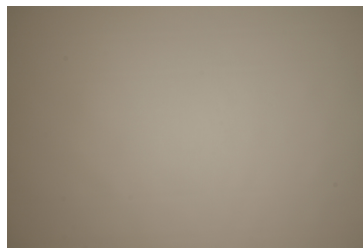


CITIZEN

LED CLL04x/CLU04x
FWHM 71.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENASTD-BASE-CLL040
C12606_LENINA-DL



CITIZEN



LED CLL04x/CLU04x
FWHM 73.0°
Efficiency 81 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12606_LENINA-DL
A.A.G. STUCCHI: 8102/G2 + S-8000/12

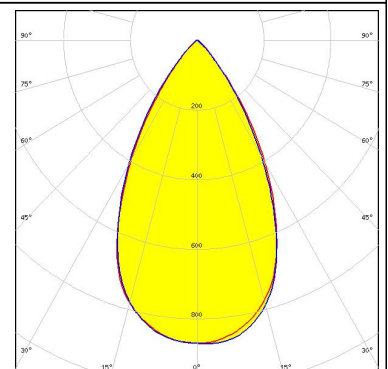

PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED CLL04x/CLU04x
FWHM 74.0°
Efficiency 84 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8102/G2 + S-8000/12

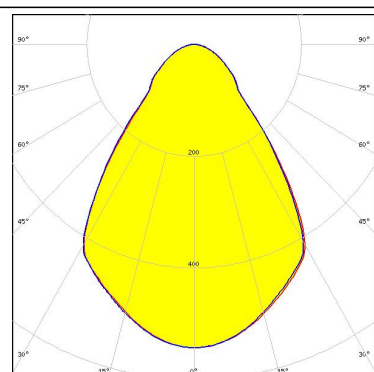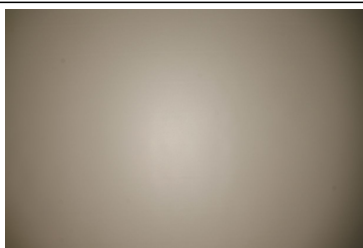



CITIZEN

LED CLL04x/CLU04x
FWHM 71.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040

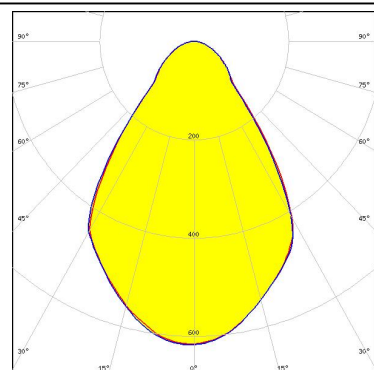



CITIZEN

LED CLL04x/CLU04x
FWHM 71.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12606_LENINA-DL
IDEAL: 50-2204CT + 50-2100LN

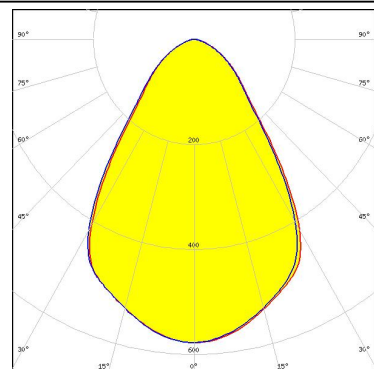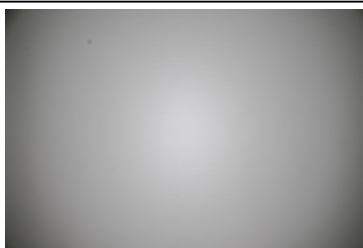

CITIZEN



LED CLL04x/CLU04x
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
Bender Wirth: 431 Typ L3

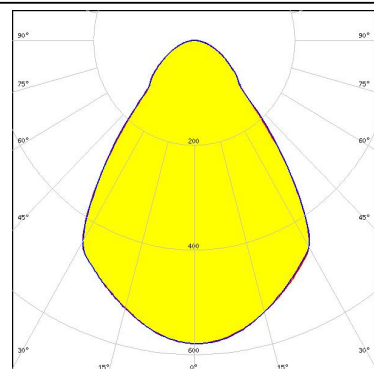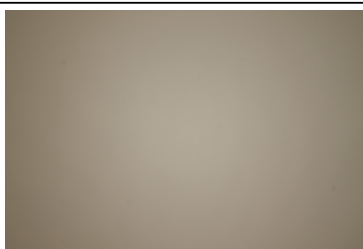

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL04x/CLU04x
FWHM 72.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
IDEAL: 50-2204CT + 50-2100LN

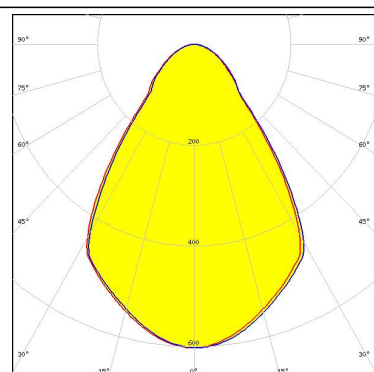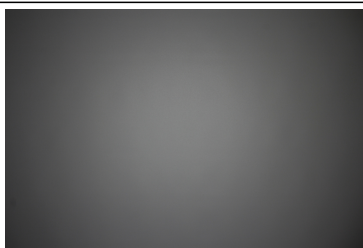



CITIZEN

LED CLU700/701/702
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 434 Typ L1

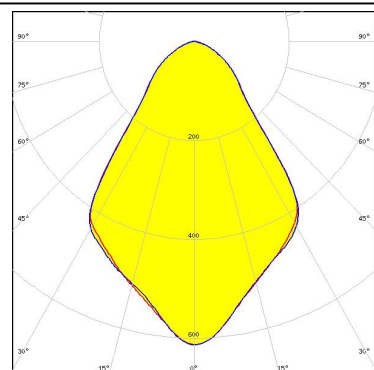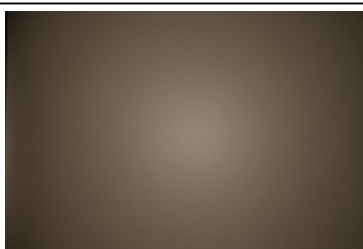



CITIZEN

LED CLU700/701/702
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 434 Typ L1

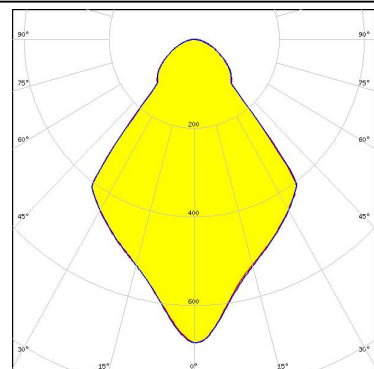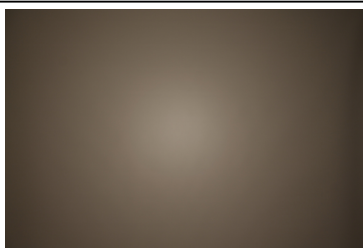

CITIZEN



LED CLU710/711
FWHM 73.0°
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030
C12606_LENINA-DL

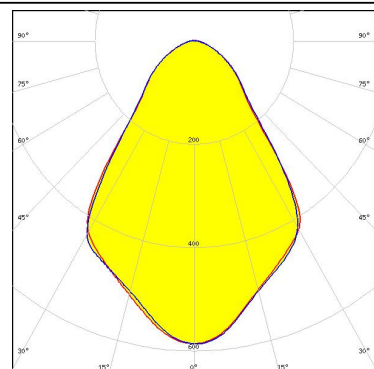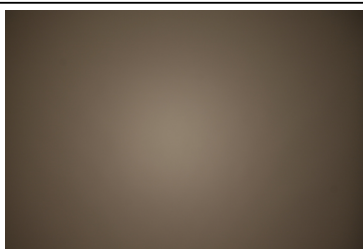

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU710/711
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

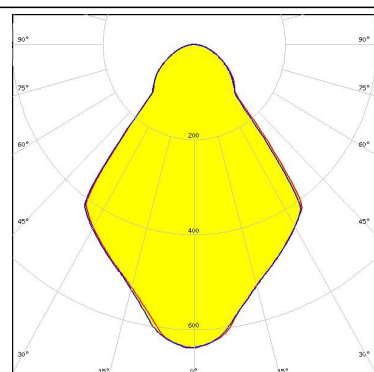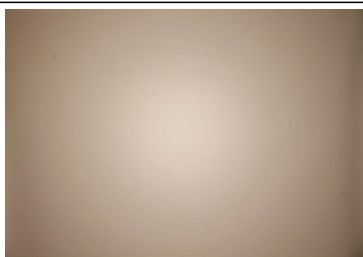



CITIZEN

LED CLU720/721
FWHM 73.0°
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030
C12606_LENINA-DL

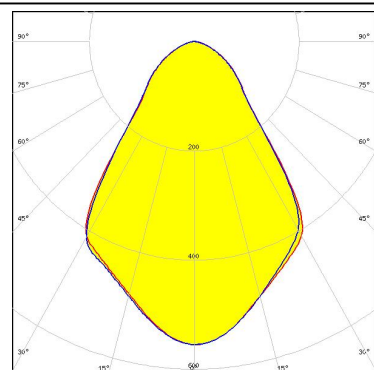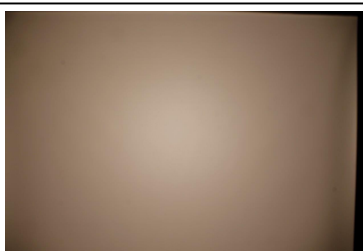



CITIZEN

LED CLU720/721
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

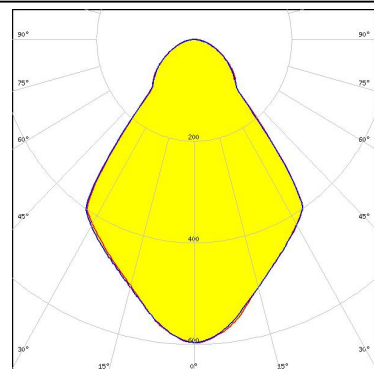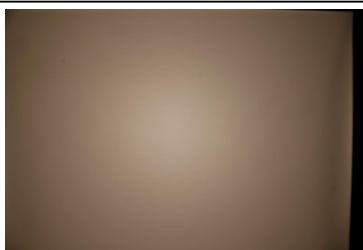

CITIZEN



LED CLU730/731
FWHM 72.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040

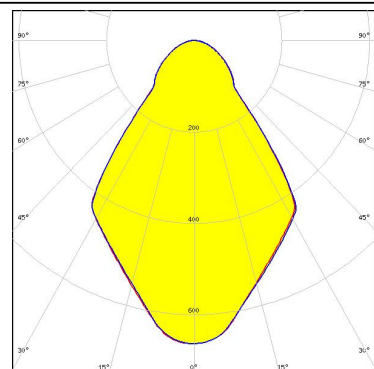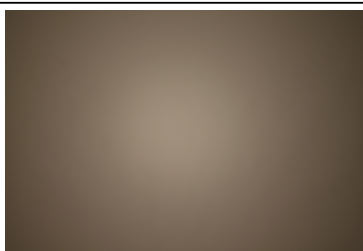

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU730/731
FWHM 71.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040
C12606_LENINA-DL

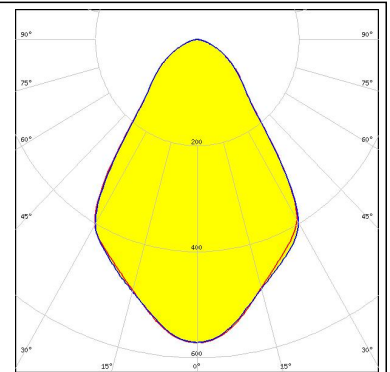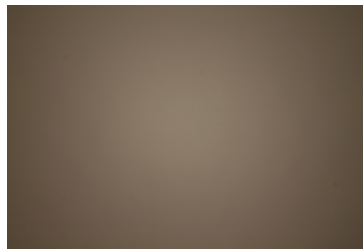



CREE

LED CMA1840
FWHM 71.0°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14146_LENINA-STD-BASE-CXA18

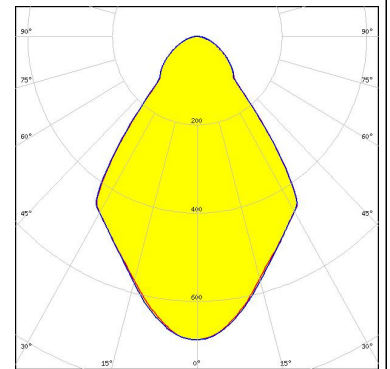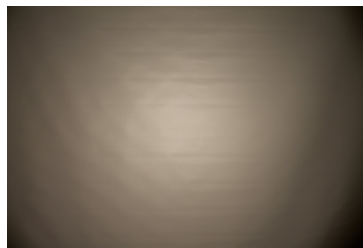



CREE

LED CMA2550
FWHM 71.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13324_LENINA-STD-BASE-CXA25

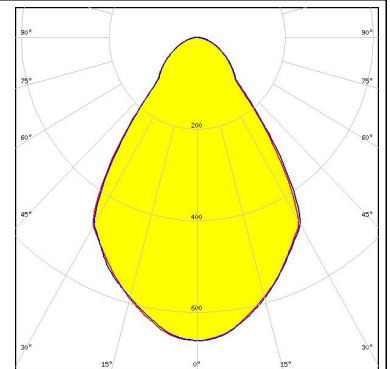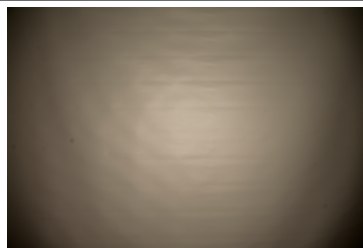

CREE



LED CMT14xx
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 434 Typ L1

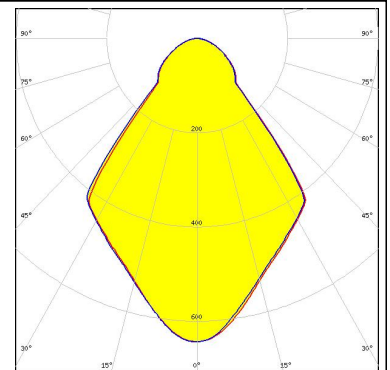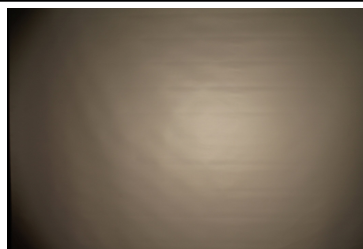



PHOTOMETRIC DATA (MEASURED):





LED CMT19xx
FWHM 74.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENASTD-BASE-CLL030

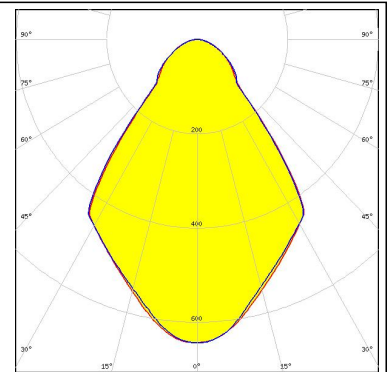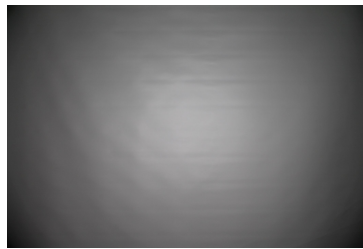



LED CMT19xx
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENASTD-BASE-VERO13-18
Bender Wirth: 477 Typ L1

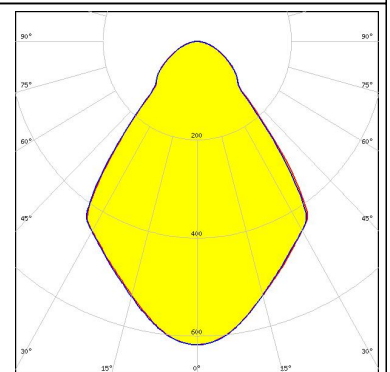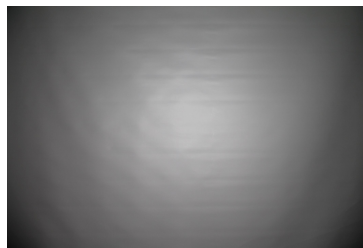

LED CMT28xx
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENASTD-BASE-VERO29
Bender Wirth: 471 Typ L3

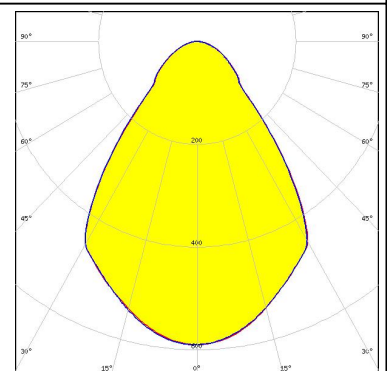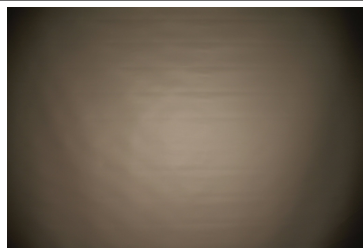



LED CMT28xx
FWHM 72.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENASTD-BASE-CLL040

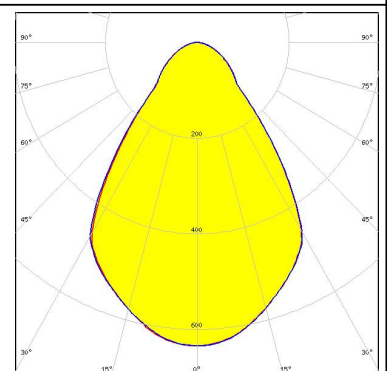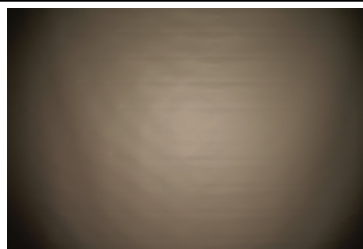



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 15xx
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 441 Typ L1

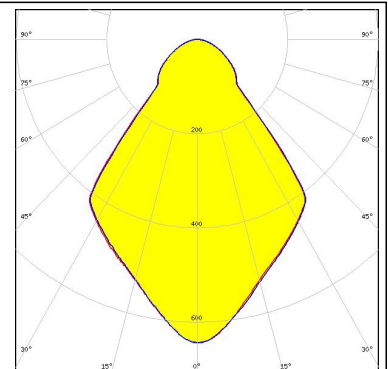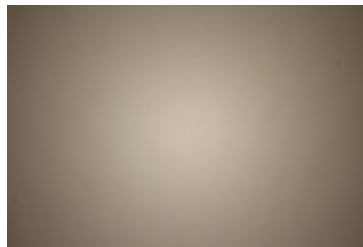



LED CXA/B 15xx
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 441 Typ L1

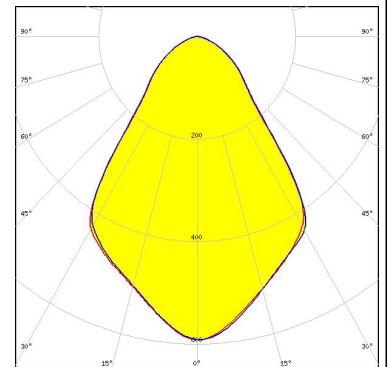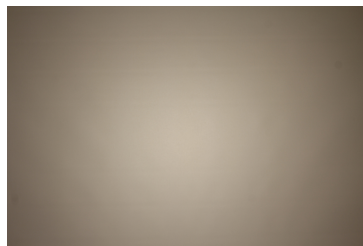

LED CXA/B 15xx
FWHM 69.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13186_LENINA-STD-BASE-CXA15
C12606_LENINA-DL

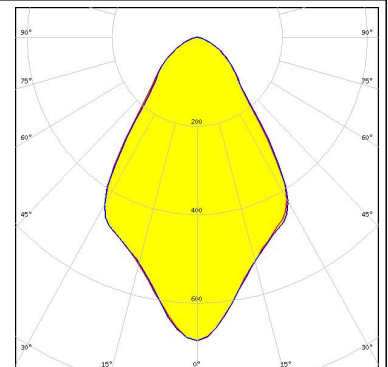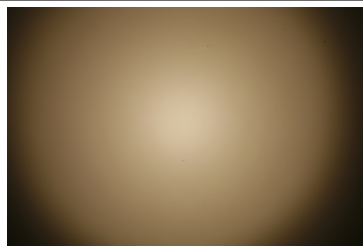

LED CXA/B 15xx
FWHM 70.0°
Efficiency 91 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13186_LENINA-STD-BASE-CXA15

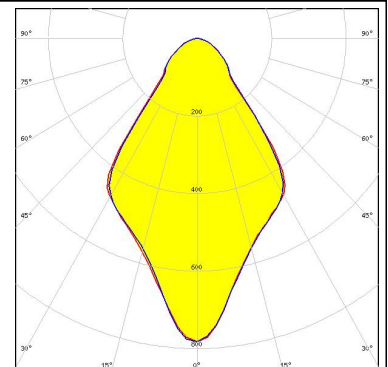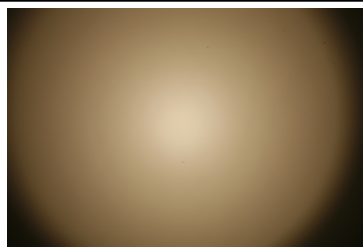



PHOTOMETRIC DATA (MEASURED):

CREE

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 73.0°
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14146_LENINA-STD-BASE-CXA18
C12606_LENINA-DL



CREE

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 437 Typ L1

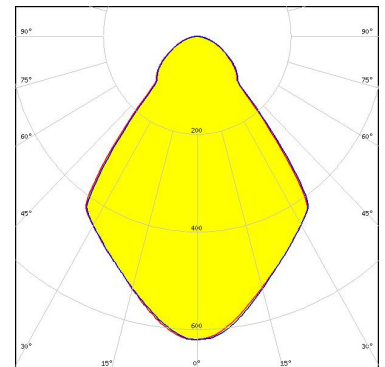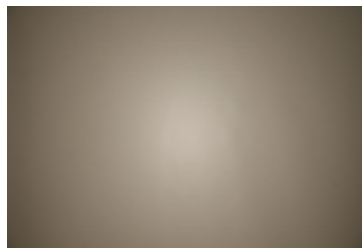


CREE

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 437 Typ L1

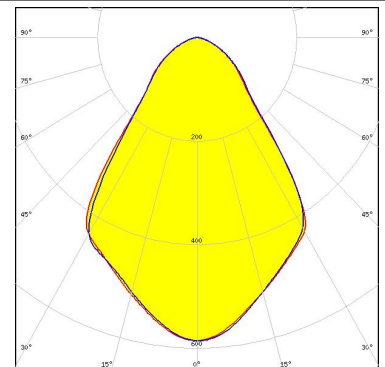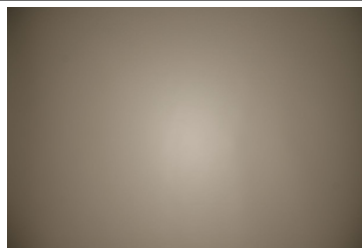

CREE

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 73.0°
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14146_LENINA-STD-BASE-CXA18

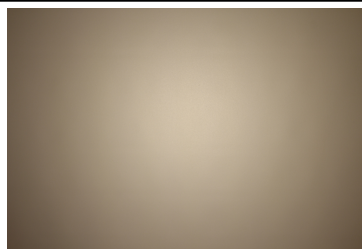

PHOTOMETRIC DATA (MEASURED):





LED CXA/B 1830
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C13868_LENINA-STD-BASE-VERO13-18

C12606_LENINA-DL

Bender Wirth: 437 Typ L1

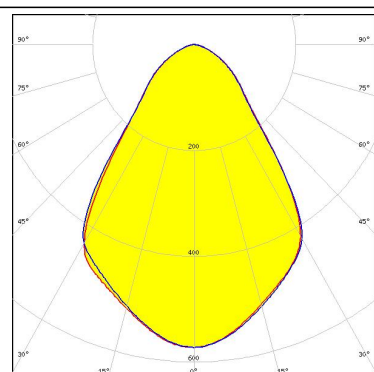
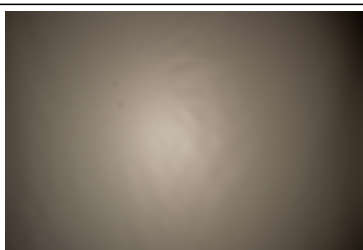


LED CXA/B 1830
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C13868_LENINA-STD-BASE-VERO13-18

Bender Wirth: 437 Typ L1

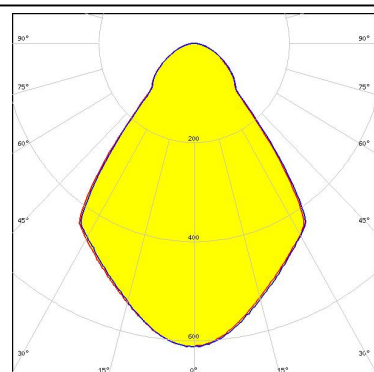
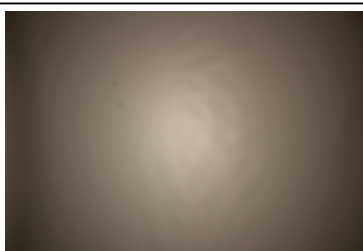


LED CXA/B 25xx
FWHM 70.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C13324_LENINA-STD-BASE-CXA25



C12606_LENINA-DL

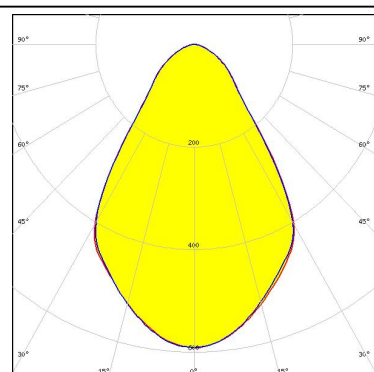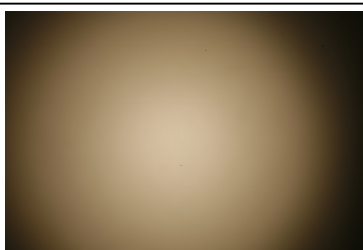

LED CXA/B 25xx
FWHM 70.0°
Efficiency 89 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:



C13324_LENINA-STD-BASE-CXA25

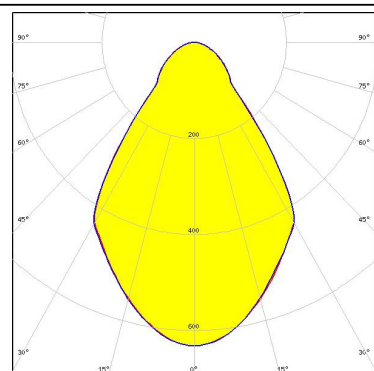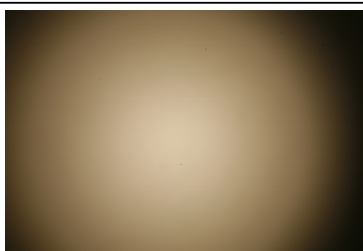



PHOTOMETRIC DATA (MEASURED):




LED CXA/B 30xx
FWHM 77.0°
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12606_LENINA-DL
IDEAL: 50-2234C + 50-2100LN

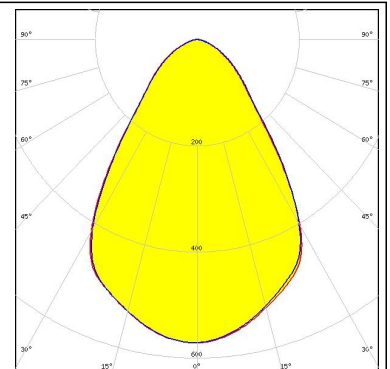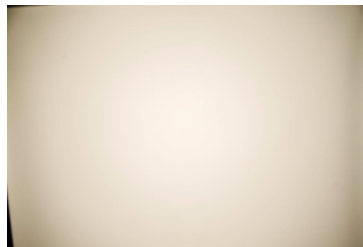


LED CXA/B 30xx
FWHM 72.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
IDEAL: 50-2234C + 50-2100LN

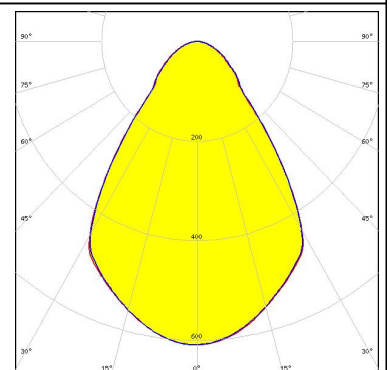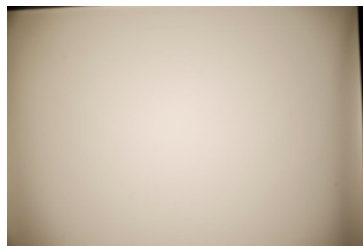

LED CXA2011
FWHM 72.0°
Efficiency 87 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12105_LENINA-STD-BASE-CXA20

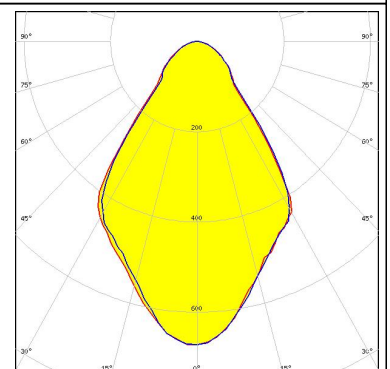


LED CXA2011
FWHM 70.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12105_LENINA-STD-BASE-CXA20
C12606_LENINA-DL

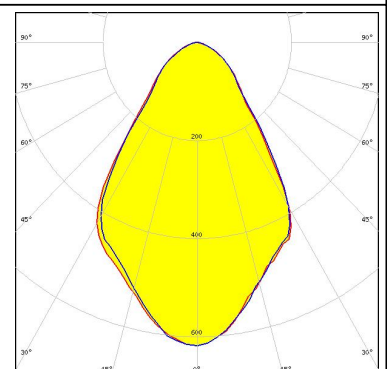

PHOTOMETRIC DATA (MEASURED):


EVERLIGHT

LED CHI3030 19W
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 468 Typ L3

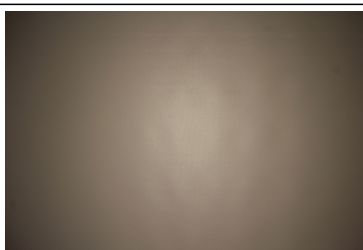



EVERLIGHT

LED CHI3030 29W
FWHM 75.0°
Efficiency 90 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 468 Typ L3

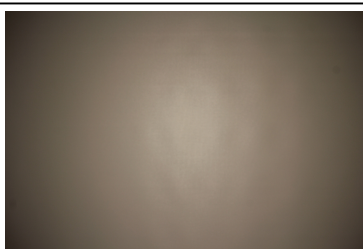



LUMILEDS

LED LUXEON CoB 1202/1203
FWHM 76.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 438 Typ L1

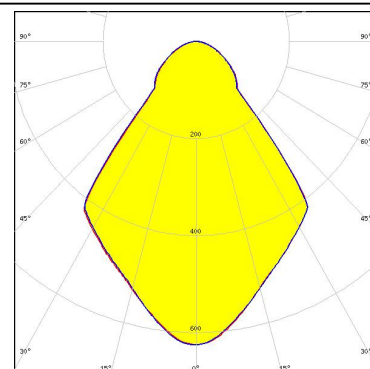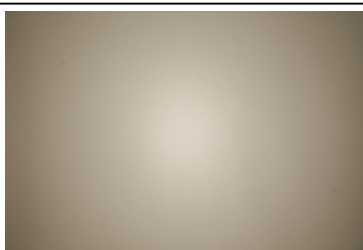

LUMILEDS


LED LUXEON CoB 1202/1203
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 438 Typ L1

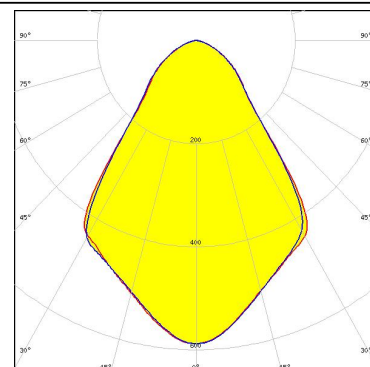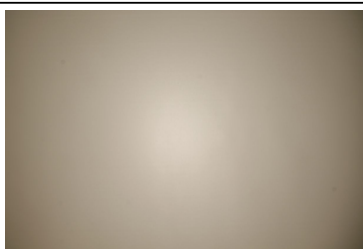


PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1204/1205
 FWHM 73.0°
 Efficiency 90 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12292_LENINA-STD-BASE-MEZ

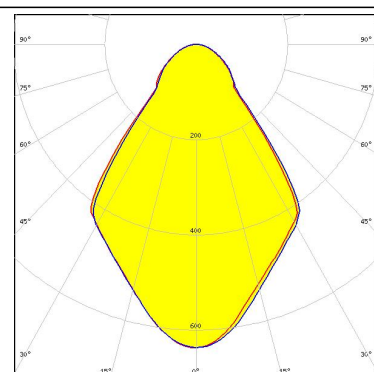



LED LUXEON CoB 1204/1205
 FWHM 71.0°
 Efficiency 86 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12292_LENINA-STD-BASE-MEZ
 C12606_LENINA-DL

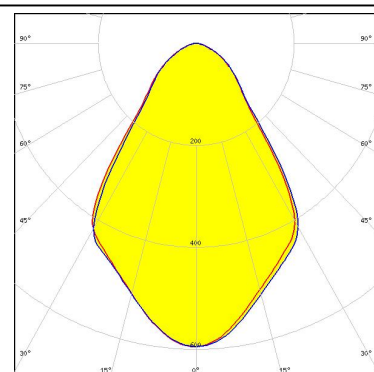

LED LUXEON CoB 1204HD
 FWHM 74.0°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C11981_LENINA-STD-BASE-COB-L110

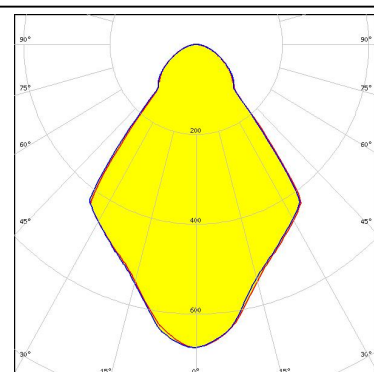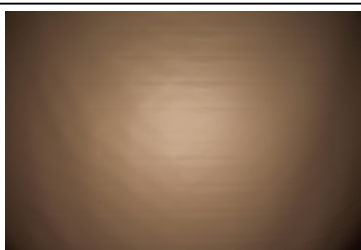



LED LUXEON CoB 1205HD
 FWHM 74.0°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C11981_LENINA-STD-BASE-COB-L110

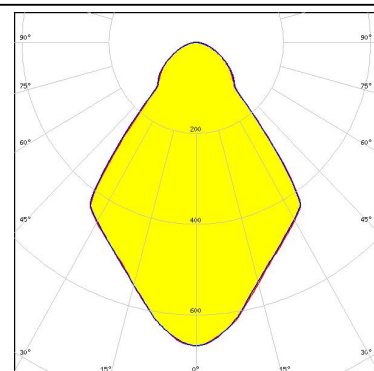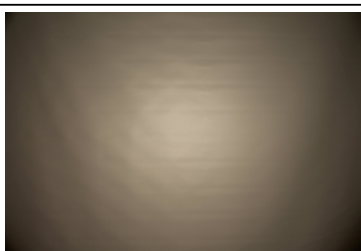



PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1208
 FWHM 73.0°
 Efficiency 91 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12292_LENINA-STD-BASE-MEZ

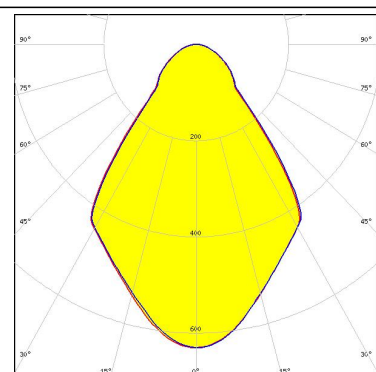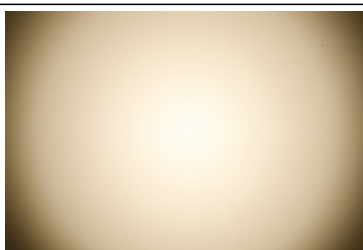



LED LUXEON CoB 1208
 FWHM 72.0°
 Efficiency 86 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12292_LENINA-STD-BASE-MEZ
 C12606_LENINA-DL

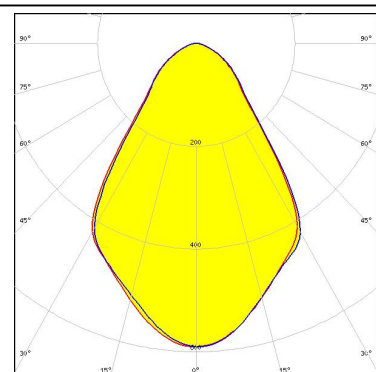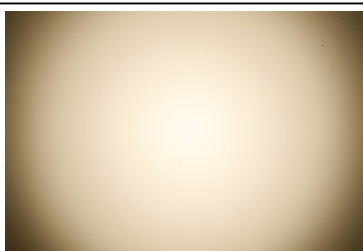

LED LUXEON CoB 1211
 FWHM 75.0°
 Efficiency 88 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13867_LENINA-STD-BASE-VERO29
 C12606_LENINA-DL
 Bender Wirth: 431 Typ L3

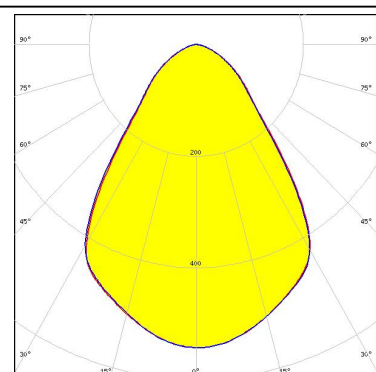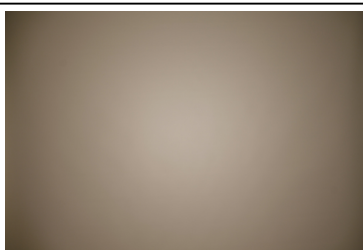



LED LUXEON CoB 1211
 FWHM 76.0°
 Efficiency 93 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13867_LENINA-STD-BASE-VERO29
 Bender Wirth: 431 Typ L3

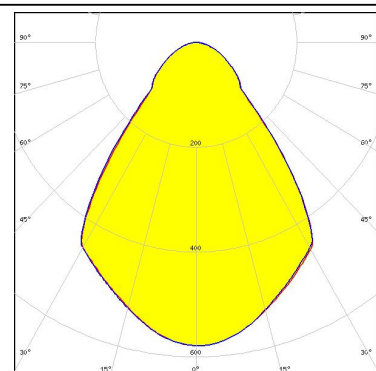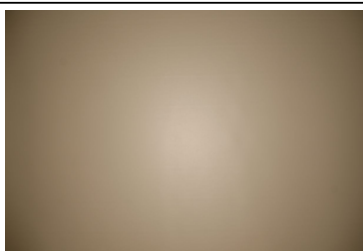



PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1216/1812
FWHM 73.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040

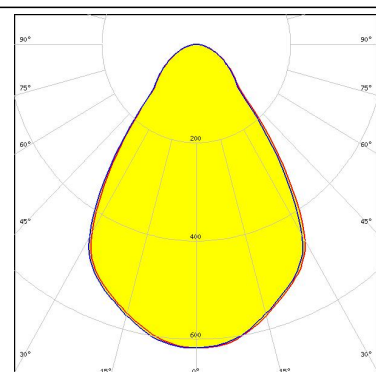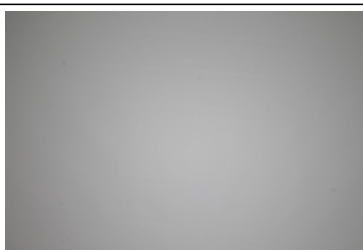



LED LUXEON CoB 1216/1812
FWHM 73.0°
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12606_LENINA-DL
A.A.G. STUCCHI: 8102/G2 + S-8000/12

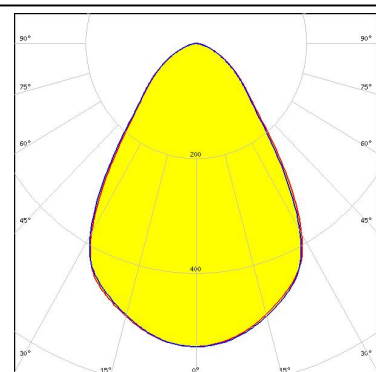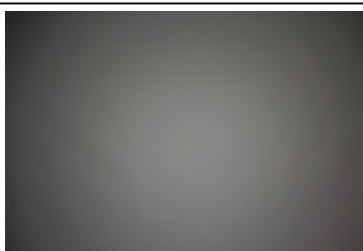

LED LUXEON CoB 1216/1812
FWHM 74.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8102/G2 + S-8000/12

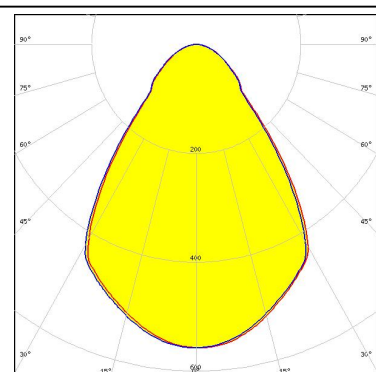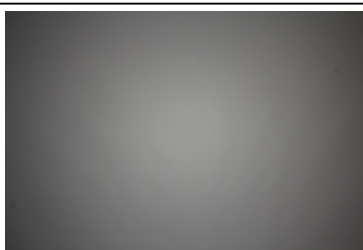



LED LUXEON CoB 1216/1812
FWHM 72.0°
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040
C12606_LENINA-DL

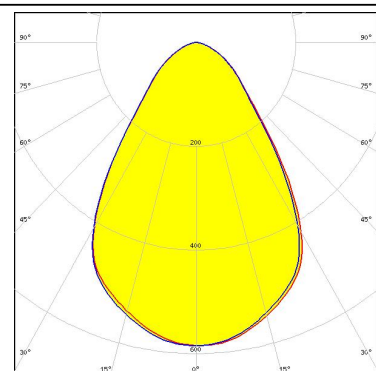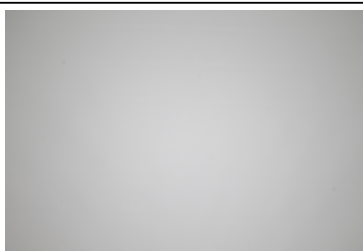



PHOTOMETRIC DATA (MEASURED):





LED LUXEON K12
 FWHM 68.0°
 Efficiency 83 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12924_LENINA-STD-BASE-LUXEON-K
 C12606_LENINA-DL

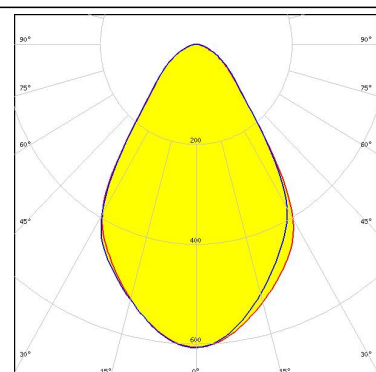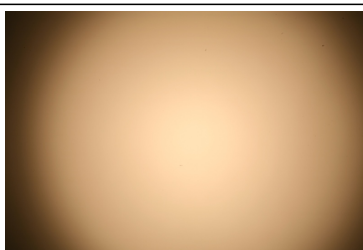



LED LUXEON K12
 FWHM 72.0°
 Efficiency 90 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12924_LENINA-STD-BASE-LUXEON-K

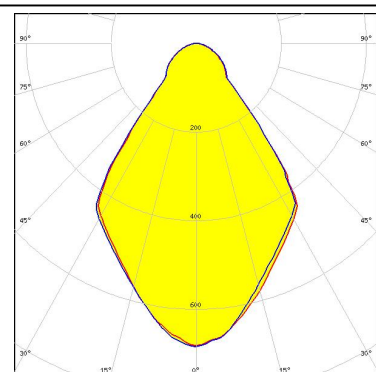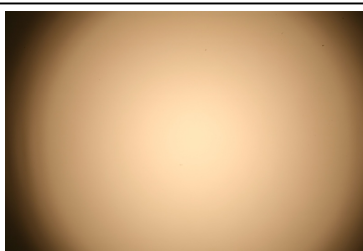

LED LUXEON K16
 FWHM 68.0°
 Efficiency 80 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12924_LENINA-STD-BASE-LUXEON-K
 C12606_LENINA-DL

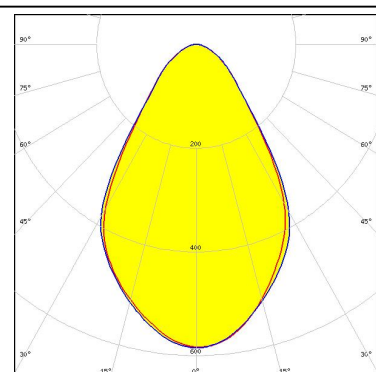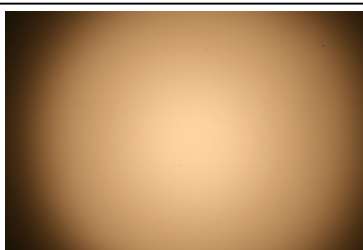



LED LUXEON K16
 FWHM 72.0°
 Efficiency 86 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12924_LENINA-STD-BASE-LUXEON-K

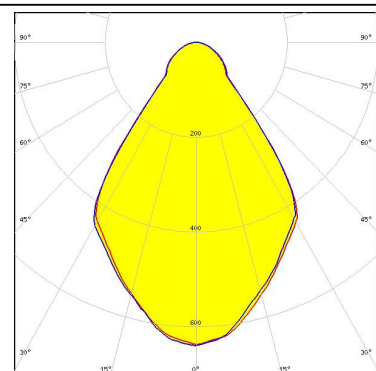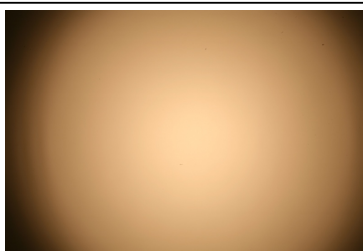



PHOTOMETRIC DATA (MEASURED):





LED CDM-14 (Dim-To-Warm)
FWHM 75.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 491 Typ L2

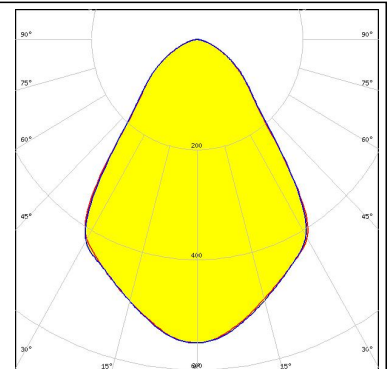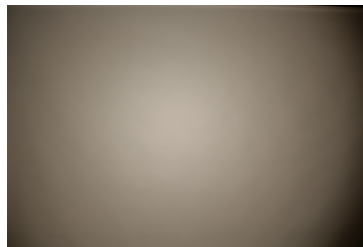



LED CDM-14 (Dim-To-Warm)
FWHM 77.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 491 Typ L2

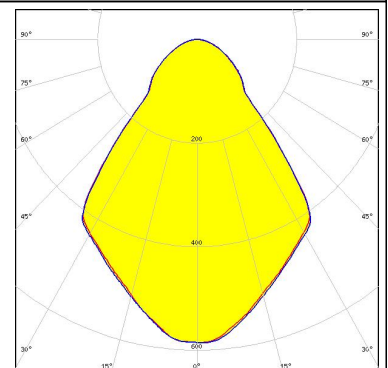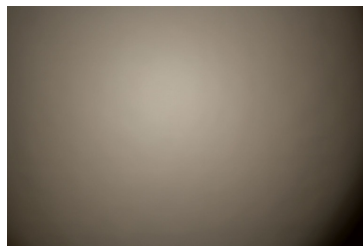

LED CDM-18 (Dim-To-Warm)
FWHM 75.0°
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 491 Typ L2

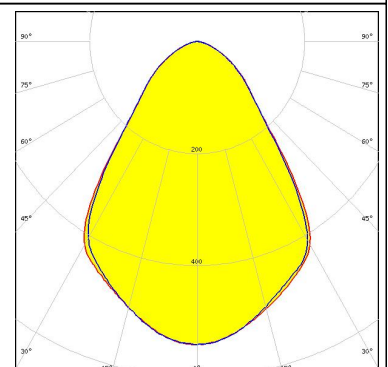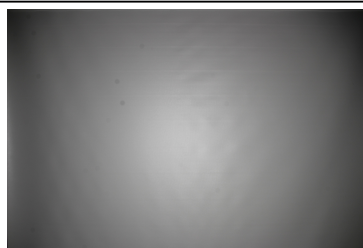



LED CDM-18 (Dim-To-Warm)
FWHM 76.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 491 Typ L2

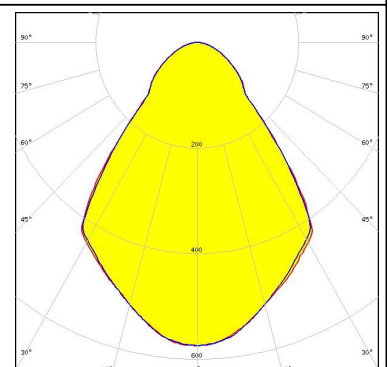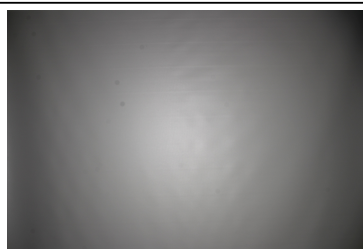



PHOTOMETRIC DATA (MEASURED):




LED CDM-9 (Dim-To-Warm)
FWHM 74.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 490 Typ L1

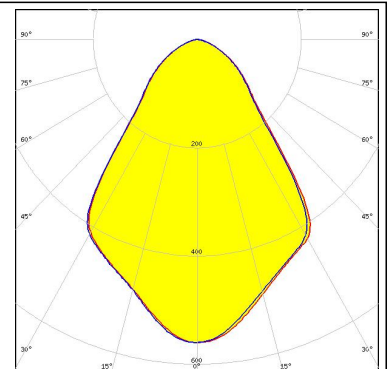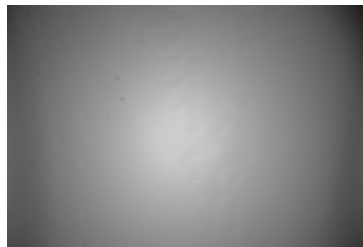



LED CDM-9 (Dim-To-Warm)
FWHM 76.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 490 Typ L1

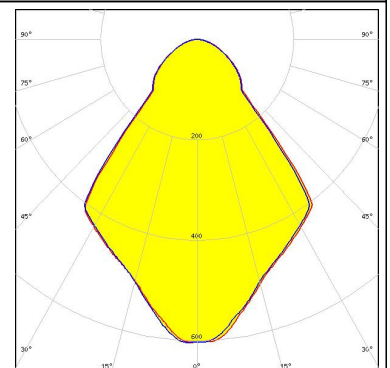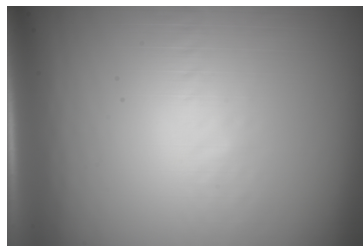

LED CTM-14 (Tunable White)
FWHM 76.0°
Efficiency 87 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 442 Typ L3

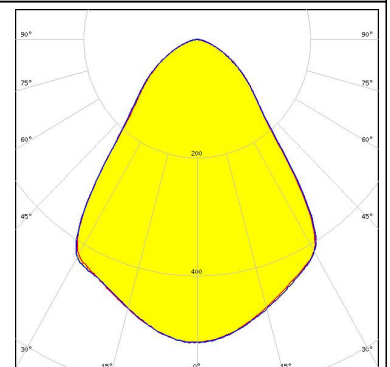



LED CTM-14 (Tunable White)
FWHM 77.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
Bender Wirth: 442 Typ L3

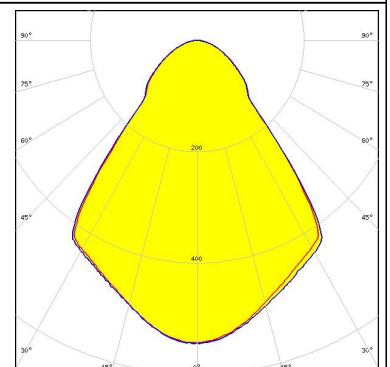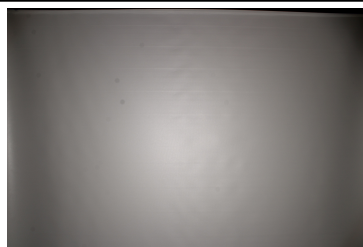



PHOTOMETRIC DATA (MEASURED):





LED CTM-18 (Tunable White)
FWHM 77.0°
Efficiency 87 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 442 Typ L3

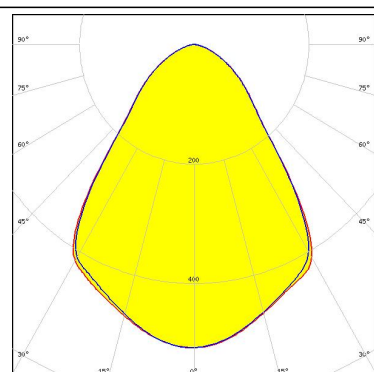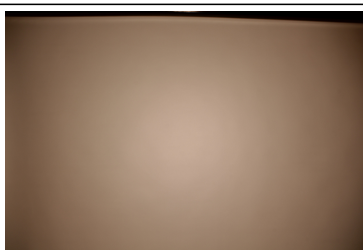



LED CTM-18 (Tunable White)
FWHM 78.0°
Efficiency 92 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
Bender Wirth: 442 Typ L3

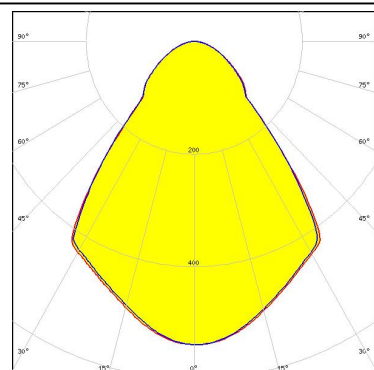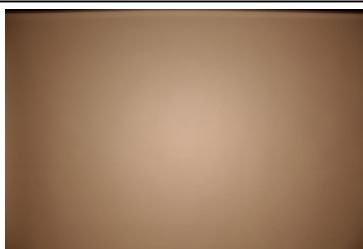

LED CTM-22 (Tunable White)
FWHM 77.0°
Efficiency 88 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 494 Typ L3

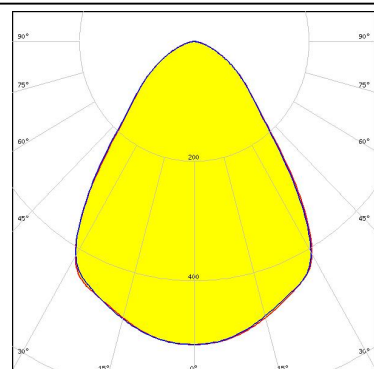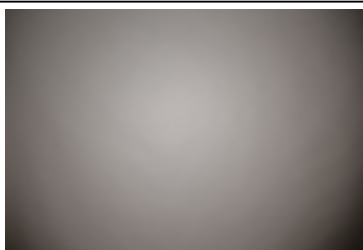



LED CTM-22 (Tunable White)
FWHM 78.0°
Efficiency 92 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
Bender Wirth: 494 Typ L3

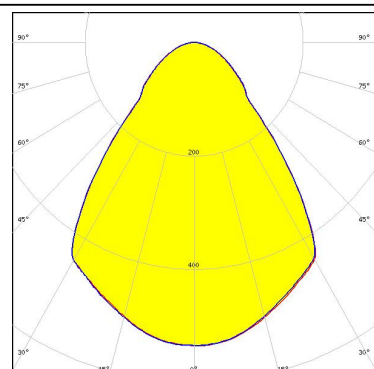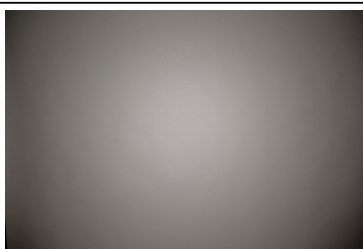



PHOTOMETRIC DATA (MEASURED):




LED CxM-14 (19x19)
FWHM 74.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

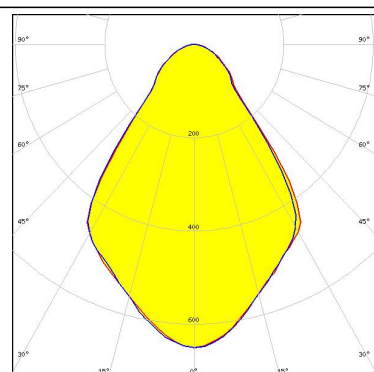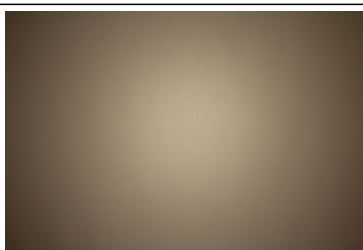


LED CxM-14 (19x19)
FWHM 73.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030
C12606_LENINA-DL

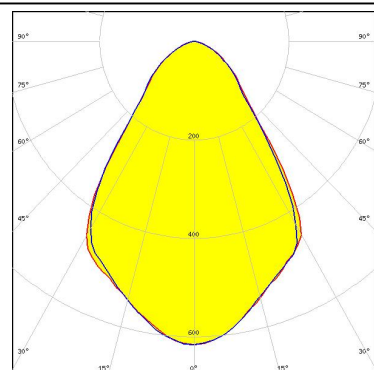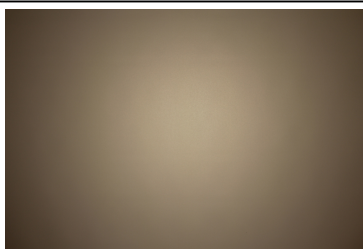

LED CxM-22 (28x28)
FWHM 73.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040
C12606_LENINA-DL

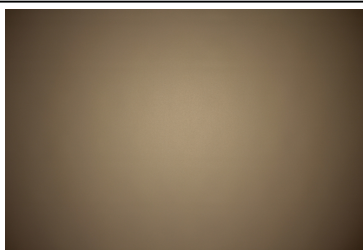



LED CxM-22 (28x28)
FWHM 73.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040

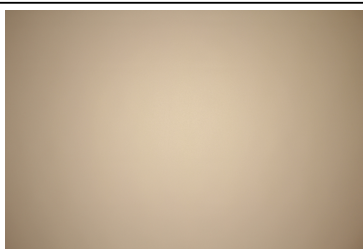



PHOTOMETRIC DATA (MEASURED):





LED COB J-Type
FWHM 76.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENASTD-BASE-VERO13-18
Bender Wirth: 463 Typ L2

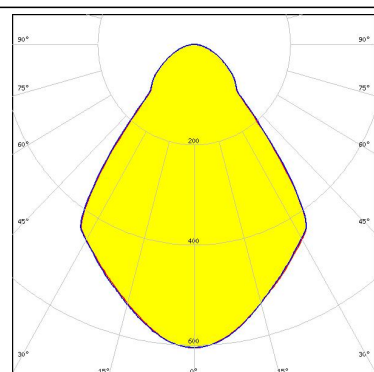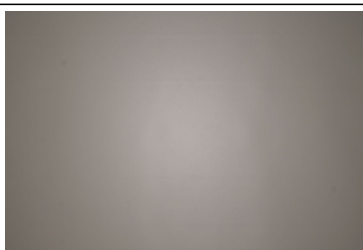



LED COB J-Type
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENASTD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 463 Typ L2

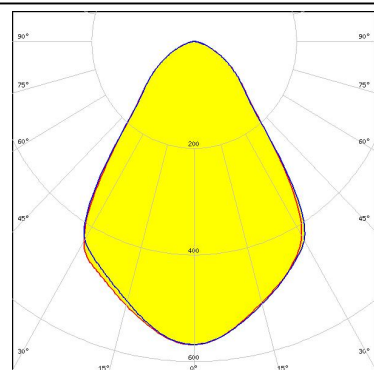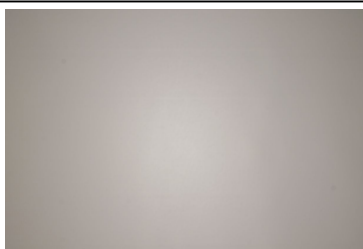

LED COB J-Type
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENASTD-BASE-MEZ

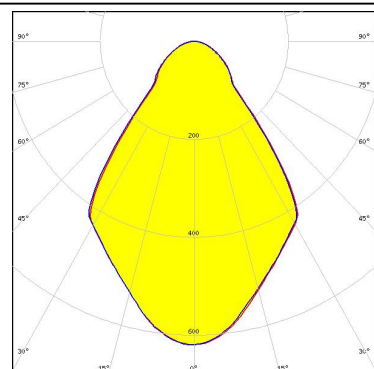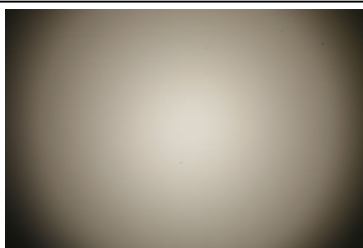



LED COB J-Type
FWHM 72.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENASTD-BASE-MEZ
C12606_LENINA-DL

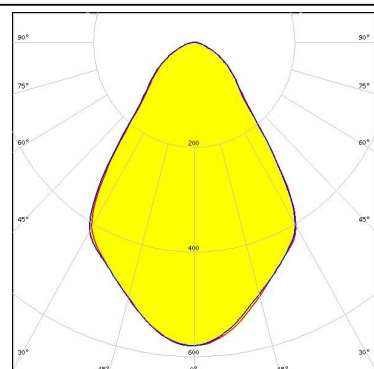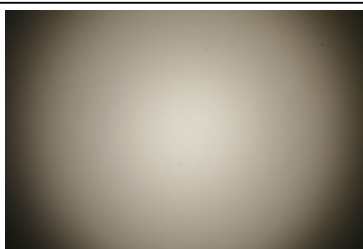



PHOTOMETRIC DATA (MEASURED):





LED COB L-Type (LES 11)
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 438 Typ L1

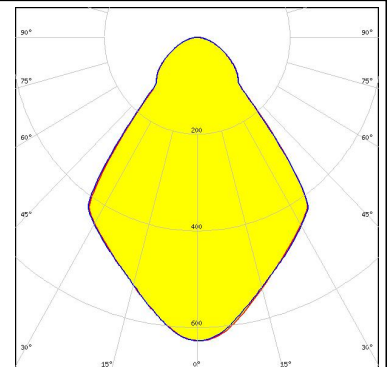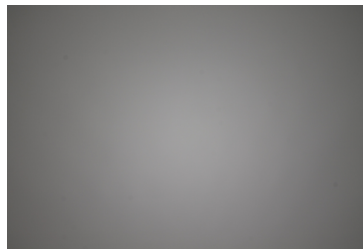



LED COB L-Type (LES 11)
FWHM 71.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C11981_LENINA-STD-BASE-COB-L110
C12606_LENINA-DL

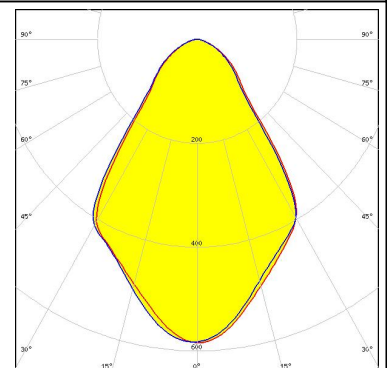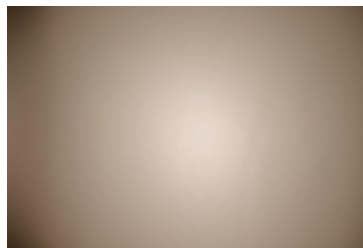

LED COB L-Type (LES 11)
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 438 Typ L1

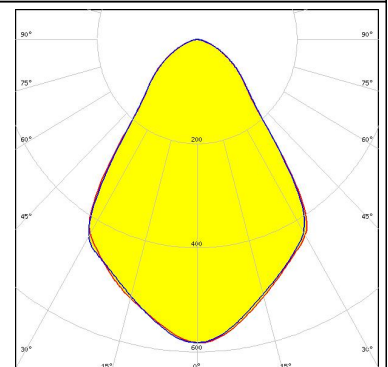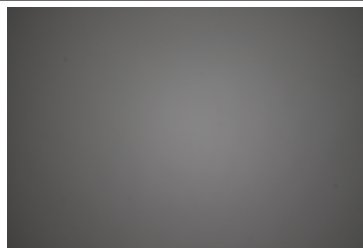



LED COB L-Type (LES 9)
FWHM 74.0°
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 438 Typ L1

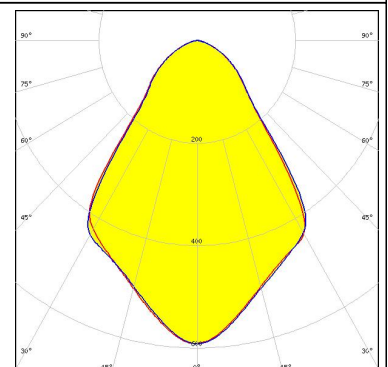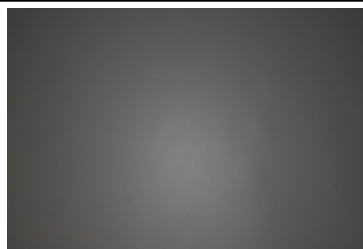



PHOTOMETRIC DATA (MEASURED):





LED COB L-Type (LES 9)
FWHM 76.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 438 Typ L1

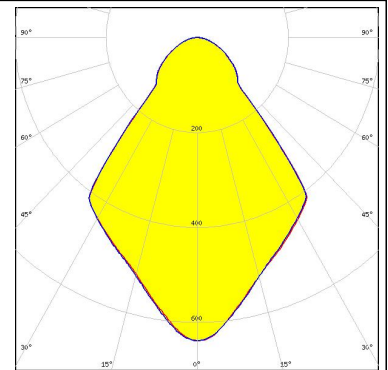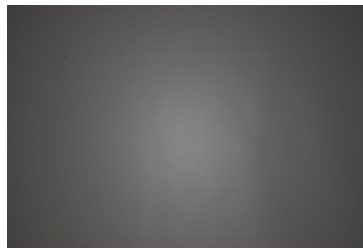



LED NVCWJ024Z-V1MT: COB J-Type Tunable White
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 498 Typ L2

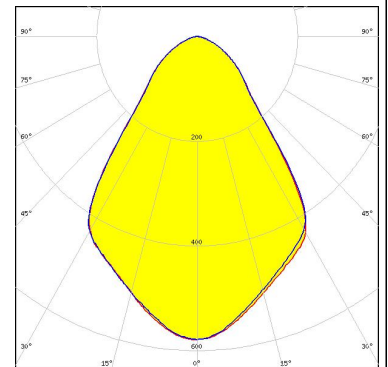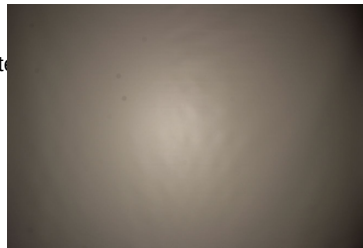

LED NVCWJ024Z-V1MT: COB J-Type Tunable White
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 498 Typ L2

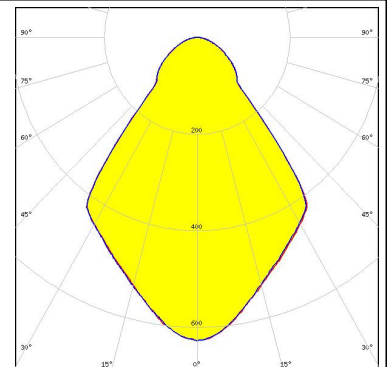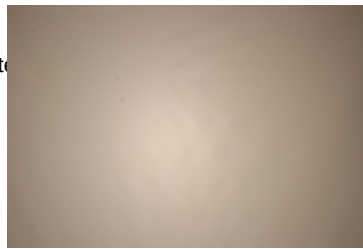

LED Soleriq S13
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 437 Typ L1

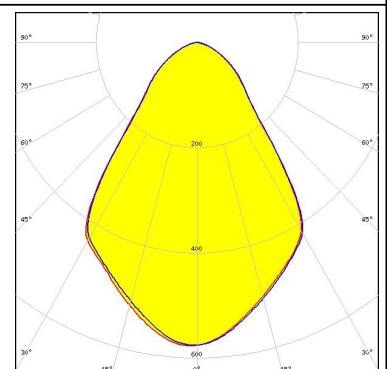
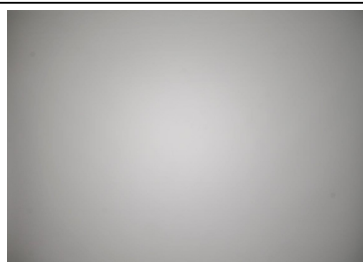


PHOTOMETRIC DATA (MEASURED):

OSRAM

Opto Semiconductors



LED Soleriq S13
FWHM 75.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 437 Typ L1

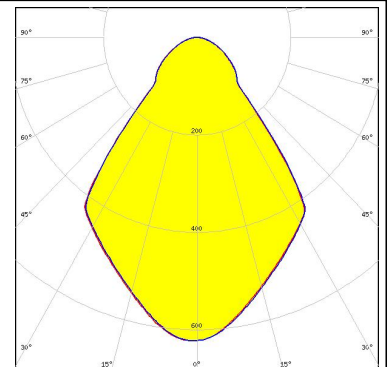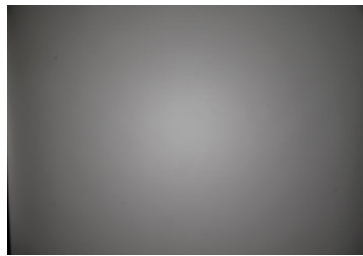

OSRAM

Opto Semiconductors



LED Soleriq S19
FWHM 75.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
C12606_LENINA-DL
Bender Wirth: 462 Typ L3

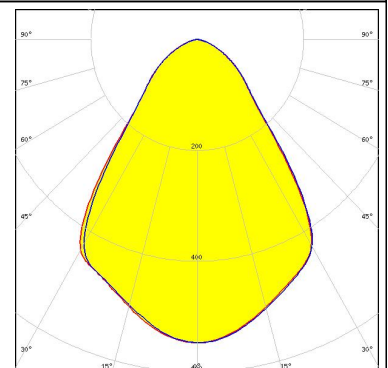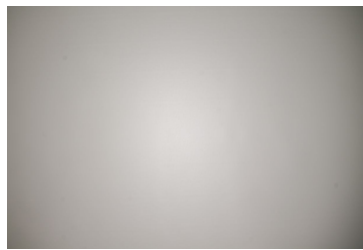

OSRAM


Opto Semiconductors

LED Soleriq S19
FWHM 76.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13867_LENINA-STD-BASE-VERO29
Bender Wirth: 462 Typ L3

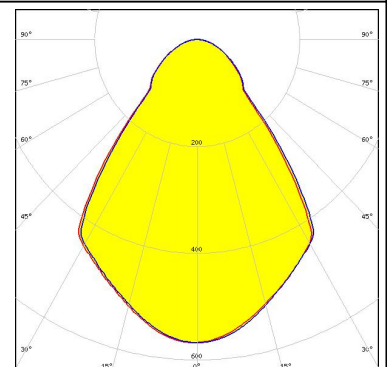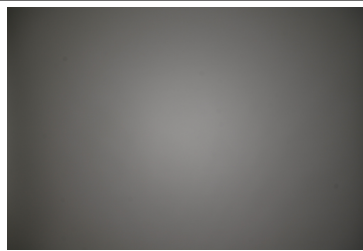

PHILIPS


LED Fortimo SLM L13 CoB
FWHM 71.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ
C12606_LENINA-DL

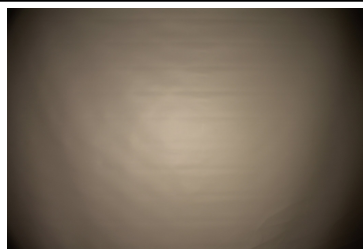

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM L13 CoB
FWHM 74.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ

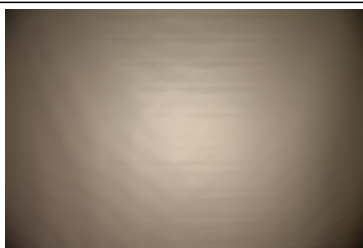



PHILIPS

LED Fortimo SLM L15 CoB
FWHM 72.0°
Efficiency 88 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ
C12606_LENINA-DL

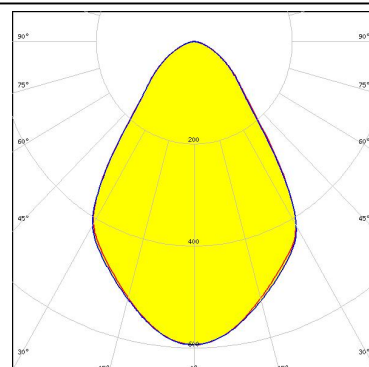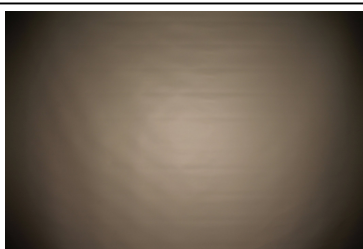



PHILIPS

LED Fortimo SLM L15 CoB
FWHM 73.0°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ

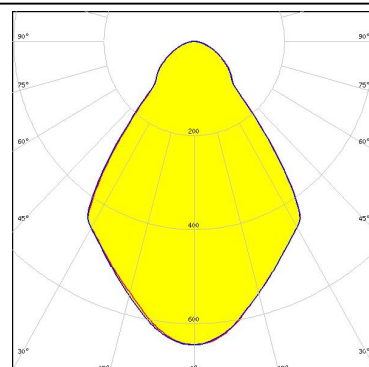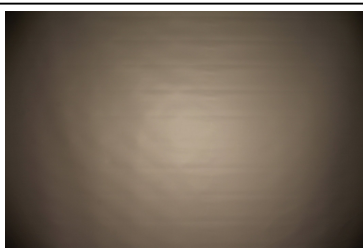

PHILIPS



LED Fortimo SLM L19 CoB
FWHM 72.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12692_LENINA-STD-BASE-CLL040

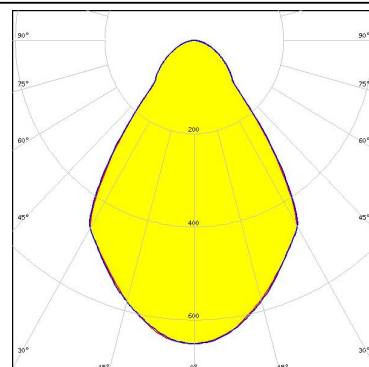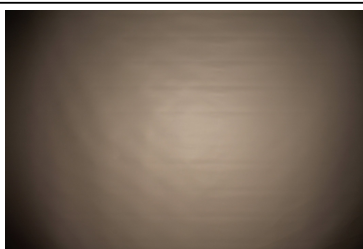

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM L19 CoB
 FWHM 71.0°
 Efficiency 88 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12692_LENINA-STD-BASE-CLL040
 C12606_LENINA-DL

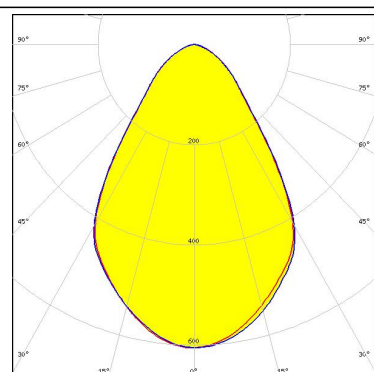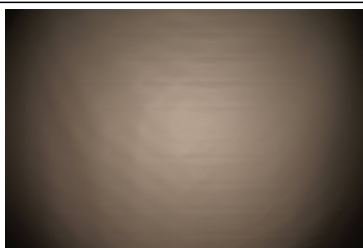



PHILIPS

LED Fortimo SLM L23 CoB
 FWHM 72.0°
 Efficiency 94 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12692_LENINA-STD-BASE-CLL040

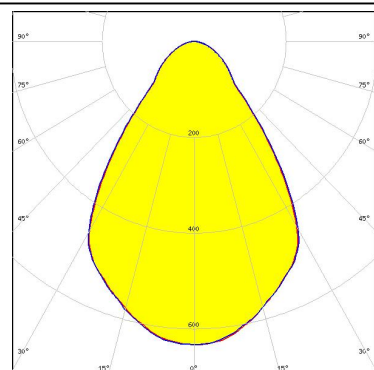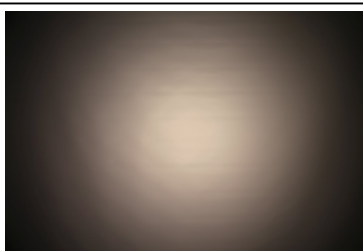



PHILIPS

LED Fortimo SLM L23 CoB
 FWHM 71.0°
 Efficiency 88 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12692_LENINA-STD-BASE-CLL040
 C12606_LENINA-DL

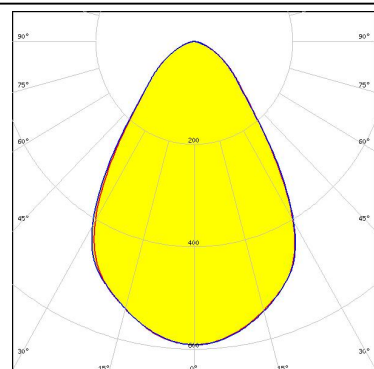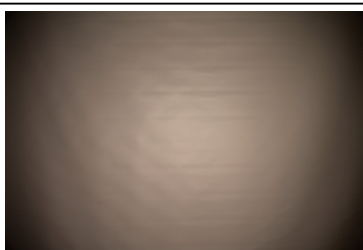

SAMSUNG



LED LC016D / LC019D / LC026D / LC033D
 FWHM 73.0°
 Efficiency 89 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12691_LENINA-STD-BASE-CLL030
 C12606_LENINA-DL

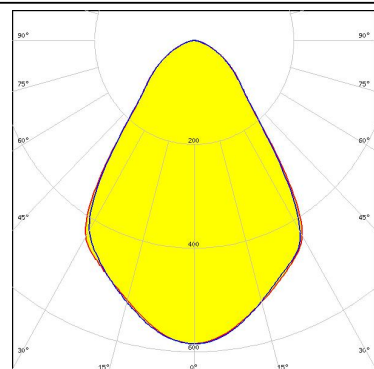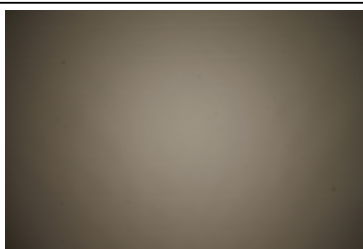

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 FWHM 74.0°
 Efficiency 94 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12691_LENINA-STD-BASE-CLL030

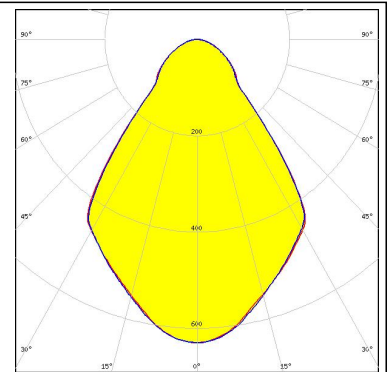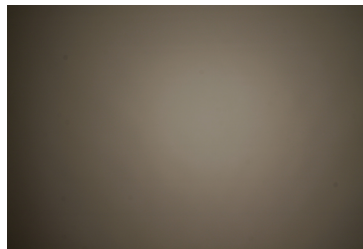



SAMSUNG

LED LC026B / 033B / 040B
 FWHM 74.0°
 Efficiency 90 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 C12606_LENINA-DL
 Bender Wirth: 450 Typ L2

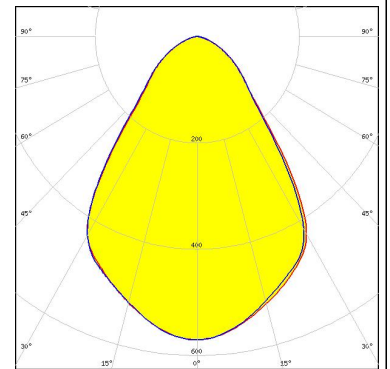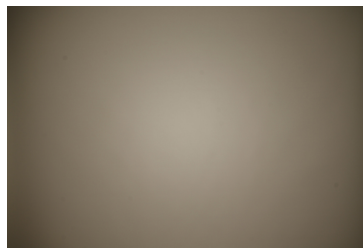



SAMSUNG

LED LC026B / 033B / 040B
 FWHM 75.0°
 Efficiency 94 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 Bender Wirth: 450 Typ L2

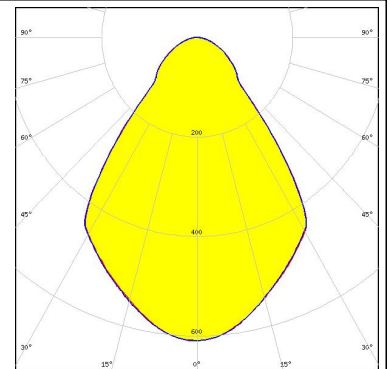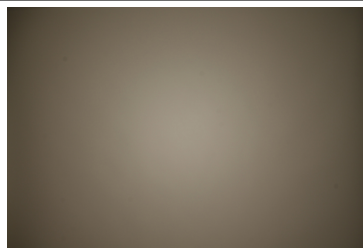

SEOL SEMICONDUCTOR

LED ZC12/18
 FWHM 75.0°
 Efficiency 90 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C12691_LENINA-STD-BASE-CLL030

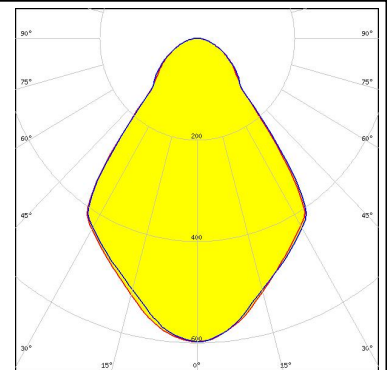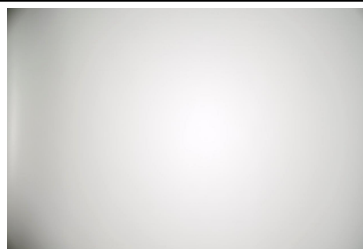

PHOTOMETRIC DATA (MEASURED):

SEOUL SEOUL SEMICONDUCTOR LED ZC12/18 FWHM 73.0° Efficiency 86 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C12691_LENINA-STD-BASE-CLL030 C12606_LENINA-DL		
SEOUL SEOUL SEMICONDUCTOR LED ZC25/40/60 FWHM 72.0° Efficiency 85 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C12692_LENINA-STD-BASE-CLL040 C12606_LENINA-DL		
SEOUL SEOUL SEMICONDUCTOR LED ZC25/40/60 FWHM 73.0° Efficiency 89 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C12692_LENINA-STD-BASE-CLL040		
SHARP LED Mega Zenigata (GW5DGC) FWHM 72.0° Efficiency 86 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: C12292_LENINA-STD-BASE-MEZ C12606_LENINA-DL		



PHOTOMETRIC DATA (MEASURED):

SHARP

LED Mega Zenigata (GW5DGC)
FWHM 73.0°
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ



SHARP

LED Mega Zenigata (GW6DME)
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ

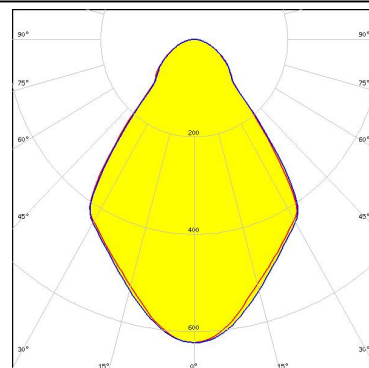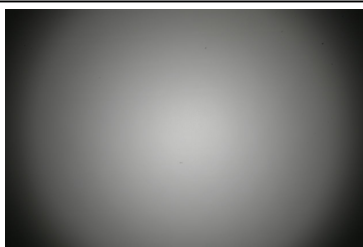



SHARP

LED Mega Zenigata (GW6DME)
FWHM 72.0°
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12292_LENINA-STD-BASE-MEZ
C12606_LENINA-DL

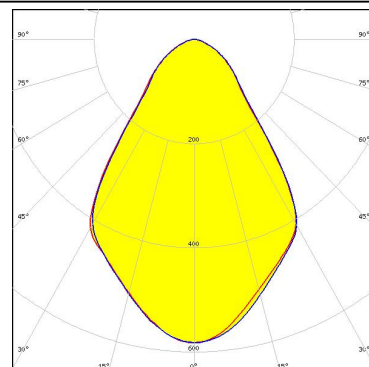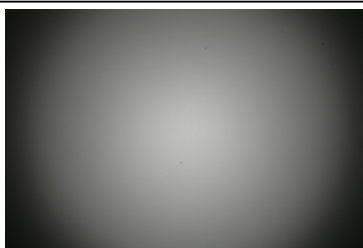

TRIDONIC


LED SLE G7 LES15
FWHM 73.0°
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

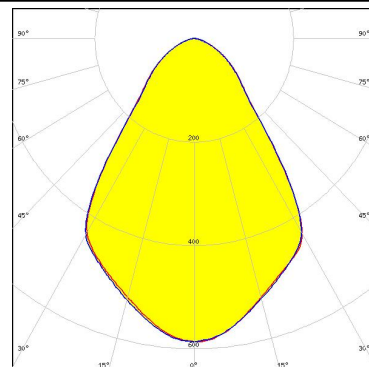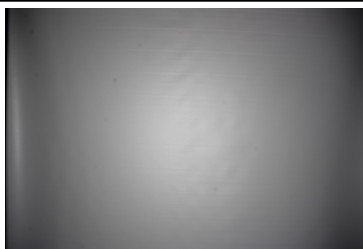

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED SLE G7 LES17 H
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14547_LENINA-ADAPTER-B

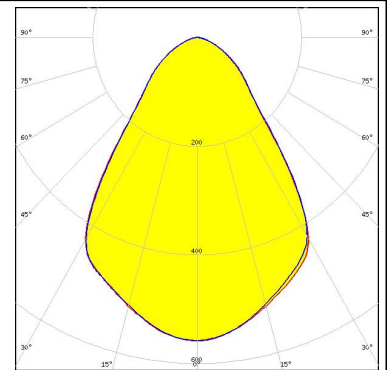



TRIDONIC

LED SLE G7 LES21 H
FWHM 74.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14547_LENINA-ADAPTER-B

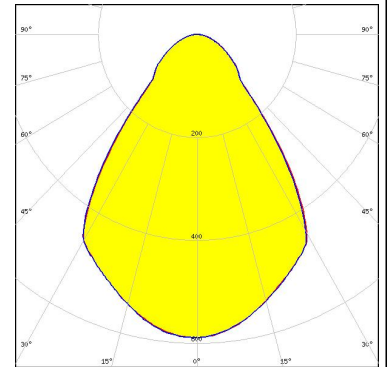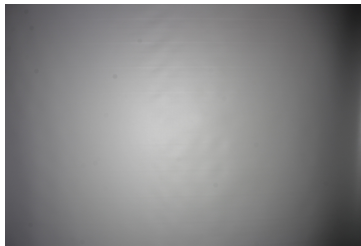

XICATO


LED XOB 14.5 mm
FWHM 74.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

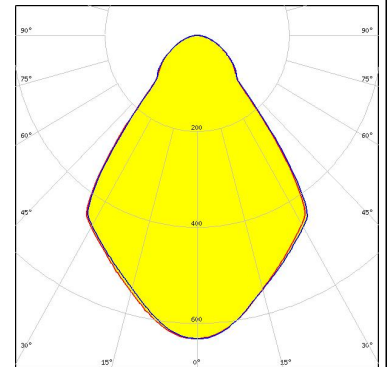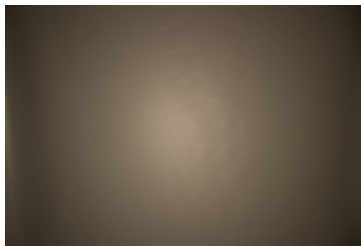


PHOTOMETRIC DATA (SIMULATED):




LED V10 Gen7
FWHM 71.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 Bender Wirth: 486 Typ L1

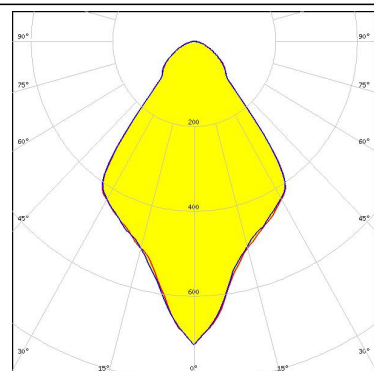


LED V13 Gen7
FWHM 73.0°
Efficiency 86 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 Bender Wirth: 477 Typ L1

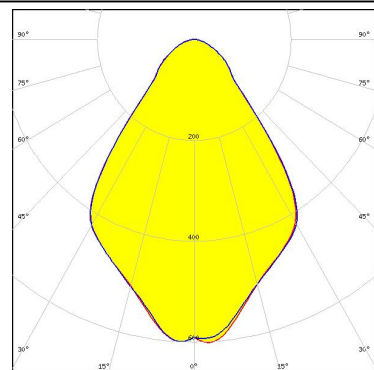

LED V13 Gen7
FWHM 70.0°
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C12606_LENINA-DL
 IDEAL: 50-2103CT + 50-2100AN

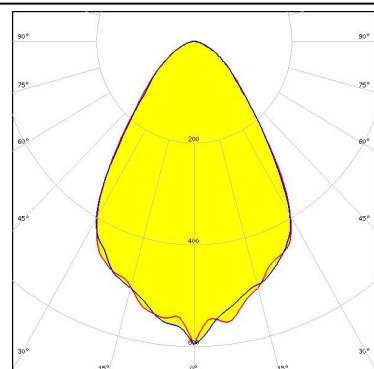


LED V13 Gen7
FWHM 72.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 C12606_LENINA-DL
 Bender Wirth: 477 Typ L1

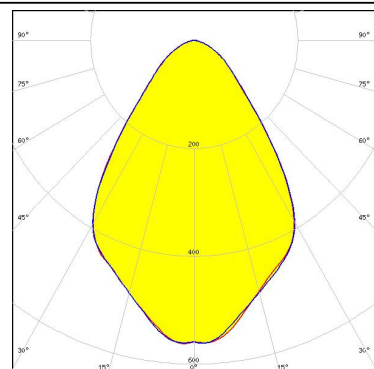


PHOTOMETRIC DATA (SIMULATED):



LED V22 Gen7
FWHM 60.0°
Efficiency 85 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13867_LENINA-STD-BASE-VERO29
 C12606_LENINA-DL
 Bender Wirth: 431 Typ L3

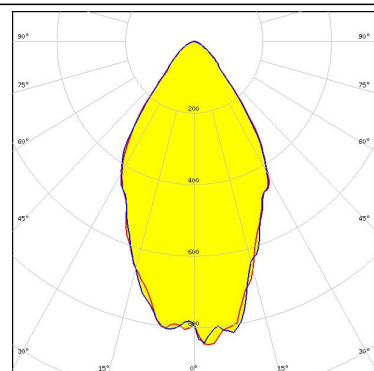

LED V22 Gen7
FWHM 60.0°
Efficiency 89 %
LEDs/each optic 1
Light colour White
Required components:
 C13867_LENINA-STD-BASE-VERO29
 Bender Wirth: 431 Typ L3

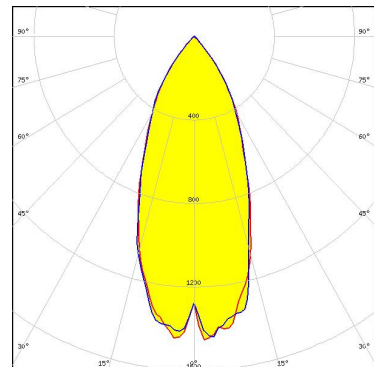

LED CxM-14 (19x19)
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 Bender Wirth: 433 Typ L1



LED CxM-14 (19x19)
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13868_LENINA-STD-BASE-VERO13-18
 C12606_LENINA-DL
 Bender Wirth: 433 Typ L1


PHOTOMETRIC DATA (SIMULATED):



LED CxM-9 (13.5x13.5)
FWHM 73.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 434 Typ L1



LED Soleriq S15
FWHM 72.0°
Efficiency 87 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C12691_LENINA-STD-BASE-CLL030

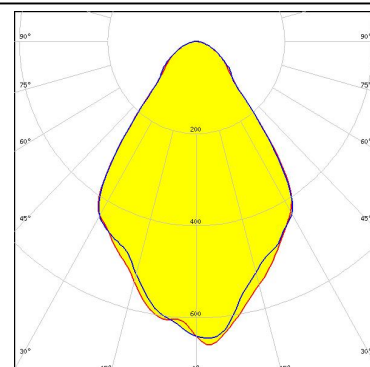

LED ZC12/18
FWHM 75.0°
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
Bender Wirth: 433 Typ L1



LED ZC12/18
FWHM 74.0°
Efficiency 89 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13868_LENINA-STD-BASE-VERO13-18
C12606_LENINA-DL
Bender Wirth: 433 Typ L1

PHOTOMETRIC DATA (SIMULATED):

 SEOUL SEMICONDUCTOR	
LED	ZC4/6
FWHM	73.0°
Efficiency	89 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	
C13868_LENINA-STD-BASE-VERO13-18	
C12606_LENINA-DL	
Bender Wirth: 434 Typ L1	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru