

Compact Thumb-wheel Driving Rotary Potentiometers

Type: **EVLH**



■ Features

- Dustproof molded structure
- Wave-soldering available
- Custom-designed thumb wheels available

■ Recommended Applications

- Radios, Headphone Cassette Tape Players, Micro-cassette Tape Recorders
- LCD screen TVs, VCRs
- Contrast control for LCDs

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	V	L	H								
Product Code			Specifications			Wheel Shape			Taper & Resistance		


■ Specifications

Mechanical	Rotation Angle	260 °																								
	Rotation Torque	0.5 mN·m to 6 mN·m																								
	Shaft Stopper Strength	60 mN·m min.																								
	Detent	Center detent available																								
Electrical	Nominal Total Resistance	1 kΩ to 250 kΩ (Tolerance ±20 %) 1 kΩ to 500 kΩ (B) (Tolerance ±20 %)																								
	Taper	<table><tr><td colspan="2"> Measuring method </td><td rowspan="2">$\frac{\text{Voltage between T1 \& T2}}{\text{Voltage between T1 \& T3}} \times 100(\%)$ At 50 % of effective rotation</td></tr><tr><td>EIAJ</td><td>Panasonic</td><td>EVLH</td></tr><tr><td>15A</td><td>A</td><td colspan="2">10 to 25</td></tr><tr><td>1B</td><td>B</td><td colspan="2">40 to 60</td></tr><tr><td>15C</td><td>C</td><td colspan="2">10 to 25*</td></tr><tr><td>10A</td><td>D</td><td colspan="2">6 to 15</td></tr></table>			Measuring method		$\frac{\text{Voltage between T1 \& T2}}{\text{Voltage between T1 \& T3}} \times 100(\%)$ At 50 % of effective rotation	EIAJ	Panasonic	EVLH	15A	A	10 to 25		1B	B	40 to 60		15C	C	10 to 25*		10A	D	6 to 15	
		Measuring method		$\frac{\text{Voltage between T1 \& T2}}{\text{Voltage between T1 \& T3}} \times 100(\%)$ At 50 % of effective rotation																						
		EIAJ	Panasonic		EVLH																					
		15A	A	10 to 25																						
		1B	B	40 to 60																						
15C		C	10 to 25*																							
10A	D	6 to 15																								
*Angle from terminal 3 side. $\left(\frac{\text{Voltage between T2 \& T3}}{\text{Voltage between T1 \& T3}} \times 100 (\%) \right)$																										
Power Rating	0.03 W (Taper B), 0.01 W (Others)																									
Residual Resistance	<table><tr><td> Taper & Terminal </td><td>A·B·D : T1 & T2 B·C : T2 & T3</td><td>A·D : T2 & T3 C : T1 & T2</td></tr><tr><td>R=Nominal Total Resistance</td><td></td><td></td></tr><tr><td>R ≤ 50 kΩ</td><td>2 Ω</td><td>25 Ω</td></tr><tr><td>50 kΩ < R ≤ 250 kΩ</td><td>25 Ω</td><td>50 Ω</td></tr><tr><td>250 kΩ < R ≤500 kΩ</td><td>100 Ω</td><td>100 Ω</td></tr></table>			Taper & Terminal	A·B·D : T1 & T2 B·C : T2 & T3	A·D : T2 & T3 C : T1 & T2	R=Nominal Total Resistance			R ≤ 50 kΩ	2 Ω	25 Ω	50 kΩ < R ≤ 250 kΩ	25 Ω	50 Ω	250 kΩ < R ≤500 kΩ	100 Ω	100 Ω								
	Taper & Terminal	A·B·D : T1 & T2 B·C : T2 & T3	A·D : T2 & T3 C : T1 & T2																							
	R=Nominal Total Resistance																									
	R ≤ 50 kΩ	2 Ω	25 Ω																							
50 kΩ < R ≤ 250 kΩ	25 Ω	50 Ω																								
250 kΩ < R ≤500 kΩ	100 Ω	100 Ω																								
Noise Level	100 mV max.																									
Endurance	Operating Life	10000 cycles min.																								
Minimum Quantity/Packing Unit		100 pcs. Polyethylene Bag (Bulk)																								
Quantity/Cartron		4000 pcs.																								

■ Dimensions in mm (not to scale)

- 7 mm Dia. Single

Pre-coupled wheel	EVLH
-------------------------	------

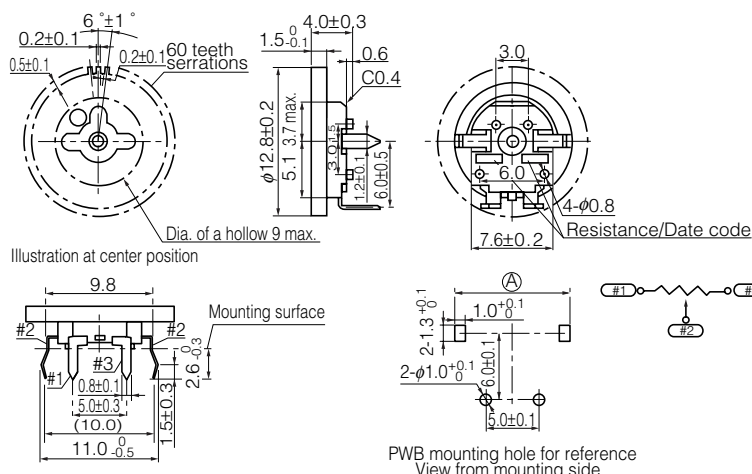


Wheel color	Part No.	Midpoint Detent
Black	EVLHFAA01	—
White	EVLHFAA02	—
Gray	EVLHFAA03	—
Black	EVLHFKA01	with
White	EVLHFKA02	with
Gray	EVLHFKA03	with

Wheel dia. $\phi 12.8$ mm

PWB thickness	Ⓐ
1.2±0.1	10.3±0.1
1.0±0.1	10.2 _{-0.1} ⁰

No. 2

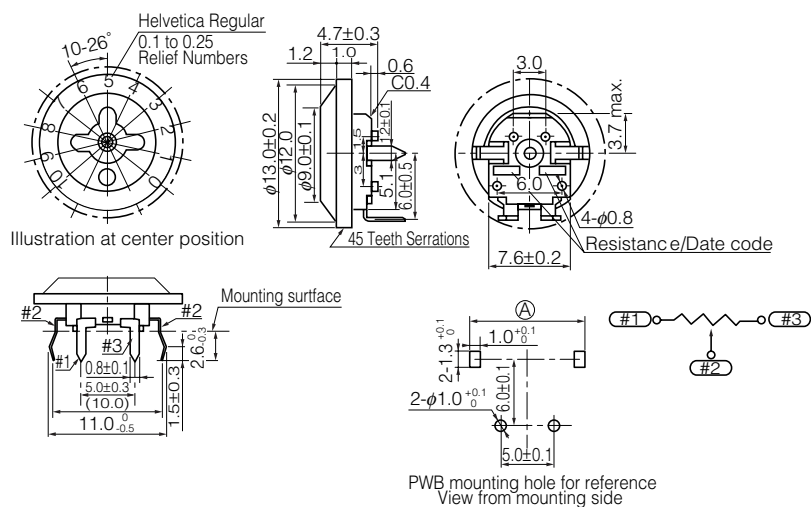


Wheel color	Part No.	Midpoint Detent
Black	EVLHFAA06	—
Black	EVLHFKA06	with



Wheel dia. $\phi 13.0$ mm

PWB thickness	Ⓐ
1.2±0.1	10.3±0.1
1.0±0.1	10.2 $^{+0}_{-0.1}$

Pre-coupled wheel EVLH

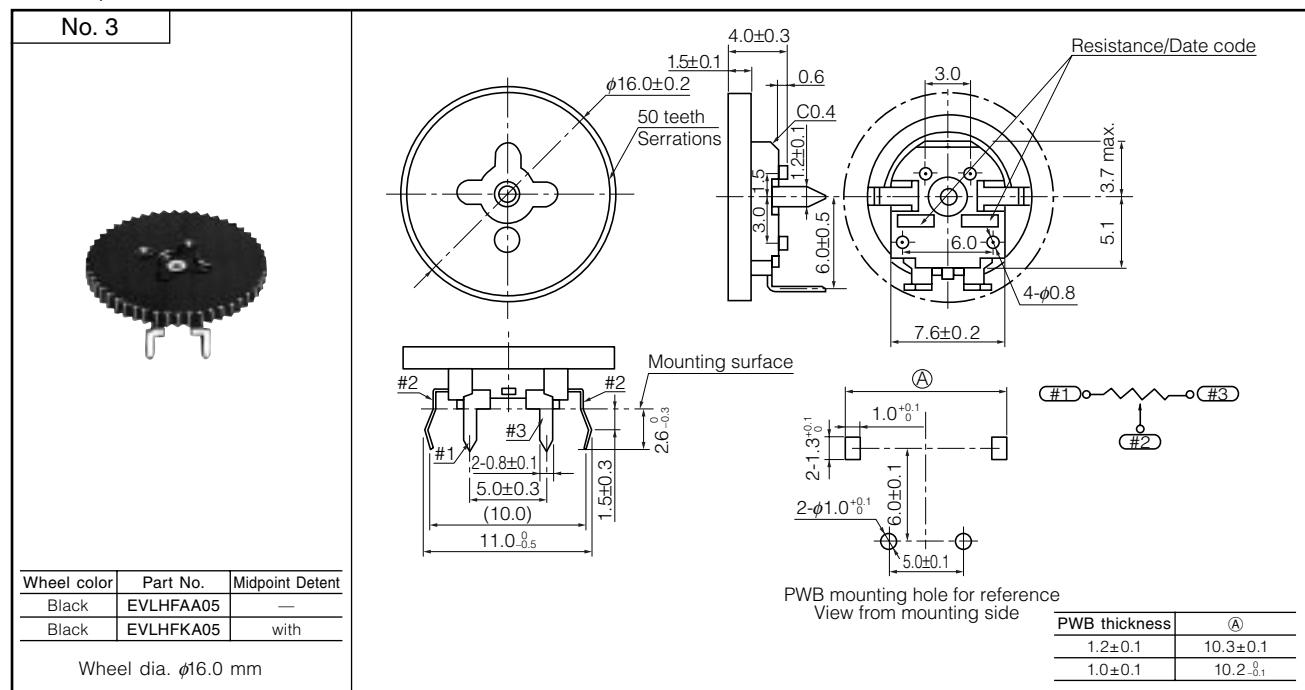

Post-coupled wheel EVLH

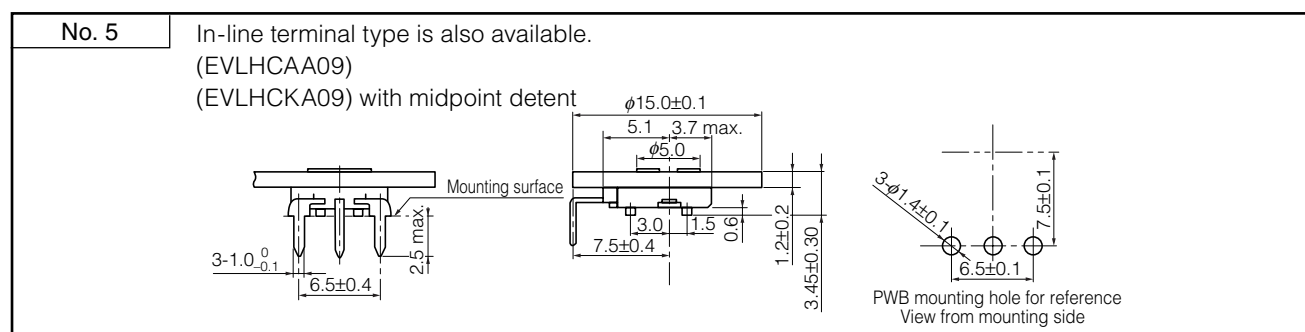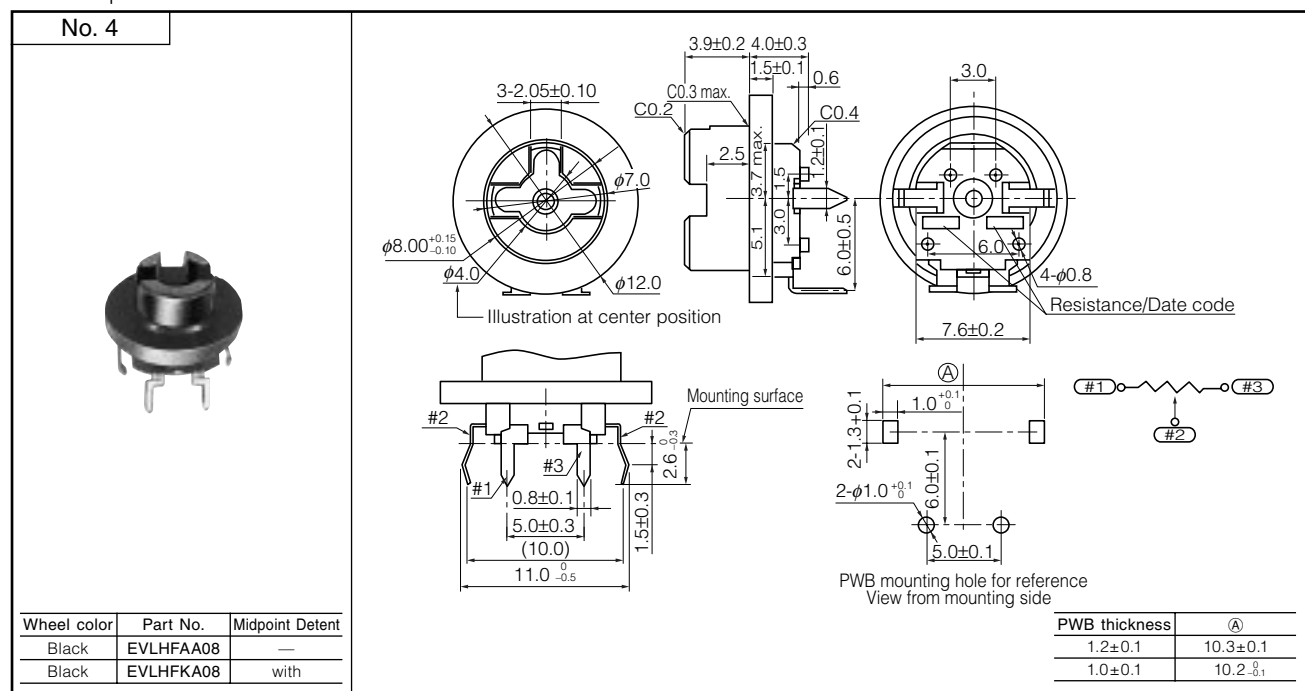

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru