

## Power MOSFET

## ■ GENERAL DESCRIPTION

The XP151A12A2MR-G is an N-channel Power MOSFET with low on state resistance and ultra high-speed switching characteristics.

Because high-speed switching is possible, the IC can be efficiently set thereby saving energy.

In order to counter static, a gate protect diode is built-in.

The small SOT-23 package makes high density mounting possible.

## ■ APPLICATIONS

- Notebook PCs
- Cellular and portable phones
- On-board power supplies
- Li-ion battery systems

## ■ FEATURES

**Low On-State Resistance** :  $R_{ds(on)} = 0.1 \Omega @ V_{gs} = 4.5V$   
 :  $R_{ds(on)} = 0.16 \Omega @ V_{gs} = 2.5V$

**Ultra High-Speed Switching**

**Gate Protect Diode Built-in**

**Driving Voltage** : 2.5V


**N-Channel Power MOSFET**

**DMOS Structure**

**Small Package** : SOT-23


**Environmentally Friendly** : EU RoHS Compliant, Pb Free

## ■ PIN CONFIGURATION/ MARKING

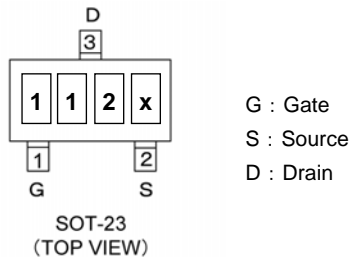

\* x represents production lot number.

## ■ EQUIVALENT CIRCUIT

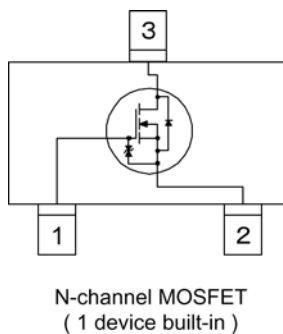

## ■ PRODUCT NAMES

PRODUCTS	PACKAGE	ORDER UNIT
XP151A12A2MR	SOT-23	3,000/Reel
XP151A12A2MR-G <sup>(*)</sup>	SOT-23	3,000/Reel

<sup>(\*)</sup> The "-G" suffix denotes Halogen and Antimony free as well as being fully RoHS compliant.

## ■ ABSOLUTE MAXIMUM RATINGS

$T_a = 25^\circ C$			
PARAMETER	SYMBOL	RATINGS	UNITS
Drain - Source Voltage	$V_{dss}$	20	V
Gate - Source Voltage	$V_{gss}$	$\pm 12$	V
Drain Current (DC)	$I_d$	1	A
Drain Current (Pulse)	$I_{dp}$	4	A
Reverse Drain Current	$I_{dr}$	1	A
Channel Power Dissipation *	$P_d$	0.5	W
Channel Temperature	$T_{ch}$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55~150	$^\circ C$

\* When implemented on a ceramic PCB

## ELECTRICAL CHARACTERISTICS

### DC Characteristics

Ta = 25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Drain Cut-Off Current	I <sub>dss</sub>	V <sub>ds</sub> = 20V, V <sub>gs</sub> = 0V	-	-	10	μA
Gate-Source Leak Current	I <sub>gss</sub>	V <sub>gs</sub> = ±12V, V <sub>ds</sub> = 0V	-	-	±10	μA
Gate-Source Cut-Off Voltage	V <sub>gs(off)</sub>	I <sub>d</sub> = 1mA, V <sub>ds</sub> = 10V	0.7	-	1.4	V
Drain-Source On-State Resistance *1	R <sub>ds(on)</sub>	I <sub>d</sub> = 0.5A, V <sub>gs</sub> = 4.5V	-	0.075	0.1	Ω
		I <sub>d</sub> = 0.5A, V <sub>gs</sub> = 2.5V	-	0.120	0.160	Ω
Forward Transfer Admittance *1	Y <sub>fs</sub>	I <sub>d</sub> = 0.5A, V <sub>ds</sub> = 10V	-	3.3	-	S
Body Drain Diode Forward Voltage	V <sub>f</sub>	I <sub>f</sub> = 1A, V <sub>gs</sub> = 0V	-	0.8	1.1	V

\*1 Effective during pulse test.

### Dynamic Characteristics

Ta = 25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Capacitance	C <sub>iss</sub>	V <sub>ds</sub> = 10V, V <sub>gs</sub> =0V f= 1MHz	-	180	-	pF
Output Capacitance	C <sub>oss</sub>		-	120	-	pF
Feedback Capacitance	C <sub>rss</sub>		-	45	-	pF

### Switching Characteristics

Ta = 25°C


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Turn-On Delay Time	t <sub>d (on)</sub>	V <sub>gs</sub> = 5V, I <sub>d</sub> = 0.5A V <sub>dd</sub> = 10V	-	10	-	ns
Rise Time	t <sub>r</sub>		-	15	-	ns
Turn-Off Delay Time	t <sub>d (off)</sub>		-	50	-	ns
Fall Time	t <sub>f</sub>		-	45	-	ns

### Thermal Characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Thermal Resistance (Channel-Ambience)	R <sub>th (ch-a)</sub>	Implement on a ceramic PCB	-	250	-	°C/W

## TYPICAL PERFORMANCE CHARACTERISTICS


(1) Drain Current vs. Drain-Source Voltage

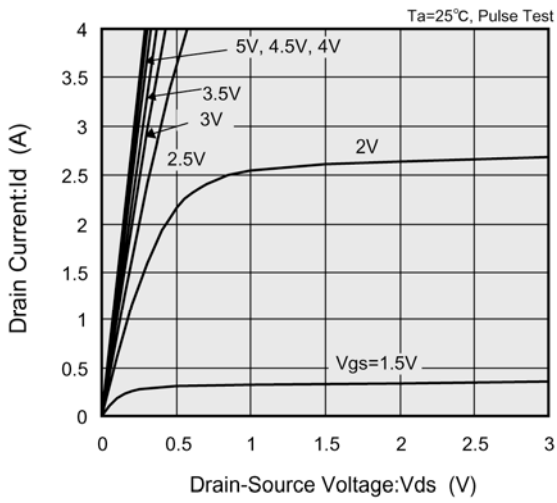


(2) Drain Current vs. Gate-Source Voltage

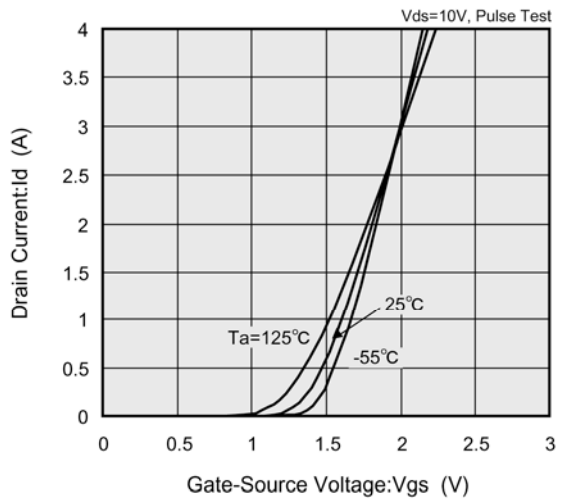


(3) Drain-Source On-State Resistance vs. Gate-Source Voltage

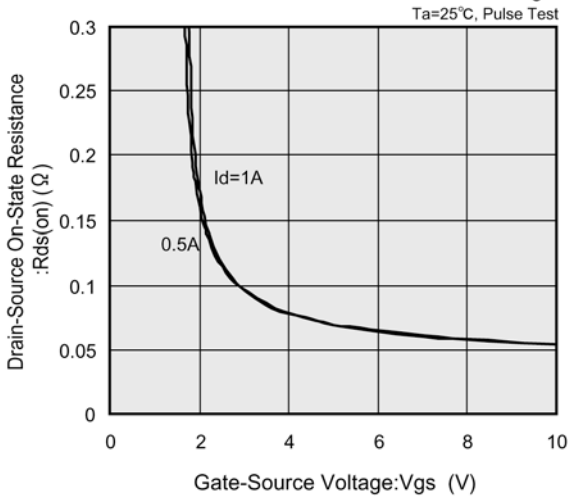


(4) Drain-Source On-State Resistance vs. Drain Current

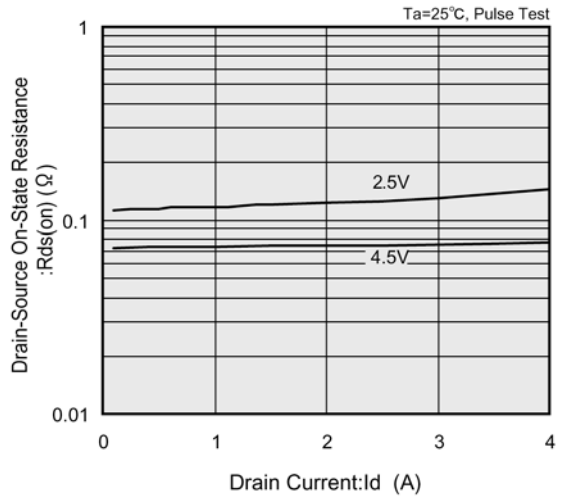

(5) Drain-Source On-State Resistance vs. Ambient Temperature

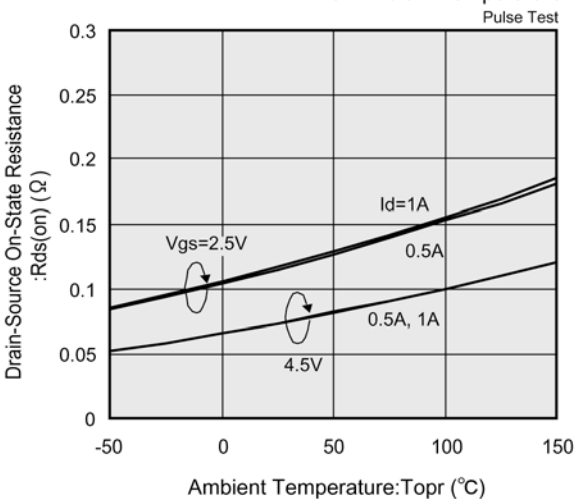


(6) Gate Source Cut-Off Voltage Variance vs. Ambient Temperature

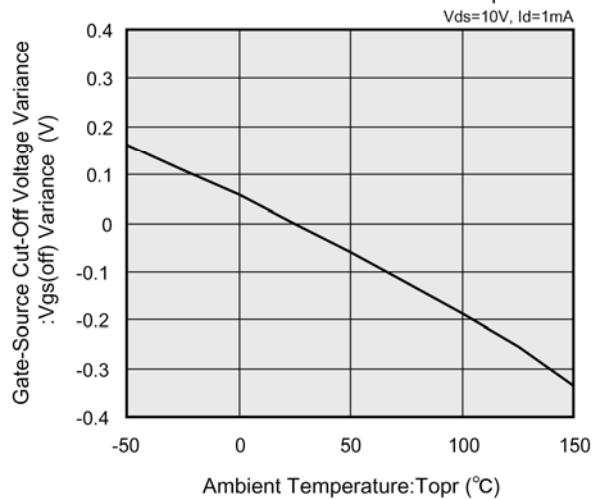


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(7) Capacitance vs. Drain-Source Voltage

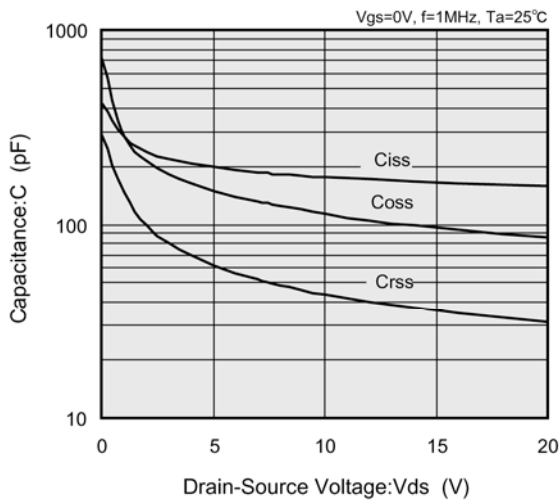


(8) Switching Time vs. Drain Current

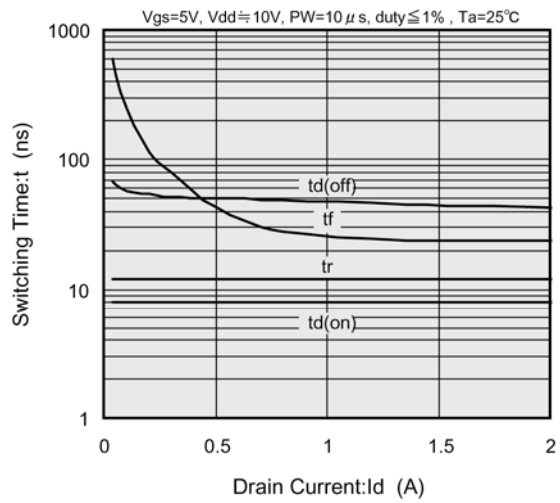


(9) Gate-Source Voltage vs. Gate Charge

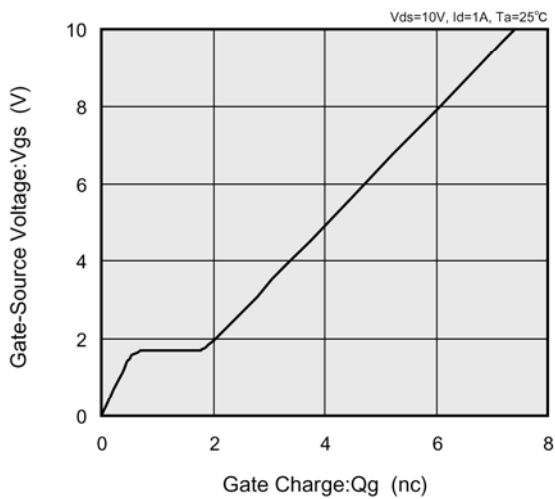

(10) Reverse Drain Current vs. Source-Drain Voltage

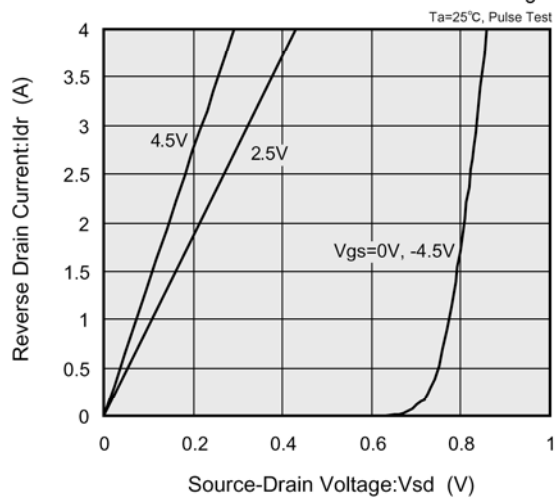

(11) Standardized transition Thermal Resistance vs. Pulse Width

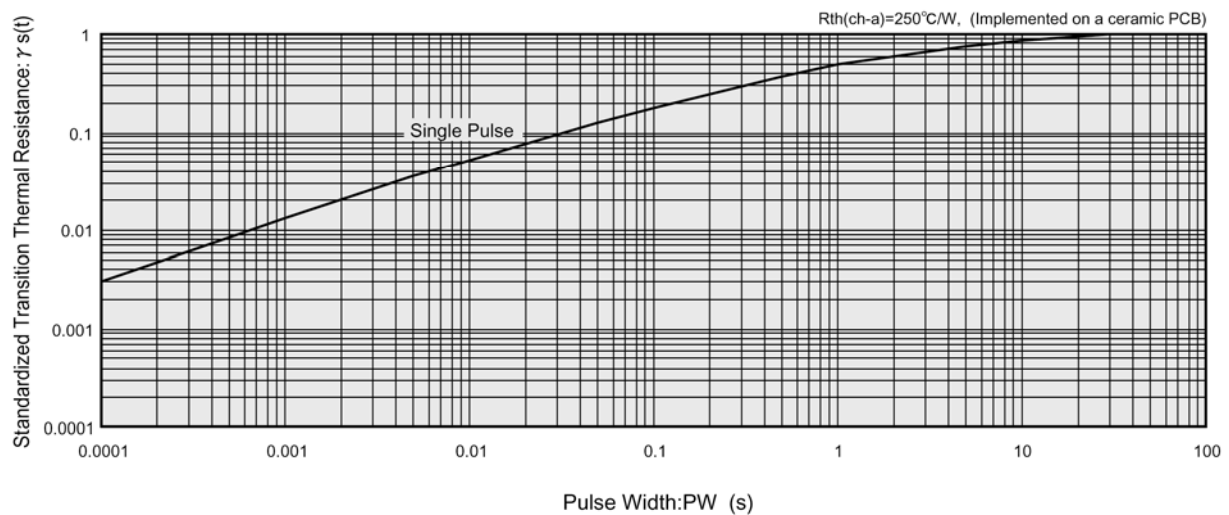

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet .
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet .
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

**TOREX SEMICONDUCTOR LTD.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)