

RFSW8009

11a/b/g/n/ac Wi-Fi SPDT SWITCH
0.5 to 6.0GHz


The RFSW8009 is a high power single-pole double-throw (SPDT) switch designed for high performance wireless applications. This wideband switch has been designed for use from 0.5 to 6GHz, where high linearity, high isolation, low insertion loss, and small package size are required. Switching for the RFSW8009 is controlled via two control voltage inputs. The RFSW8009 is manufactured in a pHEMT GaAs process and packaged in a 6-pin, 1.5 x 1.86mm Laminate package.



Package: Laminate 6-pin
1.5mm x 1.86mm x 0.59mm

Features

- Control Voltage: 2.7V to 5.3V
- Insertion Loss:
 - 0.45dB @ 2.5GHz
 - 0.65dB @ 6.0GHz.
- Isolation:
 - 28dB @ 2.5GHz
 - 26dB @ 6.0GHz
- Input P0.1dB:
 - 32dBm @ 2.0-6.0GHz, 3V

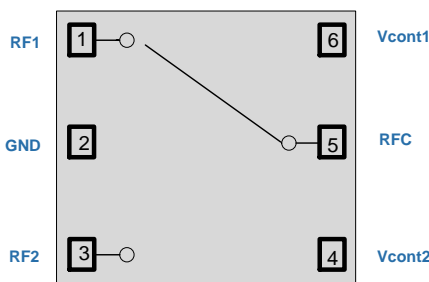

Functional Block Diagram (Top View)

Ordering Information

RFSW8009SB	Standard 5 piece bag
RFSW8009SQ	Standard 25 piece bag
RFSW8009SR	Standard 100 piece reel
RFSW8009TR7	Standard 2500 piece reel
RFSW8009PCK-410	Evaluation board sample 0.5 – 2.5GHz
RFSW8009PCK-411	Evaluation board sample 2.5 – 6GHz

Applications

- IEEE 802.11 Wi-Fi Systems
- IEEE 802.15.4 ZigBee Systems
- Customer Premise Equipment (CPE)
- Wireless Access Points, Gateways and Router Applications
- ISM Band Transmitter Applications

Absolute Maximum Ratings

Parameter	Rating	Unit
Control Voltage	6.0	V
Operating Ambient Temperature	-45 to +85	°C
Storage Temperature	-55 to +150	°C
Input RF Power (VCTL High = 3.0V)	+34	dBm
Input RF Power (VCTL High = 5.0V)	+35	dBm



Caution! ESD sensitive device.



RFMD Green: RoHS status based on EU Directive 2011/65/EU (at time of this document revision), halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

Electrical Characteristics


Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Operating Parameters					Vcont High = 3.0V; Vcont Low = 0V; Temp = 25°C; Unless noted otherwise.
Frequency	0.5		6.0	GHz	
Switch Control Voltage: High	2.7	3.0	5.3	V	
Switch Control Voltage: Low	-0.2	0	0.20	V	
Insertion Loss	-	0.40	0.65	dB	0.5 to 2.0GHz; DC blocking capacitors = 56pF
	-	0.45	0.70	dB	2.0 to 2.5GHz; DC blocking capacitors = 56pF
	-	0.55	0.80	dB	2.5 to 3.8GHz; DC blocking capacitors = 8pF
	-	0.65	0.90	dB	3.8 to 6.0GHz; DC blocking capacitors = 8pF
Isolation	25	28	-	dB	0.5 to 2.0GHz; DC blocking capacitors = 56pF
	25	28	-	dB	2.0 to 2.5GHz; DC blocking capacitors = 56pF
	25	28	-	dB	2.5 to 3.8GHz; DC blocking capacitors = 8pF
	22	26	-	dB	3.8 to 6.0GHz; DC blocking capacitors = 8pF
Return Loss	15	20	-	dB	0.5 to 2.0GHz; DC blocking capacitors = 56pF
	15	20	-	dB	2.0 to 2.5GHz; DC blocking capacitors = 56pF
	10	15	-	dB	2.5 to 6.0GHz; DC blocking capacitors = 8pF
Input P0.1dB	-	+32	-	dBm	0.5 to 2.5GHz; DC blocking capacitors = 56pF
	-	+32	-	dBm	2.5 to 6.0GHz; DC blocking capacitors = 8pF
	-	+35	-	dBm	0.5 to 6.0GHz; Vcont high = 5V.
Input P1dB	-	+34	-	dBm	0.5 to 2.5GHz; DC blocking capacitors = 56pF
	-	+34	-	dBm	2.5 to 6.0GHz; DC blocking capacitors = 8pF
Input IP3	-	+60	-	dBm	Freq=2.5GHz; Input Power = +20dBm
2 nd Harmonic	-	80	-	dBc	Freq=2.5GHz; Input Power = +20dBm
3 rd Harmonic	-	80	-	dBc	Freq=2.5GHz; Input Power = +20dBm
Switch Control Current; High	-	0.1	10	µA	No RF input ; All Modes

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Switch Control Speed	-	50	250	ns	50% of control to 90/10% of RF; All Modes


Logic Control Table

Mode	Vcont1	Vcont2
RF1 – RFC	1	0
RF2 – RFC	0	1

Application Schematic

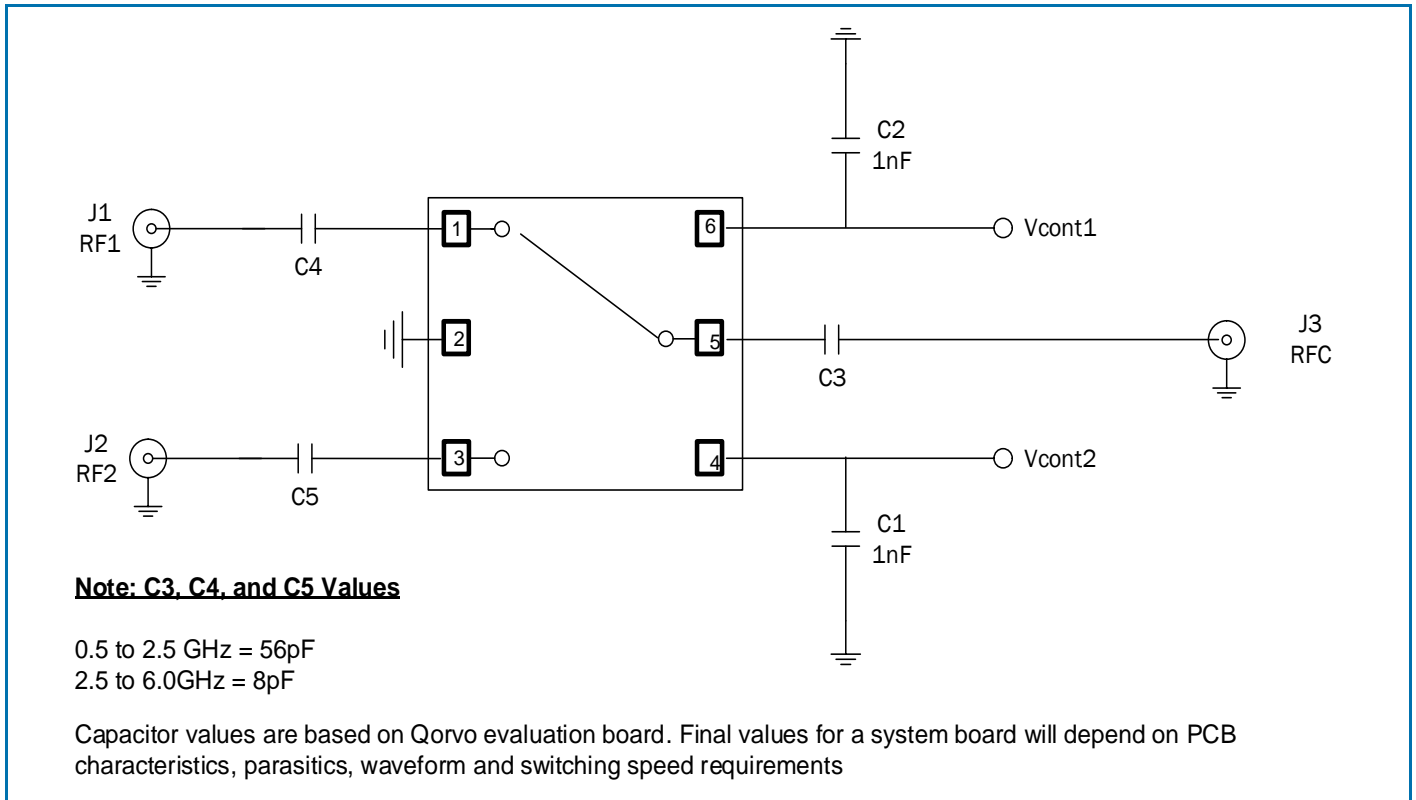

Pin Out

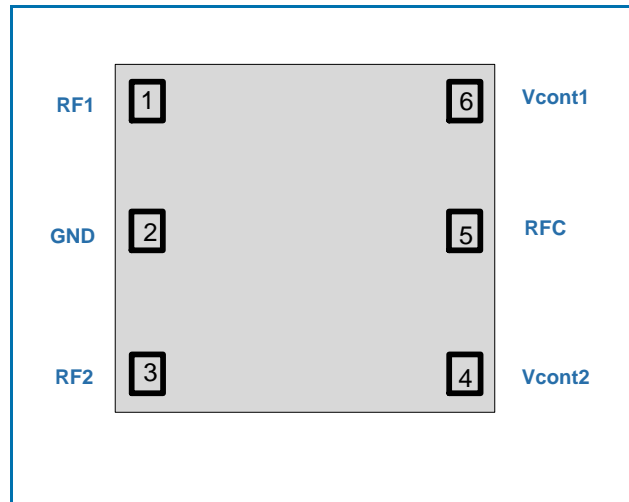


Pin Description Table


Pin	Name	Description
1	RF1	RF Port-1. External DC blocking required.
2	GND	Ground.
3	RF2	RF Port-2. External DC blocking required.
4	Vcont2	Control voltage to enable RF2 port (RF2-RFC).
5	RFC	Common RF Port. External DC blocking required.
6	Vcont1	Control voltage to enable RF1 port (RF1-RFC).

Typical Performance Plots (T=25C; Vcont High = 3V; Vcont Low = 0V; unless noted otherwise)


Insertion Loss vs. Frequency: RFC-RF1/RF2

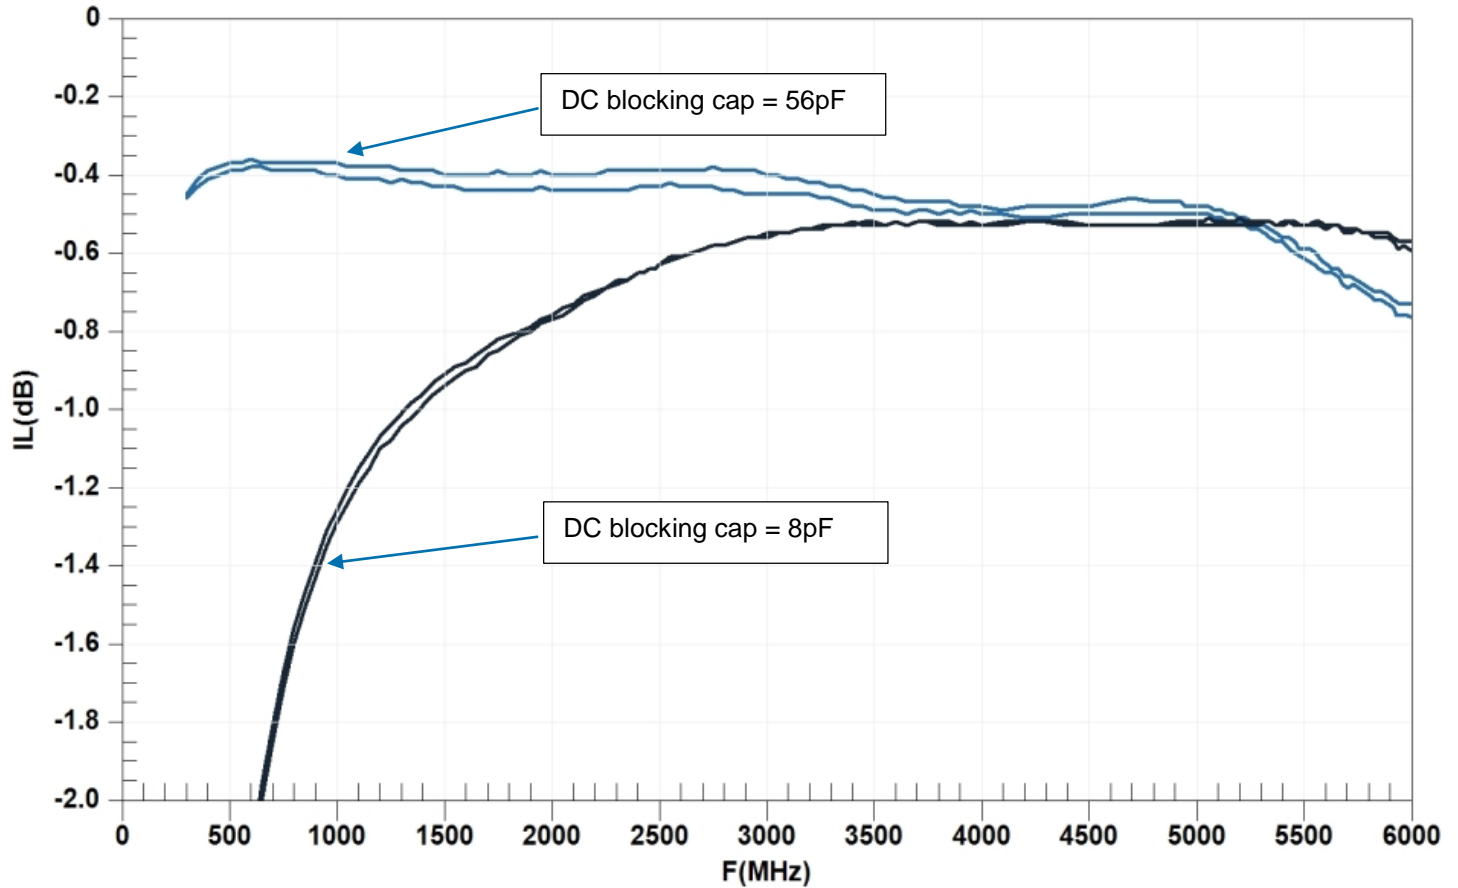


Isolation vs. Frequency: RFC-RF1/RF2

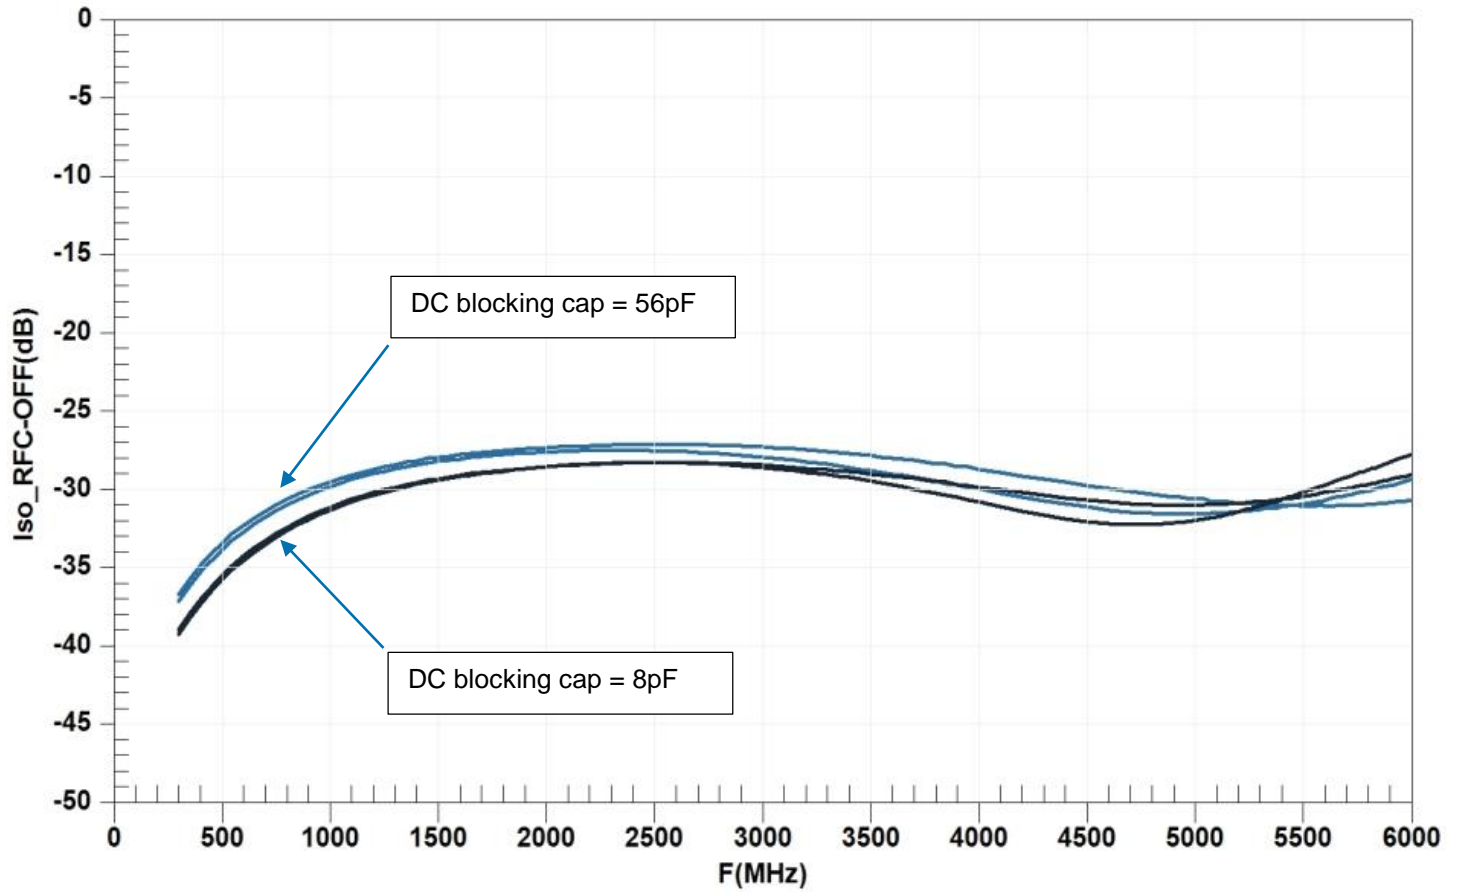


RFC return Loss vs. Frequency

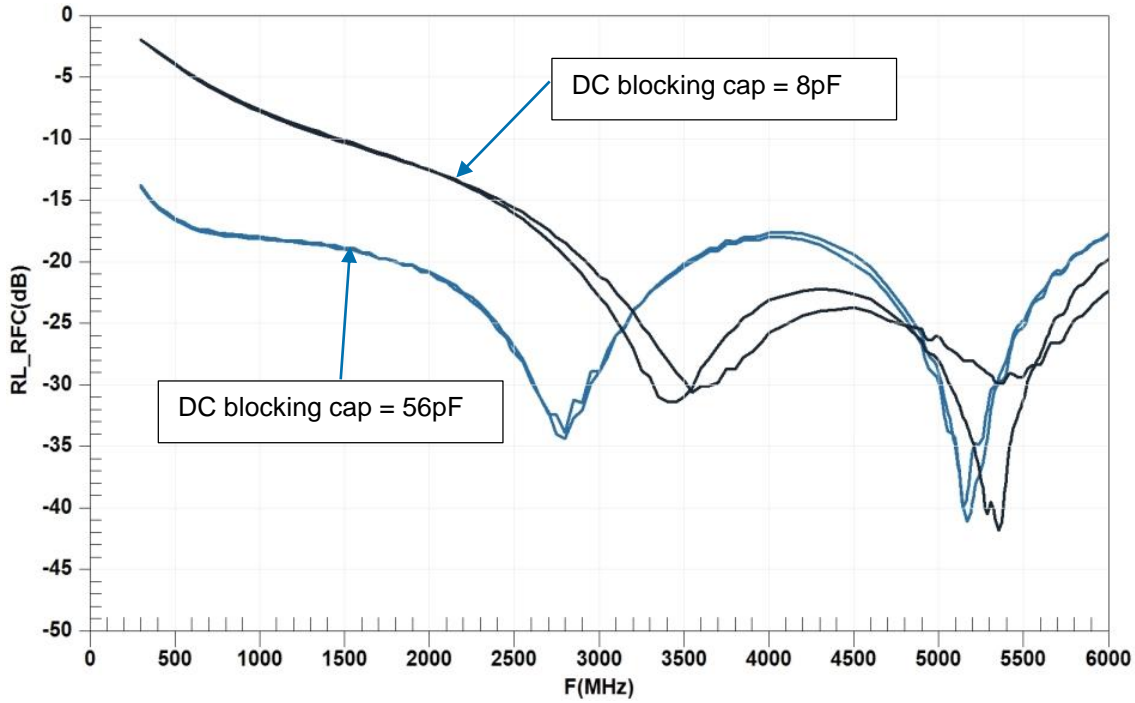


RF1/RF2 return Loss vs. Frequency

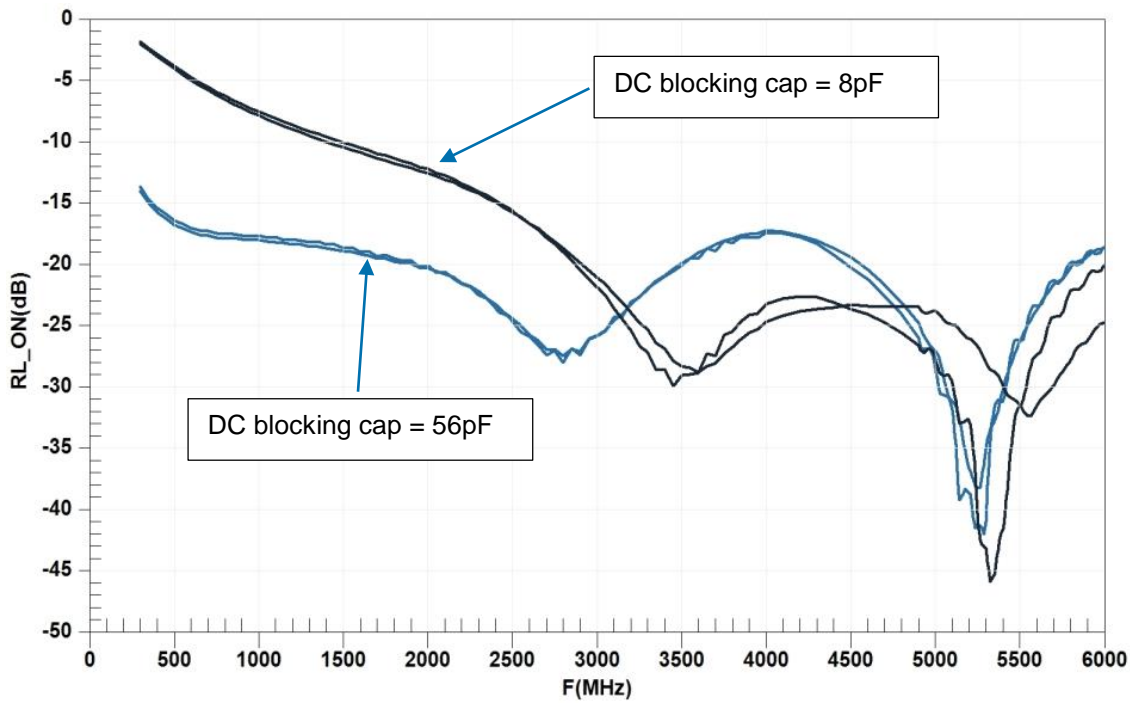


Package Outline Drawing (dimensions in mm)

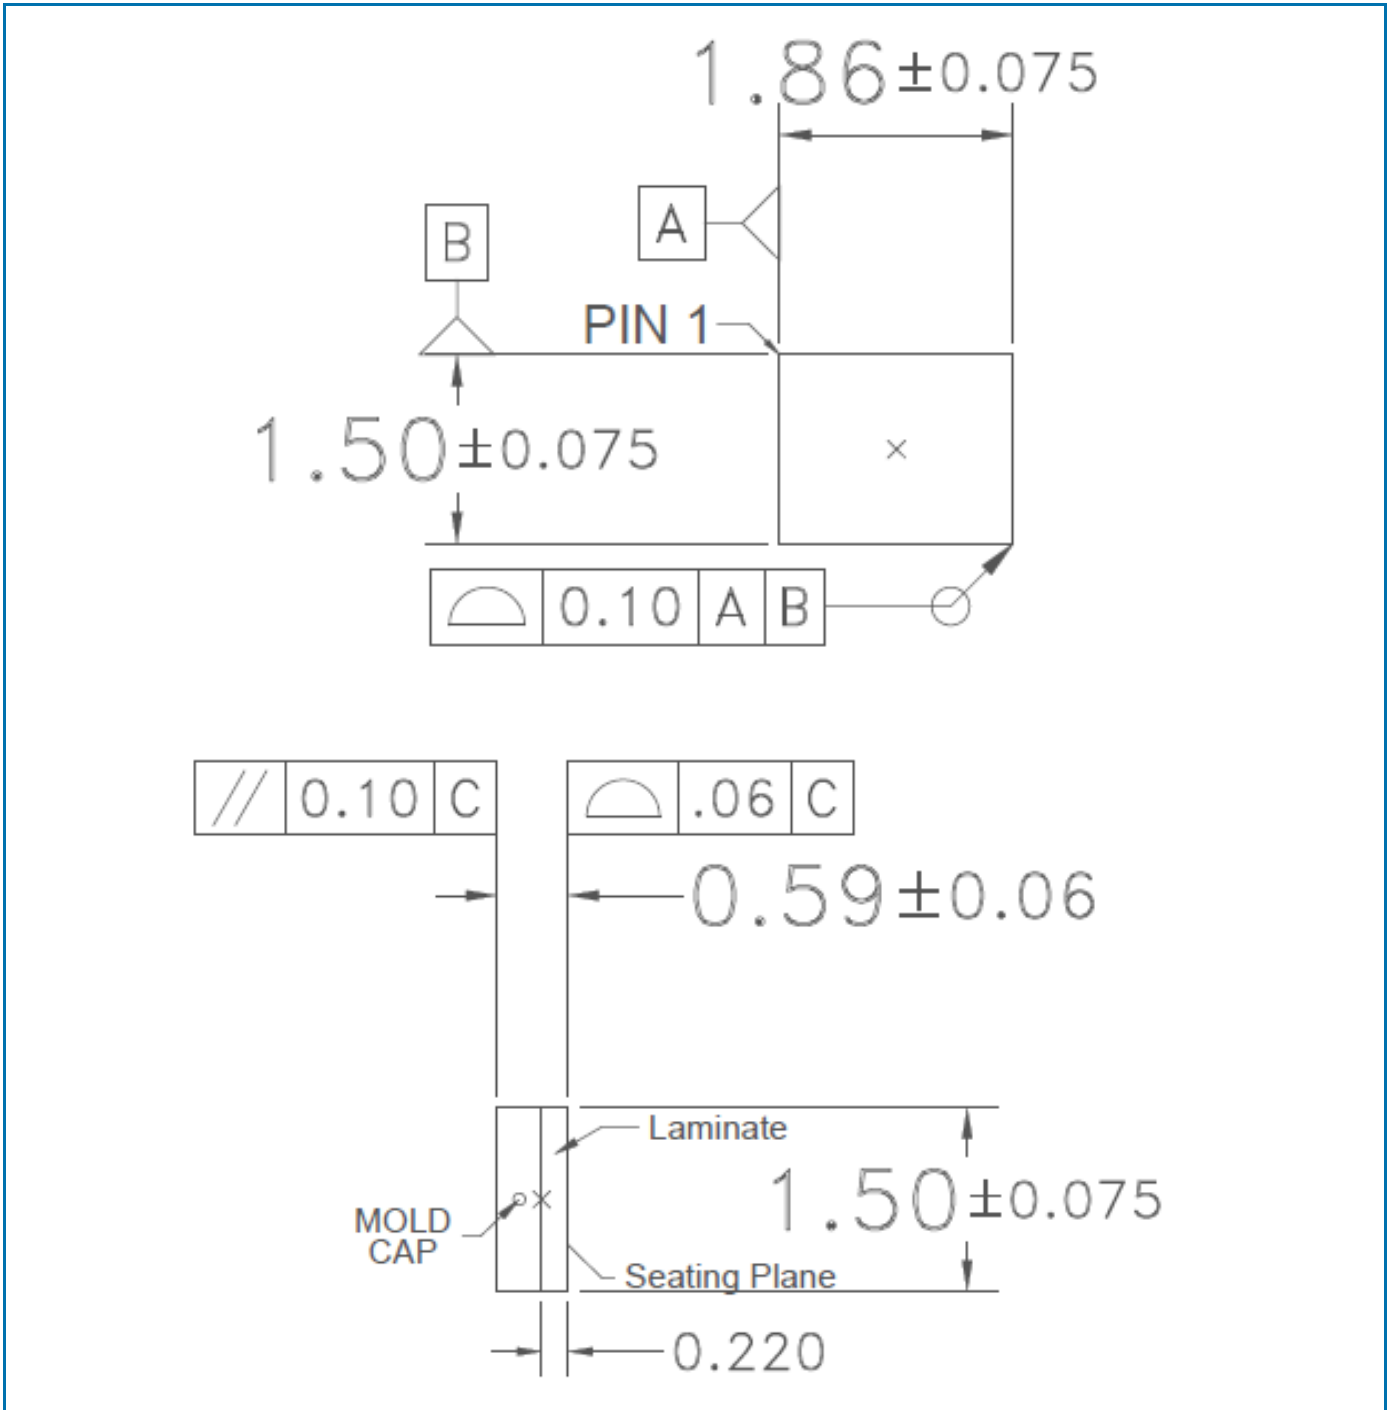


Package Outline Drawing ...continue (dimensions in mm)

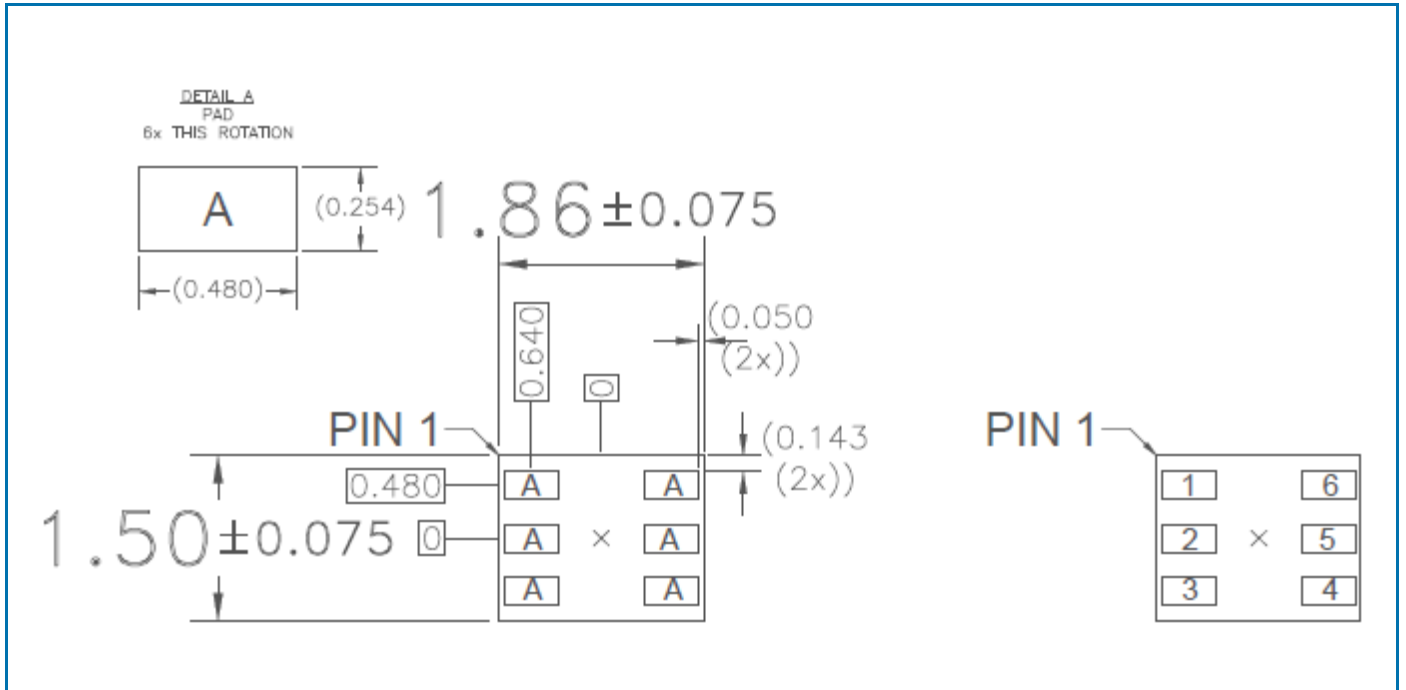

Recommended Land Pattern (dimensions in mm)

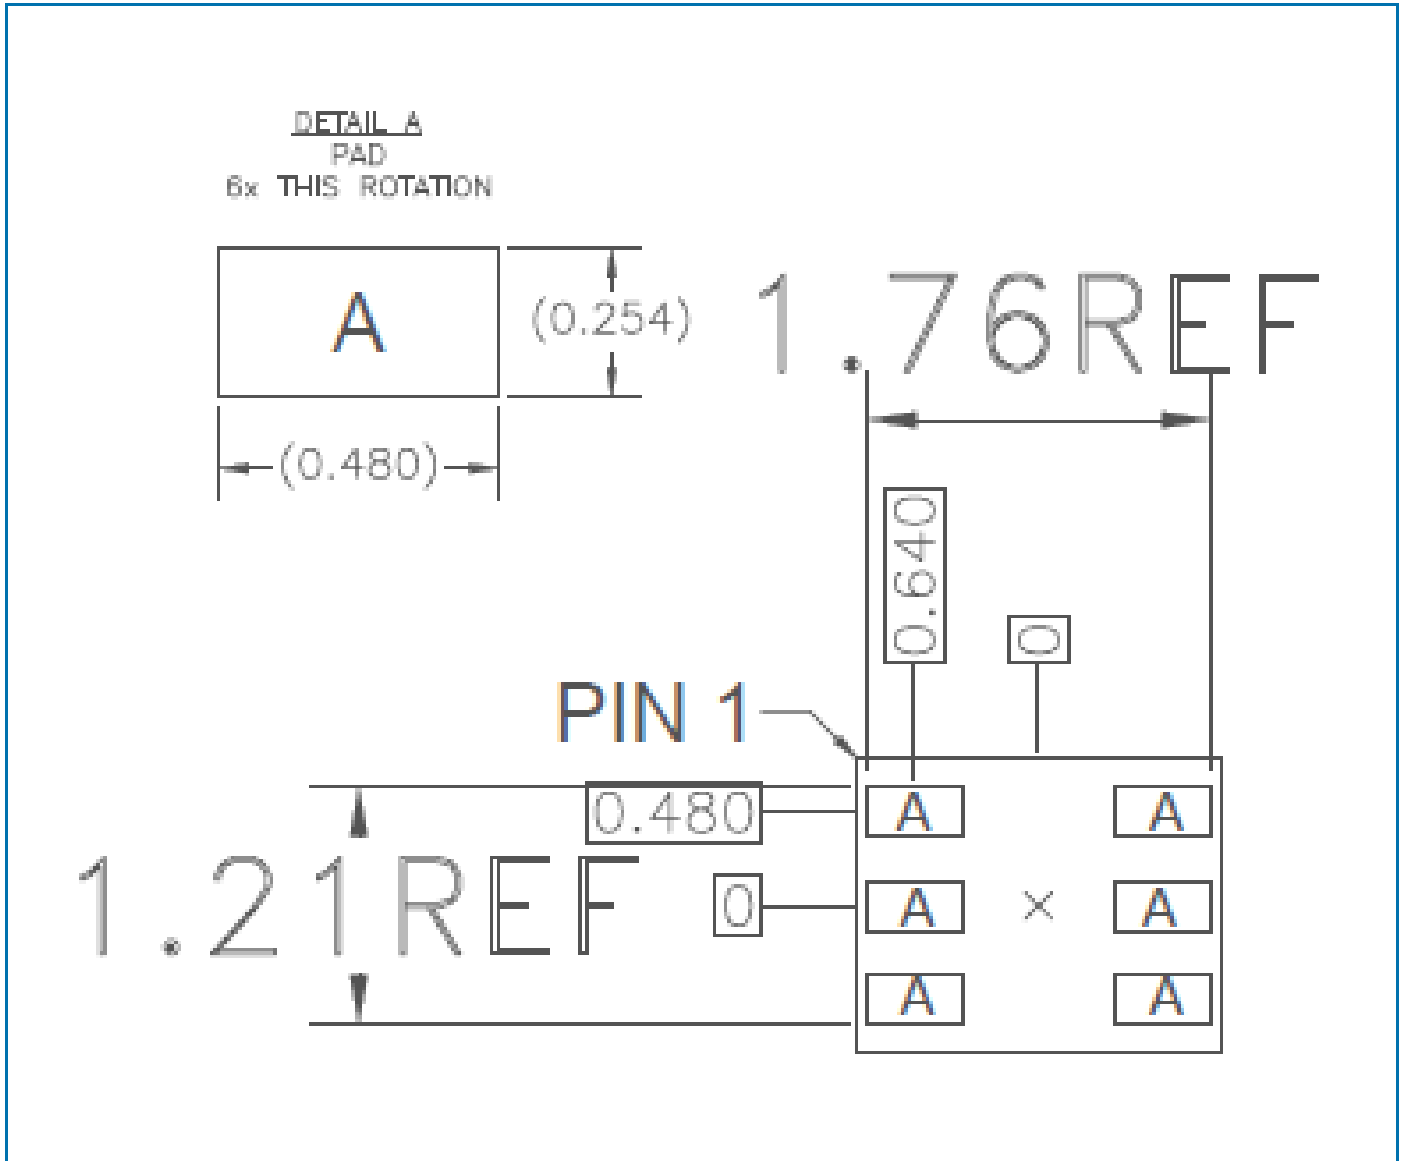

Recommended Solder Mask Pattern (dimensions in mm)

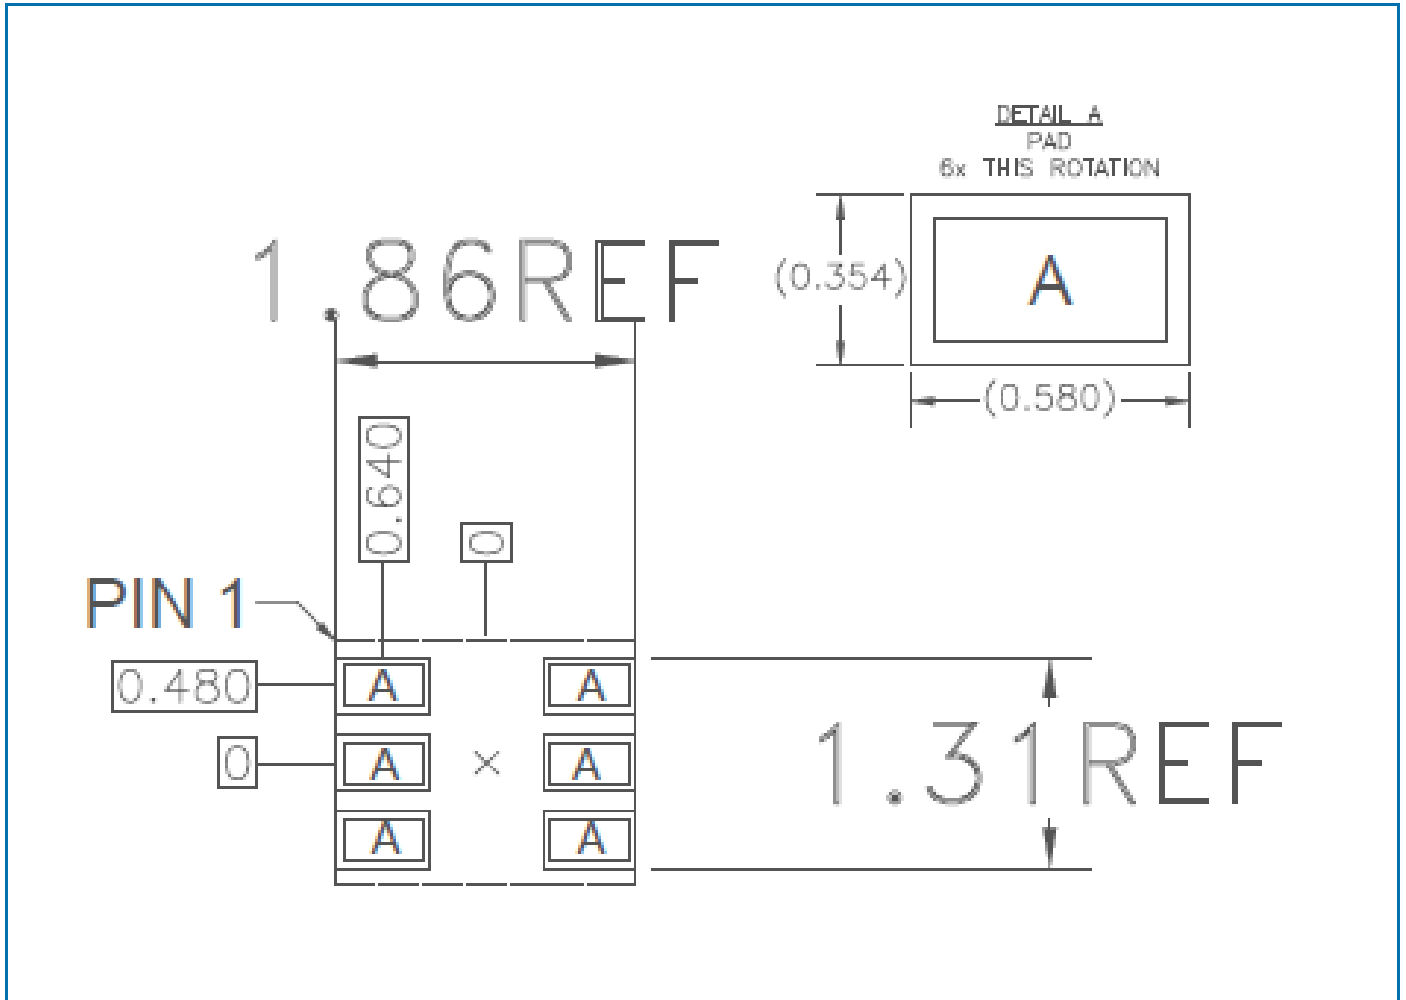

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru