



## MIC5019

### Ultra-Small High-Side N-Channel MOSFET Driver with Integrated Charge Pump

## General Description

The MIC5019 is a high-side MOSFET driver with integrated charge pump designed to switch an N-Channel enhancement type MOSFET control signal in high-side or low-side applications.

The MIC5019 operates from a 2.7V to 9V supply, and generates gate voltages of 9.2V from a 3V supply, and 16V from a 9V supply. The device consumes a low 77 $\mu$ A of supply current and less than 1 $\mu$ A of supply current in shutdown mode.

In high side configurations, the source voltage of the MOSFET approaches the supply voltage when switched on. To keep the MOSFET turned on, the MIC5019's output drives the MOSFET gate voltage higher than the supply voltage.

The MIC5019 is available in an ultra-small 4-pin 1.2mm x 1.2mm Thin QFN Package and is rated for  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  junction temperature range.


## Features

- 4-pin 1.2mm x 1.2mm Thin QFN Package
- +2.7V to +9V supply voltage range
- 16V gate drive at VDD = 9V
- 8V gate drive at VDD = 2.7V
- Operates in low and high side configurations
- 150 $\mu$ A (typical) supply current at VDD = 5V
- <1 $\mu$ A shutdown supply current
- $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Junction Temperature Range


## Applications

- Load Switch
- Solenoid Drivers
- Motor Drivers

## Application Diagram

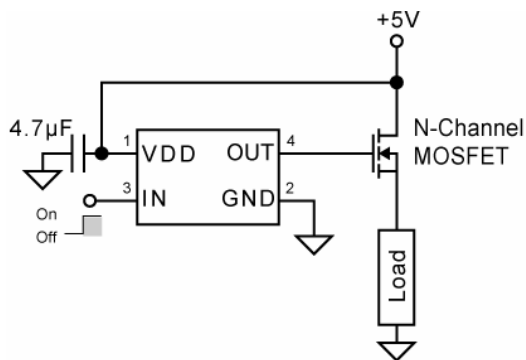

Low-Voltage High-Side Power Switch

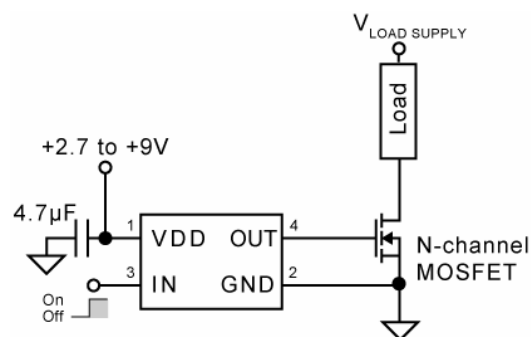

Low-Side Power Switch


## Ordering Information

| Part Number | Marking | Package                      | Junction Temperature Range | Lead Finish |
|-------------|---------|------------------------------|----------------------------|-------------|
| MIC5019YFT  | H9      | 4-pin 1.2mm x 1.2mm Thin QFN | -40°C to +125°C            | Pb-Free     |

**Note:**

Thin QFN pin 1 identifier = “▲”

## Pin Configuration

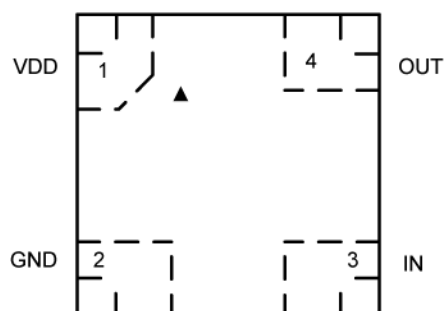

1.2mm x 1.2mm Thin QFN (FT)  
(TOP View)

## Pin Description

| Pin Number | Pin Name | Pin Function                                                                                                                                             |
|------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | VDD      | Supply Voltage: +2.7V to +9V supply.                                                                                                                     |
| 2          | GND      | Ground.                                                                                                                                                  |
| 3          | IN       | Control Input: Logic high drives the gate output above the supply voltage. Logic low forces the gate output near ground. Do not leave this pin floating. |
| 4          | OUT      | Gate Output: Connection to gate of external MOSFET.                                                                                                      |

**Absolute Maximum Ratings<sup>(1)</sup>**

|                                              |                 |
|----------------------------------------------|-----------------|
| VDD to GND.....                              | +10V            |
| IN to GND.....                               | -0.6V to +10V   |
| OUT to GND.....                              | +19V            |
| Junction Temperature (T <sub>J</sub> ) ..... | -55°C to +150°C |
| Storage Temperature (T <sub>s</sub> ) .....  | -55°C to +165°C |
| ESD Rating <sup>(2)</sup> .....              | 1.5kV HBM       |
| ESD Rating .....                             | 200V MM         |

**Operating Ratings<sup>(3)</sup>**

|                                             |                 |
|---------------------------------------------|-----------------|
| VDD to GND.....                             | +2.7V to +9V    |
| IN to GND.....                              | 0V to VDD       |
| Junction Temperature (T <sub>J</sub> )..... | -40°C to +125°C |
| Thermal Resistance                          |                 |
| (θ <sub>JC</sub> ).....                     | 60°C/W          |
| (θ <sub>JA</sub> ).....                     | 140°C/W         |

**Electrical Characteristics<sup>(4)</sup>**

2.7V ≤ VDD ≤ 9V; T<sub>A</sub> = 25°C, unless noted. **Bold** values indicate -40°C ≤ T<sub>J</sub> ≤ +125°C.


| Parameter                        | Condition         |                         | Min        | Typ   | Max        | Units |
|----------------------------------|-------------------|-------------------------|------------|-------|------------|-------|
| Supply Current                   | VDD = 3.3V        | IN = 0V                 |            | 0.15  | <b>1</b>   | μA    |
|                                  |                   | IN = 3.3V               |            | 77    | <b>140</b> |       |
|                                  | VDD = 5V          | IN = 0V                 |            |       | <b>1</b>   |       |
|                                  |                   | IN = 3.3V               |            | 150   | <b>300</b> |       |
| IN Voltage                       |                   | IN = Logic Low          |            |       | <b>0.8</b> | V     |
|                                  | 2.7V ≤ VDD ≤ 3.6V | IN = Logic High         | <b>2.7</b> |       |            |       |
|                                  | 3.6V < VDD ≤ 9V   | IN = Logic High         | <b>3.0</b> |       |            |       |
| IN Current                       | 2.7V ≤ VDD ≤ 9V   |                         |            | 0.1   | 1          | μA    |
| IN Capacitance                   |                   |                         |            | 5     |            | pF    |
| OUT Voltage                      | VDD = 2.7V        |                         | 6.3        | 8.2   |            | V     |
|                                  | VDD = 3.0V        |                         | 7.1        | 9.3   |            |       |
|                                  | VDD = 4.5V        |                         | 11.4       | 14.8  |            |       |
| OUT Zener Diode Clamp Voltage    | VDD = 9V          |                         | 13         | 16.5  | 19         | V     |
| OUT Current <sup>(5)</sup>       | VDD = 5V          | VOUT = 10V              |            | 10.6  |            | μA    |
| OUT Turn-On Time <sup>(6)</sup>  | VDD = 4.5V        | C <sub>L</sub> = 1000pF |            | 0.440 | 1.5        | ms    |
|                                  |                   | C <sub>L</sub> = 3000pF |            | 1.34  | 4.2        |       |
| OUT Turn-Off Time <sup>(7)</sup> | VDD = 4.5V        | CL = 1000pF             |            | 5.56  | 20         | μs    |
|                                  |                   | CL = 3000 pF            |            | 17.6  | 60         |       |

**Notes:**


- Exceeding the absolute maximum rating may damage the device.
- Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5kΩ in series with 100pF.
- The device is not guaranteed to function outside operating range.
- Specification for packaged product only.
- Resistive load selected to achieve V<sub>OUT</sub> = 10V.
- Turn-On Time is the time required for the gate voltage to rise to 4V above the supply voltage.
- Turn-Off Time is the time required for the gate voltage to fall to 4V above the supply voltage.

## Typical Characteristics


**VDD Supply Current  
vs. Supply Voltage**

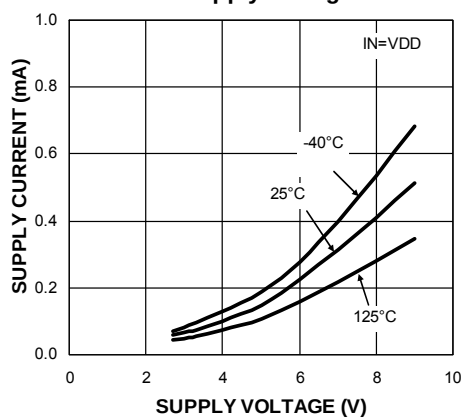


**VDD Supply Current  
vs. Supply Voltage**

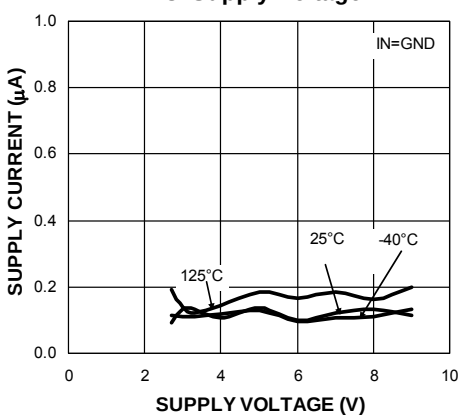


**Output Voltage  
vs. Supply Voltage**

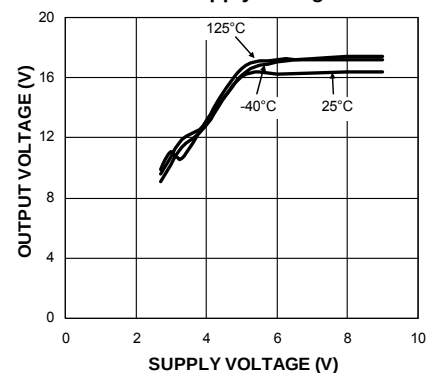


**Output Voltage  
vs. Output Current**

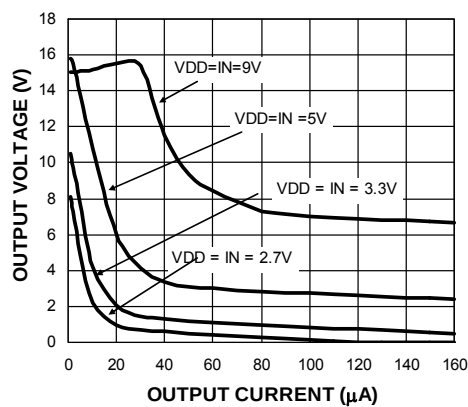


**Output Voltage  
vs. Output Current**

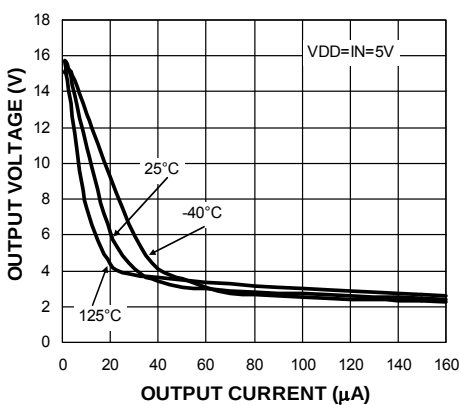


**IN Current  
vs. Supply Voltage**

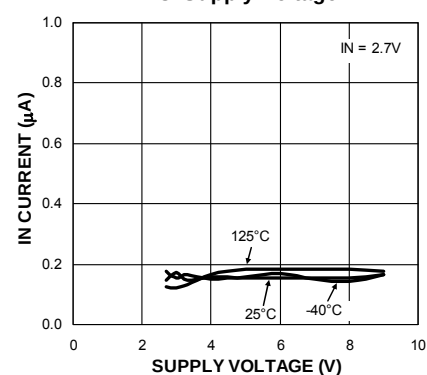





**OUT Turn-On Time  
vs. Load Capacitance**

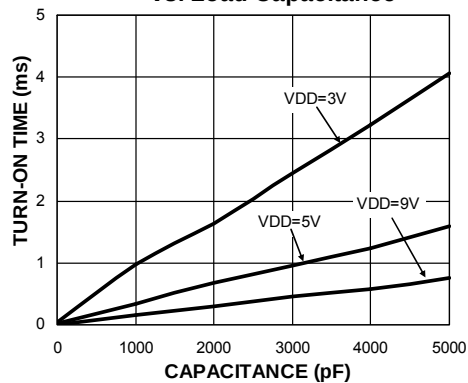


**OUT Turn-Off Time  
vs. Load Capacitance**

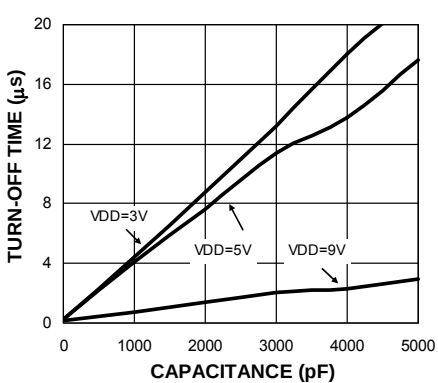

## Functional Characteristics

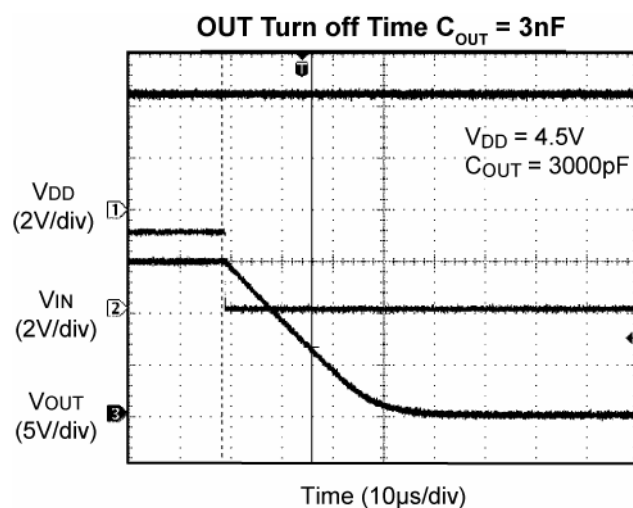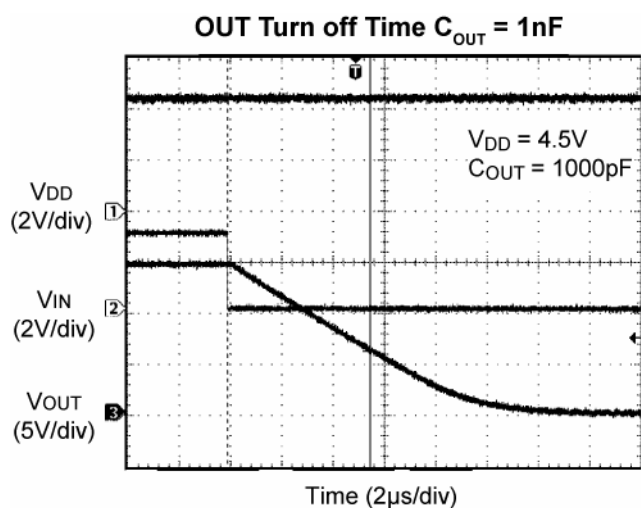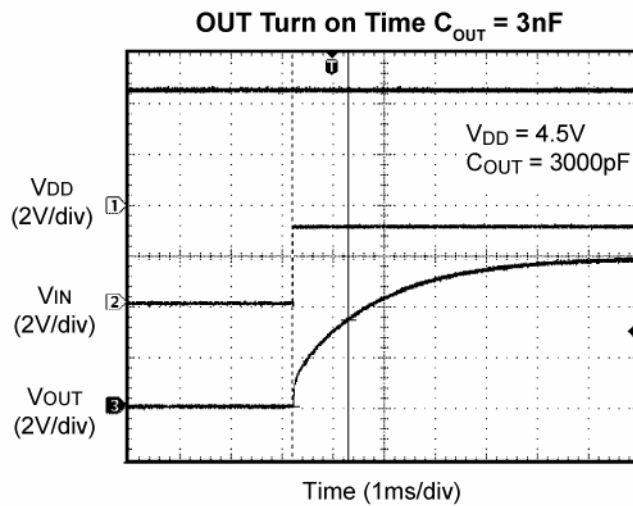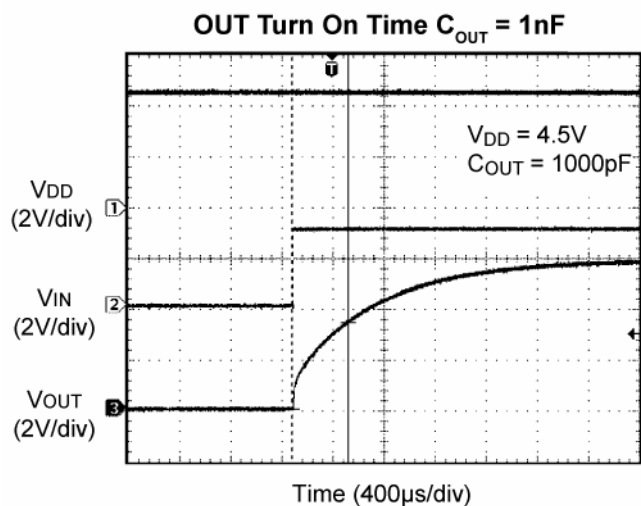

## Functional Diagram

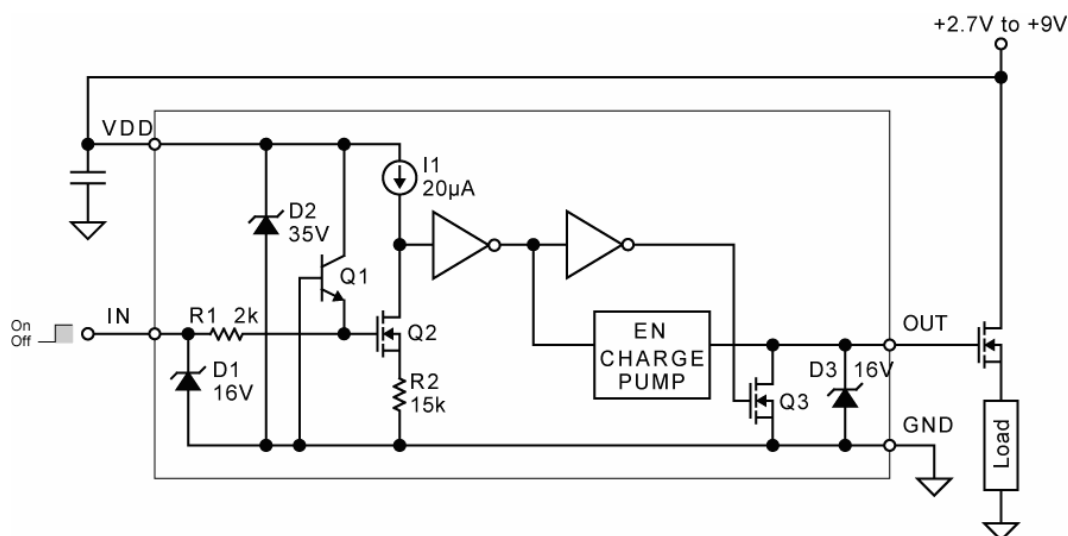

Functional Diagram with External Components  
(High-Side Driver Configuration)

## Functional Description

The MIC5019 is a non-inverting device. Applying a logic high signal to IN (control input) produces gate drive output. The OUT (Gate Output) is used to turn on an external N-channel MOSFET.

### Supply

VDD (supply) is rated for +2.7V to +9V. An external capacitor is recommended to decouple noise.

### Control

IN is the control input. IN must be forced high or low by an external signal. Do not leave IN floating as a floating input may cause unpredictable operation.

A high input turns on Q2, which sinks the output of current source I1, making the input of the first inverter low. The inverter output becomes high enabling the charge pump.

### Charge Pump

The charge pump is enabled when IN is logic high. The charge pump consists of an oscillator and voltage quadrupler (4×). The output voltage is limited to 16V typically by a zener diode. The charge pump output

voltage will be approximately:

$$V_{OUT} = 4 \times V_{DD} - 2.8V, \text{ but not exceeding } 19V_{max}.$$

The oscillator operates from approximately 70kHz to approximately 100kHz depending upon the supply voltage and temperature.

### OUT

The charge pump output is connected directly to the OUT pin. The charge pump is active only when IN is high. When IN is low, Q3 is turned on by the second inverter and discharges the gate of the external MOSFET to force it off.

If IN is high, and the voltage applied to VDD drops to zero, the gate output will be floating (unpredictable).

### ESD Protection

D1 and D2 clamp positive and negative ESD voltages. R1 isolates the gate of Q2 from sudden changes on the IN input. Q1 turns on if the emitter (IN input) is forced below ground to provide additional input protection. Zener D3 also clamps ESD voltages for the OUT (gate output).

## Application Information

### Supply Bypass

A capacitor from VDD to GND is recommended to control switching and supply transients. Load current and supply lead length are some of the factors that affect capacitor size requirements.

A 4.7 $\mu$ F or 10 $\mu$ F ceramic capacitor, aluminum electrolytic or tantalum capacitor is suitable for many applications.

The low ESR (equivalent series resistance) of ceramic and tantalum capacitors makes them especially effective, but also makes them susceptible to uncontrolled inrush current from low impedance voltage sources (such as NiCd batteries or automatic test equipment). Avoid applying voltage instantaneously, capable of high peak current, directly to or near tantalum capacitors without additional current limiting. Normal power supply turn-on (slow rise time) or printed circuit trace resistance is usually adequate for normal product usage.

### MOSFET Selection

The MIC5019 is designed to drive N-channel enhancement type MOSFETs. The gate output (OUT) of the MIC5019 provides a voltage, referenced to ground, that is greater than the supply voltage. Refer to the "Typical Characteristics: Output Voltage vs. Supply Voltage" graph.

The supply voltage and the MOSFET drain-to-source voltage drop determine the gate-to-source voltage.

$$V_{GS} = V_{OUT} - (V_{SUPPLY} - V_{DS})$$

where:

$V_{GS}$  = gate-to-source voltage (enhancement)

$V_{OUT}$  = OUT voltage (from graph "OUT Voltage vs Supply Voltage")

$V_{DD}$  = supply voltage

$V_{DS}$  = drain-to-source voltage  
(approx. 0V at low current, or when fully enhanced)

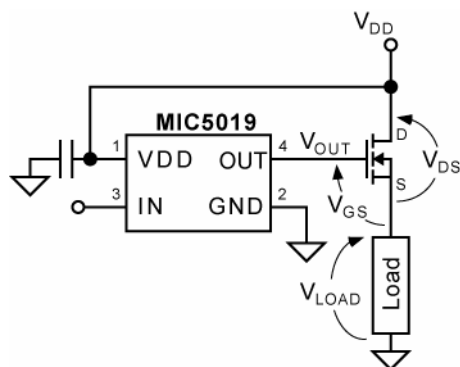


Figure 1. Node Voltages

The performance of the MOSFET is determined by the gate-to-source voltage. Choose the type of MOSFET according to the calculated gate-to-source voltage.

### Standard MOSFET

Standard MOSFETs are fully enhanced with a gate-to-source voltage of about 10V. Their absolute maximum gate-to-source voltage is  $\pm 20$ V. With a 4.5V supply, the MIC5019 produces a gate output of approximately 15V. Figure 2 shows how the remaining voltages conform. The actual drain-to-source voltage drop across an IRFZ24 is less than 0.1V with a 1A load and 10V enhancement. Higher current increases the drain-to-source voltage drop, increasing the gate-to-source voltage.

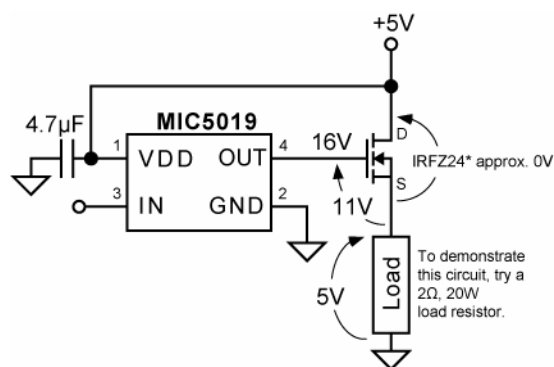


Figure 2. Using a Standard MOSFET

The MIC5019 has an internal zener diode that limits the gate-to-ground voltage to approximately 16V.

Lower supply voltages, such as 3.3V, produce lower gate output voltages which will not fully enhance standard MOSFETs. This significantly reduces the maximum current that can be switched. Always refer to the MOSFET data sheet to predict the MOSFET's performance in specific applications.

### Logic-Level MOSFET

Logic-level N-channel MOSFETs are fully enhanced with a gate-to-source voltage of approximately 5V. Some of the MOSFET's may have an absolute maximum gate-to-source voltage of  $\pm 10$ V (Refer to MOSFET datasheet).

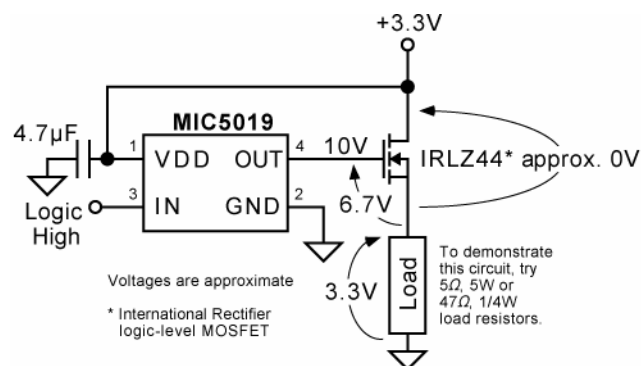


Figure 3. Using a Logic-Level MOSFET

Refer to Figure 3 for an example showing nominal voltages. The maximum gate-to-source voltage rating of some of the logic-level MOSFET can be  $\pm 10\text{V}$ ; this can be exceeded if a higher supply voltage is used. An external zener diode can clamp the gate-to-source voltage as shown in Figure 4. The zener voltage, plus its tolerance, must not exceed the absolute maximum gate voltage of the MOSFET.

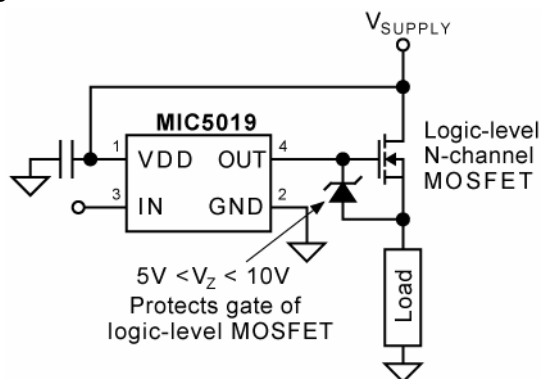


Figure 4. Gate-to-Source Protection

A gate-to-source zener may also be required when the maximum gate-to-source voltage could be exceeded due to normal part-to-part variation in gate output voltage. Other conditions can momentarily increase the gate-to-source voltage, such as turning on a capacitive load or shorting a load.

### Inductive Loads

Inductive loads include relays, and solenoids. Long leads may also have enough inductance to cause adverse effects in some circuits.

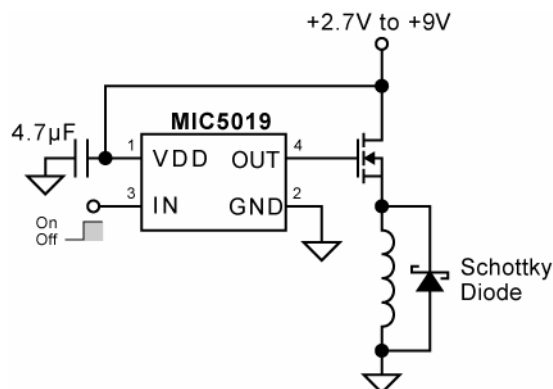


Figure 5. Switching an Inductive Load

Switching off an inductive load in a high-side application momentarily forces the MOSFET source negative (as the inductor opposes changes to current). This voltage spike can be very large and can exceed a MOSFET's gate-to-source and drain-to-source ratings. A Schottky diode across the inductive load provides a discharge current path to minimize the voltage spike. The peak current rating of the diode should be greater than the load current.

In a low-side application, switching off an inductive load will momentarily force the MOSFET drain higher than the supply voltage. The same precaution applies.

### Split Power Supply

Refer to Figure 6. The MIC5019 can be used to control a 12V load by separating the driver supply from the load supply.

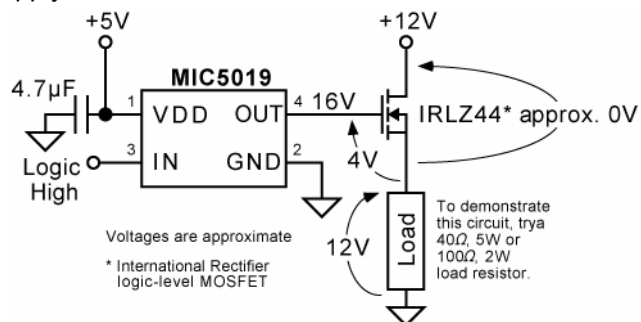


Figure 6. 12V High-Side Switch



A logic-level MOSFET is required. The MOSFET's maximum current is limited slightly because the gate is not fully enhanced. To predict the MOSFET's performance for any pair of supply voltages, calculate the gate-to-source voltage and refer to the MOSFET data sheet.

$$V_{GS} = V_{OUT} - (V_{LOAD\ SUPPLY} - V_{DS})$$

$V_{OUT}$  is determined from the driver supply voltage using the "Typical Characteristics: Output Voltage vs. Supply Voltage" graph.

### Low-Side Switch Configuration

The low-side configuration makes it possible to switch a voltage much higher than the MIC5019's maximum supply voltage.


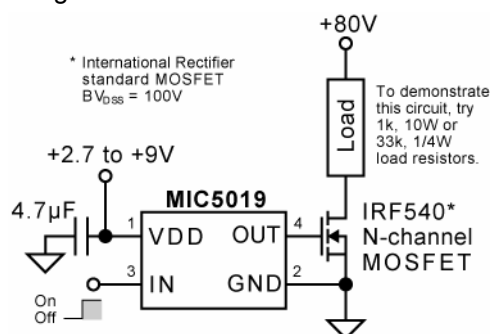


Figure 7. Low-Side Switch Configuration

The maximum switched voltage is limited only by the MOSFET's maximum drain-to-source ratings.

## Evaluation Board Schematic

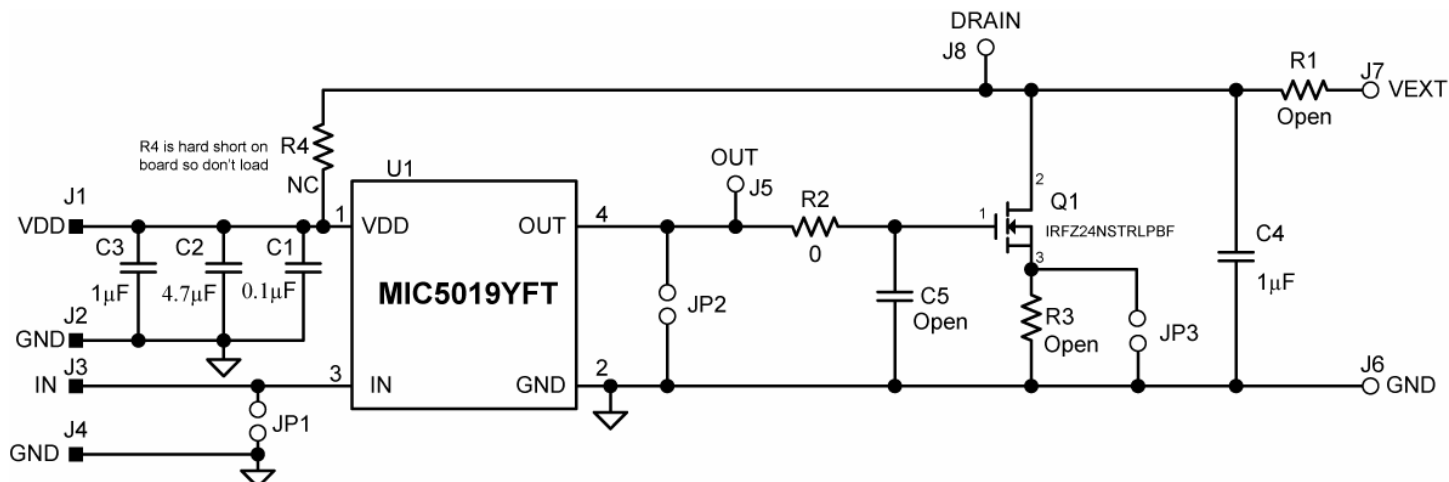

## Bill of Materials

| Item                      | Part Number        | Manufacturer                | Description                                 | Qty |
|---------------------------|--------------------|-----------------------------|---------------------------------------------|-----|
| C1                        | GRM188R71C104KA01D | Murata <sup>(1)</sup>       | 0.1μF/16V Ceramic Capacitor, X7R, Size 0603 | 1   |
| C2                        | C2012X7R1C475K     | TDK <sup>(2)</sup>          | 4.7μF/16V Ceramic Capacitor, X7R, Size 0805 | 1   |
|                           | GRM21BR71C475KA73L | Murata                      |                                             |     |
|                           | 0805YC475KAT2A     | AVX <sup>(3)</sup>          |                                             |     |
| R1, R3, C3, C4, Q1 (Open) |                    |                             |                                             |     |
| C5 (Open)                 |                    |                             | Used as gate Cap, different values          |     |
| R2                        | CRCW06030000FKEA   | Vishay Dale <sup>(4)</sup>  | 0Ω Resistor, Size 0603, 5%                  | 1   |
| U1                        | MIC5019YFT         | Micrel, Inc. <sup>(5)</sup> | High Side/Low Side MOSFET Driver            | 1   |

### Notes:

1. Murata: [www.murata.com](http://www.murata.com).
2. TDK: [www.tdk.com](http://www.tdk.com).
3. AVX: [www.avx.com](http://www.avx.com)
4. Vishay: [www.vishay.com](http://www.vishay.com)
5. Micrel, Inc.: [www.micrel.com](http://www.micrel.com).

## PCB Layout

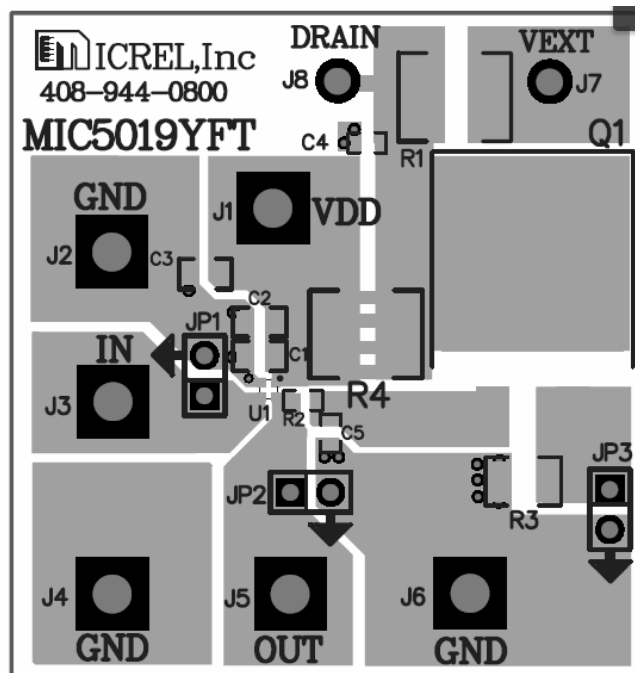


Figure 8. MIC5019 Evaluation Board Top Layer


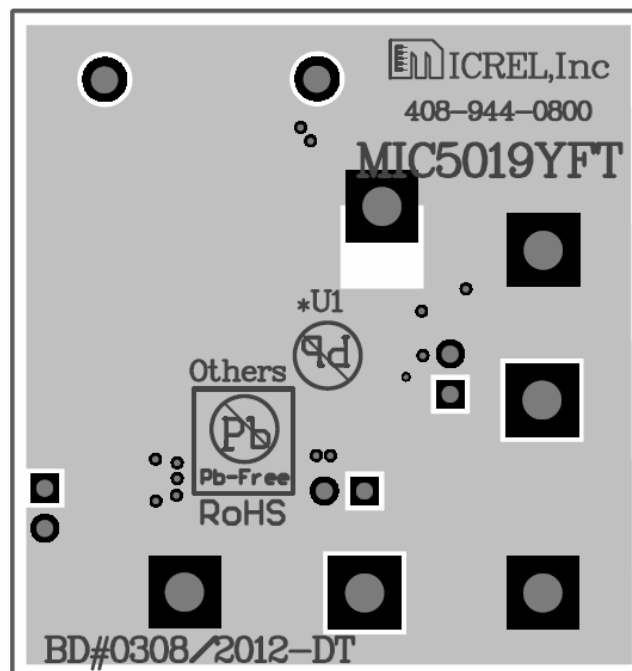


Figure 9. MIC5019 Evaluation Board Bottom Layer

## Package Information

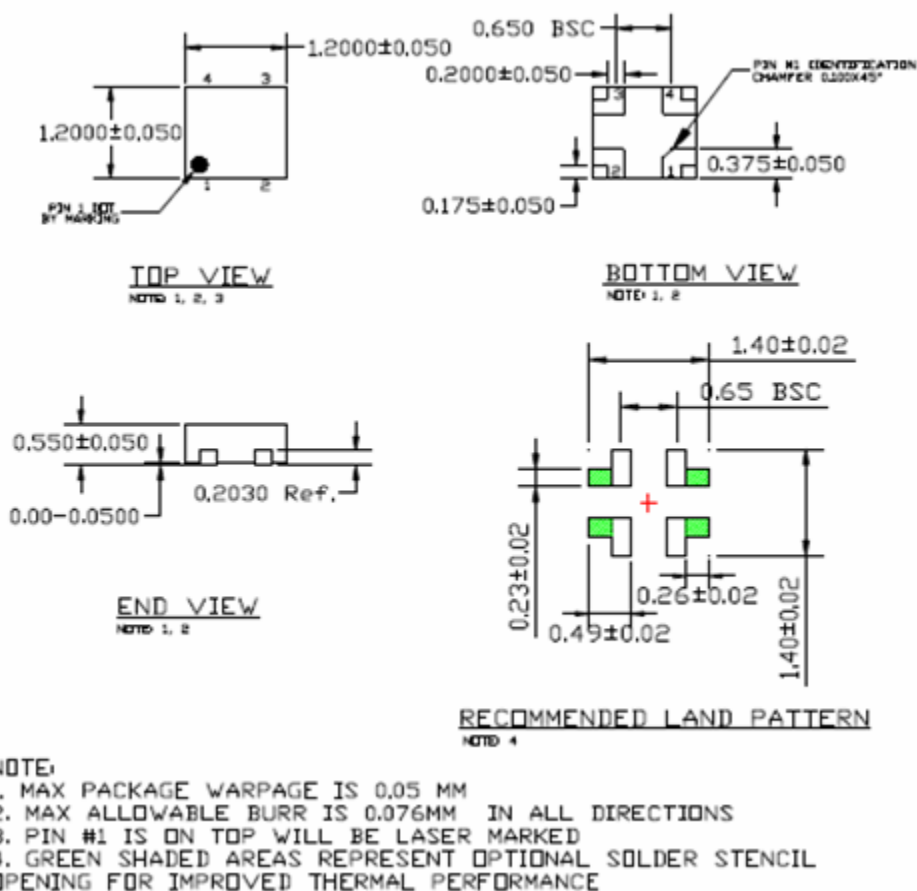

### 1.2mm x 1.2mm x 0.55mm 4 Pin QFN (FT)

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2012 Micrel, Incorporated.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micrel:](#)

[MIC5019YFT-T5](#) [MIC5019YFT-TR](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)