


SPECIFICATION

Part No. : **FXP543.A.07.A.001**

Description : Venti Circular 2.4/5.8GHz Flexible PCB Antenna
Internal 3 x MIMO
100mm 1.37 mini coax cable with IPEX MHFHT

Features : Dual Band WiFi MIMO x 3
Frequency 2.4~2.5GHz, 5.15~5.85GHz
45% efficiency and 1.5 to 5 dBi peak gain
Diameter : 37mm, Thickness : 0.15mm
Port 1, 2, 3 – 100mm Ø1.37 mini coaxial cable with IPEX MHFHT connector (U.FL comp)
3M adhesive for easy mounting
RoHS compliant

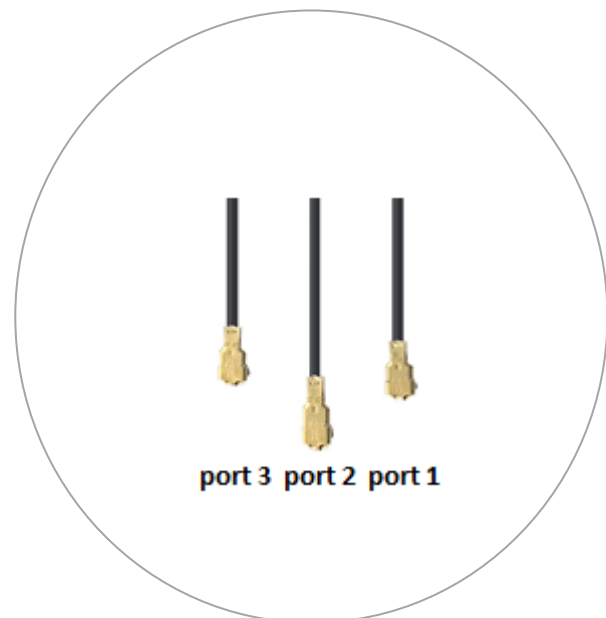

1. Introduction

The unique FXP543 Venti Circular antenna is the smallest 3-in-1 MIMO, internal flexible monopole type antenna for WiFi 2.4/5.8GHz in the market. Featuring a thickness of only 0.15mm, the FXP543 is an ideal solution for gateways, routers, smart city applications such as WiFi hot spots, smart lighting control, video surveillance and traffic monitoring.

The FXP543 has over 45% efficiency in both the 2.4GHz and 5GHz bands. It has been designed on a flexible material with a circular form-factor and cable connection for an easy installation. Great care has been taken to have high isolation (at least 10dB) between the three elements to ensure optimal MIMO system throughput.

The antenna comes with double-sided 3M adhesive for easy and robust "peel and stick" mounting. Three cables terminate with IPEX (u.fl) connectors for easy installation.

*If needed in order to comply with peak gain restrictions with certain wireless modules, the antenna peak gain can be reduced by simply using longer cable, or when tested in the actual device environment.

Many module manufacturers specify peak gain requirements for any antennas that is to be connected to that module. Upon testing of any of our antenna with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas peak gain will be below the peak gain requirements. Taoglas can then issue a specification and/or report for this selected WiFi antennas in your device that will clearly show it complying with the peak gain requirements, so you can be assured you are meeting regulatory requirements for that module.


2. Specification

ELECTRICAL *						
	Port 1		Port 2		Port 3	
Frequency(MHz)	2400-2500	5150-5850	2400-2500	5150-5850	2400-2500	5150-5850
Efficiency (%)	47.02	44.25	61.30	47.21	51.13	45.02
Peak Gain (dBi)	2.96	5.16	2.24	3.40	1.80	3.76
Average Gain (dBi)	-3.28	-3.56	-2.13	-3.28	-3.30	-3.38
Return Loss (dB)	< -10	<-9	<-10	<-8	< -8	<-9
Impedance	50 ohms					
Polarization	Linear					
Radiation Property	Omni-Directional					
Max Input Power	5W					
MECHANICAL						
Dimension (mm)	Antenna Diameter=37 Thickness=0.24 with release liner Thickness=0.15 without release liner					
Cable	3 * 1.37 coaxial cable					
Cable Length	100mm					
Connector	IPEX MHFHT					
Weight (g)	2.4					
ENVIRONMENTAL						
Operation Temperature	-40°C to 85°C					
Humidity	Non-condensing 65°C 95% RH					


*** Electrical characteristics are measured on 2mm thick ABS board.**

3. Antenna Characteristics


3.1. Return Loss

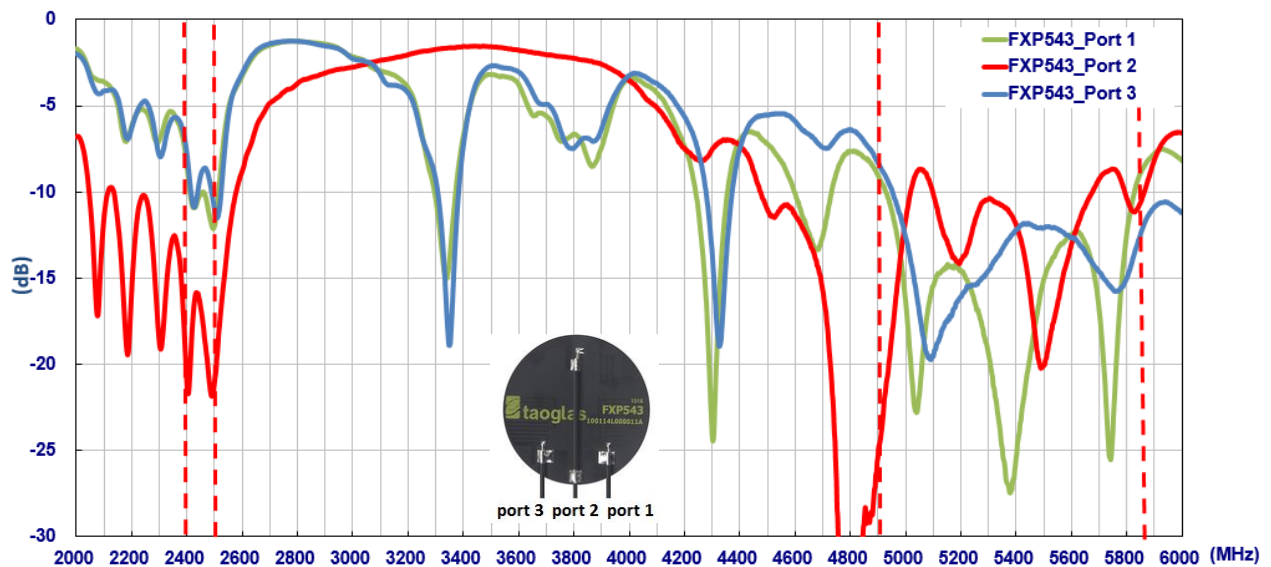


3.2. Isolation

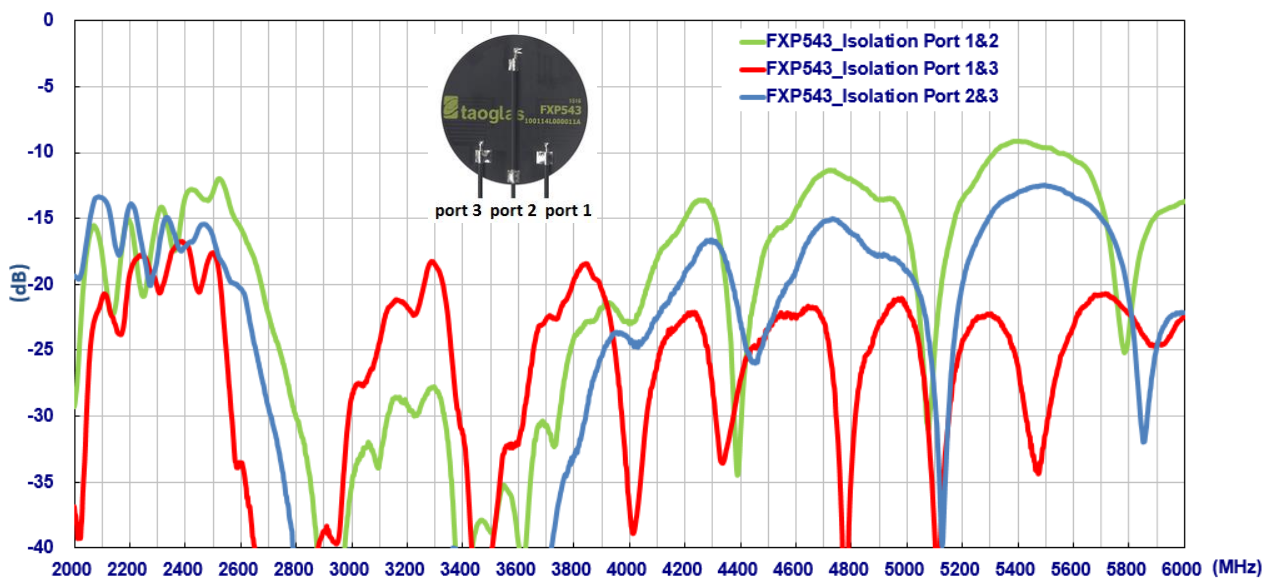


3.3. Efficiency

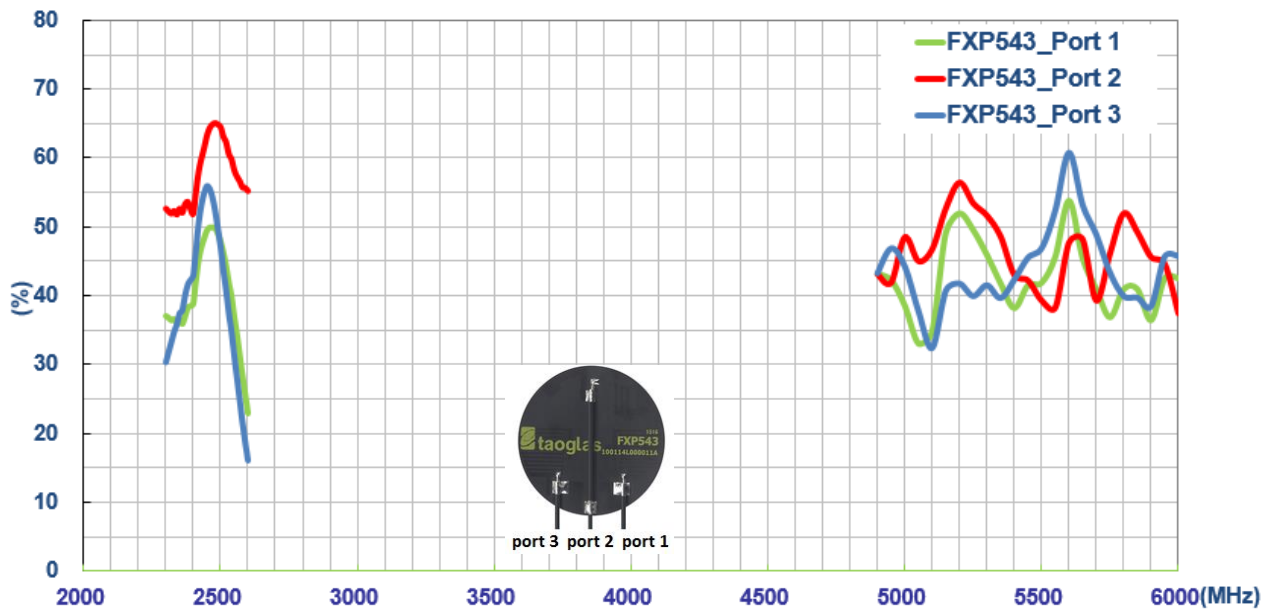

3.4. Average Gain

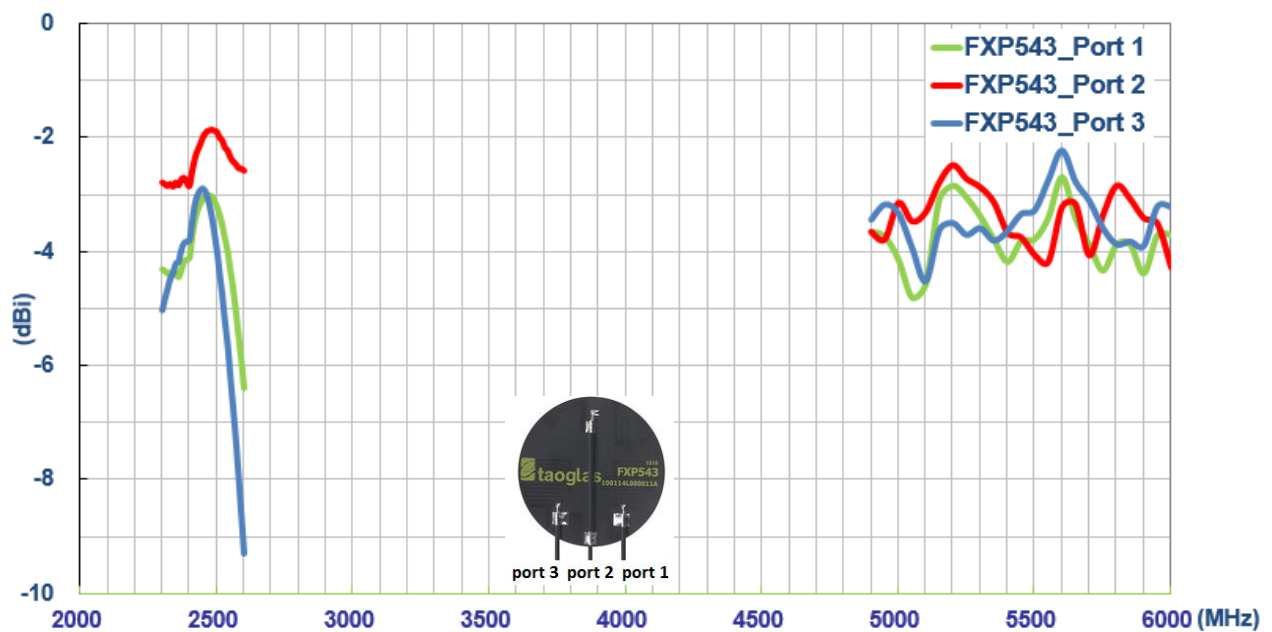


3.5. Peak Gain

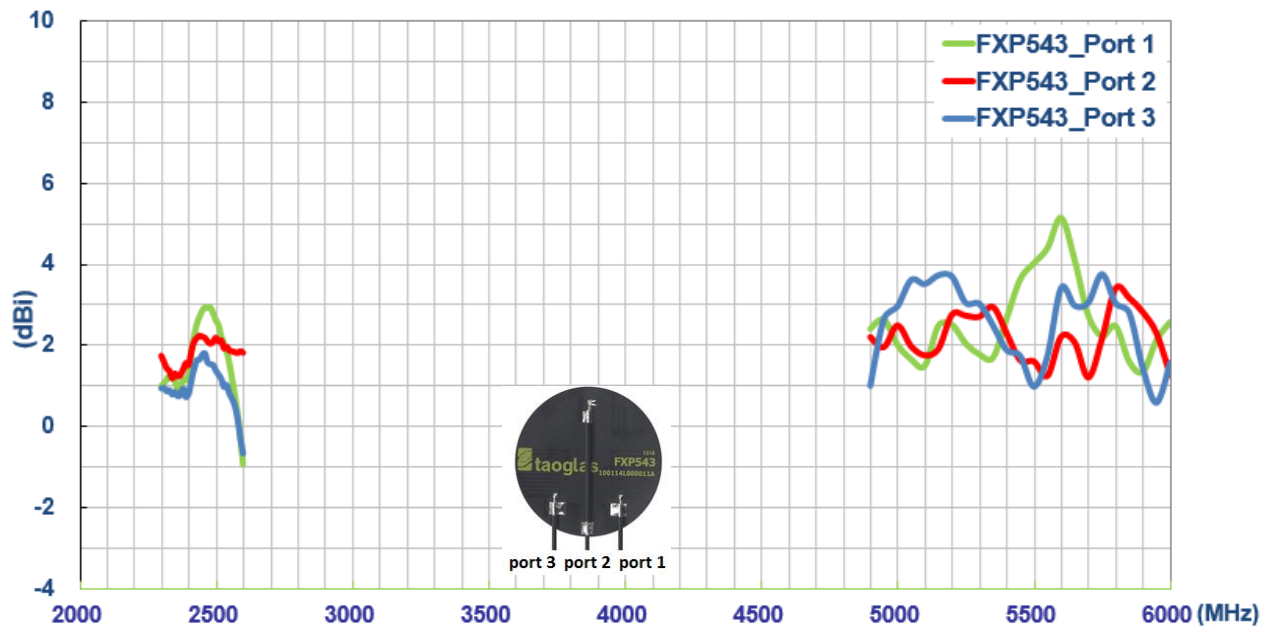

4. Antenna Radiation Pattern

4.1. Measurement Setup


The FXP543 antenna is tested in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

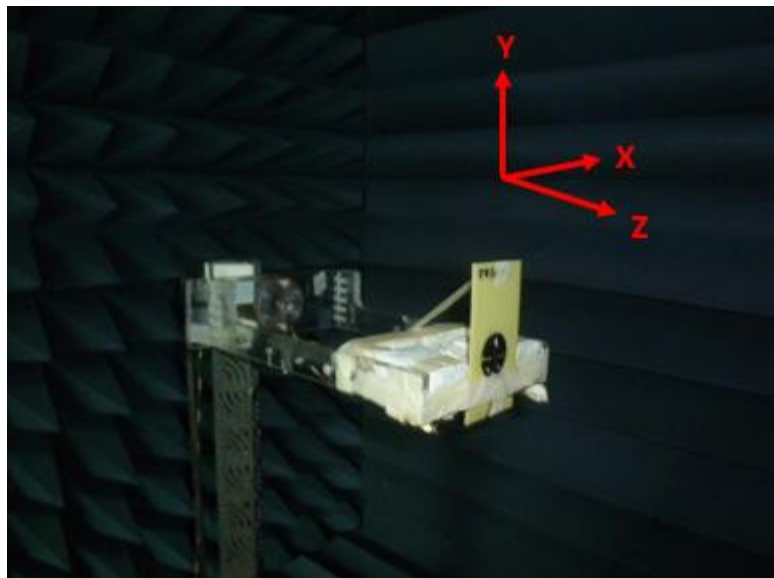


4.2. 2D Radiation Pattern

- 2400MHz


XY Plane

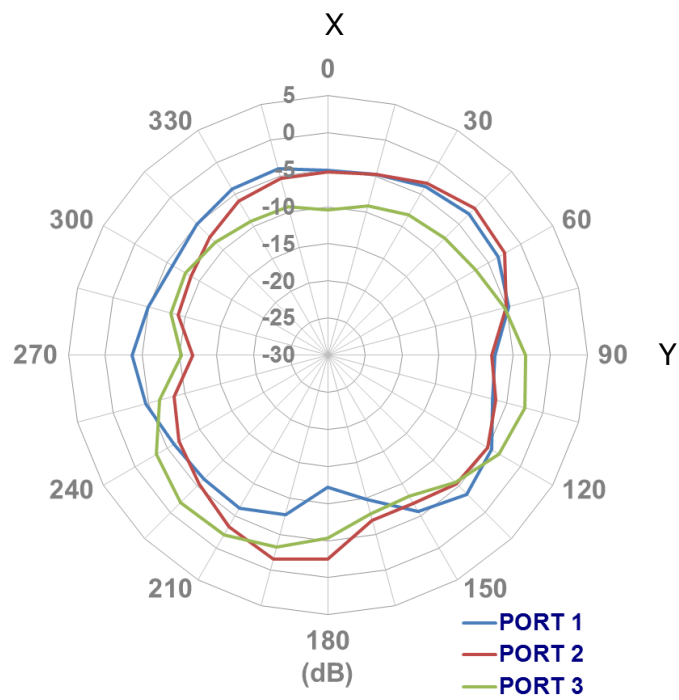

XZ Plane

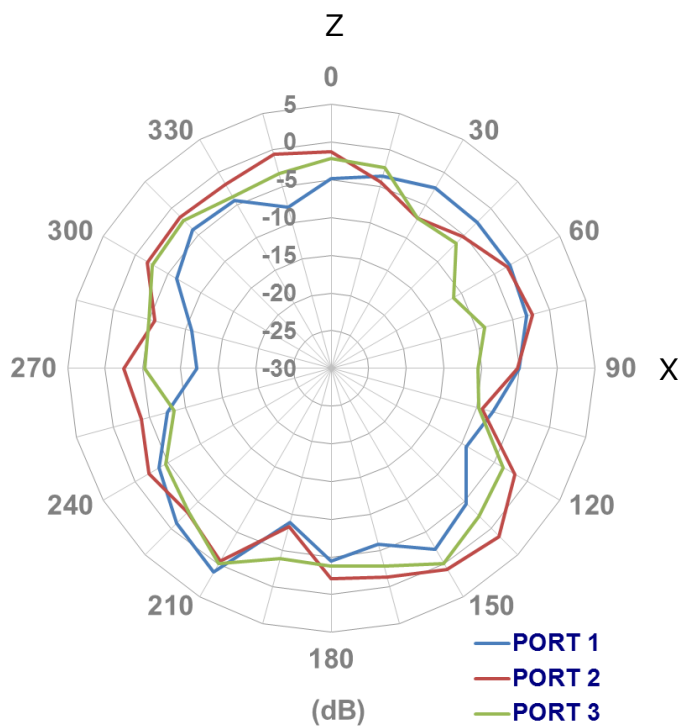


YZ Plane

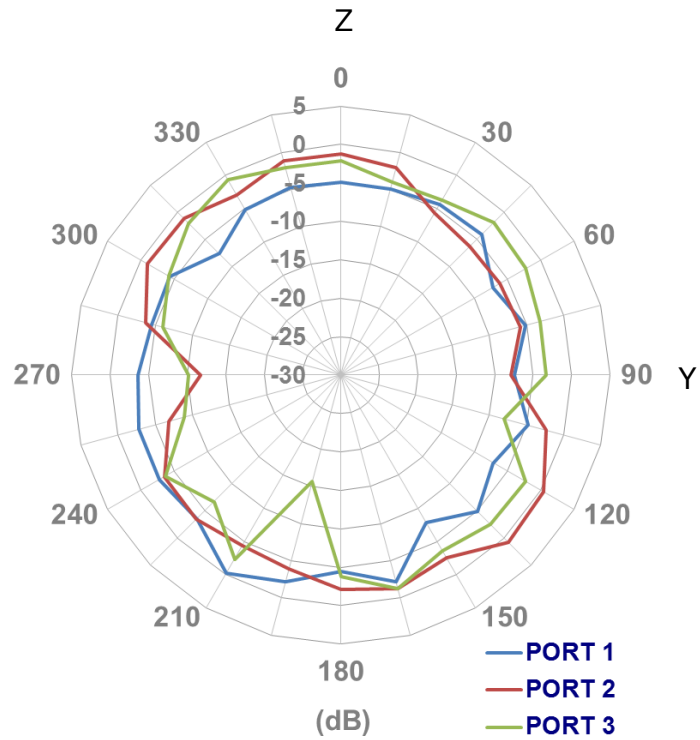


- **2450MHz**


XY Plane

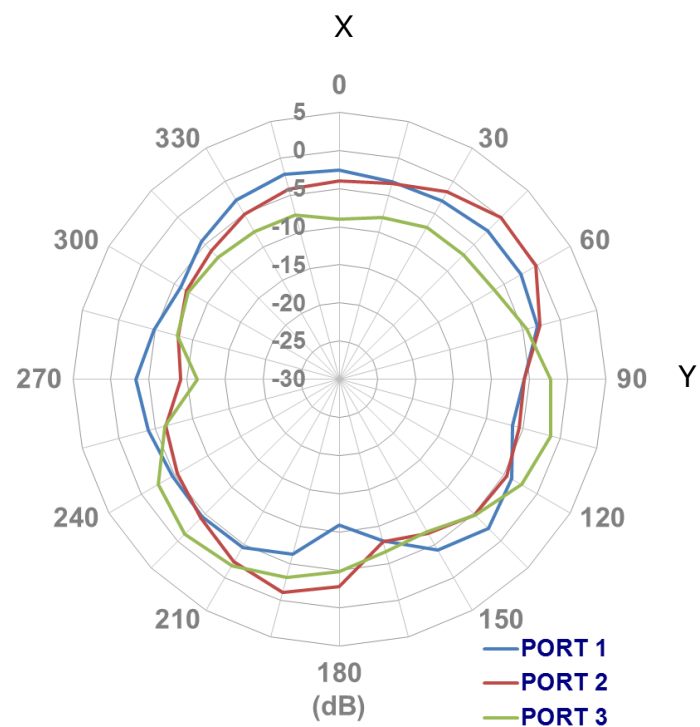

XZ Plane

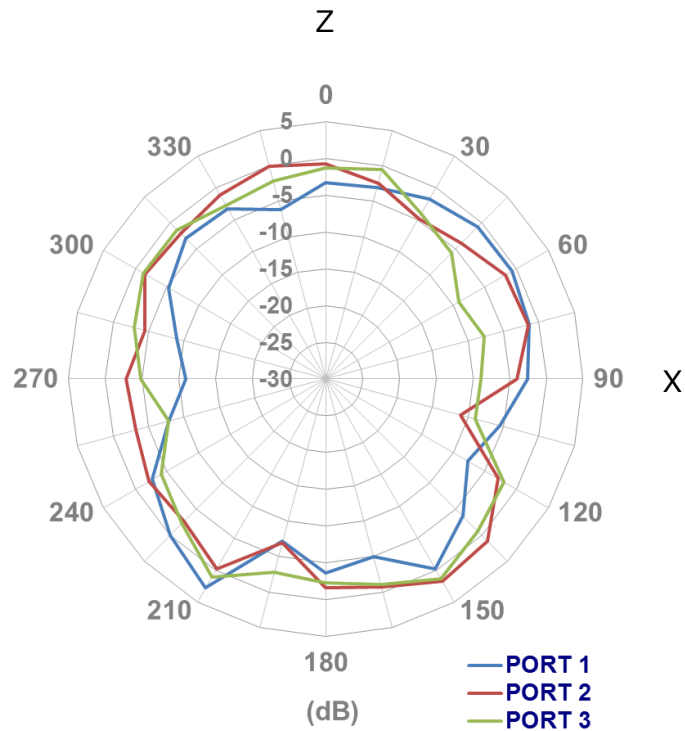


YZ Plane

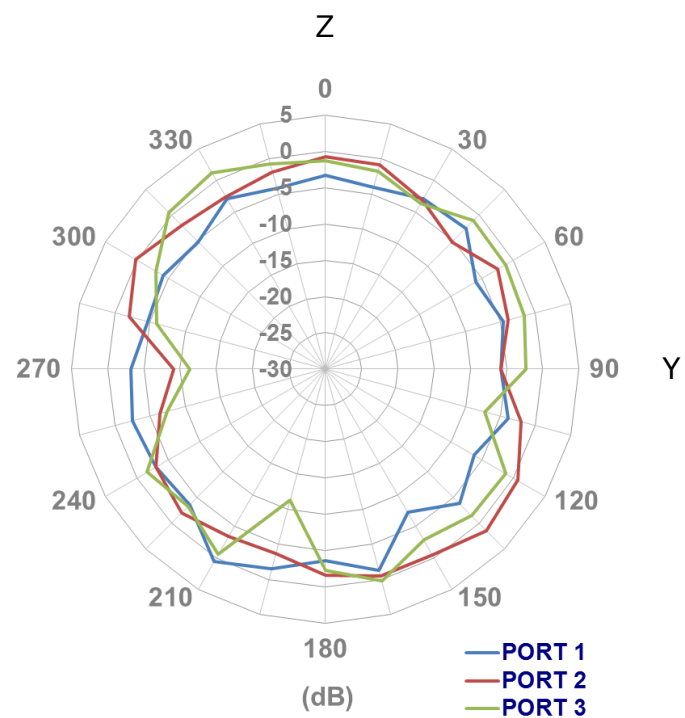


- **2500MHz**


XY Plane

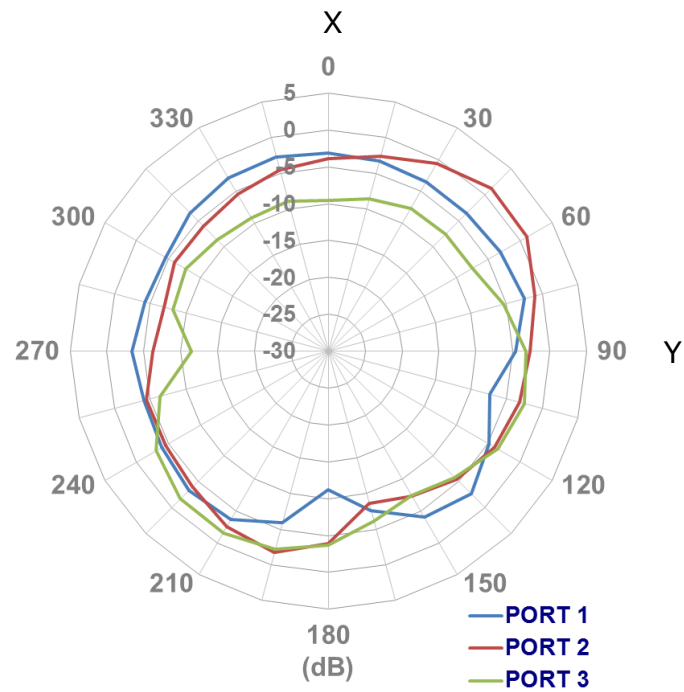

XZ Plane

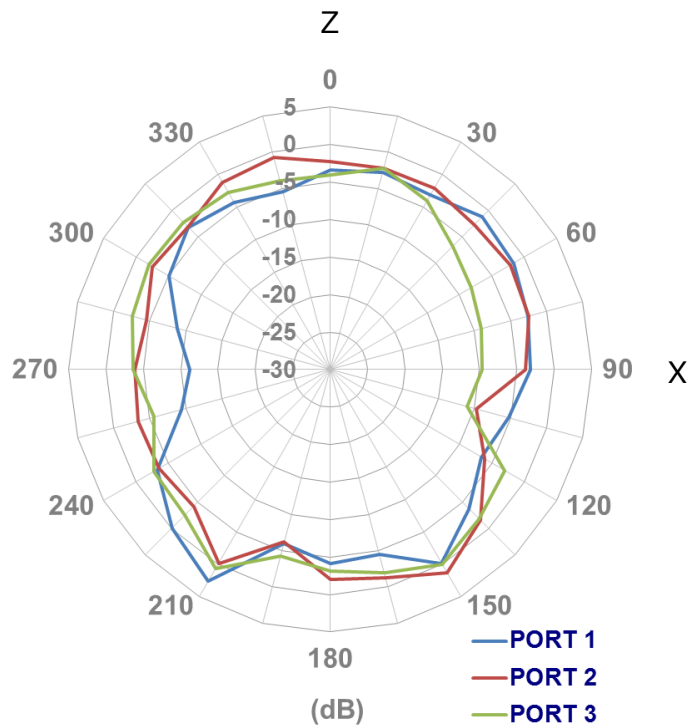


YZ Plane

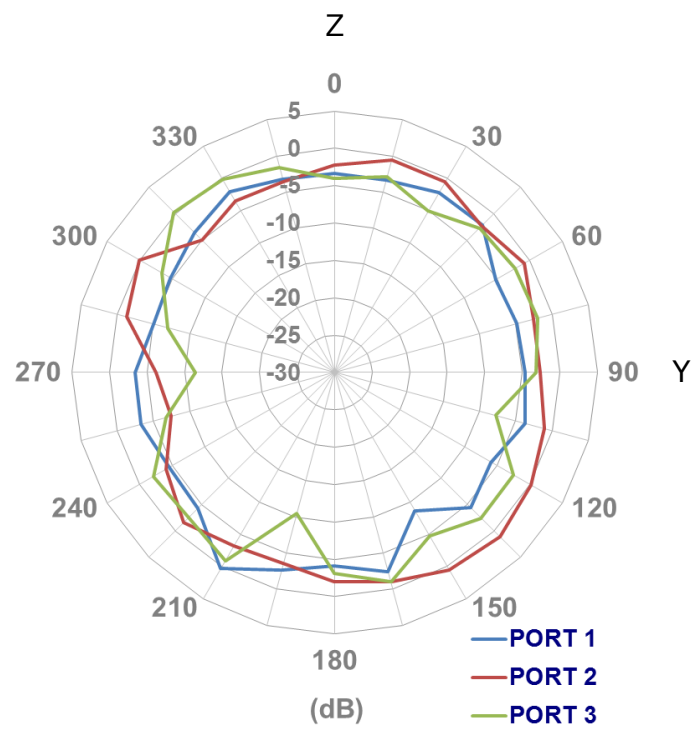


- **5150MHz**


XY Plane

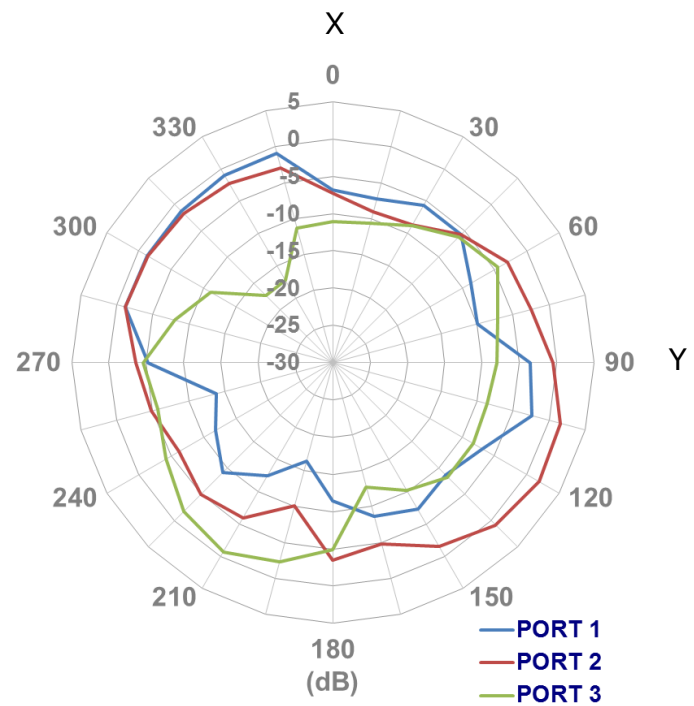

XZ Plane

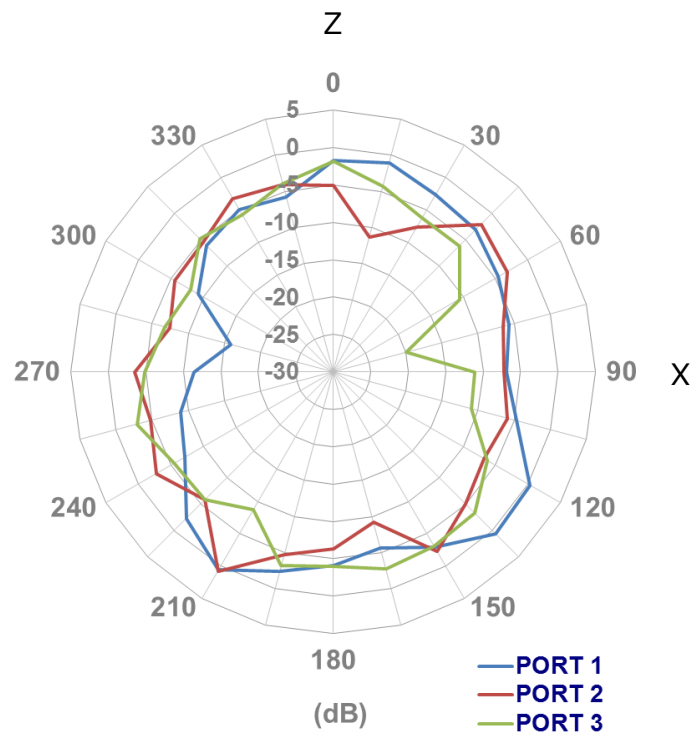


YZ Plane

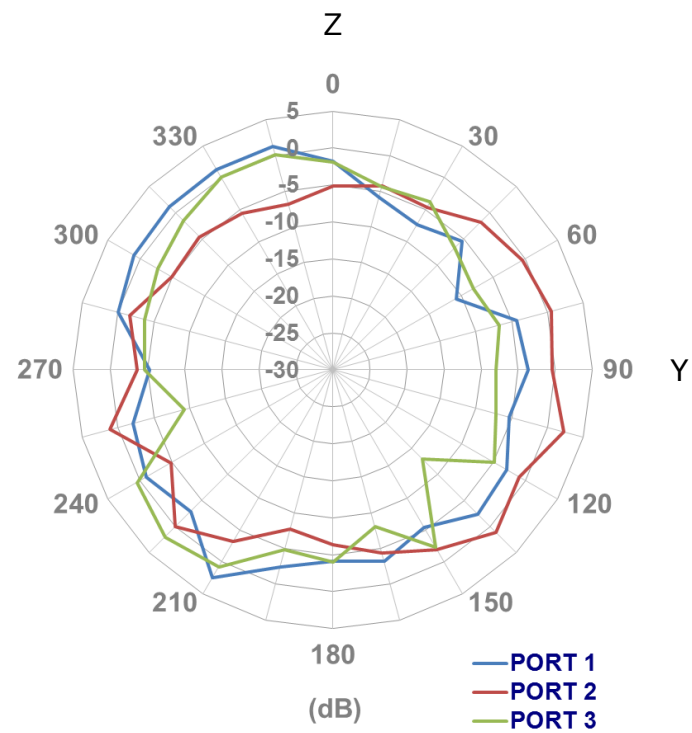


- **5500MHz**


XY Plane

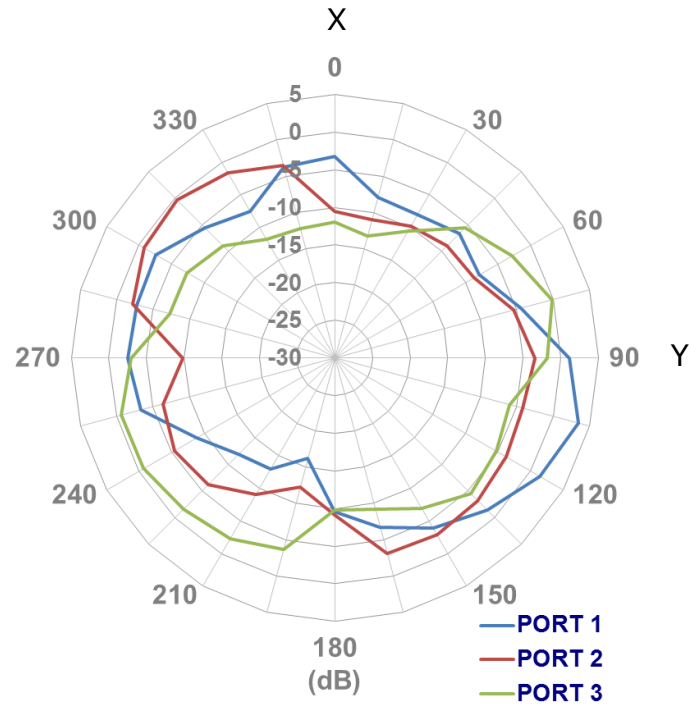

XZ Plane

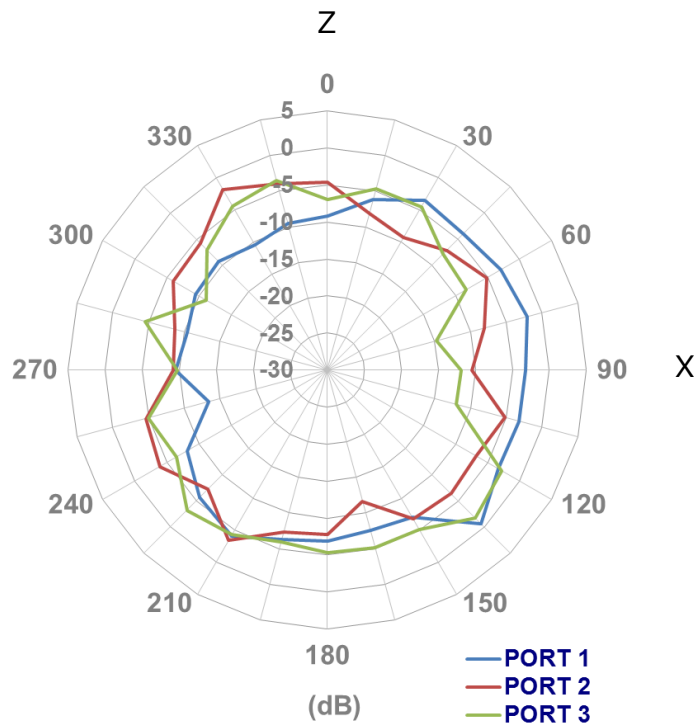


YZ Plane

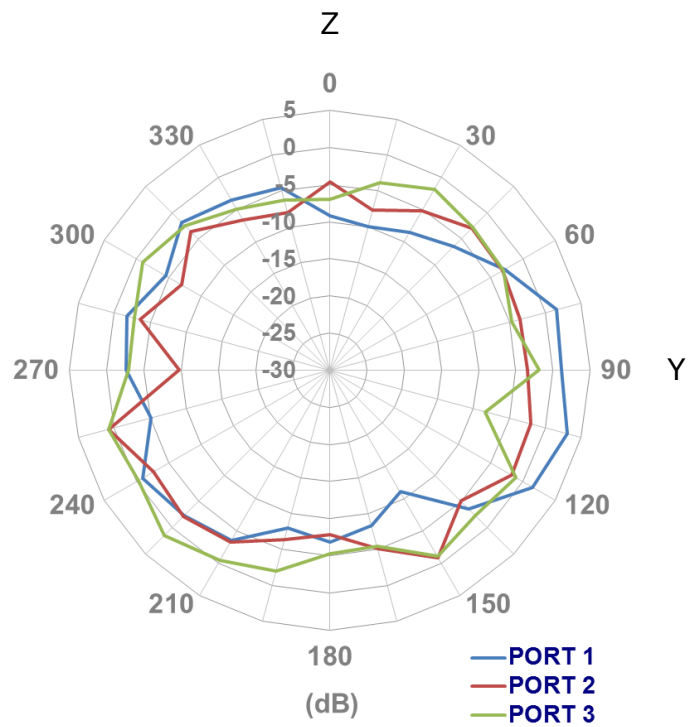


- **5850MHz**


XY Plane

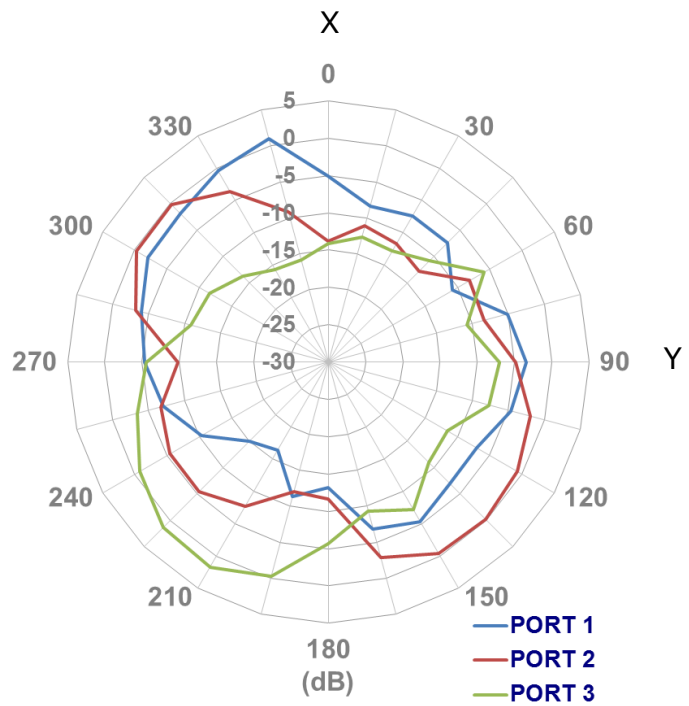

XZ Plane

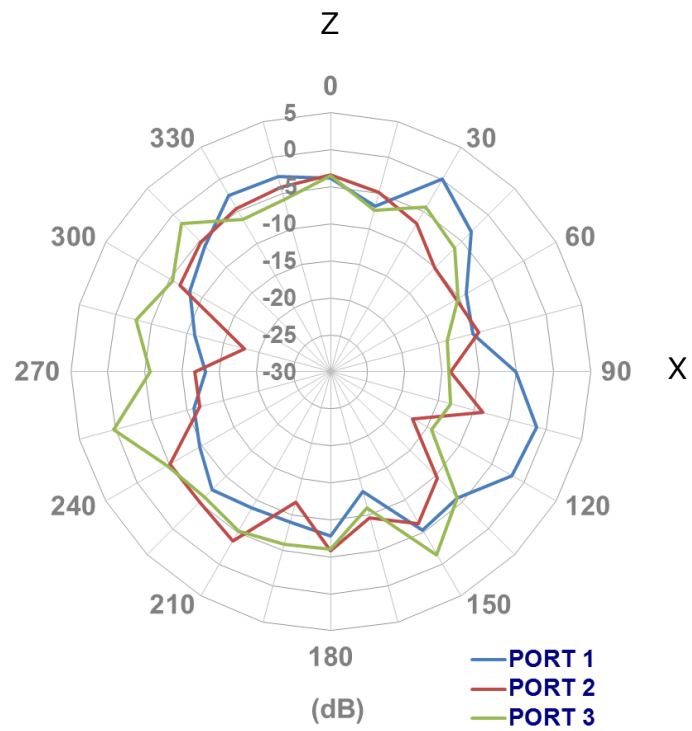


YZ Plane

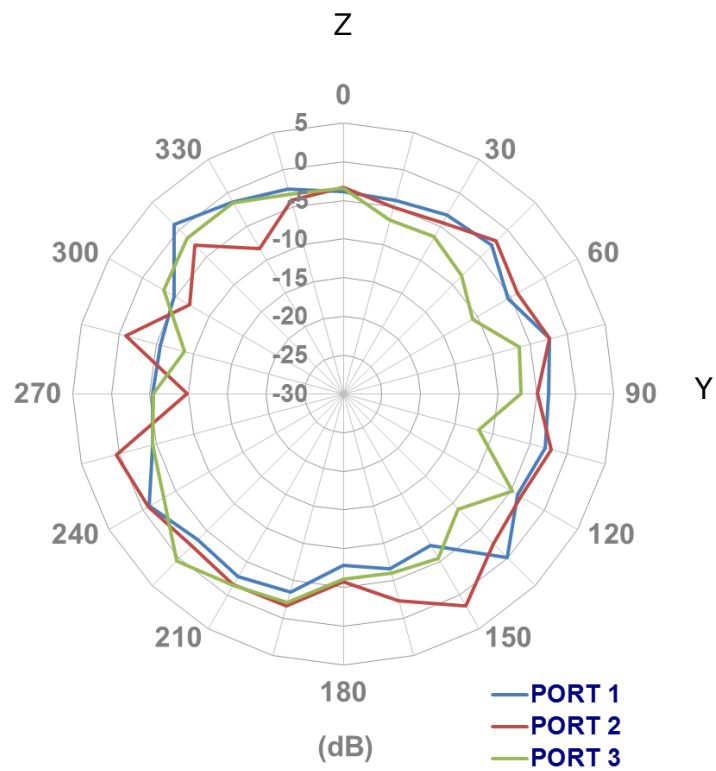


4.3. 3D Radiation Pattern


Port 1 @2450MHz

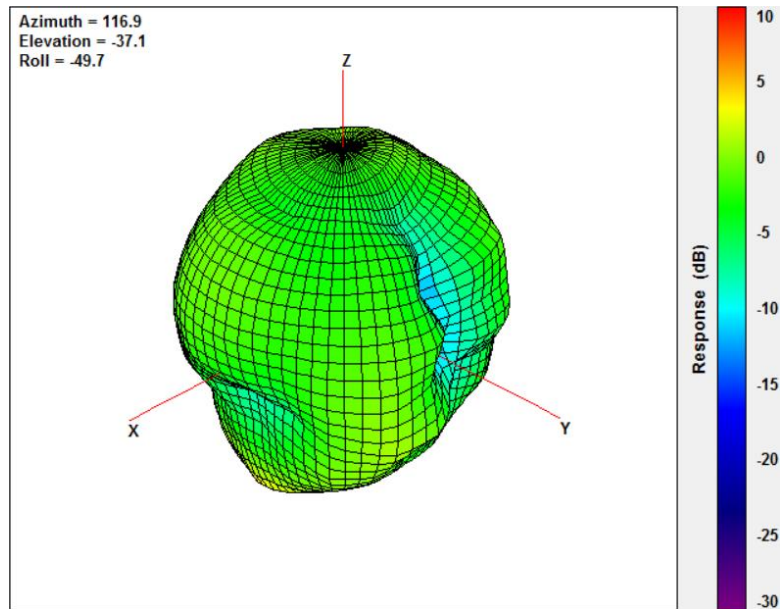


Port 1 @5550MHz

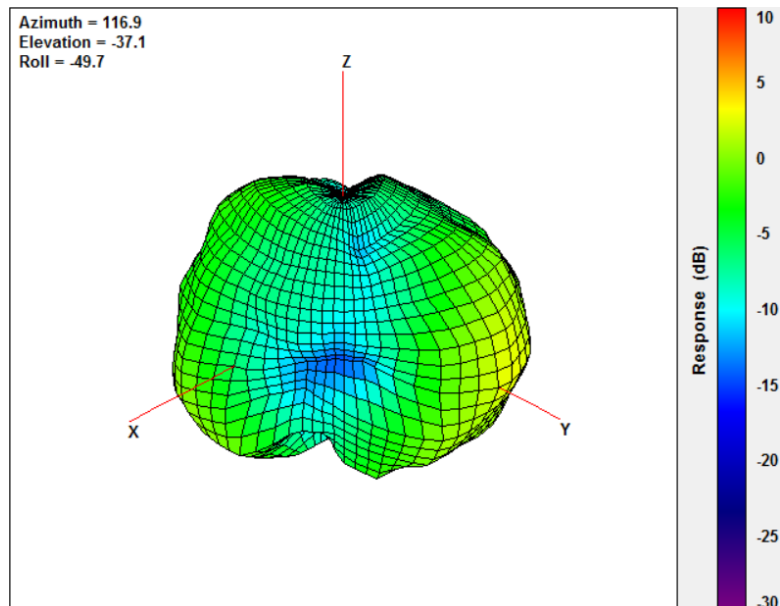


Port 2 @2450MHz

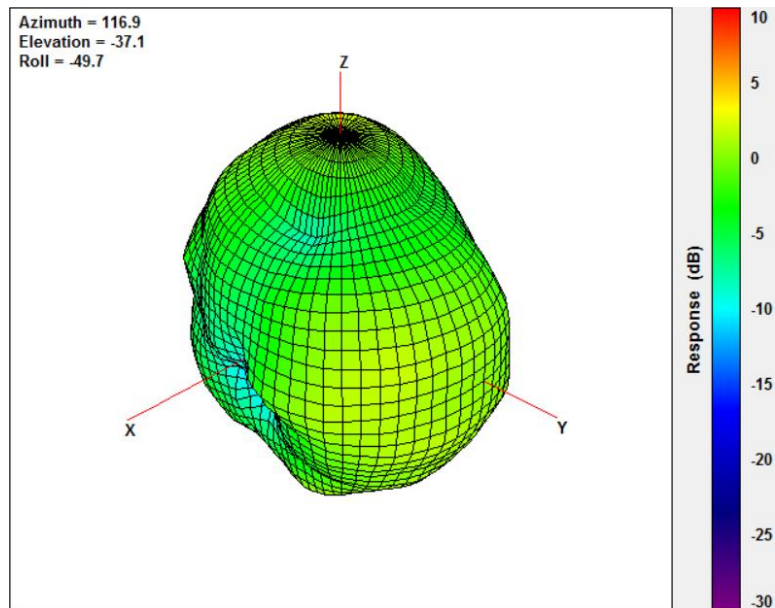


Port 2 @5550MHz

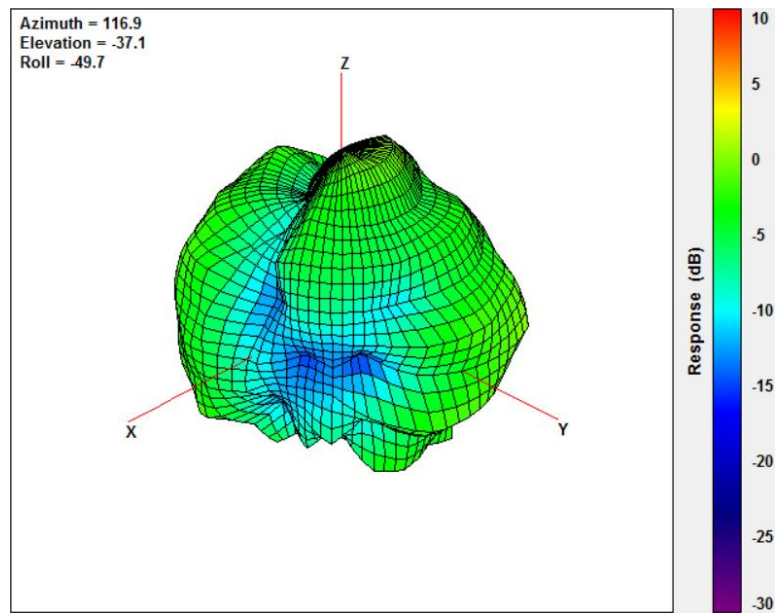


Port 3 @2450MHz

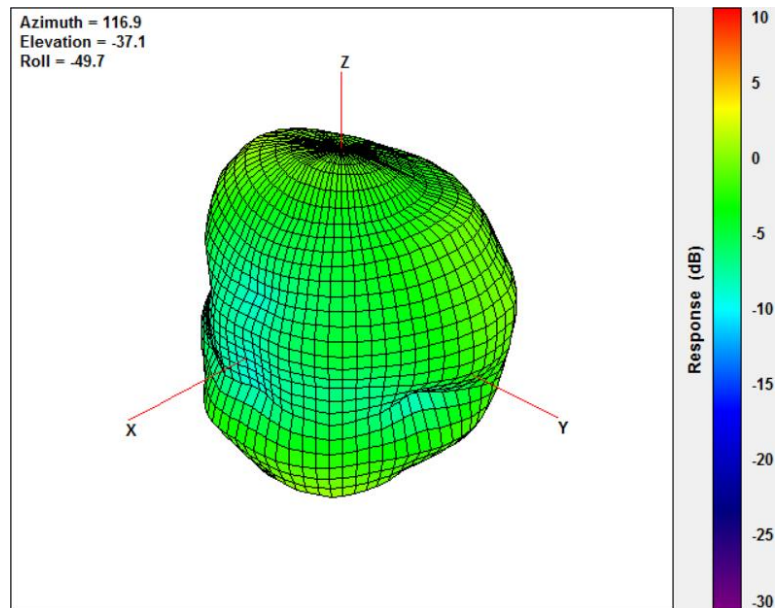

Port 3 @5550MHz

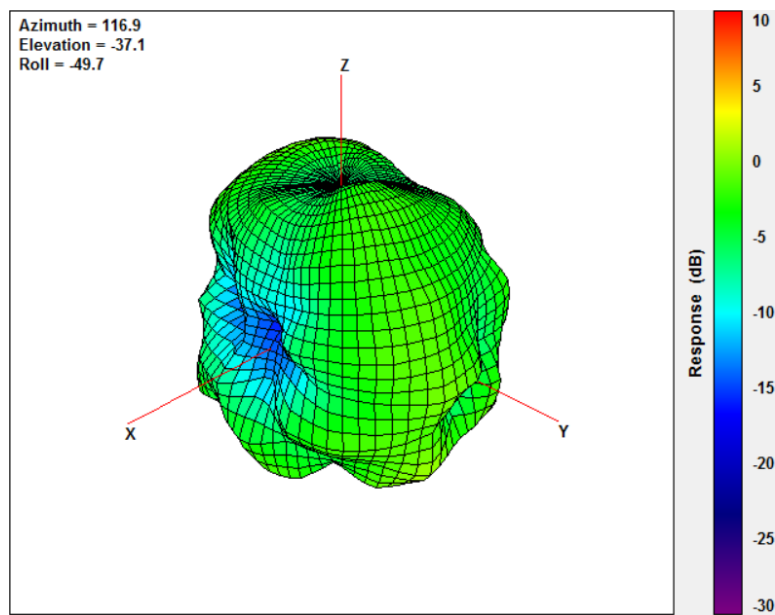

5. Mechanical Drawing

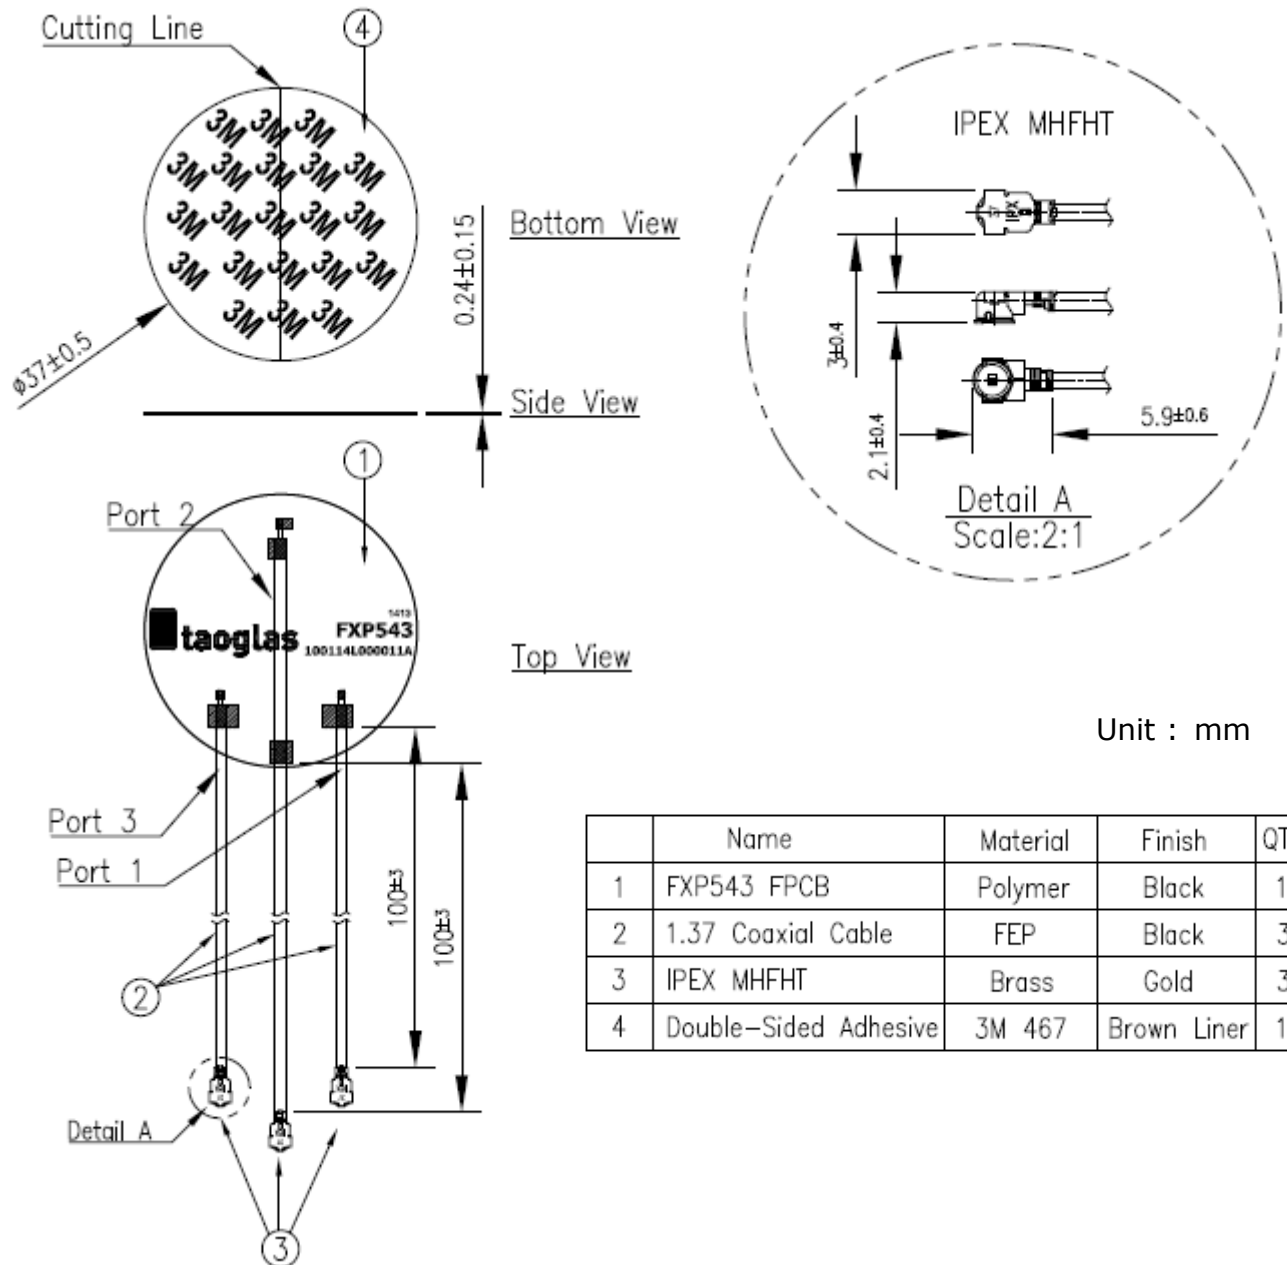


6. Packaging


FXP543.A.07.A.001

Packaging Specifications


50 pcs FXP543.A.07.A.001 per PE bag
PE Bag Dimensions - 275 x 160mm
Weight - 130g

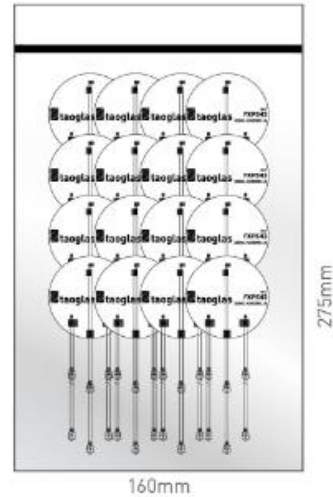

100 PE bags per carton
5000 pcs FXP543.A.07.A.001 per carton
Carton Dimensions - 320*250*230 mm
Weight - 13Kg

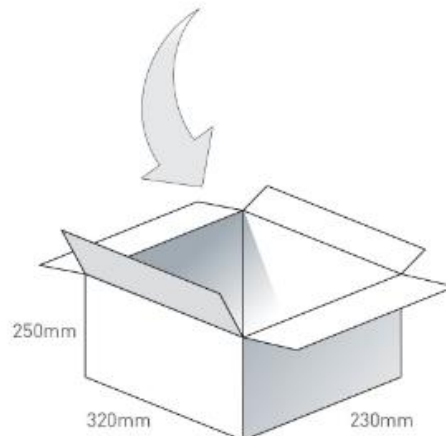

Pallet Dimensions 1100*1100*1070mm
48 Cartons per Pallet
12 Cartons per layer
4 Layers

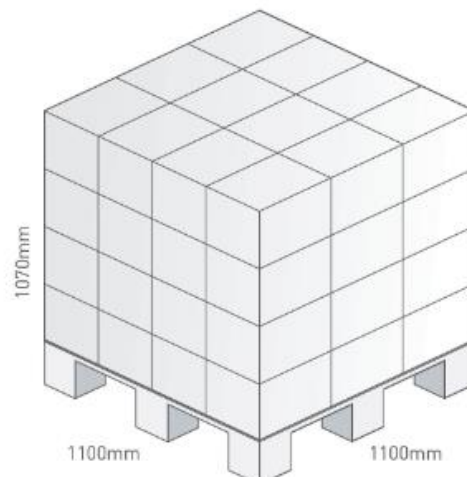

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru