



### FEATURES

- ✧ For surface mounted applications in order to optimize board space.
- ✧ Low profile package.
- ✧ Built-in strain relief.
- ✧ Glass passivated junction.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ Repetition Rate (duty cycle): 0.01%.
- ✧ Fast response time: typically less than 1.0ps from 0 volt to BV for Unidirectional types.
- ✧ Typical  $I_R$  less than 1 $\mu$ A above 10V.
- ✧ High Temperature soldering: 260°C/10 seconds at terminals.
- ✧ Plastic package has Underwriters Laboratory Flammability 94V-O.



**SMC/DO-214AB**

### MECHANICAL DATA

- ✧ Case: JEDEC DO-214AB. Molded plastic over glass passivated junction.
- ✧ Terminal: Solder plated, solderable per MIL-STD-750, Method 2026.
- ✧ Polarity: Color band denotes cathode except Bidirectional.
- ✧ Standard Packaging: 12mm tape (EIA STD RS-481).
- ✧ Weight: 0.007 ounce, 0.21 grams.

### DEVICES FOR BIPOLAR APPLICATION

For Bidirectional use C or CA suffix for type SMDJ5.0 through type SMDJ220 (e.g. SMDJ5.0CA, SMDJ220CA);  
Electrical characteristics apply in both directions.

### MAXIMUM RATINGS CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| RATING                                                                                                              | SYMBOL         | VALUE         | UNIT             |
|---------------------------------------------------------------------------------------------------------------------|----------------|---------------|------------------|
| Peak Pulse Power Dissipation on 10/1000 $\mu$ s waveform. (Note 1, Note 2, Fig. 1)                                  | $P_{PPM}$      | Minimum 3,000 | Watts            |
| Peak Pulse Current on 10/1000 $\mu$ s waveform. (Note 1, Fig. 3)                                                    | $I_{PPM}$      | See Table     | Amps             |
| Steady State Power Dissipation at $T_L = 75^\circ\text{C}$ , Lead length .375" (9.5mm). (Note 2, Fig. 5)            | $P_{M(AV)}$    | 6.5           | Watts            |
| Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load. (JEDEC Method) (Note 3, Fig. 6) | $I_{FSM}$      | 300           | Amps             |
| Operating junction and Storage Temperature Range.                                                                   | $T_J, T_{STG}$ | -65 to +150   | $^\circ\text{C}$ |


Notes: 1. Non-repetitive current pulse, per Fig. 3 and derated above  $T_A = 25^\circ\text{C}$  per Fig. 2.

2. Mounted on 0.8mm x 0.8mm Copper Pads to each terminal.

3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minute maximum.



### PACKAGE DIMENSIONS

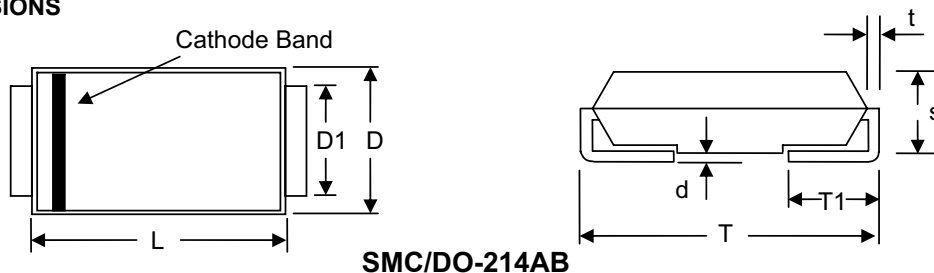

SMC/DO-214AB

| Item | Millimeters |       | Inches |       |
|------|-------------|-------|--------|-------|
|      | Min.        | Max.  | Min.   | Max.  |
| L    | 6.60        | 7.11  | 0.260  | 0.280 |
| D    | 5.59        | 6.22  | 0.220  | 0.245 |
| D1   | 2.90        | 3.20  | 0.114  | 0.126 |
| T    | 7.75        | 8.13  | 0.305  | 0.320 |
| T1   | 0.76        | 1.52  | 0.030  | 0.060 |
| d    | -           | 0.203 | -      | 0.008 |
| s    | 2.06        | 2.62  | 0.079  | 0.103 |
| t    | 0.152       | 0.305 | 0.006  | 0.012 |

### SPECIFICATIONS

| Part Number |           | Device Marking Code |     | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> | Breakdown Voltage @I <sub>T</sub> | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>RWM</sub> |
|-------------|-----------|---------------------|-----|---------------------------|-----------------------------------|-----------------------------------|---------------------|-------------------------------------------|---------------------|-----------------------------------|
| UNI-POLAR   | BI-POLAR  | UNI                 | BI  | V <sub>RWM</sub> (V)      | V <sub>BR MIN.</sub> (V)          | V <sub>BR MAX.</sub> (V)          | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)               |
| SMDJ5.0A    | SMDJ5.0CA | RDE                 | DDE | 5.0                       | 6.40                              | 7.00                              | 10                  | 9.2                                       | 326.1               | 800                               |
| SMDJ6.0A    | SMDJ6.0CA | RDG                 | DDG | 6.0                       | 6.67                              | 7.37                              | 10                  | 10.3                                      | 291.3               | 800                               |
| SMDJ6.5A    | SMDJ6.5CA | RDK                 | DDK | 6.5                       | 7.22                              | 7.98                              | 10                  | 11.2                                      | 267.9               | 500                               |
| SMDJ7.0A    | SMDJ7.0CA | PDM                 | DDM | 7.0                       | 7.78                              | 8.60                              | 10                  | 12.0                                      | 250.0               | 200                               |
| SMDJ7.5A    | SMDJ7.5CA | PDP                 | DDP | 7.5                       | 8.33                              | 9.21                              | 1                   | 12.9                                      | 232.6               | 100                               |
| SMDJ8.0A    | SMDJ8.0CA | PDR                 | DDR | 8.0                       | 8.89                              | 9.83                              | 1                   | 13.6                                      | 220.6               | 50                                |
| SMDJ8.5A    | SMDJ8.5CA | PDT                 | DDT | 8.5                       | 9.44                              | 10.40                             | 1                   | 14.4                                      | 208.3               | 20                                |
| SMDJ9.0A    | SMDJ9.0CA | PDV                 | DDV | 9.0                       | 10.00                             | 11.10                             | 1                   | 15.4                                      | 194.8               | 10                                |
| SMDJ10A     | SMDJ10CA  | PDX                 | DDX | 10.0                      | 11.10                             | 12.30                             | 1                   | 17.0                                      | 176.5               | 5                                 |
| SMDJ11A     | SMDJ11CA  | PDZ                 | DDZ | 11.0                      | 12.20                             | 13.50                             | 1                   | 18.2                                      | 164.8               | 2                                 |
| SMDJ12A     | SMDJ12CA  | PEE                 | DEE | 12.0                      | 13.30                             | 14.70                             | 1                   | 19.9                                      | 150.8               | 2                                 |
| SMDJ13A     | SMDJ13CA  | PEG                 | DEG | 13.0                      | 14.40                             | 15.90                             | 1                   | 21.5                                      | 139.5               | 2                                 |
| SMDJ14A     | SMDJ14CA  | PEK                 | DEK | 14.0                      | 15.60                             | 17.20                             | 1                   | 23.2                                      | 129.3               | 2                                 |
| SMDJ15A     | SMDJ15CA  | PEM                 | DEM | 15.0                      | 16.70                             | 18.50                             | 1                   | 24.4                                      | 123.0               | 2                                 |
| SMDJ16A     | SMDJ16CA  | PEP                 | DEP | 16.0                      | 17.80                             | 19.70                             | 1                   | 26.0                                      | 115.4               | 2                                 |

# Transient Voltage Suppressors



## SMDJ Series

MERITEK

| Part Number |           | Device Marking Code |     | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> | Breakdown Voltage @I <sub>T</sub> | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>RWM</sub> |
|-------------|-----------|---------------------|-----|---------------------------|-----------------------------------|-----------------------------------|---------------------|-------------------------------------------|---------------------|-----------------------------------|
| UNI-POLAR   | BI-POLAR  | UNI                 | BI  | V <sub>RWM</sub> (V)      | V <sub>BR MIN.</sub> (V)          | V <sub>BR MAX.</sub> (V)          | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)               |
| SMDJ17A     | SMDJ17CA  | PER                 | DER | 17.0                      | 18.90                             | 20.90                             | 1                   | 27.6                                      | 108.7               | 2                                 |
| SMDJ18A     | SMDJ18CA  | PET                 | DET | 18.0                      | 20.00                             | 22.10                             | 1                   | 29.2                                      | 102.7               | 2                                 |
| SMDJ20A     | SMDJ20CA  | PEV                 | DEV | 20.0                      | 22.20                             | 24.50                             | 1                   | 32.4                                      | 92.6                | 2                                 |
| SMDJ22A     | SMDJ22CA  | PEX                 | DEX | 22.0                      | 24.40                             | 26.90                             | 1                   | 35.5                                      | 84.5                | 2                                 |
| SMDJ24A     | SMDJ24CA  | PEZ                 | DEZ | 24.0                      | 26.70                             | 29.50                             | 1                   | 38.9                                      | 77.1                | 2                                 |
| SMDJ26A     | SMDJ26CA  | PFE                 | DFE | 26.0                      | 28.90                             | 31.90                             | 1                   | 42.1                                      | 71.3                | 2                                 |
| SMDJ28A     | SMDJ28CA  | PFG                 | DFG | 28.0                      | 31.10                             | 34.40                             | 1                   | 45.4                                      | 66.1                | 2                                 |
| SMDJ30A     | SMDJ30CA  | PFK                 | DFK | 30.0                      | 33.30                             | 36.80                             | 1                   | 48.4                                      | 62.0                | 2                                 |
| SMDJ33A     | SMDJ33CA  | PFM                 | DFM | 33.0                      | 36.70                             | 40.60                             | 1                   | 53.3                                      | 56.3                | 2                                 |
| SMDJ36A     | SMDJ36CA  | PFP                 | DFP | 36.0                      | 40.00                             | 44.20                             | 1                   | 58.1                                      | 51.6                | 2                                 |
| SMDJ40A     | SMDJ40CA  | PFR                 | DFR | 40.0                      | 44.40                             | 49.10                             | 1                   | 64.5                                      | 46.5                | 2                                 |
| SMDJ43A     | SMDJ43CA  | PFT                 | DFT | 43.0                      | 47.80                             | 52.80                             | 1                   | 69.4                                      | 43.2                | 2                                 |
| SMDJ45A     | SMDJ45CA  | PFV                 | DFV | 45.0                      | 50.00                             | 55.30                             | 1                   | 72.7                                      | 41.3                | 2                                 |
| SMDJ48A     | SMDJ48CA  | PFX                 | DFX | 48.0                      | 53.30                             | 58.90                             | 1                   | 77.4                                      | 38.8                | 2                                 |
| SMDJ51A     | SMDJ51CA  | PFZ                 | DFZ | 51.0                      | 56.70                             | 62.70                             | 1                   | 82.4                                      | 36.4                | 2                                 |
| SMDJ54A     | SMDJ54CA  | PGE                 | DGE | 54.0                      | 60.00                             | 66.30                             | 1                   | 87.1                                      | 34.4                | 2                                 |
| SMDJ58A     | SMDJ58CA  | PGG                 | DGG | 58.0                      | 64.40                             | 71.20                             | 1                   | 93.6                                      | 32.1                | 2                                 |
| SMDJ60A     | SMDJ60CA  | PGK                 | DGK | 60.0                      | 66.70                             | 73.70                             | 1                   | 96.8                                      | 31.0                | 2                                 |
| SMDJ64A     | SMDJ64CA  | PGM                 | DGM | 64.0                      | 71.10                             | 78.60                             | 1                   | 103.0                                     | 29.1                | 2                                 |
| SMDJ70A     | SMDJ70CA  | PGP                 | DGP | 70.0                      | 77.80                             | 86.00                             | 1                   | 113.0                                     | 26.5                | 2                                 |
| SMDJ75A     | SMDJ75CA  | PGR                 | DGR | 75.0                      | 83.30                             | 92.10                             | 1                   | 121.0                                     | 24.8                | 2                                 |
| SMDJ78A     | SMDJ78CA  | PGT                 | DGT | 78.0                      | 86.70                             | 95.80                             | 1                   | 126.0                                     | 23.8                | 2                                 |
| SMDJ85A     | SMDJ85CA  | PGV                 | DGV | 85.0                      | 94.40                             | 104.00                            | 1                   | 137.0                                     | 21.9                | 2                                 |
| SMDJ90A     | SMDJ90CA  | PGX                 | DGX | 90.0                      | 100.00                            | 111.00                            | 1                   | 146.0                                     | 20.5                | 2                                 |
| SMDJ100A    | SMDJ100CA | PGZ                 | DGZ | 100.0                     | 111.00                            | 123.00                            | 1                   | 162.0                                     | 18.5                | 2                                 |
| SMDJ110A    | SMDJ110CA | PHE                 | DHE | 110.0                     | 122.00                            | 135.00                            | 1                   | 177.0                                     | 16.9                | 2                                 |
| SMDJ120A    | SMDJ120CA | PHG                 | DHG | 120.0                     | 133.00                            | 147.00                            | 1                   | 193.0                                     | 15.5                | 2                                 |
| SMDJ130A    | SMDJ130CA | PHK                 | DHK | 130.0                     | 144.00                            | 159.00                            | 1                   | 209.0                                     | 14.4                | 2                                 |
| SMDJ150A    | SMDJ150CA | PHM                 | DHM | 150.0                     | 167.00                            | 185.00                            | 1                   | 243.0                                     | 12.3                | 2                                 |
| SMDJ160A    | SMDJ160CA | PHP                 | DHP | 160.0                     | 178.00                            | 197.00                            | 1                   | 259.0                                     | 11.6                | 2                                 |
| SMDJ170A    | SMDJ170CA | PHR                 | DHR | 170.0                     | 189.00                            | 209.00                            | 1                   | 275.0                                     | 10.9                | 2                                 |
| SMDJ180A    | SMDJ180CA | HHT                 | IHT | 180.0                     | 198.00                            | 230.40                            | 1                   | 292.0                                     | 10.3                | 2                                 |
| SMDJ190A    | SMDJ190CA | HHV                 | IHV | 190.0                     | 209.00                            | 243.20                            | 1                   | 308.0                                     | 9.7                 | 2                                 |
| SMDJ200A    | SMDJ200CA | HHX                 | IHX | 200.0                     | 220.00                            | 256.00                            | 1                   | 324.0                                     | 9.3                 | 2                                 |
| SMDJ210A    | SMDJ210CA | HHZ                 | IHZ | 210.0                     | 231.00                            | 268.80                            | 1                   | 340.0                                     | 8.8                 | 2                                 |
| SMDJ220A    | SMDJ220CA | HIE                 | IIE | 220.0                     | 242.00                            | 281.60                            | 1                   | 356.0                                     | 8.4                 | 2                                 |

Note: For Bidirectional type having V<sub>RWM</sub> of 10 volts and less, the I<sub>R</sub> limit doubles.

### RATING AND CHARACTERISTIC CURVES (T<sub>A</sub>: 25°C UNLESS OTHERWISE SPECIFIED)

Figure 1 - Peak Pulse Power Rating Curve

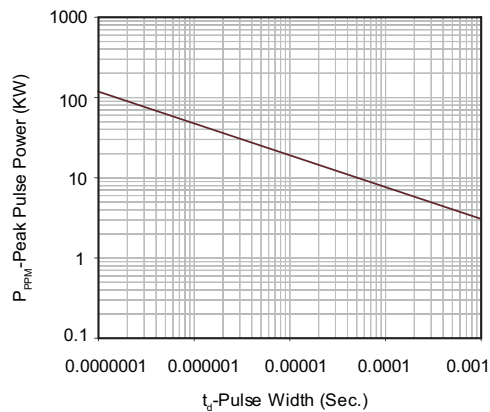


Figure 2 - Pulse Derating Curve

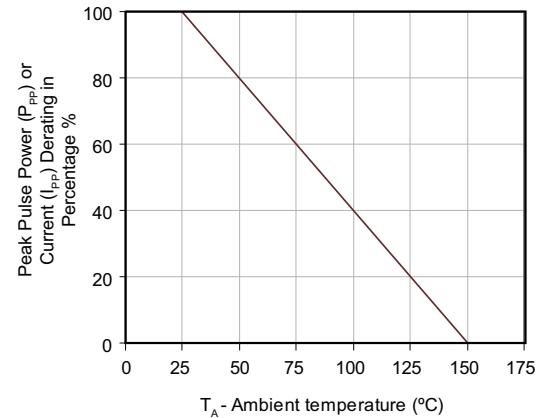


Figure 3 - Pulse Waveform



Figure 4 - Typical Junction Capacitance

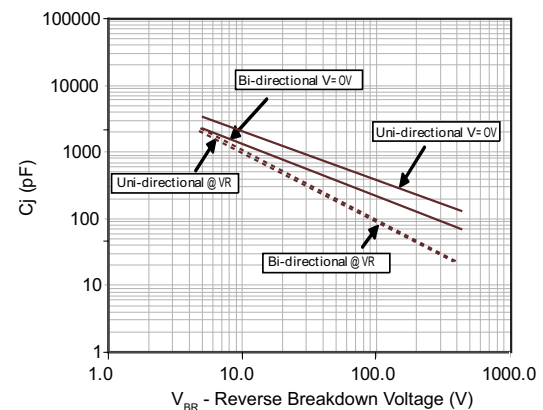


Figure 5 - Steady State Power Dissipation Derating Curve


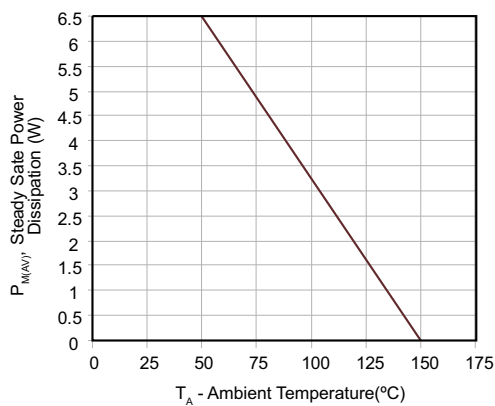


Figure 6 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

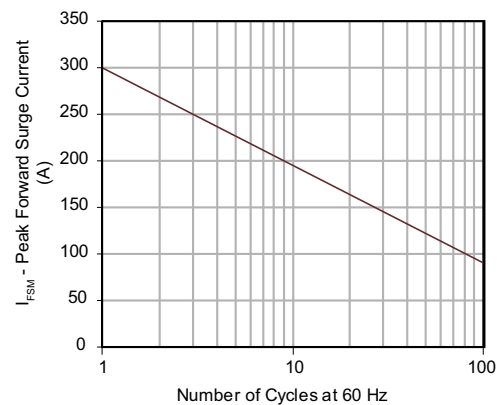

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)