


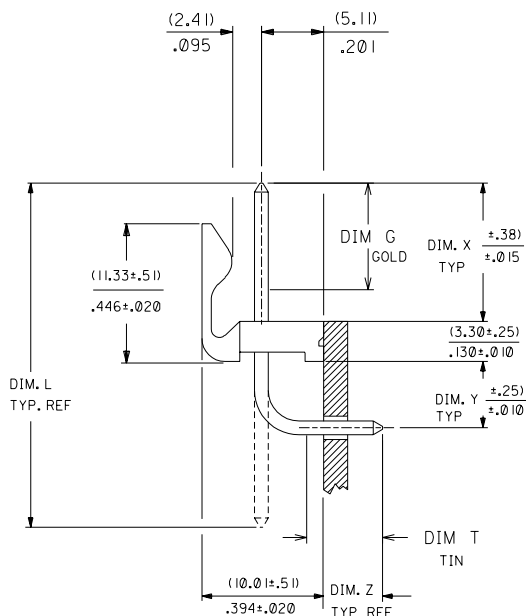



NOTES:

- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
- SOLDERABILITY: WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING. FOR OTHER INFORMATION SEE ES-152.
- PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
- FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
- PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
- FOR PART WITH PEGS SEE DWG NO. SDA-42492
- BURRS DUE TO CUTTING OFF OF PINS MUST NOT VARY FROM CENTERLINE OF PIN AT DATUM -D- BY MORE THAN .008 IN ANY DIRECTION.


MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
PIN: BRASS

PLATINGS:

(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER
(567) SELECT GOLD 15 M.I. MIN, SELECT TIN/LEAD 100 M.I. MIN., OVER NICKEL
(569) SELECT GOLD 30 M.I. MIN, SELECT TIN/LEAD 100 M.I. MIN., OVER NICKEL
FOR ADDITIONAL INFORMATION SE SDES-88.

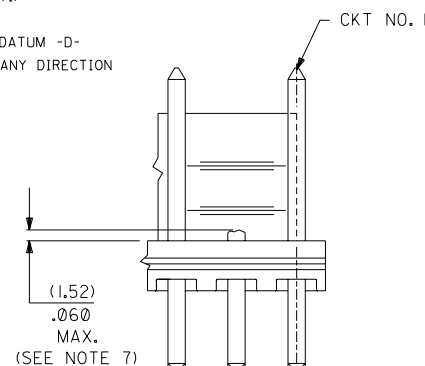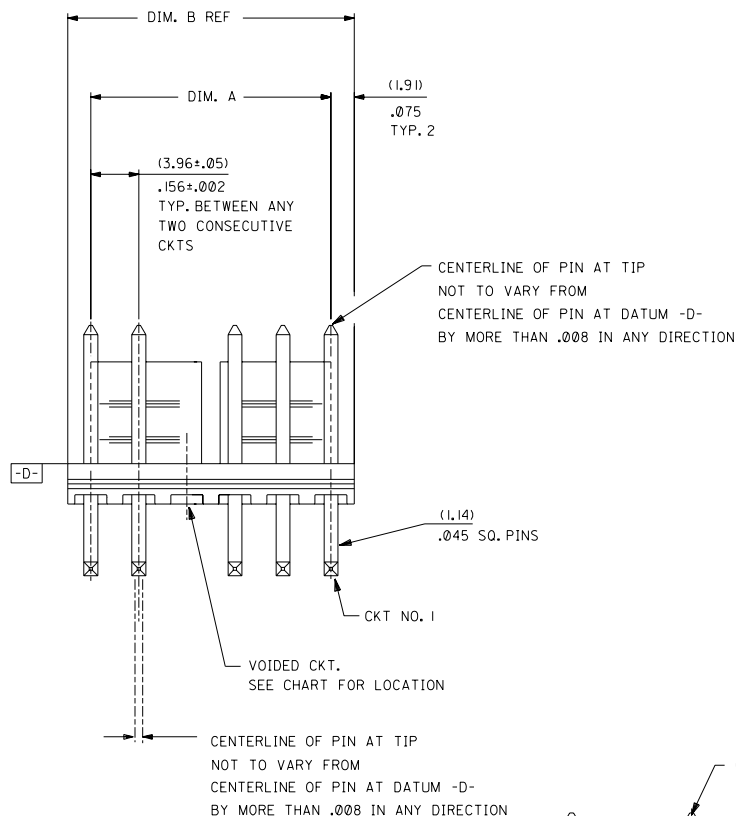

DETAIL A
(OPTIONAL PIN CUT-OFF TYPE VOID)

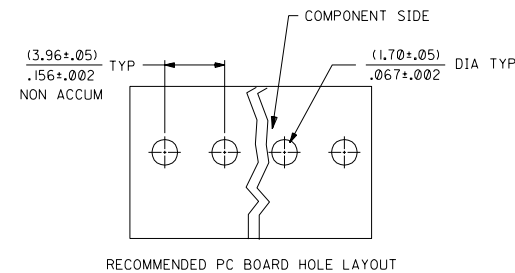

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96±.05) .156±.002	(7.77) .306
3	(7.92±.08) .312±.003	(11.73) .462
4	(11.89±.08) .468±.003	(15.70) .618
5	(15.85±.10) .624±.004	(19.66) .774
6	(19.81±.10) .780±.004	(23.62) .930
7	(23.77±.10) .936±.004	(27.58) 1.086
8	(27.74±.13) 1.092±.005	(31.55) 1.242
9	(31.70±.13) 1.248±.005	(35.51) 1.398
10	(35.66±.13) 1.404±.005	(39.47) 1.554
11	(39.62±.15) 1.560±.006	(43.43) 1.710
12	(43.59±.15) 1.716±.006	(47.40) 1.866
13	(47.55±.15) 1.872±.006	(51.36) 2.022
14	(51.51±.18) 2.028±.007	(55.32) 2.178
15	(55.47±.18) 2.184±.007	(59.28) 2.334
16	(59.44±.18) 2.340±.007	(63.25) 2.490
17	(63.40±.20) 2.496±.008	(67.21) 2.646
18	(67.36±.20) 2.652±.008	(71.17) 2.802

6	E
5	E2
4	E1
3	E
2	E
1	E2

MFG. SH. REV.

DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		INCH METRIC	
3 PLACE	±	2 PLACE	±	1 PLACE	±
3 PLACE	±	2 PLACE	±	1 PLACE	±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
DRWG. BY	SAMIEC	CHK'D. BY	PATEL	SCALE	1
APP'D. BY	LENZ	SCALE	1		
L.T.R.		REVISIONS			
E2		REL SHT 5 UCP2003-0755 11/6/2002 SAMIEC			
E1		REL SHT 4 UCR2002-0555 12/17/01 SAMIEC			
E		ADD PACK SPEC UCR2002-0087 7/26/01 SAMIEC			
L.T.R.		REVISIONS			

2.632x.000		2.80x	
▽ = 0		▽ = 0	
REVISE ONLY ON CAD SYSTEM			
TITLE			
FRICTION LOCK HEADER ASS'Y			
.156 Q BENT SQ PINS, W/O PEGS			
41792 SERIES DWG.			
MOLEX INCORPORATED		SHEET NO.	DATE
1.156x.111 .60532		1 OF 6	09/09/87
PART NO.	SEE CHART	DRWG. NO.	SDA-41792
FILE NAME	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		DRWG. NO.
S41792X1			SIZE

I3		I2		I1		I0		9		8		7		6		41792		4		3		2		1				
ENG. NO.		HEADER NO.		PIN NO.		PLATING		DIM. L		DIM. X		DIM. G GOLD		DIM. Y		DIM. Z		DIM. T TIN		DIM. W		NO OF CKTS		VOID CKTS		PACKAGING		
J	A-41792-0019/0035		41790-0002/0018		2161-37(501)		501		(27.94) 1.100		(11.43) .450		() OVERALL		(5.41) .213		(3.96) .156		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0036/0050		41790-0002/0018		2161-37(102)		102		(27.94) 1.100		(11.43) .450		() N/A		(5.41) .213		(3.96) .156		() OVERALL		90°		4-18		4		BULK PER PK-41792-002	
I	A-41792-0051/0067		41790-0002/0018		2161-64(102)		102		(29.85) 1.175		(13.28) .523		() N/A		(5.41) .213		(4.01) .158		() OVERALL		90°		2-18				BULK PER PK-41792-002	
	A-41792-0068/0084		41790-0002/0018		2161-64(501)		501		(29.85) 1.175		(13.28) .523		() OVERALL		(5.41) .213		(4.01) .158		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0085/0101		41790-0002/0018		2161-64(503)		503		(29.85) 1.175		(13.28) .523		() OVERALL		(5.41) .213		(4.01) .158		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0102/0118		41790-0002/0018		2161-37(122)		122		(27.94) 1.100		(11.43) .450		() N/A		(5.41) .213		(3.96) .156		() OVERALL		90°		2-18				BULK PER PK-41792-002	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru