# Standard Series Buccaneer

**Tried and tested, the Standard Buccaneer is one of our most popular waterproof connectors in the industry today. IP68 and IP69K rated, these environmentally sealed power connectors have been designed into a wide range of markets such as Industrial, Automotive and Marine, setting the gold standard for dust and waterproof circular connectors.**

- Flex Cable Connectors
- Water and dustproof to IP68 when mated with compatible connector
- 2, 3, 4, 6, 7, 9, 12, 25 Pole with leading Earth contact on 3 Pole Socket versions
- Screw, Crimp, Crimp/Solder Terminations depending on part code and number of Poles
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series In-Line Fle and Panel Mount Connectors
- Plug or Socket
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- Choice of cable acceptance 3.5mm-9mm diameter depending on part code (see data for details)
- Cable Support accessory 12237 available separately to provide extra support for smaller cables (5mm-9mm diameter)
- Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)

# Standard Series Buccaneer

## Flex Cable Connector

PX0731

- Mates with In-Line Flex or Panel Mounting Versions
- Screw Locking Ring
- Leading Earth on 3 Pole Connectors
- Standard Cable Acceptance (2 to 9 pole) 6-8mm, 3.5-9mm with Alternative Glands with Alternative Glands




| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0736/P | PX0736/S | 02 | Screw | Supplied Fitted |
| PX0731/P | PX0731/S | 03 | Screw | Supplied Fitted |
| PX0776/P | PX0776/S | 03 | Crimp | Supplied Loose |
| PX0748/P | PX0748/S | 04 | Screw | Supplied Fitted |
| PX0739/P | PX0739/S | 06 | Screw | Supplied Fitted |
| PX0745/P | PX0745/S | 07 | Screw | Supplied Fitted |
| PX0728/P | PX0728/S | 09 | Crimp | Supplied Loose |
| PX0794/P | PX0794/S | 12 | Crimp / Solder | Order Separately |
| PX0820/P | PX0820/S | 25 | Crimp / Solder | Order Separately |

## Inline Flex Cable Connector

PX0732

- Mates with Flex or Panel Mounting Versions
- Screw Locking Ring
- Leading Earth on 3 Pole Connectors
- Standard Cable Acceptance (2 to 9 Pole) 6-8mm, 3.5-9mm with Alternative Glands




| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0737/P | PX0737/S | 02 | Screw | Supplied Fitted |
| PX0732/P | PX0732/S | 03 | Screw | Supplied Fitted |
| PX0778/P | PX0778/S | 03 | Crimp | Supplied Loose |
| PX0749/P | PX0749/S | 04 | Screw | Supplied Fitted |
| PX0740/P | PX0740/S | 06 | Screw | Supplied Fitted |
| PX0746/P | PX0746/S | 07 | Screw | Supplied Fitted |
| PX0729/P | PX0729/S | 09 | Crimp | Supplied Loose |
| PX0795/P | PX0795/S | 12 | Crimp / Solder | Order Separately |
| PX0821/P | PX0821/S | 25 | Crimp / Solder | Order Separately |

# Standard Series Buccaneer

## Pre Wired Flex Cable Connector

PX0700

- Overmoulded Cable Assemblies
- Up to 14mm Dia Cable with PVC or PU Jackets
- PX0700 Flex Cable Connector
- Mates with In-Line Flex Connector & all Panel Connectors




## Front Panel Mounting Connector

PX0730/P

- Mates with Flex Cable Connector
- Front Panel Mounting
- Single Hole Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12 & 25

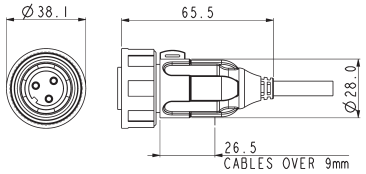


| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0735/P | PX0735/S | 02 | Screw | Supplied Fitted |
| PX0730/P | PX0730/S | 03 | Screw | Supplied Fitted |
| PX0779/P | PX0779/S | 03 | Crimp | Supplied Loose |
| PX0747/P | PX0747/S | 04 | Screw | Supplied Fitted |
| PX0738/P | PX0738/S | 06 | Screw | Supplied Fitted |
| PX0744/P | PX0744/S | 07 | Screw | Supplied Fitted |
| PX0727/P | PX0727/S | 09 | Crimp | Supplied Loose |
| PX0796/P | PX0796/S | 12 | Crimp / Solder | Order Separately |
| PX0822/P | PX0822/S | 25 | Crimp / Solder | Order Separately |

## Rear Panel Mounting Connector

PX0709/x/xx

- Mates with Flex Cable Connector
- Front Panel Mounting
- Single Hole Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12 & 25

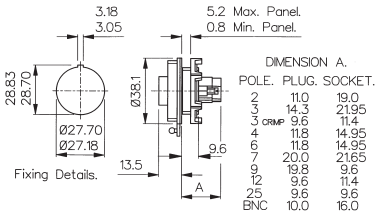


| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0709/P/02 | PX0709/S/02 | 02 | Screw | Supplied Fitted |
| PX0709/P/03 | PX0709/S/03 | 03 | Screw | Supplied Fitted |
| PX0708/P/03 | PX0708/S/03 | 03 | Crimp | Supplied Loose |
| PX0709/P/04 | PX0709/S/04 | 04 | Screw | Supplied Fitted |
| PX0709/P/06 | PX0709/S/06 | 06 | Screw | Supplied Fitted |
| PX0709/P/07 | PX0709/S/07 | 07 | Screw | Supplied Fitted |
| PX0708/P/09 | PX0708/S/09 | 09 | Crimp | Supplied Loose |
| PX0708/P/12 | PX0708/S/12 | 12 | Crimp / Solder | Order Separately |
| PX0708/P/25 | PX0708/S/25 | 25 | Crimp / Solder | Order Separately |

# Standard Series Buccaneer

## PCB Mounting Connector

PX0707/P/12

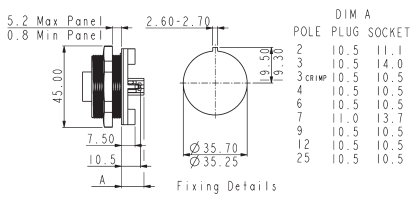- Mates with Flex Cable Connector
- Rear Panel Mounting
- No. Poles: 3, 4, 6, 9, 12 or 25
- Pin or Socket Versions
- Pre-loaded Gold Plated Contacts




| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0707/P/03 | PX0707/S/03 | 03 | PCB | Supplied Fitted |
| PX0707/P/04 | PX0707/S/04 | 04 | PCB | Supplied Fitted |
| PX0707/P/06 | PX0707/S/06 | 06 | PCB | Supplied Fitted |
| PX0707/P/09 | PX0707/S/09 | 09 | PCB | Supplied Fitted |
| PX0707/P/12 | PX0707/S/12 | 12 | PCB | Supplied Fitted |
| PX0707/P/25 | PX0707/S/25 | 25 | PCB | Supplied Fitted |

## Bulkhead Flange Mounting Connector

PX0756/S

- Mates with Flex Cable Connector
- Rear Panel Mounting
- No. Poles: 3, 4, 6, 9, 12 or 25
- Pin or Socket Versions
- Pre-loaded Gold Plated Contacts

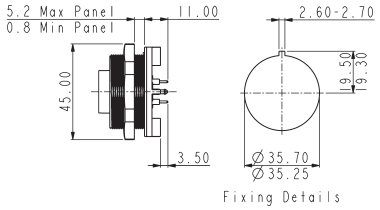


| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0757/P | PX0757/S | 02 | Screw | Supplied Fitted |
| PX0756/P | PX0756/S | 03 | Screw | Supplied Fitted |
| PX0787/P | PX0787/S | 03 | Crimp | Supplied Loose |
| PX0761/P | PX0761/S | 04 | Screw | Supplied Fitted |
| PX0758/P | PX0758/S | 06 | Screw | Supplied Fitted |
| PX0760/P | PX0760/S | 07 | Screw | Supplied Fitted |
| PX0762/P | PX0762/S | 09 | Crimp | Supplied Loose |
| PX0798/P | PX0798/S | 12 | Crimp/Solder | Order Separately |
| PX0823/P | PX0823/S | 25 | Crimp/Solder | Order Separately |

# Standard Series Buccaneer

**Low Profile Flange Mounting Connector**

PX0765/S

- Screw Flange Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12 & 25
- Mates with Flex Cable Connector
- Supplied with Sealing Gasket & Screw Sealing Grommets




| Pin Contacts | Socket Contacts | Pole Count | Termination | Contacts |
|---|---|---|---|---|
| PX0764/P | PX0764/S | 02 | Screw | Supplied Fitted |
| PX0765/P | PX0765/S | 03 | Screw | Supplied Fitted |
| PX0781/P | PX0781/S | 03 | Crimp | Supplied Loose |
| PX0766/P | PX0766/S | 04 | Screw | Supplied Fitted |
| PX0767/P | PX0767/S | 06 | Screw | Supplied Fitted |
| PX0768/P | PX0768/S | 07 | Screw | Supplied Fitted |
| PX0769/P | PX0769/S | 09 | Crimp | Supplied Loose |
| PX0797/P | PX0797/S | 12 | Crimp/Solder | Order Separately |
| PX0824/P | PX0824/S | 25 | Crimp/Solder | Order Separately |

# Standard Series Buccaneer

## Sealing Cap and Assembling Tool

PX0734
PX0733

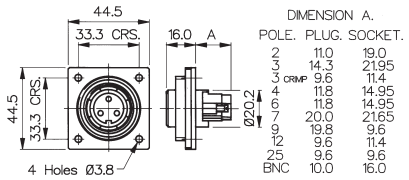- Maintains IP68 Rating of Unmated Panel, Bulkhead & Flange Mount Connectors
- PX0734 for Flex Cable Connector
- PX0733 for In-line Flex Front
- PX0711 for PCB & Rear Panel Mount Connectors




## Rear of Panel Back Shell

PX0799

- Environmental Seal for Panel Rear
- Standard Cable Acceptance 6-8mm, 3.5 to 9mm with Alternative Glands
- For Front Panel Mounting Connectors
- Replaces Mounting Nut in Panel Connector

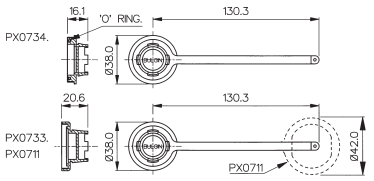


## PVC Insulation Boot

PNo. 12855

12855 for panel mounting types only.

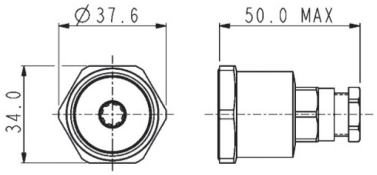


## Cable Support Accessory

PNo. 12237

- Gives Extra Support to the Cable
- Suitable for 5-7mm and 7-9mm Cable Diameters

12237 provides additional cable support. Suitable for 5-7mm and 7-9mm cables.



# Standard Series Buccaneer

## Spring Loaded Sealing Cap

PX0713

- IP54 rated
- Spring loaded
- Clip shut to seal
- For use with front of panel mounting connector types




## Coloured Contact Inserts

PX0941

- With or Without Matching Gland Nut
- Positive Visual Identification
- Available In:

  Black, Blue, Green, Grey,
  Light Grey, Red, White & Yellow
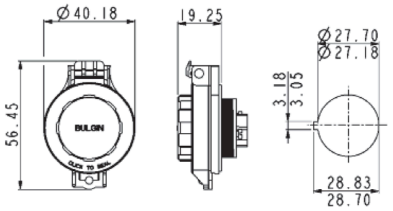
| Part No. | Suffix Colour |
|---|---|
| Blank | Black |
| BL | Blue |
| GN | Green |
| GY | Grey |
| LG | Light Grey |
| RD | Red |
| WH | White |
| YL | Yellow |

**Insert / Gland Nut Combinations**

**1** = Insert and Gland Nut Coloured

**2** = Insert Only Coloured

**Example:**

**PX0731/P/YL1** = Yellow Insert and Gland Nut

# Standard Series Buccaneer

## Contacts for 12 & 25 Pole Inserts

12 & 25 Way Contacts

- Crimp or Solder Pins & Sockets
- Gold Plated
- Current Ratings:

  12 Way: 5A, 50V
  25 Way: 1A, 50V

| Part No. | | Description |
|---|---|---|
| **Crimp:** | **Solder:** | **Contacts (25 Pole) / Supplied In Packs of 10:** |
| SA3180 | SA3180/1 | Pins |
| SA3179 | SA 3179/1 | Sockets |
| | | **Contacts (12 Pole) / (Supplied In Packs of 10:** |
| SA3348 | SA3348/1 | Pins |
| SA3347 | SA3347/1 | Sockets |

## Assembly Tools

14025
13027

- Crimp Tools for 3, 9, 12 & 25 Pole Crimp Contacts
- Insertion / Extraction Tool for 25 Pole Contacts




| Part No. | Description |
|---|---|
| 14232 | Crimp Tool (3 pole) |
| 13826 | Crimp Tool (9 pole) |
| 14025 | Crimp Tool (12 pole) |
| 14025/1AMP | Crimp Tool (25 pole) |
| 14232/1 | Positioner (3 pole) |
| 14025/5AMP | Positioner (12 pole) |
| 13027/3 | Insertion / Extraction Tool (3 Pole) |
| 13027/1 | Insertion / Extraction Tool (12 Pole) |
| 13027 | Insertion / Extraction Tool (25 Pole) |

# Standard Series Buccaneer

## Cable Glands

SA3253

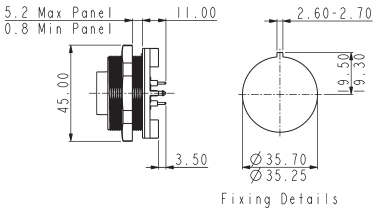⬡ Pack of Alternative Cable Glands to Suit Cables from 3.5 to 9mm Dia.

## Cable Acceptance - Alternatives

| Gland Diameter: | Gland Part: | Gland Colour: | Additional Suffix: |
|---|---|---|---|
| 6-8mm | 12023 | Black | Standard for 2-12 Pole |
| 3.5-5mm | SA3426 | Grey | Suffix /04† |
| 5-7mm<br>7-9mm | 12023/1<br>12023/2 | White<br>Yellow | Suffix /05<br>Suffix /07* |
| Gland Pack | SA3253 | Pack of 3 Glands to Suit Cables 3.5-5mm, 5-7mm & 7-9mm dia† | |

## Cable Acceptance - Standard As Supplied

| No. Contacts: | Cable Diameter or Type: |
|---|---|
| 2-12 Pole | 6-8mm |
| 25 Pole | 7-9mm |

**Note:**

7-9mm Gland Standard for 25 Way, No Suffix Required.

† Includes Additional Black Gland Cage for 3.5-5mm Dia. Cable Range.

To Order Connector with Alternative Cable Gland add Suffix to Part No. e.g. PX0731/P/07 = PX0731 3 Pin Connector with Cable Gland to Suit 7-9mm Dia. Cable.

# Standard Series Buccaneer

## Technical Overview Data

### Electrical:

| | | | | | | |
|---|---|---|---|---|---|---|
| **No. Poles:** | 2, 3 | 4 | 6, 7 | 9 | 12 | 25 |
| **Current Rating:** | | | | | | |
| **VDE:** | 12A | 10A | 5A | 5A | 5A | 1A |
| **UL, CSA:** | 10A | 6A | 3A | 5A | 5A | 1A |
| **Voltage Rating (ac/dc):** | 277V | 277V | 277V | 150V | 50V | 50V |

**Contact Resistance:**
<10mΩ (2-9 Pole)
<5mΩ (12 Pole)
<5mΩ (25 Pole)

**Insulation Resistance:** $>10^4$MΩ @ 500V d.c. (2-9 Pole)

**AC Breakdown voltage:**
4kV Pole - Pole (2-9 Pole)
6kV Poles - Panel (Low Profile Flange and Panel Types – 2-9 Pole)
7.5kV Poles - Panel (Other Types – 2-9 Pole)

**Operating Temp. Range:** –20°C to +70°C

**Approvals**

| | |
|---|---|
| **UL** | E93288 and E337507 |
| **CSA** | LR80968-30 |
| **VDE** | 40023148 |

Overmoulded Cable Assemblies Approvals to Customer Requirements.

### Materials:

| | |
|---|---|
| **Body Mouldings:** | Glass Filled Polyamide UL94HB |
| **Inserts (2-25 pole):** | Polyamide UL94V-0 |
| **PX0707:** | Polyamide UL94V-0 |
| **PX0708:** | Polyamide UL94V-0 |
| **PX0709:** | Polyamide UL94V-0 |

**Overmoulded Types**

| | |
|---|---|
| **Body Mouldings:** | Polyurethane |
| **Flammability Rating:** | UL94V-HB |

**Contacts**

| | |
|---|---|
| **Screw Terminal:** | Brass, Nickel Plated |
| **Crimp (9 pole):** | Copper Alloy, Tin Plated |
| **Crimp / Solder (12+25 Pole):** | Copper Alloy, Gold Plated (0.1µm on Nickel) |
| **BNC Inserts:** | Brass, Nickel Plated |
| **BNC Contacts:** | Brass, Silver Plated |
| RoHS | Compliant |

### Mechanical:

**Sealing:**
IP69K, Tested in Accordance with DIN 40050/Part 9 IP6k9k

IP68, EN 60529:1992+A2:2013 Tested @ 1.054kg/sq.cm. (15lb/sq.in.) 10m Depth for 2 Weeks.

EN 60529:1992 +A2:2013 Tested @ 9.84kg/sq.cm. (140lb/sq.in.) 100m Septh for 12 Hours.

**Salt Mist:** EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

**Cable Acceptance**

| | |
|---|---|
| **2-12 Pole - Standard Gland:** | 6-8mm Dia |
| **2-12 Pole - Alternative Glands:** | 3.5-9mm Dia |
| **25 Pole - Standard Gland:** | 7-9mm Dim |
| **25 Pole - Alternative Glands:** | 3.5-7mm Dim |

**Contact Accommodation**

| | |
|---|---|
| **2 & 3 Pole Screw Terminals:** | 4mm2 (12AWG) Max |
| **3 Pole Crimp:** | 1.0-1.5mm2 (14-18AWG) Max |
| **4, 6 & 7 Pole:** | 1.5mm2 (16AWG) Max |
| **9 Pole:** | 0.12-0.21mm2 (24-26AWG) |
| **12 Pole:** | 0.32mm2 (22-26AWG) Max |
| **25 Pole:** | 0.12-0.21mm2 (24-26AWG) |

**Terminations**

| | |
|---|---|
| **2-7 Pole:** | Screw Terminals |
| **3 Pole:** | Screw Terminals & Crimp |
| **9 Pole:** | Crimp Contacts |
| **12 Pole:** | Crimp & Solder Contacts |
| **25 Pole:** | Crimp & Solder Contacts |

| | |
|---|---|
| **Tightening Torques:** | Gland Nut: 1.13Nm (10lbf.in.) |
| **Flex Mounting / In-Line:** | Rear Fixing Nut: 1.7Nm (15lbf.in.) |
| **Panel Mounting:** | Front Fixing Nut: 1.4Nm (12.4lbf.in.) |
| **Surface / Bulkhead and Low Profile Flange Mounting:** | 4 Fixing Screws (using Washers Supplied) 0.34Nm (3lbf.in.) |
| **Sealings Caps / Locking Ring:** | 1.13Nm (10lbf.in.) |
| **Rear Thread, Front Panel Connector:** | M27 x 1.0-6H |
| **Thread, Front Panel Connector:** | M35 x 1.0-6H |

# Standard Series Buccaneer

| PX0xxx | / | X | / | XX | / | XX | / | X |
|---|---|---|---|---|---|---|---|---|

**Body Styles**

**Contacts Type**

**P** = Pin

**S** = Socket

**Cable Acceptance or PCB / Rear Panel Mounting**

Flex Cable and In-line Flex Connectors cable acceptance use:

**Blank** = 6-8mm (Black) standard for 2-12 pole

**04** = 3.5-5mm (Grey)
**05** = 5-7mm (White)
**07** = 7-9mm (Yellow)
(standard for 25 way, no suffix required)

PCB (PX0707) and Rear Panel Mount connectors (PX0708 and PX0709) use:

**02** = 2 pole
**03** = 3 pole
**04** = 4 pole
**06** = 6 pole
**07** = 7 pole
**09** = 9 pole
**12** = 12 pole
**25** = 25 pole

Front Panel, Bulkhead and Flange Mount - not required:

**Insert / Gland Nut Colour**

**Blank** = Black

**BL** = Blue

**GN** = Green

**GY** = Grey

**LG** = Light Grey

**RD** = Red

**WH** = White

**YL** = Yellow

**Insert / Gland Nut Colour Combination**

**1** = Insert and Gland Nut Coloured

**2** = Insert only Coloured

**Example:**

**PX0707/P/06 =** PCB Panel connector, pin contacts, 6 pole
**PX0731/S =** Flex Cable connector, socket contacts, 3 pole
**PX0732/P/07/BL2 =** In-Line Flex Cable connector, pin contacts, 3 pole, 7-9mm cable acceptance, blue insert

**PCB Layouts:**

**Sockets:**
Contact Nos viewed from rear of panel




PX0707/S/03




PX0707/S/04




PX0707/S/06




PX0707/S/09




PX0707/S/12




PX0707/S/25

**Pins:**
Contact Nos viewed from rear panel rear of panel




PX0707/P/03




PX0707/P/04




PX0707/P/06




PX0707/P/09




PX0707/P/12




PX0707/P/25

# Sealed Inline Cable Joiner

**Cable Joiner**

PX0777

- Standard Cable Acceptance 6-8mm
- Cable Range 3.5-9mm (Using Alternative Glands)
- Supplied with 4, 6 or 8 Way
- Terminal Block
- Available Moulded in Black or Orange




## Technical Overview Data

| Specifications: | PX0777 | PX0777/4POLE, 6POLE, 8POLE |
|---|---|---|
| **Rating:** | 16A, 250V a.c. | 10A, 250V a.c. |
| **Wire Termination:** | 3 Way Terminal Block | 4, 6, 8 Way Terminal Block |
| **Conductor Accommodation:** | 2.5mm² Max (14AWG) | 1.5mm² Max (16AWG) |
| **Cable Acceptance:** | 6-8mm Dia<br>Alternative Glands available on request | 6-8mm Dia<br>Alternative Glands available on request |
| **Material:** | Glass Filled Polyamide UL94-HB | Glass Filled Polyamide UL94-V0 |
| **Sealing:** | IP68 to BSEN 60529 : 1992<br>1.054kg/sq.cm. (15lbs/sq.in.)<br>10m Depth for 2 Weeks | IP68 to BSEN 60529 : 1992<br>1.054kg/sq.cm. (15lbs/sq.in.)<br>10m Depth for 2 Weeks |
| | IP69k to DIN 40050-9 | IP69k to DIN 40050-9 |
| **Salt Mist:** | EN60068-2-52 Test Kb Salt Mist (Cyclic)<br>Marine Severity Level 1 | EN60068-2-52 Test Kb Salt Mist (Cyclic)<br>Marine Severity Level 1 |
| **Operating Temp. Range:** | –20°C to +70°C | –20°C to +70°C |
| **Colour:** | Black<br>Orange (Add /OR to PNo.) | Black<br>Orange (Add /OR to PNo.) |
| RoHS | Compliant | Compliant |

**POLE Configurations:**

| PX0777 / | XPOLE / | XX / | XX |
|---|---|---|---|
| **Part No.** | **Blank** = 3 Pole | **Blank** = 6-8mm | **Blank** = Black |
| | **4POLE** = 4 Pole | **04** = 3.5-5mm | **OR** = Orange |
| | **6POLE** = 6 Pole | **05** = 5-7mm | |
| | **8POLE** = 8 Pole | **07** = 7-9mm | |

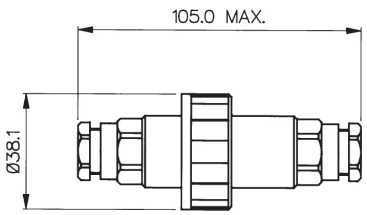**Example:**

**PX0777** = 3 Pole 6-8mm Black
**PX0777/04** = 3 Pole 3.5-5.0mm Black
**PX0777/04/OR** = 3 Pole 3.5-5.0mm Orange

**PX0777/4POLE** = 4 Pole 6-8mm Black
**PX0777/6POLE/04** = 6 Pole 3.5-5.0mm Black
**PX0777/8POLE/04/OR** = 8 Pole 3.5-5.0mm Orange

# PX0777 Wiring & Assembly Instructions




**1.** Strip wires to dimensions shown.




**Wire Stripping Details**

**2.** Assemble components parts onto cable as shown, then connect wires to terminal block.

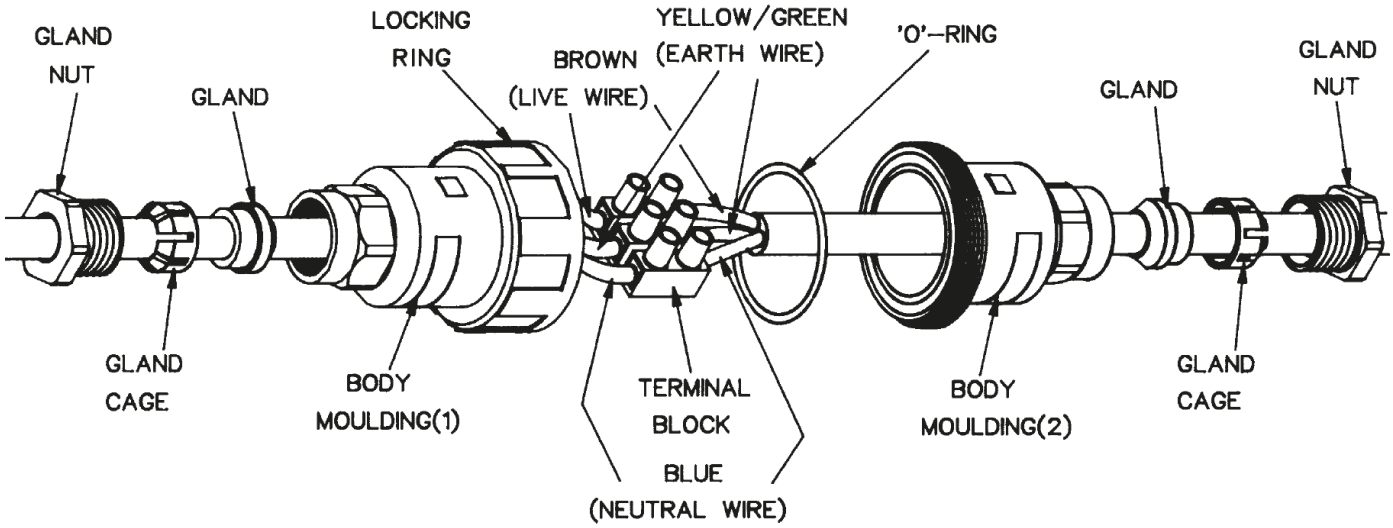**ENSURING WIRES CONNECTED INTO ONE SIDE OF TERMINAL BLOCK MATCH WIRES CONNECTED INTO THE OTHER SIDE.**

**E.g. Brown to Brown (Live)**
**Blue to Blue (Neutral)**
**Green / Yellow to Green / Yellow (Earth)**

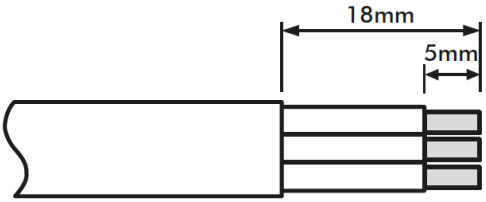**3.** Bring the two body mouldings together ensuring the 'O' ring is correctly located in groove then lock together with locking ring, ensure ring is fully tightened.

Put gland cage over gland and push fully home into its appropriate body then fully tighten gland nuts.

**4.** To ensure a good seal, all surfaces must be completely free of dust, grease or any other contamination.

**THIS CABLE CONNECTOR IS SUITABLE FOR USE WITH LOADS NOT EXCEEDING 16 AMPS USING 1.5mm2 CABLE**

**ALWAYS USE WITH SUPPLY PROTECTED BY AN RCD, IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN.**

**DANGER**

DISCONNECT MAINS SUPPLY BEFORE DISMANTLING CONNECTOR

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***