



# PXFC191507FC

## Thermally-Enhanced High Power RF LDMOS FET 150 W, 28 V, 1805 – 1990 MHz

### Description

The PXFC191507FC is a 150-watt LDMOS FET intended for use in multi-standard cellular power amplifier applications in the 1805 to 1990 MHz frequency band. Features include input and output matching, high gain and thermally-enhanced package with earless flanges. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

PXFC191507FC  
Package H-37248G-4/2

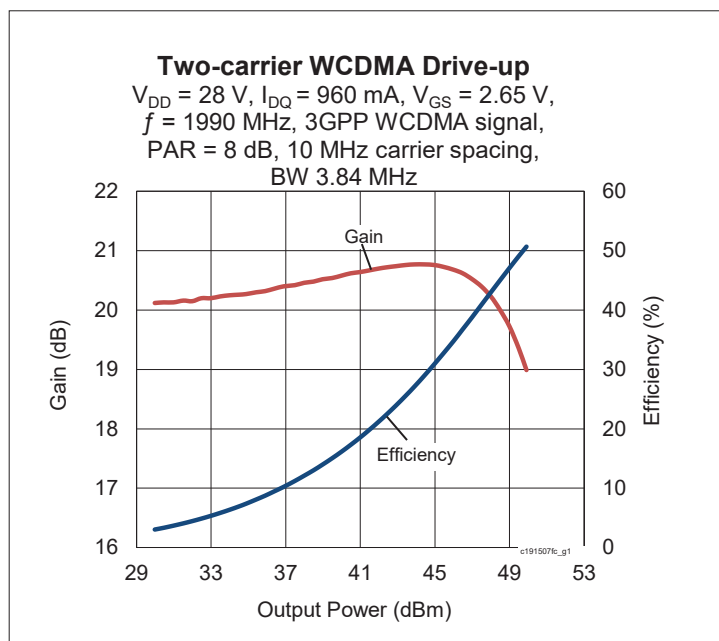

### Features

- Broadband internal input and output matching
- Typical Pulsed CW performance, 1990 MHz, 28 V, 10  $\mu\text{s}$  pulse width, 10% duty cycle, class AB test
  - Output power at  $P_{1dB}$  = 140 W
  - Efficiency = 54%
  - Gain = 19.5 dB
- Typical single-carrier WCDMA performance, 1990 MHz, 28 V, 10 dB PAR @ 0.01% CCDF, Test Model 1 with 16DPCH
  - Output power = 32 W avg
  - Efficiency = 34%
  - Gain = 20 dB
  - ACPR = -31 dBc @ 5 MHz
- Capable of handling 10:1 VSWR @ 28 V, 150 W (CW) output power
- Integrated ESD protection : Human Body Model, Class 1C (per JESD22-A114)
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Two-carrier WCDMA Specifications (tested in Wolfspeed production test fixture)

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 960\text{ mA}$ ,  $P_{OUT} = 32\text{ W avg}$ ,  $f_1 = 1980\text{ MHz}$ ,  $f_2 = 1990\text{ MHz}$ , 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	19	20.5	—	dB
Drain Efficiency	$\eta_D$	29	31	—	%
Intermodulation Distortion	IMD	—	-33	-31	dBc

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!



**DC Characteristics** (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	0.05	1	$\mu\text{A}$
	$V_{DS} = 63\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.05	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 26\text{ V}, I_{DQ} = 960\text{ mA}$	$V_{GS}$	2.3	2.6	2.9	V
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1	$\mu\text{A}$





**Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	65	V
Gate-Source Voltage	$V_{GS}$	-6 to +10	V
Operating Voltage	$V_{DD}$	0 to +32	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}, 140\text{ W CW}$ )	$R_{\theta JC}$	0.43	$^{\circ}\text{C/W}$

**Ordering Information**


Type and Version	Order Code	Package Description	Shipping
PXFC191507FC V1 R0	PXFC191507FC-V1-R0	H-37248G-4/2, earless flange	Tape & Reel, 50 pcs
PXFC191507FC V1 R250	PXFC191507FC-V1-R250	H-37248G-4/2, earless flange	Tape & Reel, 250 pcs

**Typical Performance** (data taken in a production test fixture)

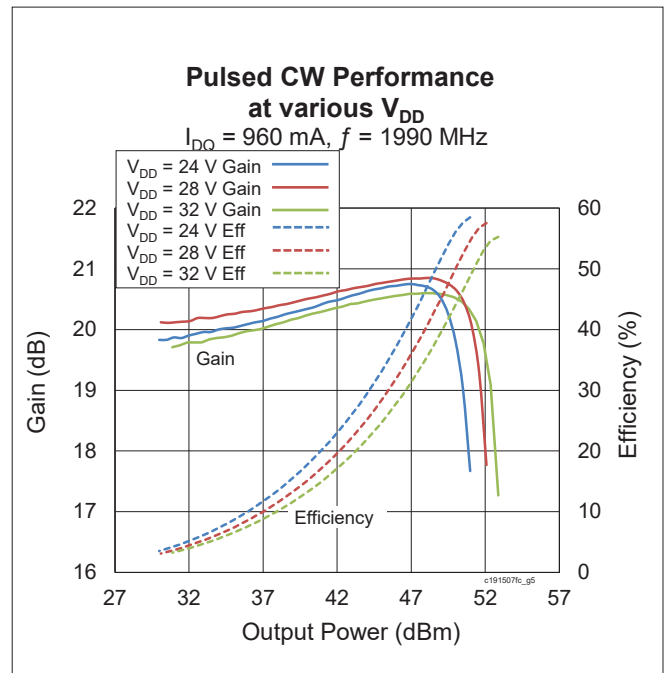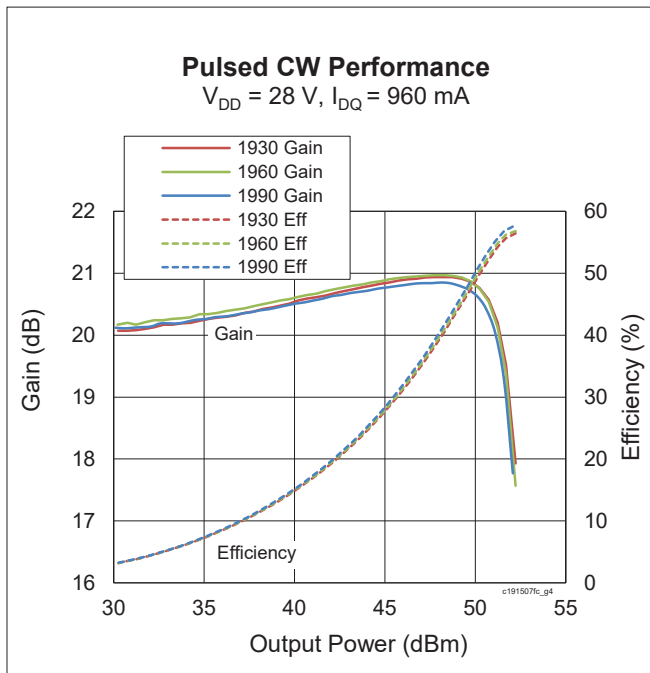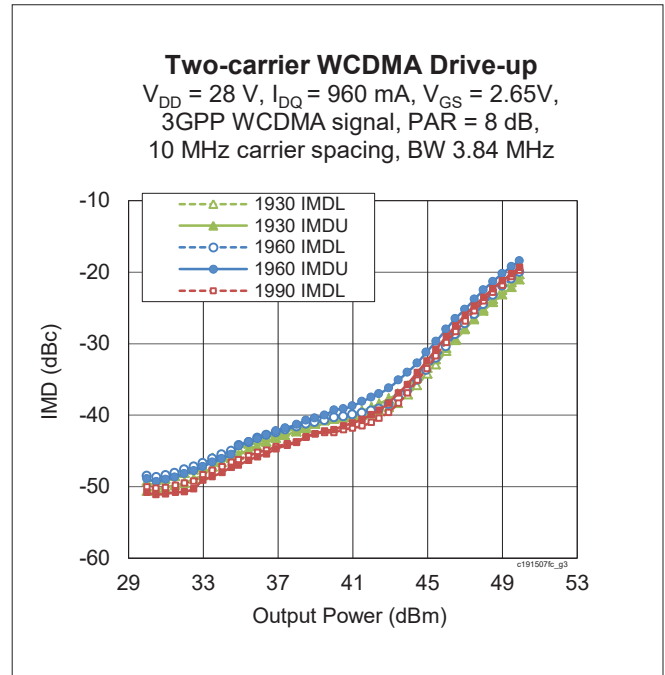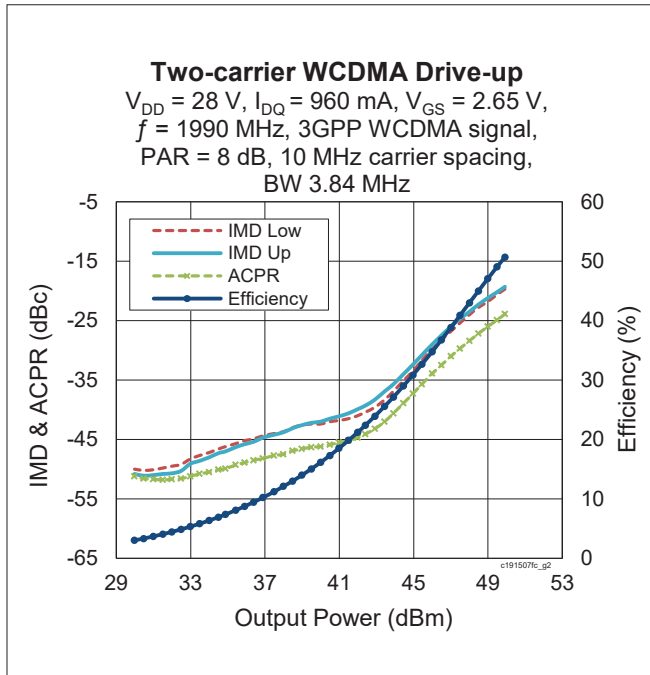




**Typical Performance** (cont.)

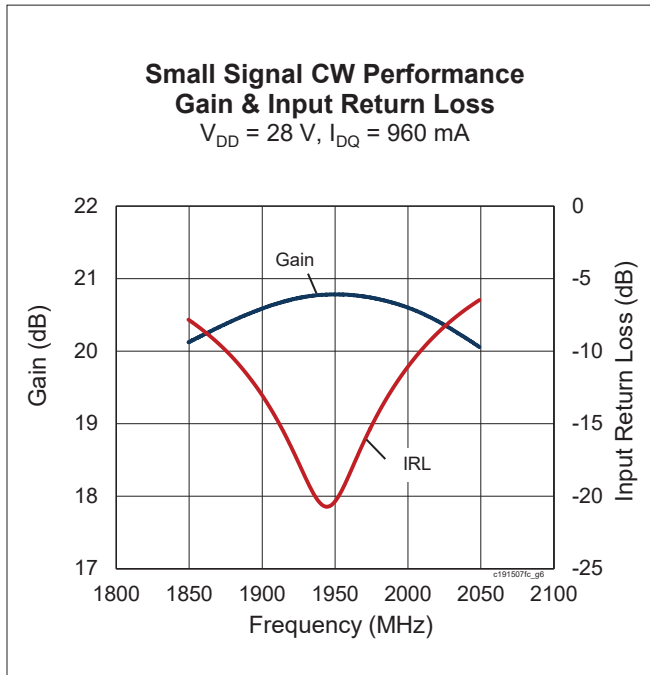

**Broadband Circuit Impedance**

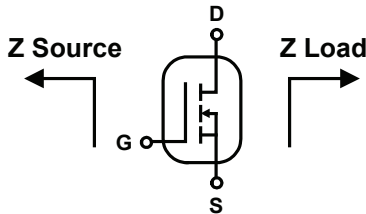

Freq [MHz]	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
1930	1.34	-4.30	1.55	-3.14
1960	1.28	-4.15	1.54	-2.99
1990	1.25	-4.04	1.52	-2.86


**Load Pull Performance**

**Main Side Load Pull Performance** – Pulsed CW signal: 100  $\mu\text{s}$ , 10% duty cycle,  $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 960\text{ mA}$

Freq [MHz]	Zs [ $\Omega$ ]	P <sub>1dB</sub>									
		Max Output Power					Max PAE				
		ZI [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]	ZI [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]
1805	1.00 - j3.39	1.36 - j2.81	18.2	52.30	170	58.1	2.82 - j2.46	20.4	50.40	110	65.7
1880	1.38 - j3.80	1.26 - j3.35	17.8	52.10	164	54.7	2.48 - j2.33	20.2	50.50	112	64.8
1930	1.88 - j4.65	1.14 - j3.38	17.6	52.10	162	52.1	2.25 - j2.06	20.1	50.20	104	63.7
1990	2.85 - j4.62	1.31 - j3.40	18.4	52.00	157	56.4	1.81 - j2.40	19.9	50.60	116	62.8



Reference Circuit , 1930 – 1990 MHz

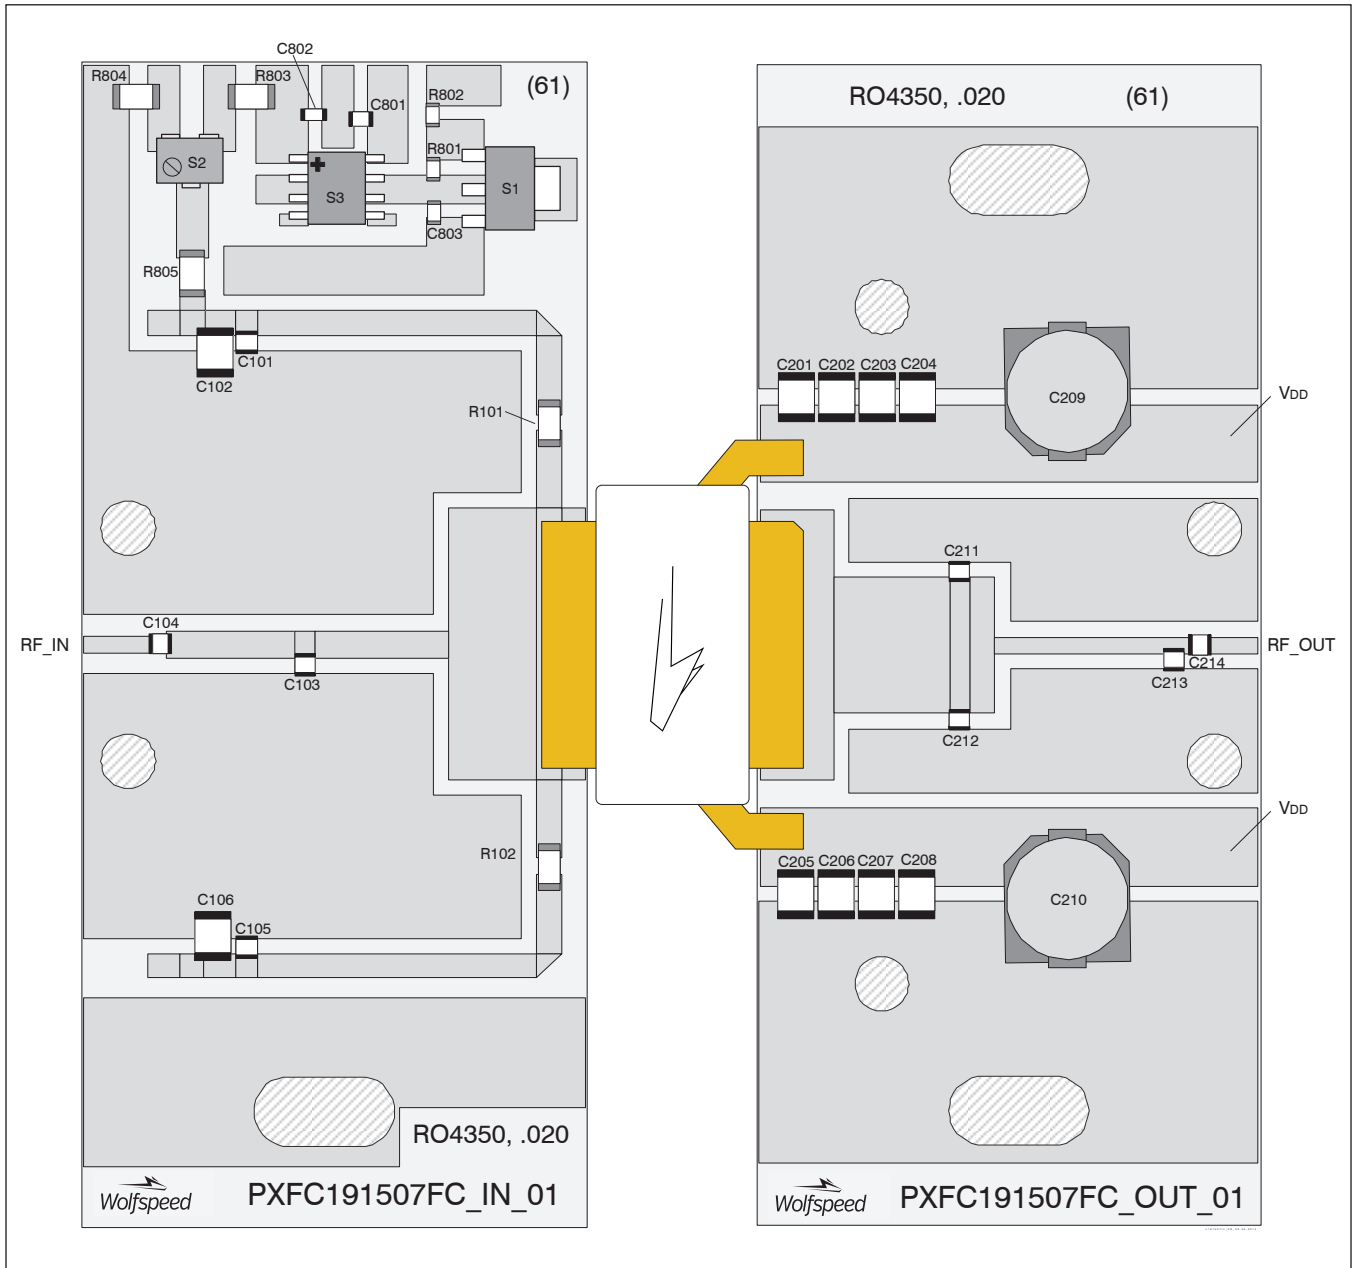

Reference circuit assembly diagram (not to scale)



**Reference Circuit** (cont.)


**Reference Circuit Assembly**

DUT	PXFC191507FC V1
Test Fixture Part No.	LTN/PXFC191507FC V1
PCB	Rogers 4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$ , $f = 1930 - 1990$ MHz
Find Gerber files for this test fixture on the Wolfspeed Web site at <a href="http://www.wolfspeed.com/RF">www.wolfspeed.com/RF</a>	

**Components Information**

Component	Description	Suggested Manufacturer	P/N
<b>Input</b>			
C101, C104, C105,	Capacitor, 33 pF	ATC	ATC800A330JT250
C102, C106	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
C103	Capacitor, 1.0 pF	ATC	ATC800A1R0BT250
C801, C802, C803	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R101, R102, R805	Capacitor, 10 ohms	Panasonic Electronic Components	ERJ-8GEYJ100V
R801	Resistor, 1200 Ohm	Panasonic Electronic Components	ERJ-3GEYJ122V
R802	Resistor, 1300 Ohm	Panasonic Electronic Components	ERJ-3GEYJ132V
R803, R804	Capacitor, 100 ohms	Panasonic Electronic Components	ERJ-8GEYJ101V
S1	Transistor	Infineon Technologies	BCP56
S2	Potentiometer, 2k $\Omega$	Bourns Inc.	3224W-1-202E
S3	Voltage Regulator	Texas Instruments	LM7805
<b>Output</b>			
C201, C202, C203, C204, C205, C206, C207, C208	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
C209, C210	Capacitor, 220 $\mu$ F	Panasonic Electronic Components	EEE-FP1V221AP
C211, C212, C213	Capacitor, 0.3 pF	ATC	ATC800A0R3BT250
C214	Capacitor, 33 pF	ATC	ATC800A330JT250

Package Outline Specifications

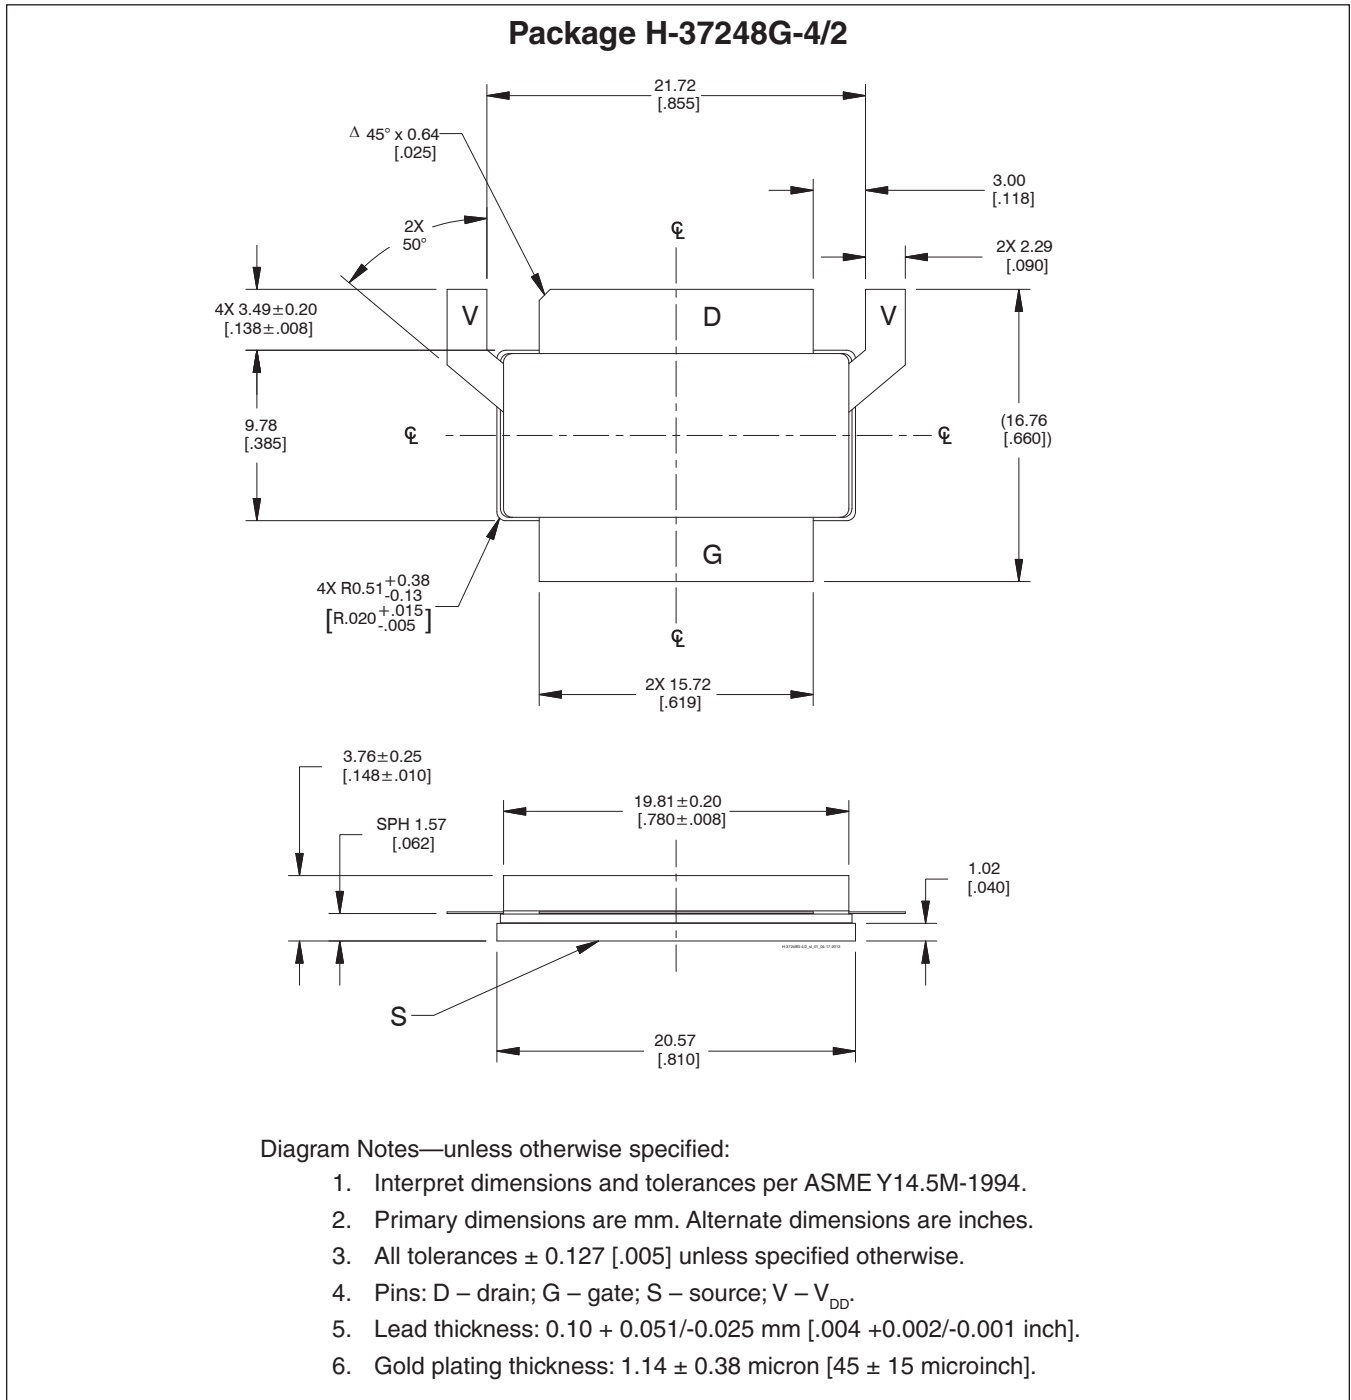

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2014-04-11	Advance	All	Data Sheet reflects advance specification for product development
02	2014-08-26	Production	All All	Data Sheet reflects released product specification Revised all data and includes final specs, typical performance graphs, loadpull, reference circuit
02.1	2016-06-22	Production	2	Updated ordering information
03	2018-06-25	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)