

## Setting Up the Evaluation Board for the ADCLK950

### PACKAGE LIST

**Evaluation board with ADCLK950 component installed**

**Applicable documents (schematic, layout)**

### GENERAL DESCRIPTION

This user guide describes how to set up and use the evaluation board for the [ADCLK950](#). The ADCLK950 data sheet should be used in conjunction with this user guide.

The data sheet contains full technical details about the specifications and operation of this device.

The ADCLK950 is a very high performance clock fanout buffer. The evaluation board is fabricated using a high quality Rogers dielectric material. Transmission line paths are kept as close to  $50 \Omega$  as possible.

### DIGITAL PICTURE OF EVALUATION BOARD

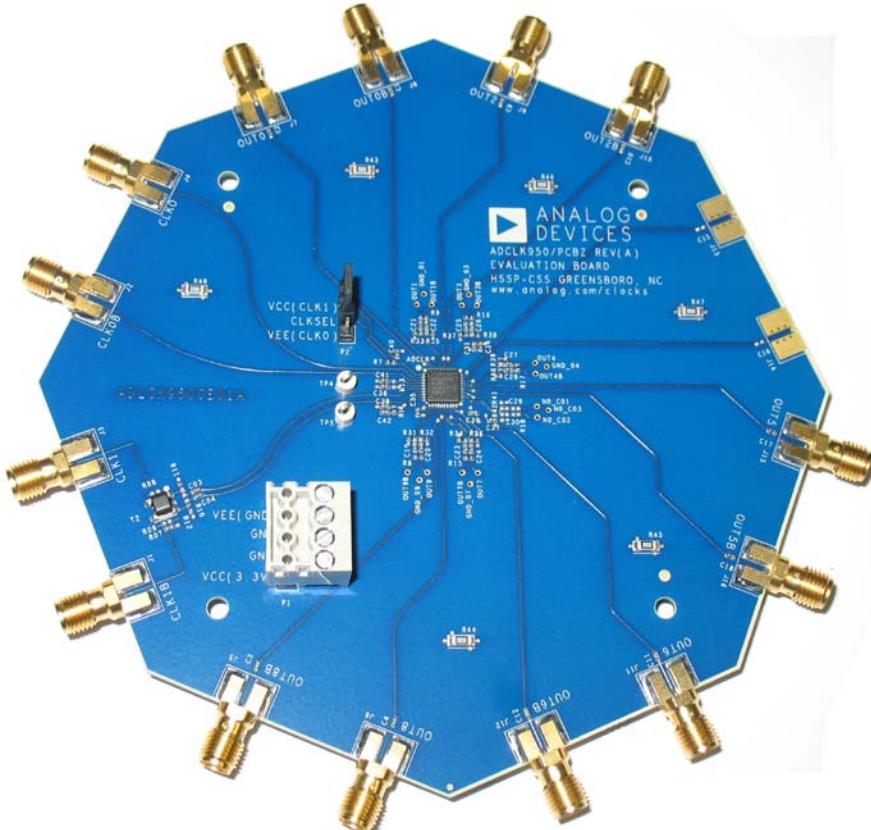


Figure 1. ADCLK950 Evaluation Board

## TABLE OF CONTENTS

Package List .....	1	Recommended Board Setup .....	3
General Description .....	1	Clock Outputs.....	4
Digital Picture of Evaluation Board .....	1	Evaluation Board Schematic and Artwork.....	5
Revision History .....	2	ESD Caution.....	8
Evaluation Board Hardware .....	3		

## REVISION HISTORY

11/09—Revision 0: Initial Version

## EVALUATION BOARD HARDWARE

### RECOMMENDED BOARD SETUP

The recommended setup for the ADCLK950 evaluation board is shown in Figure 2.  $V_{CC}$  is set to 3.3 V and  $V_{EE}$  is set to GND. The CLKSEL jumper (P2) is provided to select the desired input configuration.

On the evaluation board, Input CLK0 and Input CLK0 are set up for dc-coupled operation to the [ADCLK950](#) via J2 and J4. This input configuration requires the user to provide the appropriate ac swing and common-mode voltage to both inputs. Refer to the ADCLK950 data sheet for input specifications.

CLK1 is set up to evaluate with a single-ended source via the balun on the evaluation board. In addition, series capacitors in the path provide ac-coupled inputs to the ADCLK950. The common-mode voltage for both inputs is provided by tying

$V_{REF1}$  and  $V_{T1}$  together. This connection is made with R14 installed at the factory.

The range of the peak-to-peak input voltage swing at CLK1 is 0.2 V p-p to 1.7 V p-p. Note that output jitter performance is degraded by an input slew rate, as shown in the data sheet.

**Table 1. Basic Equipment Required**

Quantity	Description
1	Single power supply
1	Signal source
1	High bandwidth oscilloscope
1	High bandwidth differential probe (optional)
4	Matched high speed cables

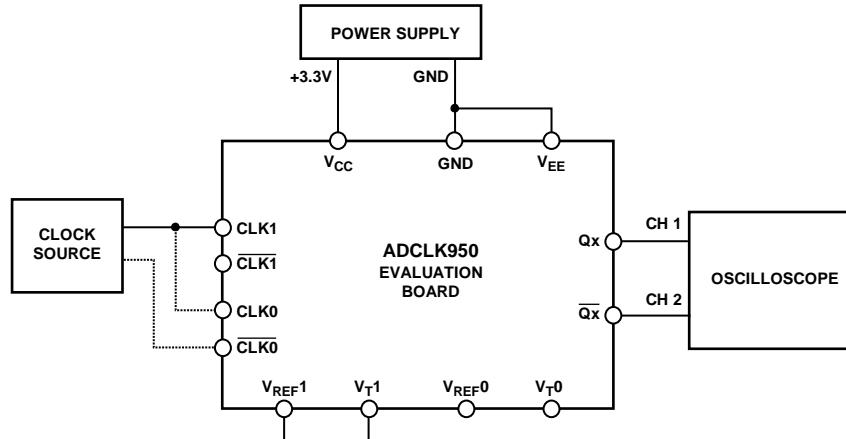


Figure 2. Recommended Setup for Device Evaluation

08666-002

## CLOCK OUTPUTS

The ADCLK950 has 10 differential outputs. The five even-ordered differential clock outputs on the evaluation board are biased to GND via  $200\ \Omega$  and ac-coupled to the SMAs. From the SMAs, use matched  $50\ \Omega$  coaxial cables into the oscilloscope for evaluation. The five odd-ordered differential outputs on the evaluation board are not launched. Use a high bandwidth differential probe and oscilloscope close to the ADCLK950 device for evaluation. See the evaluation board schematic in Figure 4 for more details.

**Table 2. Power Connections via P1**

Label	ADCLK950
GND	Connect to GND
VCC	Connect to 3.3 V
VEE	Connect to GND

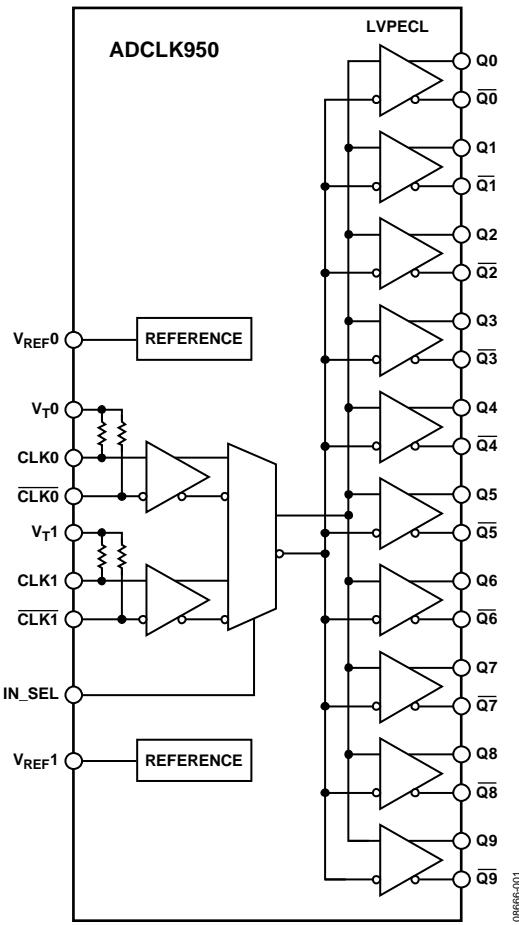


Figure 3. ADCLK950 1:10 Clock/Data Buffer Block Diagram

# EVALUATION BOARD SCHEMATIC AND ARTWORK

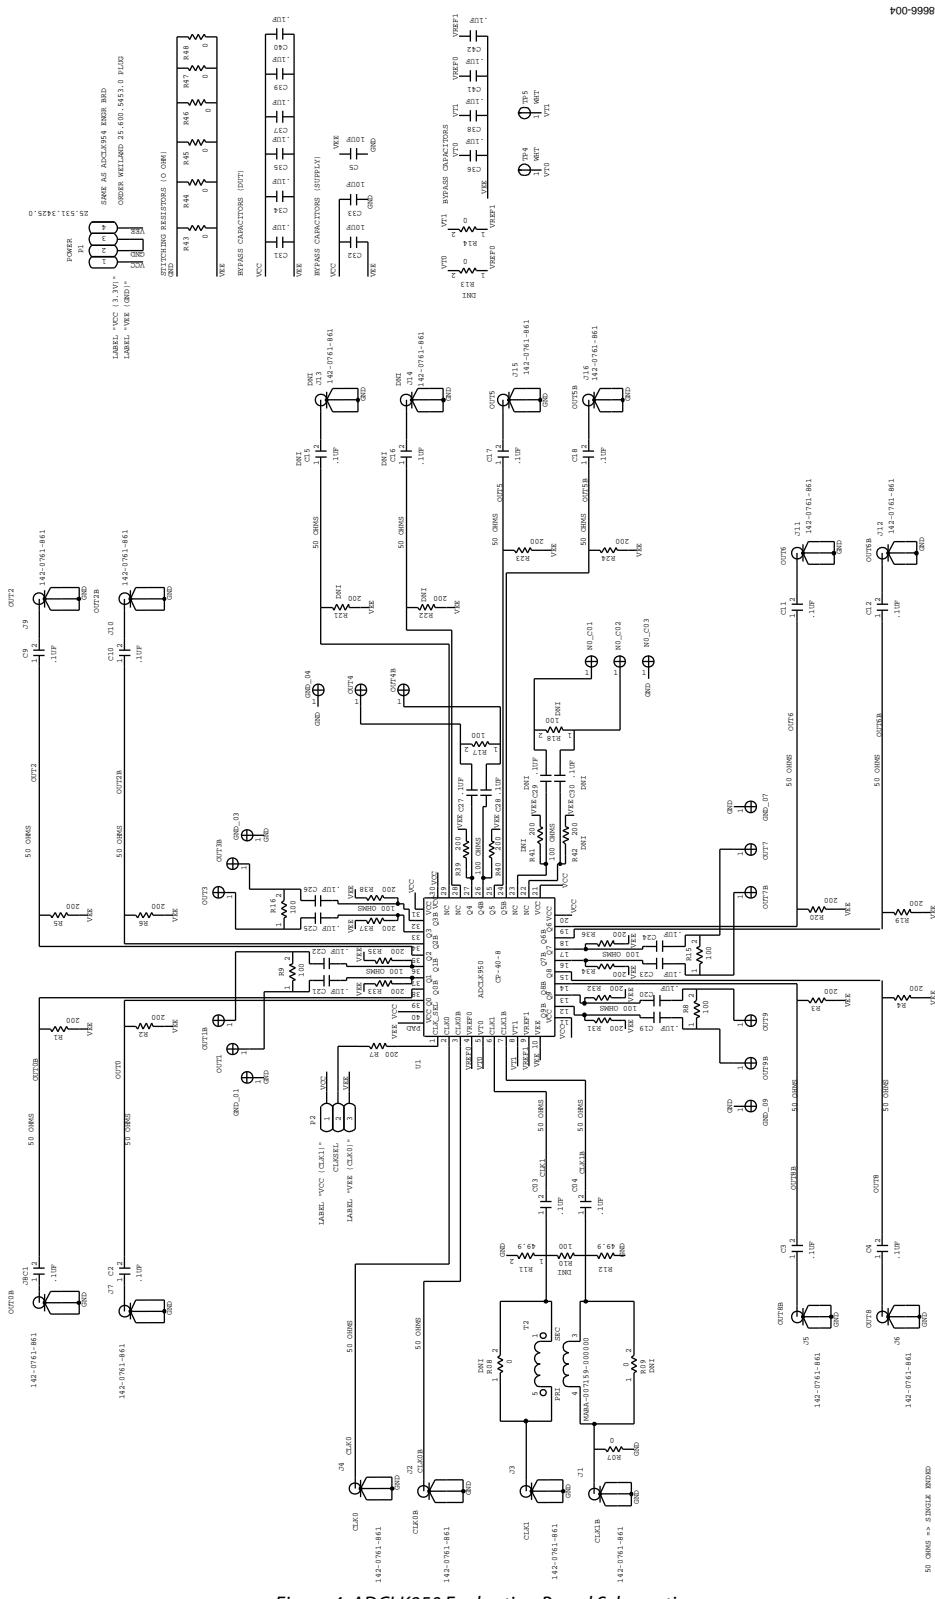


Figure 4. ADCLK950 Evaluation Board Schematic

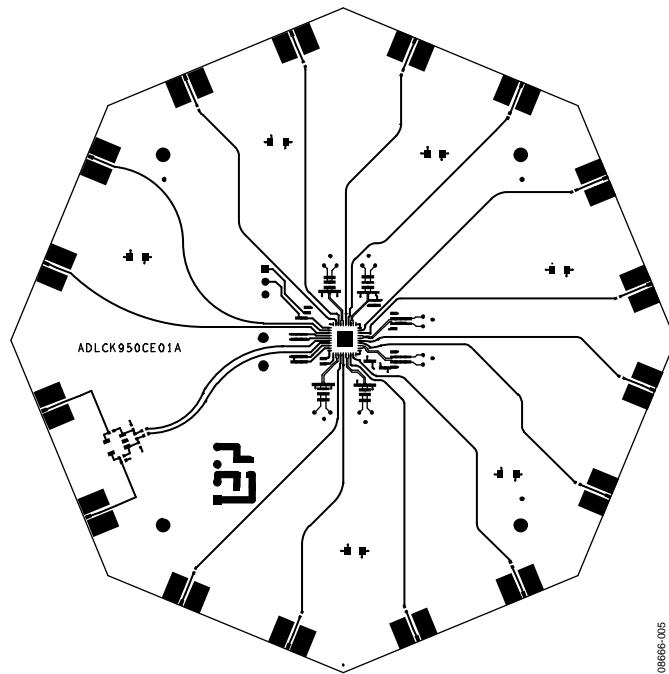


Figure 5. Top Trace Layer



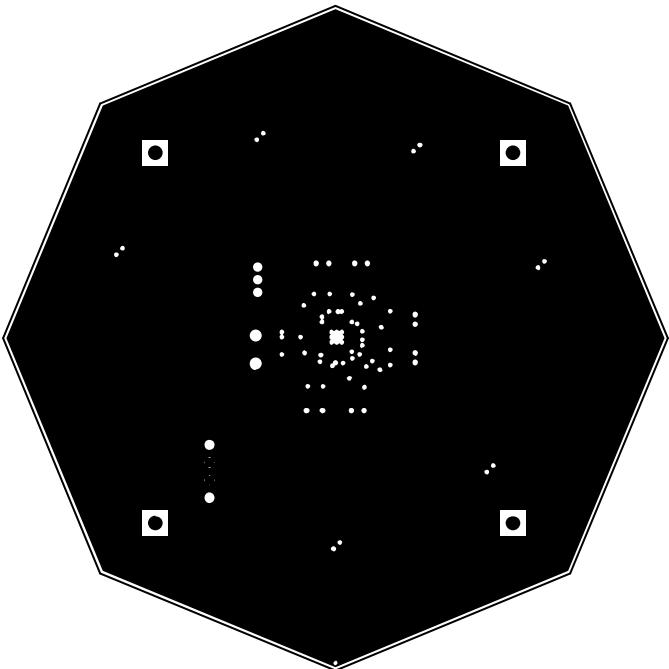


Figure 6. Ground Plane Layer

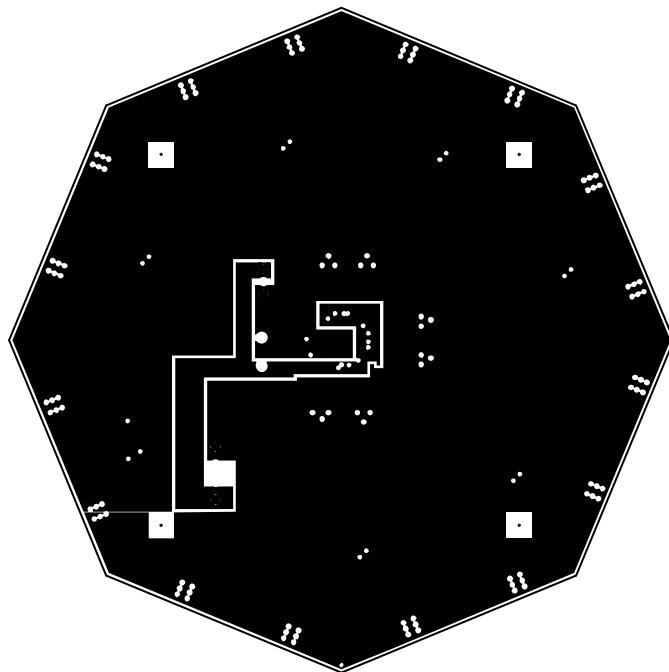

09866-007

Figure 7.  $V_{CC}$  and  $V_{EE}$  Power Plane Layer

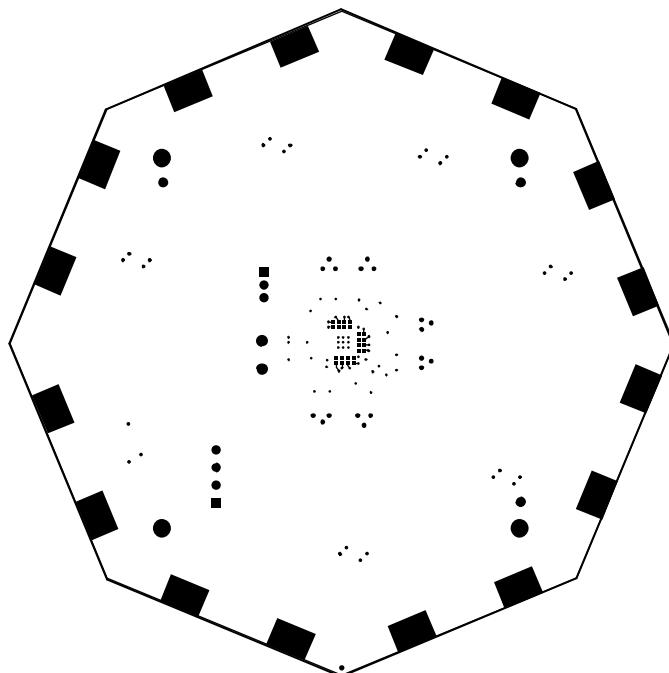

09866-008

Figure 8. Bottom Trace Layer

## NOTES

### ESD CAUTION

**ESD (electrostatic discharge) sensitive device.**

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Evaluation boards are only intended for device evaluation and not for production purposes. Evaluation boards are supplied "as is" and without warranties of any kind, express, implied, or statutory including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. No license is granted by implication or otherwise under any patents or other intellectual property by application or use of evaluation boards. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Analog Devices reserves the right to change devices or specifications at any time without notice. Trademarks and registered trademarks are the property of their respective owners. Evaluation boards are not authorized to be used in life support devices or systems.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru