

Type M15 to M50 Multilayer Ceramic Capacitors

COG (NPO). X7R & Z5U Capacitors



Type M15 to M50 conformally coated radial leaded capacitors cover a wide range of temperature coefficients for a wide variety of applications.

Highlights

- Conformally coated, radial leaded
- Coating meets UL94V-0
- IECQ approved to:
 - QC300601/US0002 - NPO
 - QC300701/US0002 - X7R
 - QC300701/US0004 - Z5U

Specifications

Capacitance Range: 1 pF to 6.8 μ F

Voltage Range: 50, 100, 200 Vdc

Capacitance Tolerance: See ratings tables

Temperature Coefficient: COG (NPO), X7R & Z5U

Available in Tape and Ammo Pack Configuration: Add 'TA' to end of catalog part number

Ratings

RoHS Compliant

COG (NPO) Temperature Coefficient 200 Vdc																				
Catalog		Sizes (Inches)					Catalog		Sizes (Inches)					Catalog		Sizes (Inches)				
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S			
M15G109D2-F	1.0 pF	.150	.210	.130	.100	M15G120*2-F	12 pF	.150	.210	.130	.100	M15G101*2-F	100 pF	.150	.210	.130	.100			
M20G109D2-F	1.0 pF	.200	.260	.150	.100	M20G120*2-F	12 pF	.200	.260	.150	.100	M20G101*2-F	100 pF	.200	.260	.150	.100			
M22G109D2-F	1.0 pF	.200	.260	.150	.200	M22G120*2-F	12 pF	.200	.260	.150	.200	M22G101*2-F	100 pF	.200	.260	.150	.200			
M15G159D2-F	1.5 pF	.150	.210	.130	.100	M15G150*2-F	15 pF	.150	.210	.130	.100	M15G121*2-F	120 pF	.150	.210	.130	.100			
M20G159D2-F	1.5 pF	.200	.260	.150	.100	M20G150*2-F	15 pF	.200	.260	.150	.100	M20G121*2-F	120 pF	.200	.260	.150	.100			
M22G159D2-F	1.5 pF	.200	.260	.150	.200	M22G150*2-F	15 pF	.200	.260	.150	.200	M22G121*2-F	120 pF	.200	.260	.150	.200			
M15G229D2-F	2.2 pF	.150	.210	.130	.100	M15G180*2-F	18 pF	.150	.210	.130	.100	M15G151*2-F	150 pF	.150	.210	.130	.100			
M20G229D2-F	2.2 pF	.200	.260	.150	.100	M20G180*2-F	18 pF	.200	.260	.150	.100	M20G151*2-F	150 pF	.200	.260	.150	.100			
M22G229D2-F	2.2 pF	.200	.260	.150	.200	M22G180*2-F	18 pF	.200	.260	.150	.200	M22G151*2-F	150 pF	.200	.260	.150	.200			
M15G279D2-F	2.7 pF	.150	.210	.130	.100	M15G220*2-F	22 pF	.150	.210	.130	.100	M15G181*2-F	180 pF	.150	.210	.130	.100			
M20G279D2-F	2.7 pF	.200	.260	.150	.100	M20G220*2-F	22 pF	.200	.260	.150	.100	M20G181*2-F	180 pF	.200	.260	.150	.100			
M22G279D2-F	2.7 pF	.200	.260	.150	.200	M22G220*2-F	22 pF	.200	.260	.150	.200	M22G181*2-F	180 pF	.200	.260	.150	.200			
M15G339D2-F	3.3 pF	.150	.210	.130	.100	M15G270*2-F	27 pF	.150	.210	.130	.100	M15G221*2-F	220 pF	.150	.210	.130	.100			
M20G339D2-F	3.3 pF	.200	.260	.150	.100	M20G270*2-F	27 pF	.200	.260	.150	.100	M20G221*2-F	220 pF	.200	.260	.150	.100			
M22G339D2-F	3.3 pF	.200	.260	.150	.200	M22G270*2-F	27 pF	.200	.260	.150	.200	M22G221*2-F	220 pF	.200	.260	.150	.200			
M15G399D2-F	3.9 pF	.150	.210	.130	.100	M15G330*2-F	33 pF	.150	.210	.130	.100	M15G271*2-F	270 pF	.150	.210	.130	.100			
M20G399D2-F	3.9 pF	.200	.260	.150	.100	M20G330*2-F	33 pF	.200	.260	.150	.100	M20G271*2-F	270 pF	.200	.260	.150	.100			
M22G399D2-F	3.9 pF	.200	.260	.150	.200	M22G330*2-F	33 pF	.200	.260	.150	.200	M22G271*2-F	270 pF	.200	.260	.150	.200			
M15G479D2-F	4.7 pF	.150	.210	.130	.100	M15G390*2-F	39 pF	.150	.210	.130	.100	M15G331*2-F	330 pF	.150	.210	.130	.100			
M20G479D2-F	4.7 pF	.200	.260	.150	.100	M20G390*2-F	39 pF	.200	.260	.150	.100	M20G331*2-F	330 pF	.200	.260	.150	.100			
M22G479D2-F	4.7 pF	.200	.260	.150	.200	M22G390*2-F	39 pF	.200	.260	.150	.200	M22G331*2-F	330 pF	.200	.260	.150	.200			
M15G569D2-F	5.6 pF	.150	.210	.130	.100	M15G470*2-F	47 pF	.150	.210	.130	.100	M15G391*2-F	390 pF	.150	.210	.130	.100			
M20G569D2-F	5.6 pF	.200	.260	.150	.100	M20G470*2-F	47 pF	.200	.260	.150	.100	M20G391*2-F	390 pF	.200	.260	.150	.100			
M22G569D2-F	5.6 pF	.200	.260	.150	.200	M22G470*2-F	47 pF	.200	.260	.150	.200	M22G391*2-F	390 pF	.200	.260	.150	.200			
M15G689D2-F	6.8 pF	.150	.210	.130	.100	M15G560*2-F	56 pF	.150	.210	.130	.100	M15G471*2-F	470 pF	.150	.210	.130	.100			
M20G689D2-F	6.8 pF	.200	.260	.150	.100	M20G560*2-F	56 pF	.200	.260	.150	.100	M20G471*2-F	470 pF	.200	.260	.150	.100			
M22G689D2-F	6.8 pF	.200	.260	.150	.200	M22G560*2-F	56 pF	.200	.260	.150	.200	M22G471*2-F	470 pF	.200	.260	.150	.200			
M15G829D2-F	8.2 pF	.150	.210	.130	.100	M15G680*2-F	68 pF	.150	.210	.130	.100	M20G561*2-F	560 pF	.200	.260	.150	.100			
M20G829D2-F	8.2 pF	.200	.260	.150	.100	M20G680*2-F	68 pF	.200	.260	.150	.100	M22G561*2-F	560 pF	.200	.260	.150	.200			
M22G829D2-F	8.2 pF	.200	.260	.150	.200	M22G680*2-F	68 pF	.200	.260	.150	.200	M20G681*2-F	680 pF	.200	.260	.150	.100			
M15G100*2-F	10 pF	.150	.210	.130	.100	M15G820*2-F	82 pF	.150	.210	.130	.100	M22G681*2-F	680 pF	.200	.260	.150	.200			
M20G100*2-F	10 pF	.200	.260	.150	.100	M20G820*2-F	82 pF	.200	.260	.150	.100	M20G821*2-F	820 pF	.200	.260	.150	.100			
M22G100*2-F	10 pF	.200	.260	.150	.200	M22G820*2-F	82 pF	.200	.260	.150	.200	M22G821*2-F	820 pF	.200	.260	.150	.200			

Add 'TR' to end of part number for Tape & Reel
M15, M20, M22 - 2,500 per reel
M30 - 1,500; M40 - 1,000 per reel; M50 - N/A
(Available in full reels only)

*Insert proper letter symbol for tolerance
1 pF to 8.2 pF available in D = ± 5 pF only
10 pF to 22 pF: J = $\pm 5\%$; K = $\pm 10\%$
27 pF to 47 pF: G = $\pm 2\%$; J = $\pm 5\%$; K = $\pm 10\%$
56 pF & Up: F = $\pm 1\%$; G = $\pm 2\%$; J = $\pm 5\%$; K = $\pm 10\%$

Type M15 to M50 Multilayer Ceramic Capacitors

Ratings

RoHS Compliant

COG (NPO) Temperature Coefficient																				
Catalog		Sizes (Inches)					Catalog		Sizes (Inches)					Catalog		Sizes (Inches)				
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S			
200 Vdc																				
M20G102*2-F	1000 pF	.200	.260	.150	.100	M30G272*2-F	2700 pF	.300	.360	.200	.200	M30G153*2-F	.015 uF	.300	.360	.200	.200			
M22G102*2-F	1000 pF	.200	.260	.150	.200	M20G332*2-F	3300 pF	.200	.260	.150	.100	M40G153*2-F	.015 uF	.400	.460	.200	.200			
M20G122*2-F	1200 pF	.200	.260	.150	.100	M22G332*2-F	3300 pF	.200	.260	.150	.200	M30G183*2-F	.018 uF	.300	.360	.200	.200			
M22G122*2-F	1200 pF	.200	.260	.150	.200	M30G332*2-F	3300 pF	.300	.360	.200	.200	M40G183*2-F	.018 uF	.400	.460	.200	.200			
M20G152*2-F	1500 pF	.200	.260	.150	.100	M30G392*2-F	3900 pF	.300	.360	.200	.200	M40G223*2-F	.022 uF	.400	.460	.200	.200			
M22G152*2-F	1500 pF	.200	.260	.150	.200	M30G472*2-F	4700 pF	.300	.360	.200	.200	M40G273*2-F	.027 uF	.400	.460	.200	.200			
M20G182*2-F	1800 pF	.200	.260	.150	.100	M30G562*2-F	5600 pF	.300	.360	.200	.200	M40G333*2-F	.033 uF	.400	.460	.200	.200			
M22G182*2-F	1800 pF	.200	.260	.150	.200	M30G682*2-F	6800 pF	.300	.360	.200	.200	M40G393*2-F	.039 uF	.400	.460	.200	.200			
M20G222*2-F	2200 pF	.200	.260	.150	.100	M30G822*2-F	8200 pF	.300	.360	.200	.200	M50G393*2-F	.039 uF	.500	.560	.250	.400			
M22G222*2-F	2200 pF	.200	.260	.150	.200	M30G103*2-F	.010 uF	.300	.360	.200	.200	M40G473*2-F	.047 uF	.400	.460	.200	.200			
M20G272*2-F	2700 pF	.200	.260	.150	.100	M30G123*2-F	.012 uF	.300	.360	.200	.200	M50G473*2-F	.047 uF	.500	.560	.250	.400			
M22G272*2-F	2700 pF	.200	.260	.150	.200	M40G123*2-F	.012 uF	.400	.460	.200	.200	M50G563*2-F	.056 uF	.500	.560	.250	.400			
*Insert proper letter symbol for tolerance												M50G683*2-F	.068 uF	.500	.560	.250	.400			

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

100 Vdc																	
M15G121*1-F	120 pF	.150	.210	.130	.100			M20G152*1-F	1500 pF	.200	.260	.150	.100			M30G682*1-F	6800 pF
M15G151*1-F	150 pF	.150	.210	.130	.100			M22G152*1-F	1500 pF	.200	.260	.150	.200			M30G822*1-F	8200 pF
M15G181*1-F	180 pF	.150	.210	.130	.100			M20G182*1-F	1800 pF	.200	.260	.150	.100			M30G103*1-F	.01 uF
M15G221*1-F	220 pF	.150	.210	.130	.100			M22G182*1-F	1800 pF	.200	.260	.150	.200			M30G123*1-F	.012 uF
M15G271*1-F	270 pF	.150	.210	.130	.100			M20G222*1-F	2200 pF	.200	.260	.150	.100			M30G153*1-F	.015 uF
M15G331*1-F	330 pF	.150	.210	.130	.100			M22G222*1-F	2200 pF	.200	.260	.150	.200			M30G183*1-F	.018 uF
M15G391*1-F	390 pF	.150	.210	.130	.100			M20G272*1-F	2700 pF	.200	.260	.150	.100			M30G223*1-F	.022 uF
M15G471*1-F	470 pF	.150	.210	.130	.100			M22G272*1-F	2700 pF	.200	.260	.150	.200			M30G273*1-F	.027 uF
M15G561*1-F	560 pF	.150	.210	.130	.100			M20G332*1-F	3300 pF	.200	.260	.150	.100			M40G273*1-F	.027 uF
M15G681*1-F	680 pF	.150	.210	.130	.100			M22G332*1-F	3300 pF	.200	.260	.150	.200			M40G333*1-F	.033 uF
M20G681*1-F	680 pF	.200	.260	.150	.100			M30G332*1-F	3300 pF	.300	.360	.200	.200			M40G393*1-F	.039 uF
M22G681*1-F	680 pF	.200	.260	.150	.200			M20G392*1-F	3900 pF	.200	.260	.150	.100			M50G393*1-F	.039 uF
M15G821*1-F	820 pF	.150	.210	.130	.100			M22G392*1-F	3900 pF	.200	.260	.150	.200			M40G473*1-F	.047 uF
M20G821*1-F	820 pF	.200	.260	.150	.100			M30G392*1-F	3900 pF	.300	.360	.200	.200			M50G473*1-F	.047 uF
M22G821*1-F	820 pF	.200	.260	.150	.200			M20G472*1-F	4700 pF	.200	.260	.150	.100			M40G563*1-F	.056 uF
M15G102*1-F	1000 pF	.150	.210	.130	.100			M22G472*1-F	4700 pF	.200	.260	.150	.200			M50G563*1-F	.056 uF
M20G102*1-F	1000 pF	.200	.260	.150	.100			M30G472*1-F	4700 pF	.300	.360	.200	.200			M40G683*1-F	.068 uF
M22G102*1-F	1000 pF	.200	.260	.150	.200			M20G562*1-F	5600 pF	.200	.260	.150	.100			M50G683*1-F	.068 uF
M20G122*1-F	1200 pF	.200	.260	.150	.100			M22G562*1-F	5600 pF	.200	.260	.150	.200			M50G823*1-F	.082 uF
M22G122*1-F	1200 pF	.200	.260	.150	.200			M30G562*1-F	5600 pF	.300	.360	.200	.200			M50G104*1-F	.1 uF
																M50G124*1-F	.12 uF

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

X7R Temperature Coefficient																	
200 Vdc																	
Catalog						Catalog						Catalog					
Part Number		Cap		Sizes (Inches)				Part Number		Cap		Sizes (Inches)				Part Number	
				L	H	T	S					L	H	T	S		
M15R101*2-F	100 pF	.150	.210	.130	.100			M15R561*2-F	560 pF	.150	.210	.130	.100			M15R152*2-F	1500 pF
M15R121*2-F	120 pF	.150	.210	.130	.100			M15R681*2-F	680 pF	.150	.210	.130	.100			M20R152*2-F	1500 pF
M15R151*2-F	150 pF	.150	.210	.130	.100			M15R821*2-F	820 pF	.150	.210	.130	.100			M22R152*2-F	1500 pF
M15R181*2-F	180 pF	.150	.210	.130	.100			M15R102*2-F	1000 pF	.150	.210	.130	.100			M15R182*2-F	1800 pF
M15R221*2-F	220 pF	.150	.210	.130	.100			M20R102*2-F	1000 pF	.200	.260	.150	.100			M20R182*2-F	1800 pF
M15R271*2-F	270 pF	.150	.210	.130	.100			M22R102*2-F	1000 pF	.200	.260	.150	.200			M22R182*2-F	1800 pF
M15R331*2-F	330 pF	.150	.210	.130	.100			M15R122*2-F	1200 pF	.150	.210	.130	.100			M15R222*2-F	2200 pF
M15R391*2-F	390 pF	.150	.210	.130	.100			M20R122*2-F	1200 pF	.200	.260	.150	.100			M20R222*2-F	2200 pF
M15R471*2-F	470 pF	.150	.210	.130	.100			M22R122*2-F	1200 pF	.200	.260	.150	.200			M22R222*2-F	2200 pF

Add 'TR' to end of part number for Tape & Reel

M15, M20, M22 - 2,500 per reel

M30 - 1,500 per reel Full reels only on all

M40 - 1,000 per reel; sizes.

M50 - N/A

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

Type M15 to M50 Multilayer Ceramic Capacitors

Ratings

RoHS Compliant

X7R Temperature Coefficient 200 Vdc																	
Catalog		Sizes (Inches)				Catalog		Sizes (Inches)				Catalog		Sizes (Inches)			
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S
M20R272*2-F	2700 pF	.200	.260	.150	.100	M22R103*2-F	.010 uF	.200	.260	.150	.200	M30R473*2-F	.047 uF	.300	.360	.200	.200
M22R272*2-F	2700 pF	.200	.260	.150	.200	M20R123*2-F	.012 uF	.200	.260	.150	.100	M30R563*2-F	.056 uF	.300	.360	.200	.200
M20R332*2-F	3300 pF	.200	.260	.150	.100	M22R123*2-F	.012 uF	.200	.260	.150	.200	M30R683*2-F	.068 uF	.300	.360	.200	.200
M22R332*2-F	3300 pF	.200	.260	.150	.200	M20R153*2-F	.015 uF	.200	.260	.150	.100	M30R823*2-F	.082 uF	.300	.360	.200	.200
M20R392*2-F	3900 pF	.200	.260	.150	.100	M22R153*2-F	.015 uF	.200	.260	.150	.200	M40R823*2-F	.082 uF	.400	.460	.200	.200
M22R392*2-F	3900 pF	.200	.260	.150	.200	M30R153*2-F	.015 uF	.300	.360	.200	.200	M30R104*2-F	.10 uF	.300	.360	.200	.200
M20R472*2-F	4700 pF	.200	.260	.150	.100	M20R183*2-F	.018 uF	.200	.260	.150	.100	M40R104*2-F	.10 uF	.400	.460	.200	.200
M22R472*2-F	4700 pF	.200	.260	.150	.200	M22R183*2-F	.018 uF	.200	.260	.150	.200	M40R124*2-F	.12 uF	.400	.460	.200	.200
M20R562*2-F	5600 pF	.200	.260	.150	.100	M30R183*2-F	.018 uF	.300	.360	.200	.200	M40R154*2-F	.15 uF	.400	.460	.200	.200
M22R562*2-F	5600 pF	.200	.260	.150	.200	M20R223*2-F	.022 uF	.200	.260	.150	.100	M40R184*2-F	.18 uF	.400	.460	.200	.200
M20R682*2-F	6800 pF	.200	.260	.150	.100	M22R223*2-F	.022 uF	.200	.260	.150	.200	M40R224*2-F	.22 uF	.400	.460	.200	.200
M22R682*2-F	6800 pF	.200	.260	.150	.200	M30R223*2-F	.022 uF	.300	.360	.200	.200	M50R224*2-F	.22 uF	.500	.560	.250	.400
M20R822*2-F	8200 pF	.200	.260	.150	.100	M30R273*2-F	.027 uF	.300	.360	.200	.200	M40R274*2-F	.27 uF	.400	.460	.200	.200
M22R822*2-F	8200 pF	.200	.260	.150	.200	M30R333*2-F	.033 uF	.300	.360	.200	.200	M50R274*2-F	.27 uF	.500	.560	.250	.400
M20R103*2-F	.010 uF	.200	.260	.150	.100	M30R393*2-F	.039 uF	.300	.360	.200	.200	M50R334*2-F	.33 uF	.500	.560	.250	.400
*Insert proper letter symbol for tolerance												M50R394*2-F	.39 uF	.500	.560	.250	.400
K = 10%; M = ±20%												M50R474*2-F	.47 uF	.500	.560	.250	.400

100 Vdc X7R																	
Catalog		Sizes (Inches)				Catalog		Sizes (Inches)				Catalog		Sizes (Inches)			
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S
M15R821*1-F	820 pF	.150	.210	.130	.100	M20R123*1-F	.012 uF	.200	.260	.150	.100	M20R104*1-F	.10 uF	.200	.260	.150	.100
M15R102*1-F	1000 pF	.150	.210	.130	.100	M22R123*1-F	.012 uF	.200	.260	.150	.200	M22R104*1-F	.10 uF	.200	.260	.150	.200
M15R122*1-F	1200 pF	.150	.210	.130	.100	M20R153*1-F	.015 uF	.200	.260	.150	.100	M30R104*1-F	.10 uF	.300	.360	.200	.200
M15R152*1-F	1500 pF	.150	.210	.130	.100	M22R153*1-F	.015 uF	.200	.260	.150	.200	M30R124*1-F	.12 uF	.300	.360	.200	.200
M15R182*1-F	1800 pF	.150	.210	.130	.100	M20R183*1-F	.018 uF	.200	.260	.150	.100	M30R154*1-F	.15 uF	.300	.360	.200	.200
M15R222*1-F	2200 pF	.150	.210	.130	.100	M22R183*1-F	.018 uF	.200	.260	.150	.200	M30R184*1-F	.18 uF	.300	.360	.200	.200
M15R272*1-F	2700 pF	.150	.210	.130	.100	M20R223*1-F	.022 uF	.200	.260	.150	.100	M30R224*1-F	.22 uF	.300	.360	.200	.200
M15R332*1-F	3300 pF	.150	.210	.130	.100	M22R223*1-F	.022 uF	.200	.260	.150	.200	M30R274*1-F	.27 uF	.300	.360	.200	.200
M15R392*1-F	3900 pF	.150	.210	.130	.100	M20R273*1-F	.027 uF	.200	.260	.150	.100	M30R334*1-F	.33 uF	.300	.360	.200	.200
M15R472*1-F	4700 pF	.150	.210	.130	.100	M22R273*1-F	.027 uF	.200	.260	.150	.200	M40R334*1-F	.33 uF	.400	.460	.200	.200
M20R472*1-F	4700 pF	.200	.260	.150	.100	M20R333*1-F	.033 uF	.200	.260	.150	.100	M30R394*1-F	.39 uF	.300	.360	.200	.200
M22R472*1-F	4700 pF	.200	.260	.150	.200	M22R333*1-F	.033 uF	.200	.260	.150	.200	M40R394*1-F	.39 uF	.400	.460	.200	.200
M15R562*1-F	5600 pF	.150	.210	.130	.100	M20R393*1-F	.039 uF	.200	.260	.150	.100	M30R474*1-F	.47 uF	.300	.360	.200	.200
M20R562*1-F	5600 pF	.200	.260	.150	.100	M22R393*1-F	.039 uF	.200	.260	.150	.200	M40R474*1-F	.47 uF	.400	.460	.200	.200
M22R562*1-F	5600 pF	.200	.260	.150	.200	M20R473*1-F	.047 uF	.200	.260	.150	.100	M40R564*1-F	.56 uF	.400	.460	.200	.200
M15R682*1-F	6800 pF	.150	.210	.130	.100	M22R473*1-F	.047 uF	.200	.260	.150	.200	M40R684*1-F	.68 uF	.400	.460	.200	.200
M20R682*1-F	6800 pF	.200	.260	.150	.100	M20R563*1-F	.056 uF	.200	.260	.150	.100	M50R684*1-F	.68 uF	.500	.560	.250	.400
M22R682*1-F	6800 pF	.200	.260	.150	.200	M22R563*1-F	.056 uF	.200	.260	.150	.200	M40R824*1-F	.82 uF	.400	.460	.200	.200
M15R822*1-F	8200 pF	.150	.210	.130	.100	M20R683*1-F	.068 uF	.200	.260	.150	.100	M50R824*1-F	.82 uF	.500	.560	.250	.400
M20R822*1-F	8200 pF	.200	.260	.150	.100	M22R683*1-F	.068 uF	.200	.260	.150	.200	M40R105*1-F	1.0 uF	.400	.460	.200	.200
M22R822*1-F	8200 pF	.200	.260	.150	.200	M30R683*1-F	.068 uF	.300	.360	.200	.200	M50R105*1-F	1.0 uF	.500	.560	.250	.400
M15R103*1-F	.010 uF	.150	.210	.130	.100	M20R823*1-F	.082 uF	.200	.260	.150	.100	M50R125*1-F	1.2 uF	.500	.560	.250	.400
M20R103*1-F	.010 uF	.200	.260	.150	.100	M22R823*1-F	.082 uF	.200	.260	.150	.200	*Insert proper letter symbol for tolerance					
M22R103*1-F	.010 uF	.200	.260	.150	.200	M30R823*1-F	.082 uF	.300	.360	.200	.200	K = 10%; M = ±20%					

50 Vdc X7R																	
Catalog		Sizes (Inches)				Catalog		Sizes (Inches)				Catalog		Sizes (Inches)			
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S
M15R332*5-F	3300 pF	.150	.210	.130	.100	M15R682*5-F	6800 pF	.150	.210	.130	.100	M20R123*5-F	.012 uF	.200	.260	.150	.100
M15R392*5-F	3900 pF	.150	.210	.130	.100	M15R822*5-F	8200 pF	.150	.210	.130	.100	M22R123*5-F	.012 uF	.200	.260	.150	.200
M15R472*5-F	4700 pF	.150	.210	.130	.100	M15R103*5-F	.010 uF	.150	.210	.130	.100	M15R153*5-F	.015 uF	.150	.210	.130	.100
M15R562*5-F	5600 pF	.150	.210	.130	.100	M15R123*5-F	.012 uF	.150	.210	.130	.100	M20R153*5-F	.015 uF	.200	.260	.150	.100

Add 'TR' to end of part number for Tape & Reel

M15, M20, M22 - 2,500 per reel

M30 - 1,500 per reel Full reels only on all sizes

M40 - 1,000 per reel

M50 - N/A

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

Type M15 to M50 Multilayer Ceramic Capacitors

Ratings

RoHS Compliant

X7R Temperature Coefficient 50 Vdc X7R																				
Catalog		Sizes (Inches)					Catalog		Sizes (Inches)					Catalog		Sizes (Inches)				
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S			
M22R153*5-F	.015 uF	.200	.260	.150	.200	M20R683*5-F	.068 uF	.200	.260	.150	.100	M22R274*5-F	.27 uF	.200	.260	.150	.200			
M15R183*5-F	.018 uF	.150	.210	.130	.100	M22R683*5-F	.068 uF	.200	.260	.150	.200	M30R274*5-F	.27 uF	.300	.360	.200	.200			
M20R183*5-F	.018 uF	.200	.260	.150	.100	M20R823*5-F	.082 uF	.200	.260	.150	.100	M30R334*5-F	.33 uF	.300	.360	.200	.200			
M22R183*5-F	.018 uF	.200	.260	.150	.200	M22R823*5-F	.082 uF	.200	.260	.150	.200	M30R394*5-F	.39 uF	.300	.360	.200	.200			
M15R223*5-F	.022 uF	.150	.210	.130	.100	M20R104*5-F	.10 uF	.200	.260	.150	.100	M30R474*5-F	.47 uF	.300	.360	.200	.200			
M20R223*5-F	.022 uF	.200	.260	.150	.100	M22R104*5-F	.10 uF	.200	.260	.150	.200	M30R564*5-F	.56 uF	.300	.360	.200	.200			
M22R223*5-F	.022 uF	.200	.260	.150	.200	M20R124*5-F	.12 uF	.200	.260	.150	.100	M30R684*5-F	.68 uF	.300	.360	.200	.200			
M15R273*5-F	.027 uF	.150	.210	.130	.100	M22R124*5-F	.12 uF	.200	.260	.150	.200	M30R824*5-F	.82 uF	.300	.360	.200	.200			
M20R273*5-F	.027 uF	.200	.260	.150	.100	M20R154*5-F	.15 uF	.200	.260	.150	.100	M30R105*5-F	1.0 uF	.300	.360	.200	.200			
M22R273*5-F	.027 uF	.200	.260	.150	.200	M22R154*5-F	.15 uF	.200	.260	.150	.200	M40R105*5-F	1.0 uF	.400	.460	.200	.200			
M15R333*5-F	.033 uF	.150	.210	.130	.100	M30R154*5-F	.15 uF	.300	.360	.200	.200	M40R125*5-F	1.2 uF	.400	.460	.200	.200			
M20R333*5-F	.033 uF	.200	.260	.150	.100	M20R184*5-F	.18 uF	.200	.260	.150	.100	M40R155*5-F	1.5 uF	.400	.460	.200	.200			
M22R333*5-F	.033 uF	.200	.260	.150	.200	M22R184*5-F	.18 uF	.200	.260	.150	.200	M40R185*5-F	1.8 uF	.400	.460	.200	.200			
M20R393*5-F	.039 uF	.200	.260	.150	.100	M30R184*5-F	.18 uF	.300	.360	.200	.200	M40R225*5-F	2.2 uF	.400	.460	.200	.200			
M22R393*5-F	.039 uF	.200	.260	.150	.200	M20R224*5-F	.22 uF	.200	.260	.150	.100	M50R225*5-F	2.2 uF	.500	.560	.250	.400			
M20R473*5-F	.047 uF	.200	.260	.150	.100	M22R224*5-F	.22 uF	.200	.260	.150	.200	M50R275*5-F	2.7 uF	.500	.560	.250	.400			
M22R473*5-F	.047 uF	.200	.260	.150	.200	M30R224*5-F	.22 uF	.300	.360	.200	.200	M50R335*5-F	3.3 uF	.500	.560	.250	.400			
M20R563*5-F	.056 uF	.200	.260	.150	.100	M20R274*5-F	.27 uF	.200	.260	.150	.100	M50R395*5-F	3.9 uF	.500	.560	.250	.400			
M22R563*5-F	.056 uF	.200	.260	.150	.200															

*Insert proper letter symbol for tolerance

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

Z5U Temperature Coefficient 100 Vdc																	
Catalog		Sizes (Inches)				Catalog		Sizes (Inches)				Catalog		Sizes (Inches)			
Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S	Part Number	Cap	L	H	T	S
M15U102*1-F	1000 pF	.150	.210	.130	.100	M20U223*1-F	.022 uF	.200	.260	.150	.100	M22U154*1-F	.15 uF	.200	.260	.150	.200
M15U122*1-F	1200 pF	.150	.210	.130	.100	M22U223*1-F	.022 uF	.200	.260	.150	.200	M30U154*1-F	.15 uF	.300	.360	.200	.200
M15U152*1-F	1500 pF	.150	.210	.130	.100	M20U273*1-F	.027 uF	.200	.260	.150	.100	M30U184*1-F	.18 uF	.300	.360	.200	.200
M15U182*1-F	1800 pF	.150	.210	.130	.100	M22U273*1-F	.027 uF	.200	.260	.150	.200	M30U224*1-F	.22 uF	.300	.360	.200	.200
M15U222*1-F	2200 pF	.150	.210	.130	.100	M20U333*1-F	.033 uF	.200	.260	.150	.100	M30U274*1-F	.27 uF	.300	.360	.200	.200
M15U272*1-F	2700 pF	.150	.210	.130	.100	M22U333*1-F	.033 uF	.200	.260	.150	.200	M30U334*1-F	.33 uF	.300	.360	.200	.200
M15U332*1-F	3300 pF	.150	.210	.130	.100	M20U393*1-F	.039 uF	.200	.260	.150	.100	M40U334*1-F	.33 uF	.400	.460	.200	.200
M15U392*1-F	3900 pF	.150	.210	.130	.100	M22U393*1-F	.039 uF	.200	.260	.150	.200	M30U394*1-F	.39 uF	.300	.360	.200	.200
M15U472*1-F	4700 pF	.150	.210	.130	.100	M20U473*1-F	.047 uF	.200	.260	.150	.100	M40U394*1-F	.39 uF	.400	.460	.200	.200
M15U562*1-F	5600 pF	.150	.210	.130	.100	M22U473*1-F	.047 uF	.200	.260	.150	.200	M30U474*1-F	.47 uF	.300	.360	.200	.200
M15U682*1-F	6800 uF	.150	.210	.130	.100	M20U563*1-F	.056 uF	.200	.260	.150	.100	M40U474*1-F	.47 uF	.400	.460	.200	.200
M15U822*1-F	8200 pF	.150	.210	.130	.100	M22U563*1-F	.056 uF	.200	.260	.150	.200	M40U564*1-F	.56 uF	.400	.460	.200	.200
M15U103*1-F	.010 uF	.150	.210	.130	.100	M20U683*1-F	.068 uF	.200	.260	.150	.100	M40U684*1-F	.68 uF	.400	.460	.200	.200
M20U103*1-F	.010 uF	.200	.260	.150	.100	M22U683*1-F	.068 uF	.200	.260	.150	.200	M40U824*1-F	.82 uF	.400	.460	.200	.200
M22U103*1-F	.010 uF	.200	.260	.150	.200	M20U823*1-F	.082 uF	.200	.260	.150	.100	M40U105*1-F	1.0 uF	.400	.460	.200	.200
M15U123*1-F	.012 uF	.150	.210	.130	.100	M22U823*1-F	.082 uF	.200	.260	.150	.200	M50U105*1-F	1.0 uF	.500	.560	.250	.400
M20U123*1-F	.012 uF	.200	.260	.150	.100	M20U104*1-F	.10 uF	.200	.260	.150	.100	M40U125*1-F	1.2 uF	.400	.460	.200	.200
M22U123*1-F	.012 uF	.200	.260	.150	.200	M22U104*1-F	.10 uF	.200	.260	.150	.200	M50U125*1-F	1.2 uF	.500	.560	.250	.400
M15U153*1-F	.015 uF	.150	.210	.130	.100	M30U104*1-F	.10 uF	.300	.360	.200	.200	M40U155*1-F	1.5 uF	.400	.460	.200	.200
M20U153*1-F	.015 uF	.200	.260	.150	.100	M20U124*1-F	.12 uF	.200	.260	.150	.100	M50U155*1-F	1.5 uF	.500	.560	.250	.400
M22U153*1-F	.015 uF	.200	.260	.150	.200	M22U124*1-F	.12 uF	.200	.260	.150	.200	M50U185*1-F	1.8 uF	.500	.560	.250	.400
M15U183*1-F	.018 uF	.150	.210	.130	.100	M30U124*1-F	.12 uF	.300	.360	.200	.200	M50U225*1-F	2.2 uF	.500	.560	.250	.400
M20U183*1-F	.018 uF	.200	.260	.150	.100	M20U154*1-F	.15 uF	.200	.260	.150	.100	*Insert proper letter symbol for tolerance					
M22U183*1-F	.018 uF	.200	.260	.150	.200							K = 10%; M = ±20%					

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

Add 'TR' to end of part number for Tape & Reel

M15, M20, M22 - 2,500 per reel

M30 - 1,500 per reel Full reels only on all

M40 - 1,000 per reel; sizes.

M50 - N/A

Type M15 to M50 Multilayer Ceramic Capacitors

Ratings

RoHS Compliant

Z5U Temperature Coefficient 50 Vdc																				
Catalog		Sizes (Inches)					Catalog		Sizes (Inches)					Catalog		Sizes (Inches)				
Part Number	Cap	L	H	T	S		Part Number	Cap	L	H	T	S		Part Number	Cap	L	H	T	S	
M15U472*5-F	4700 pF	.150	.210	.130	.100		M15U683*5-F	.068 uF	.150	.210	.130	.100		M20U474*5-F	.47 uF	.200	.260	.150	.100	
M15U562*5-F	5600 pF	.150	.210	.130	.100		M20U683*5-F	.068 uF	.200	.260	.150	.100		M22U474*5-F	.47 uF	.200	.260	.150	.200	
M15U682*5-F	6800 pF	.150	.210	.130	.100		M22U683*5-F	.068 uF	.200	.260	.150	.200		M30U474*5-F	.47 uF	.300	.360	.200	.200	
M15U822*5-F	8200 pF	.150	.210	.130	.100		M20U823*5-F	.082 uF	.200	.260	.150	.100		M20U564*5-F	.56 uF	.200	.260	.150	.100	
M15U103*5-F	.010 uF	.150	.210	.130	.100		M22U823*5-F	.082 uF	.200	.260	.150	.200		M22U564*5-F	.56 uF	.200	.260	.150	.200	
M15U123*5-F	.012 uF	.150	.210	.130	.100		M15U104*5-F	.10 uF	.150	.210	.130	.100		M30U564*5-F	.56 uF	.300	.360	.200	.200	
M15U153*5-F	.015 uF	.150	.210	.130	.100		M20U104*5-F	.10 uF	.200	.260	.150	.100		M30U684*5-F	.68 uF	.300	.360	.200	.200	
M15U183*5-F	.018 uF	.150	.210	.130	.100		M22U104*5-F	.10 uF	.200	.260	.150	.200		M30U824*5-F	.82 uF	.300	.360	.200	.200	
M15U223*5-F	.022 uF	.150	.210	.130	.100		M20U124*5-F	.12 uF	.200	.260	.150	.100		M30U105*5-F	1.0 uF	.300	.360	.200	.200	
M15U273*5-F	.027 uF	.150	.210	.130	.100		M22U124*5-F	.12 uF	.200	.260	.150	.200		M30U125*5-F	1.2 uF	.300	.360	.200	.200	
M20U273*5-F	.027 uF	.200	.260	.150	.100		M20U154*5-F	.15 uF	.200	.260	.150	.100		M40U125*5-F	1.2 uF	.400	.460	.200	.200	
M22U273*5-F	.027 uF	.200	.260	.150	.200		M22U154*5-F	.15 uF	.200	.260	.150	.200		M30U155*5-F	1.5 uF	.300	.360	.200	.200	
M15U333*5-F	.033 uF	.150	.210	.130	.100		M20U184*5-F	.18 uF	.200	.260	.150	.100		M40U155*5-F	1.5 uF	.400	.460	.200	.200	
M20U333*5-F	.033 uF	.200	.260	.150	.100		M22U184*5-F	.18 uF	.200	.260	.150	.200		M30U185*5-F	1.8 uF	.300	.360	.200	.200	
M22U333*5-F	.033 uF	.200	.260	.150	.200		M20U224*5-F	.22 uF	.200	.260	.150	.100		M40U185*5-F	1.8 uF	.400	.460	.200	.200	
M15U393*5-F	.039 uF	.150	.210	.130	.100		M22U224*5-F	.22 uF	.200	.260	.150	.200		M40U225*5-F	2.2 uF	.400	.460	.200	.200	
M20U393*5-F	.039 uF	.200	.260	.150	.100		M20U274*5-F	.27 uF	.200	.260	.150	.100		M40U275*5-F	2.7 uF	.400	.460	.200	.200	
M22U393*5-F	.039 uF	.200	.260	.150	.200		M22U274*5-F	.27 uF	.200	.260	.150	.200		M40U335*5-F	3.3 uF	.400	.460	.200	.200	
M15U473*5-F	.047 uF	.150	.210	.130	.100		M30U274*5-F	.27 uF	.300	.360	.200	.200		M40U395*5-F	3.9 uF	.400	.460	.200	.200	
M20U473*5-F	.047 uF	.200	.260	.150	.100		M20U334*5-F	.33 uF	.200	.260	.150	.100		M50U395*5-F	3.9 uF	.500	.560	.250	.400	
M22U473*5-F	.047 uF	.200	.260	.150	.200		M22U334*5-F	.33 uF	.200	.260	.150	.200		M40U475*5-F	4.7 uF	.400	.460	.200	.200	
M15U563*5-F	.056 uF	.150	.210	.130	.100		M30U334*5-F	.33 uF	.300	.360	.200	.200		M50U475*5-F	4.7 uF	.500	.560	.250	.400	
M20U563*5-F	.056 uF	.200	.260	.150	.100		M20U394*5-F	.39 uF	.200	.260	.150	.100		M50U565*5-F	5.6 uF	.500	.560	.250	.400	
M22U563*5-F	.056 uF	.200	.260	.150	.200		M22U394*5-F	.39 uF	.200	.260	.150	.200		M50U685*5-F	6.8 uF	.500	.560	.250	.400	
Add 'TR' to end of part number for Tape & Reel							M30U394*5-F	.39 uF	.300	.360	.200	.200		*Insert proper letter symbol for tolerance						

Add 'TR' to end of part number for Tape & Reel

M15, M20, M22 - 2,500 per reel

M30 - 1,500 per reel Full reels only on all


M40 - 1,000 per reel; sizes.

M50 - N/A

*Insert proper letter symbol for tolerance

K = 10%; M = ±20%

Outline Drawing

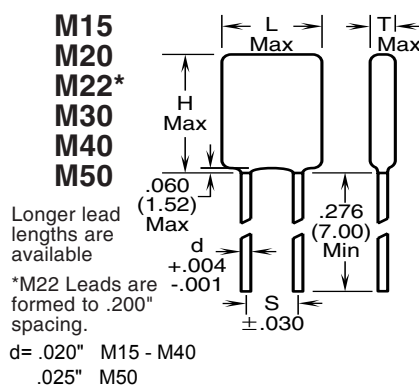

M30 Z5U 100 V 104 - 334 leads are formed to .200"

M30 X7R 50 V 154-105 leads are formed to .200"

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru