
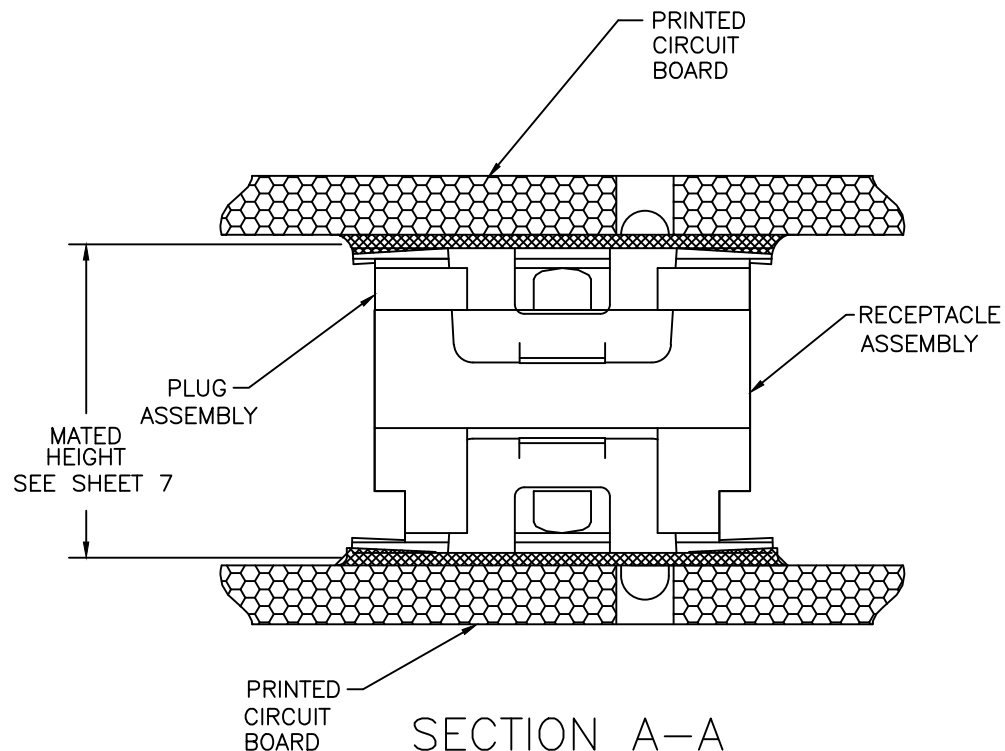




PRODUCT NUMBER
SEE TABLE

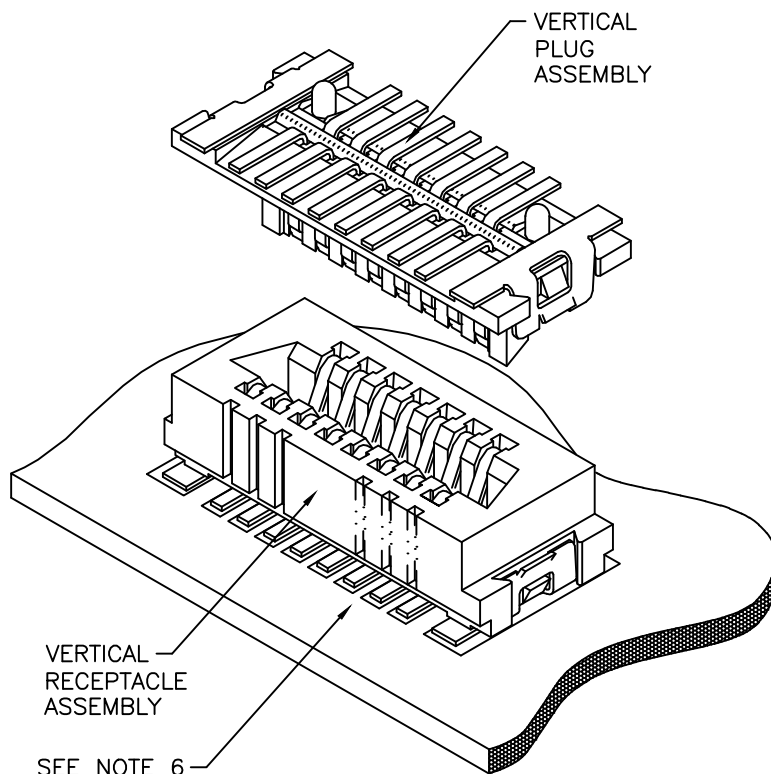

SECTION A-A
ROTATED 90°
N.T.S.


mat'l. code				surface ISO 1302 ✓			tolerance ISO 406 ISO 1101					product family CONAN®					
ltr	ecn no	dr	date	tolerances unless otherwise specified													
A	N11-0214	J.Z	2011-07-20	angles	linear	XX±.01/XX±0.3					title CONAN® CONNECTOR ASSEMBLY						
B	ELX-N-05460	J.Z	2011-08-23			XXX±.005/XXX±0.13											
C	ELX-N-14210	GM	2013-03-07			XXXX±.0020/XXXX±0.051											
				0°±2°					scale 5:1								
				dr		J.ZHOU		2011-07-20				dwg no		sheet 1 of 7		size	
				engr		J.ZHOU		2011-07-20				10118744		A3			
				chr		J.ZHOU		2011-07-20									
				appd		R.BIAN		2011-07-20									
sheet		revision		C	C	C	C	C	C	C							
index		sheet		1	2	3	4	5	6	7							

PRODUCT NUMBER
SEE TABLE

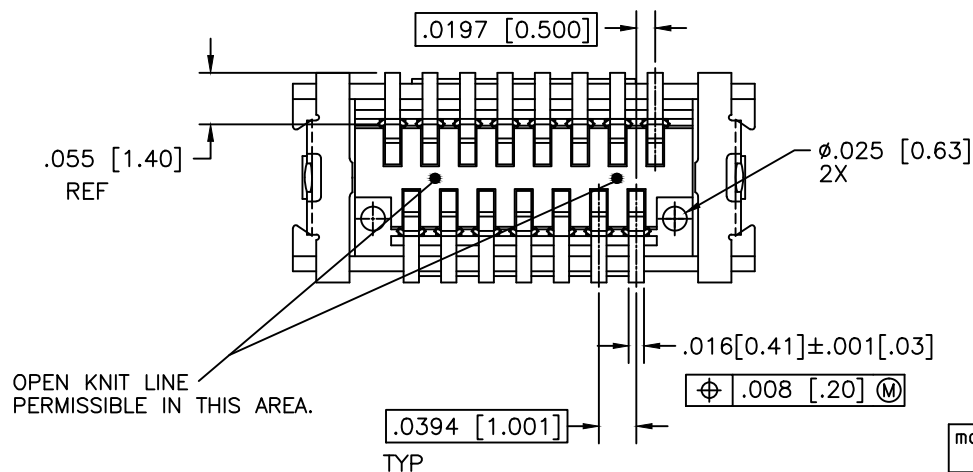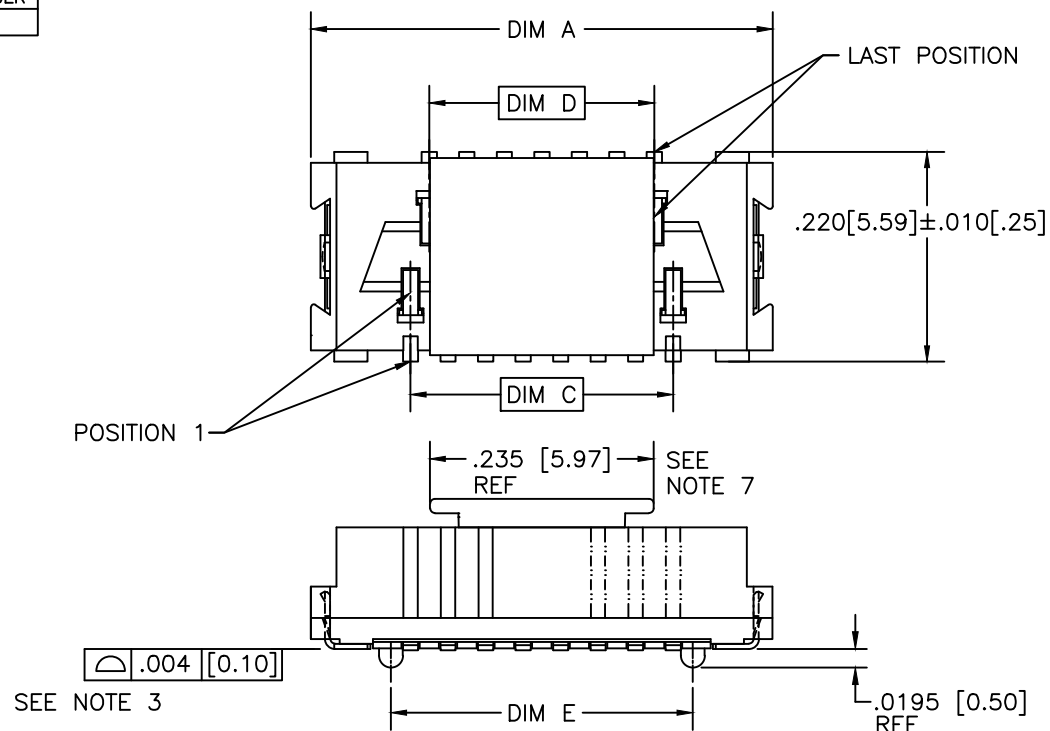


mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection INCH/MM	product family CONAN®
ltr	ecn no	dr	date	tolerances unless otherwise specified		scale 5:1	title CONAN® CONNECTOR ASSEMBLY
c				angles	linear		
				0°±2°			dwg no
				dr	J.ZHOU	2011-07-20	sheet 2 of 7
				enr	J.ZHOU	2011-07-20	size
				chr	J.ZHOU	2011-07-20	10118744
				appd	R.BIAN	2011-07-20	A3
sheet index	revision sheet						type
							Product Customer Drawing

PRODUCT NUMBER
SEE TABLE

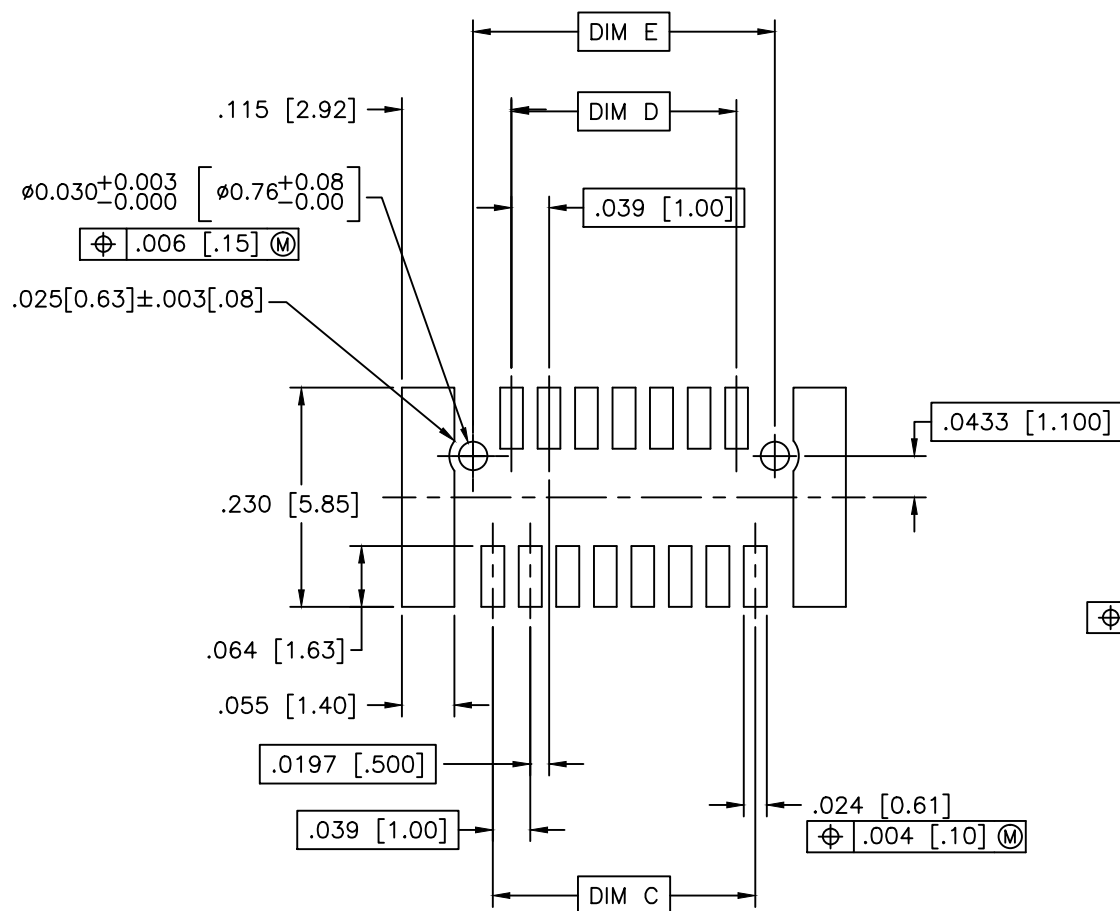




RECOMMENDED
PAD LAYOUT
FOR RECEPTACLE

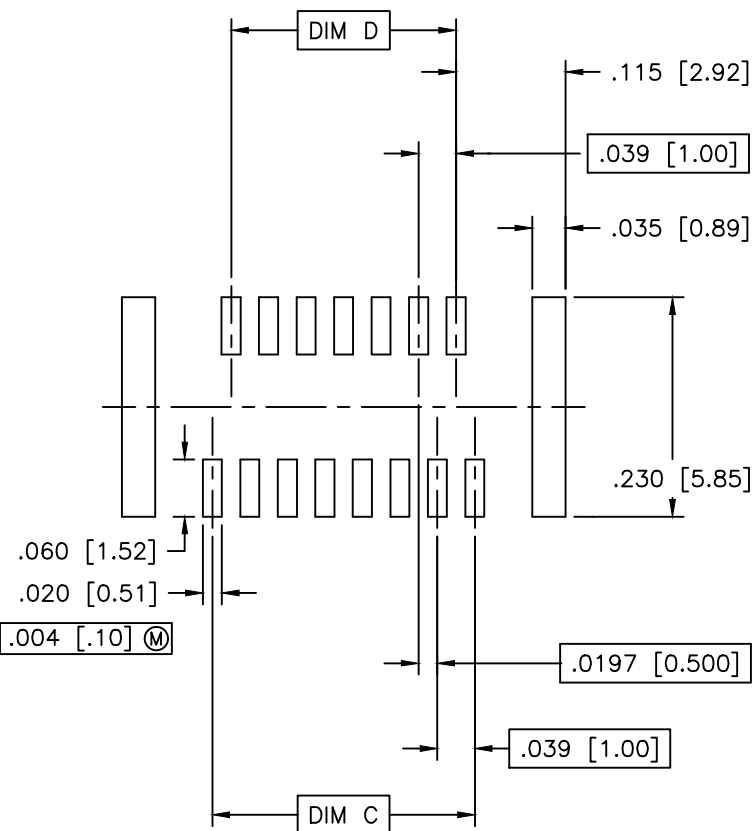


RECOMMENDED
STENCIL LAYOUT
FOR RECEPTACLE

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family CONAN®			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title CONAN® CONNECTOR ASSEMBLY			
c				angles	linear					
				0°±2°			dwg no 10118744			
				dr	J.ZHOU	2011-07-20				
				enr	J.ZHOU	2011-07-20	sheet 3 of 7 size A3			
				chr	J.ZHOU	2011-07-20				
				appd	R.BIAN	2011-07-20	type Product Customer Drawing			
sheet index	revision sheet									

PRODUCT NUMBER
SEE TABLE

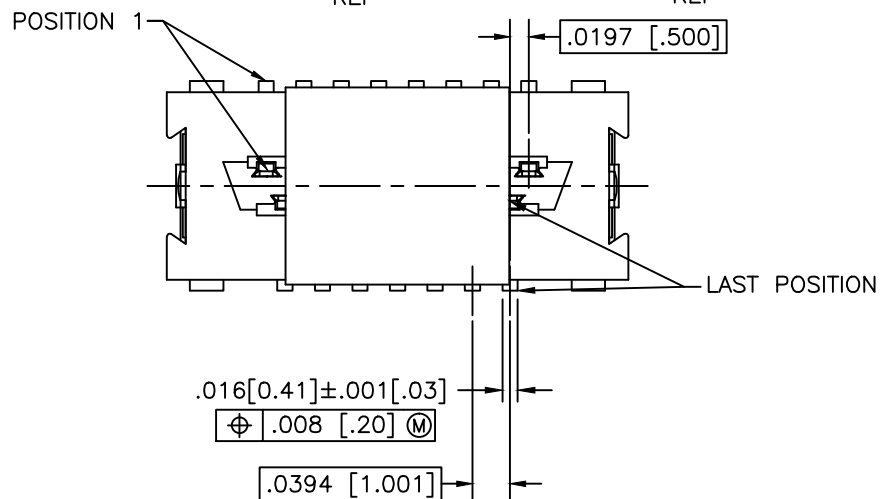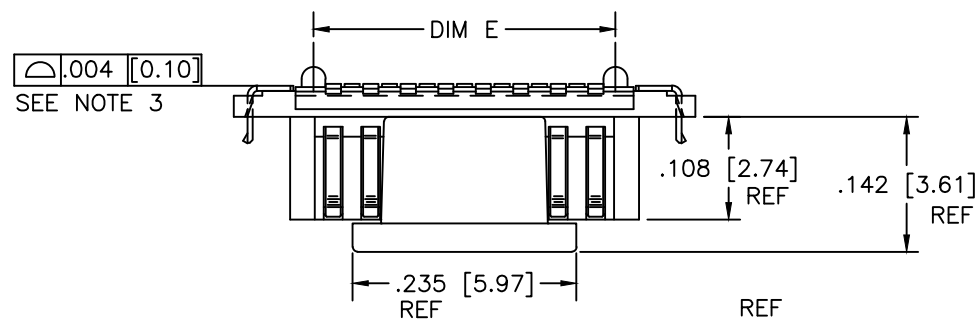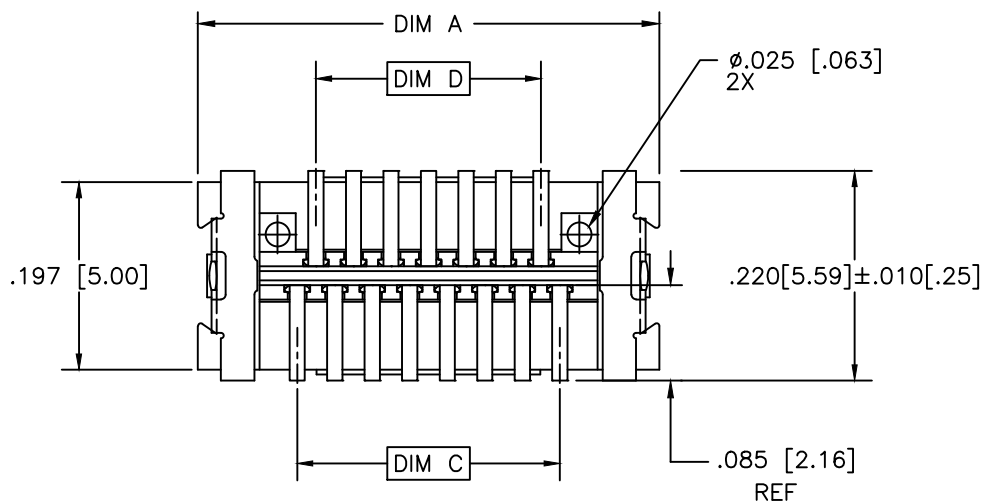

PLUG


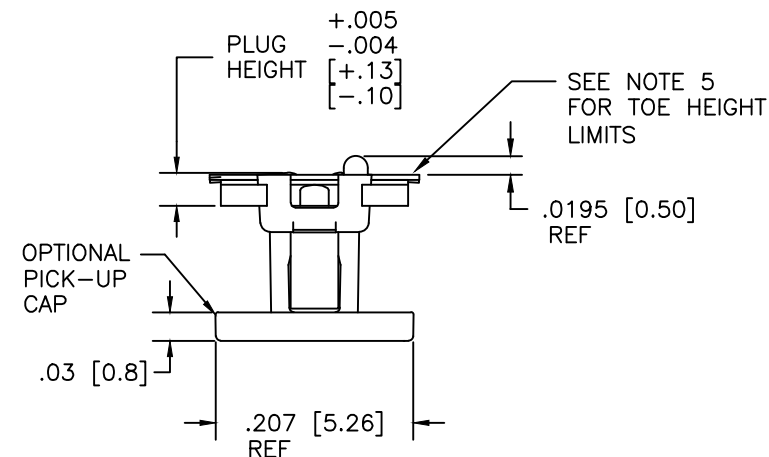


mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family CONAN®
ltr	ecn no	dr	date	tolerances unless otherwise specified			title CONAN® CONNECTOR ASSEMBLY
c				angles	linear		
				0° ± 2'		INCH/MM	
				dr	J.ZHOU	2011-07-20	dwg no
				enr	J.ZHOU	2011-07-20	10118744
				chr	J.ZHOU	2011-07-20	sheet 4 of 7 size
				appd	R.BIAN	2011-07-20	A3
sheet index	revision sheet						type Product Customer Drawing



FCIconnect.com

Copyright FCI

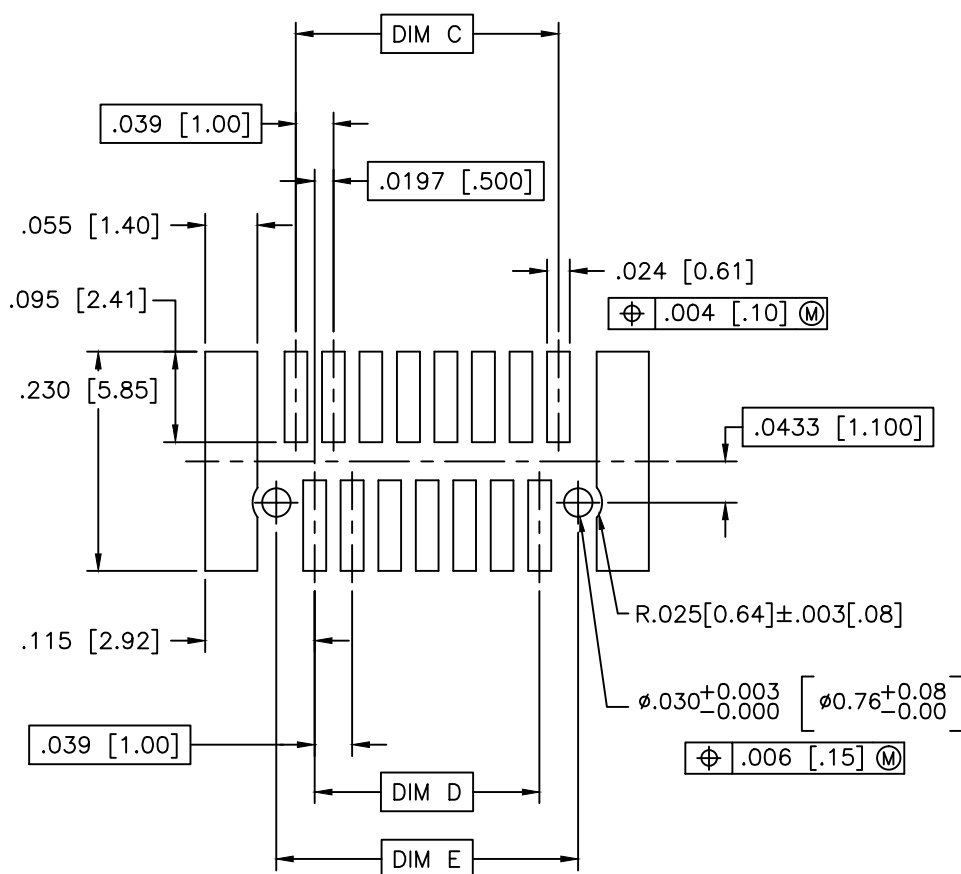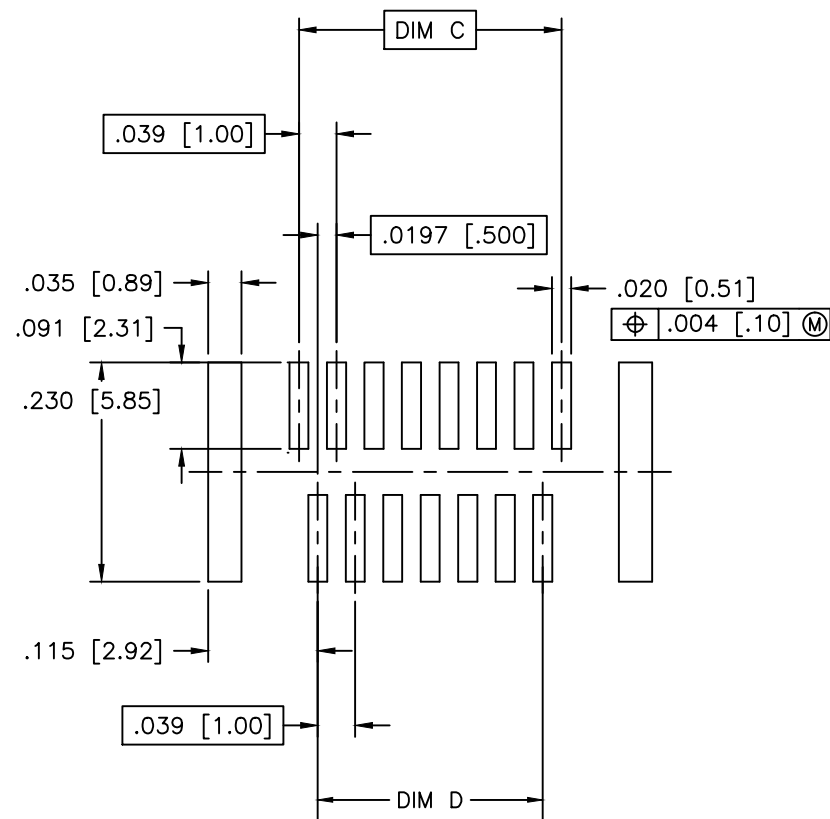PRODUCT NUMBER
SEE TABLERECOMMENDED
PAD LAYOUT
FOR PLUGRECOMMENDED
STENCIL LAYOUT
FOR PLUG

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection INCH/MM	product family CONAN®			
ltr	ecn no	dr	date	tolerances unless otherwise specified		scale 5:1	title CONAN® CONNECTOR ASSEMBLY			
c				angles	linear					
				0° ± 2'			dwg no 10118744			
				dr	J.ZHOU	2011-07-20				
				enr	J.ZHOU	2011-07-20	sheet 5 of 7 size A3			
				chr	J.ZHOU	2011-07-20				
				appd	R.BIAN	2011-07-20	type Product Customer Drawing			
sheet index	revision sheet									

PRODUCT NUMBER	POS	DIM "A"	DIM "C"	DIM "D"	DIM "E"
10118744-TCWXY09LF	9	.366 [9.30]	.157 [4.00]	.118 [3.00]	.1990 [5.055]
-TCWXY11LF	11	.406 [10.30]	.197 [5.00]	.157 [4.00]	.2380 [6.045]
-TCWXY15LF	15	.484 [12.30]	.276 [7.00]	.236 [6.00]	.3170 [8.052]
-TCWXY21LF	21	.602 [15.30]	.394 [10.00]	.354 [9.00]	.4350 [11.049]
-TCWXY25LF	25	.681 [17.30]	.472 [12.00]	.433 [11.00]	.5140 [13.056]
-TCWXY31LF	31	.800 [20.30]	.591 [15.00]	.551 [14.00]	.6320 [16.053]
-TCWXY41LF	41	.996 [25.30]	.787 [20.00]	.748 [19.00]	.8290 [21.057]
-TCWXY51LF	51	1.193 [30.30]	.984 [25.00]	.945 [24.00]	1.0260 [26.060]
-TCWXY69LF	69	1.547 [39.30]	1.339 [34.00]	1.299 [33.00]	1.3800 [35.052]

NOTES:

1. MATERIALS:

RECEPTACLE HOUSING - LCP, UL-94V-0. COLOR: NATURAL.

RECEPTACLE TERMINALS - COPPER ALLOY,
PLATED WITH GOLD OR GXT IN CONTACT AREA
AND 100u"/2.54u Sn ON SOLDER LEGS WITH
AN OVERALL 50u"/1.27u Ni UNDERPLATE.

PLUG HOUSING - LCP, UL-94V-0. COLOR: NATURAL.

PLUG TERMINALS - COPPER ALLOY,
PLATED WITH GOLD OR GXT IN CONTACT AREA
AND 100u"/2.54u Sn ON SOLDER LEGS WITH
AN OVERALL 50u"/1.27u Ni UNDERPLATE.

RETENTION DEVICE - BRASS,
PLATED WITH 100u"/2.54u Sn OVER NICKEL.

2. REFERENCE GS-12-0977 FOR PRODUCT PERFORMANCE AND ENVIRONMENTAL RESISTANCE DATA.

3. SEE TA-774 FOR FURTHER DESCRIPTION OF HOW THIS DIMENSION IS APPLIED.

4. RECOMMENDED SOLDER PASTE THICKNESS IS .006 TO .008 INCHES THICK.

5. THE TOE HEIGHT OF THE SOLDER TAIL SHALL BE MEASURED FROM THE LOWEST POINT OF THE .004 CO-PLANARITY GRAVITY PLANE. THIS MEASUREMENT IS NOT TO EXCEED A WINDOW OF .000 TO .007 INCHES.

6. THREE SLOTS MAY BE LOCATED AT EITHER END OF HOUSING.

7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A CONVECTION INFRA RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION/PROCEDURES IF THEY ARE AVAILABLE

8. PRODUCT WITH "LF" AT THE END MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family CONAN®			
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title CONAN® CONNECTOR ASSEMBLY			
c					angles	linear	INCH/MM			
							scale 5:1			
					dr	J.ZHOU	2011-07-20	dwg no		
					enr	J.ZHOU	2011-07-20	sheet 6 of 7		
					chr	J.ZHOU	2011-07-20	10118744		
					appd	R.BIAN	2011-07-20	A3		
sheet	revision							type		
index	sheet							Product Customer Drawing		

PRODUCT NUMBER
SEE TABLE

CONAN® ASSEMBLY PART NUMBER

10118744 - T C W 3 Y ZZ LF

LEAD FREE
SEE NOTE 8

TYPE	T
PLUG WITH PEGS	1
RECEPTACLE WITH PEGS	3

Y	PLUG HEIGHT	RECEPTACLE HEIGHT	MATED HEIGHT +.010 -.008 [+.25] [-.20]
1	.034 [.86]	.129 [3.28]	.163 [4.15]
2	.048 [1.23]	SEE Y=1 FOR ALL RECEPTACLES	.177 [4.50]
3	.068 [1.73]		.197 [5.00]
4	.107 [2.72]		.236 [6.00]
5	.1465 [3.721]		.276 [7.00]

ZZ	NUMBER OF POSITIONS
09	9
11	11
15	15
21	21
25	25
31	31
41	41
51	51
69	69

PICK AND PLACE CAP OR TAPE	C
WITH CAP	1

PACKAGING	W
PRESSURE SEALED TAPE & REEL	3

EXAMPLE: 10118744-3131125LF
IS A CONAN® RECEPTACLE ASSEMBLY,
HAVING PEGS AND WITH A PICK AND PLACE CAP.
IT IS .13 [3.2] HIGH AND 25 POSITIONS AND IS
PACKAGED IN PRESSURE SEALED TAPE, REEL AND LEAD FREE.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family CONAN®			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM scale 5:1	title CONAN® CONNECTOR ASSEMBLY			
C				angles	linear					
				0°±2'						
				dr	J.ZHOU	2011-07-20				
				enr	J.ZHOU	2011-07-20				
				chr	J.ZHOU	2011-07-20				
				appd	R.BIAN	2011-07-20	dwg no 10118744			
sheet index	revision sheet									
							type Product Customer Drawing			
							sheet 7 of 7 size A3			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru