




## Cree® XLamp® XP-G3 LEDs



XP-G3 White



XP-G3 Royal Blue



XP-G3 Photo Red

### PRODUCT DESCRIPTION

XLamp® XP-G3 LEDs are optimized for directional, high-lumen lighting applications where efficacy and optical control are critical, such as roadway, portable and horticulture. The compact and proven 3.45-mm XP platform has an excellent ecosystem of optics and system solutions available, enabling lighting manufacturers to simplify their design process and shorten time-to-market.

XP-G3 LEDs are available in royal blue, photo red and two different white versions. White (Standard) delivers best-in-class TM-21 lifetimes and color stability over time. White (S Line) improves on the Standard version: better system-level reliability through switching and dimming cycles, improved resistance to sulfur exposure and higher efficacy. With this S Line version, Cree delivers high-power LED technology that is optimized for robust lighting applications where sensors and the internet-of-things (IOT) are becoming common.

### FEATURES

- Available in no CRI minimum white, 70-, 80- and 90-CRI white, royal blue & photo red
- ANSI-compatible chromaticity bins
- 3-step and 5-step options
- White binned at 85 °C, royal blue & photo red binned at 25 °C
- Maximum drive current: white, royal blue: 2000 mA, photo red: 1500 mA
- Low thermal resistance: white: 3 °C/W, royal blue: 2 °C/W, photo red: 2.5 °C/W
- Wide viewing angle: 125°–130°
- Unlimited floor life at ≤ 30 °C/85% RH
- Reflow solderable - JEDEC J-STD-020C
- Electrically neutral thermal path
- RoHS and REACH compliant
- UL® recognized component (E349212)



## TABLE OF CONTENTS

|                                                                                                 |    |
|-------------------------------------------------------------------------------------------------|----|
| Characteristics .....                                                                           | 3  |
| Flux Characteristics - White (Standard) .....                                                   | 4  |
| Flux Characteristics - White (S Line) .....                                                     | 13 |
| Flux Characteristics - Color .....                                                              | 15 |
| Relative Spectral Power Distribution - White (Standard) .....                                   | 16 |
| Relative Spectral Power Distribution - White (S Line) .....                                     | 16 |
| Relative Spectral Power Distribution - Color .....                                              | 17 |
| Relative Flux vs. Junction Temperature - White (Standard) .....                                 | 17 |
| Relative Flux vs. Junction Temperature - White (S Line) .....                                   | 18 |
| Relative Flux vs. Junction Temperature - Color .....                                            | 18 |
| Electrical Characteristics - White (Standard) .....                                             | 19 |
| Electrical Characteristics - White (S Line) .....                                               | 19 |
| Electrical Characteristics - Color .....                                                        | 20 |
| Relative Luminous Flux vs. Current - White (Standard) .....                                     | 20 |
| Relative Luminous Flux vs. Current - White (S Line) .....                                       | 21 |
| Relative Radiant Flux vs. Current - Color .....                                                 | 21 |
| Relative Chromaticity vs. Current and Temperature .....                                         | 22 |
| Typical Spatial Distribution - White (Standard) .....                                           | 23 |
| Typical Spatial Distribution - White (S Line) .....                                             | 23 |
| Typical Spatial Distribution - Color .....                                                      | 24 |
| Thermal Design .....                                                                            | 25 |
| Performance Groups - Luminous Flux .....                                                        | 26 |
| Performance Groups - Radiant Flux .....                                                         | 26 |
| Performance Groups - Peak Wavelength .....                                                      | 27 |
| Performance Groups - Forward Voltage .....                                                      | 27 |
| Performance Groups - Chromaticity .....                                                         | 28 |
| Cree's Standard Chromaticity Regions Plotted on the 1931 CIE Curve .....                        | 32 |
| Cree's Standard Cool White Kits Plotted on ANSI Standard Chromaticity Regions .....             | 34 |
| Cree's Standard Warm and Neutral White Kits Plotted on ANSI Standard Chromaticity Regions ..... | 35 |
| Cree's EasyWhite® White Kits Plotted on ANSI Standard Chromaticity Regions .....                | 36 |
| Cree's Standard Chromaticity Kits .....                                                         | 37 |
| Bin and Order Code Formats .....                                                                | 38 |
| Reflow Soldering Characteristics .....                                                          | 39 |
| Notes .....                                                                                     | 40 |
| Mechanical Dimensions .....                                                                     | 42 |
| Tape and Reel .....                                                                             | 43 |
| Packaging .....                                                                                 | 44 |

## CHARACTERISTICS

| Characteristics                                                 | Unit    | Minimum | Typical  | Maximum |
|-----------------------------------------------------------------|---------|---------|----------|---------|
| Thermal resistance, junction to solder point - standard, S Line | °C/W    |         | 3        |         |
| Thermal resistance, junction to solder point - royal blue       | °C/W    |         | 2        |         |
| Thermal resistance, junction to solder point - photo red        | °C/W    |         | 2.5      |         |
| Viewing angle (FWHM) - standard, S Line                         | degrees |         | 125      |         |
| Viewing angle (FWHM) - royal blue                               | degrees |         | 130      |         |
| Viewing angle (FWHM) - photo red                                | degrees |         | 125      |         |
| Temperature coefficient of voltage                              | mV/°C   |         | -1.3     |         |
| ESD withstand voltage (HBM per Mil-Std-883D)                    |         |         | Class 3A |         |
| DC forward current - standard, S Line, royal blue               | mA      |         |          | 2000    |
| DC forward current - photo red                                  | mA      |         |          | 1500    |
| Reverse voltage                                                 | V       |         |          | 5       |
| Forward voltage (@ 350 mA, 85 °C) - standard, S Line            | V       |         | 2.70     | 2.90    |
| Forward voltage (@ 350 mA, 25 °C) - royal blue                  | V       |         | 2.79     | 3.0     |
| Forward voltage (@ 350 mA, 25 °C) - photo red                   | V       |         | 1.99     | 2.2     |
| Forward voltage (@ 700 mA, 85 °C) - standard, S Line            | V       |         | 2.80     |         |
| Forward voltage (@ 700 mA, 25 °C) - royal blue                  | V       |         | 2.90     |         |
| Forward voltage (@ 700 mA, 25 °C) - photo red                   | V       |         | 2.18     |         |
| Forward voltage (@ 1000 mA, 85 °C) - standard, S Line           | V       |         | 2.87     |         |
| Forward voltage (@ 1000 mA, 25 °C) - royal blue                 | V       |         | 2.99     |         |
| Forward voltage (@ 1000 mA, 25 °C) - photo red                  | V       |         | 2.36     |         |
| Forward voltage (@ 1500 mA, 85 °C) - standard, S Line           | V       |         | 2.97     |         |
| Forward voltage (@ 1500 mA, 25 °C) - royal blue                 | V       |         | 3.11     |         |
| Forward voltage (@ 1500 mA, 25 °C) - photo red                  | V       |         | 2.65     |         |
| Forward voltage (@ 2000 mA, 85 °C) - standard, S Line           | V       |         | 3.06     |         |
| Forward voltage (@ 2000 mA, 25 °C) - royal blue                 | V       |         | 3.20     |         |
| LED junction temperature                                        | °C      |         |          | 150     |

## FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$

The following table provides order codes for XLamp XP-G3 White (Standard) LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 38). For definitions of the chromaticity kits, please see the Cree's Standard Chromaticity Kits section (page 37).

| Chromaticity |         | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|---------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT     | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| DT           | 7000 K  | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00MDT |                      |                      |
|              |         | S4                                  | 164               | 179                | XPGDWT-01-0000-00LDT | XPGDWT-B1-0000-00LDT |                      |                      |
|              |         | S3                                  | 156               | 170                | XPGDWT-01-0000-00KDT | XPGDWT-B1-0000-00KDT | XPGDWT-H1-0000-00KDT |                      |
|              |         | S2                                  | 148               | 161                | XPGDWT-01-0000-00JDT | XPGDWT-B1-0000-00JDT | XPGDWT-H1-0000-00JDT |                      |
|              |         | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HDT |                      |
| CB           | 6500 K  | S3                                  | 156               | 170                |                      |                      | XPGDWT-H1-0000-00KCB |                      |
|              |         | S2                                  | 148               | 161                |                      |                      | XPGDWT-H1-0000-00JCB |                      |
|              |         | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HCB |                      |
| E0           | >6500 K | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE0 | XPGDWT-B1-0000-00LE0 |                      |                      |
|              |         | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE0 | XPGDWT-B1-0000-00KE0 | XPGDWT-H1-0000-00KE0 |                      |
|              |         | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE0 | XPGDWT-B1-0000-00JE0 | XPGDWT-H1-0000-00JE0 |                      |
|              |         | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HE0 |                      |
| E1           | 6500 K  | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE1 | XPGDWT-B1-0000-00LE1 |                      |                      |
|              |         | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE1 | XPGDWT-B1-0000-00KE1 | XPGDWT-H1-0000-00KE1 |                      |
|              |         | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE1 | XPGDWT-B1-0000-00JE1 | XPGDWT-H1-0000-00JE1 |                      |
|              |         | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HE1 |                      |
| DV           | 6000 K  | S5                                  | 172               | 187                | XPGDWT-01-0000-00MDV | XPGDWT-B1-0000-00MDV |                      |                      |
|              |         | S4                                  | 164               | 179                | XPGDWT-01-0000-00LDV | XPGDWT-B1-0000-00LDV |                      |                      |
|              |         | S3                                  | 156               | 170                | XPGDWT-01-0000-00KDV | XPGDWT-B1-0000-00KDV | XPGDWT-H1-0000-00KDV |                      |
|              |         | S2                                  | 148               | 161                | XPGDWT-01-0000-00JDV | XPGDWT-B1-0000-00JDV | XPGDWT-H1-0000-00JDV |                      |
|              |         | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HDV |                      |
|              |         | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |         | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FDV |
|              |         | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EDV |

### Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| 50           | 6000 K | S5                                  | 172               | 187                | XPGDWT-01-0000-00M50 | XPGDWT-B1-0000-00M50 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00L50 | XPGDWT-B1-0000-00L50 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00K50 | XPGDWT-B1-0000-00K50 | XPGDWT-H1-0000-00K50 |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00J50 | XPGDWT-B1-0000-00J50 | XPGDWT-H1-0000-00J50 |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H50 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00F50 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E50 |
| E2           | 5700 K | S5                                  | 172               | 187                | XPGDWT-01-0000-00ME2 | XPGDWT-B1-0000-00ME2 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE2 | XPGDWT-B1-0000-00LE2 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE2 | XPGDWT-B1-0000-00KE2 | XPGDWT-H1-0000-00KE2 |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE2 | XPGDWT-B1-0000-00JE2 | XPGDWT-H1-0000-00JE2 |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HE2 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FE2 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EE2 |
| 2E           | 5700 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00M2E |                      |                      |
|              |        | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L2E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K2E | XPGDWT-H1-0000-00K2E |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J2E | XPGDWT-H1-0000-00J2E |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H2E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00F2E |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E2E |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85\text{ }^{\circ}\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| 3E           | 5000 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00M3E |                      |                      |
|              |        | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L3E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K3E | XPGDWT-H1-0000-00K3E |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J3E | XPGDWT-H1-0000-00J3E |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H3E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00F3E |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E3E |
| E3           | 5000 K | S5                                  | 172               | 187                | XPGDWT-01-0000-00ME3 | XPGDWT-B1-0000-00ME3 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE3 | XPGDWT-B1-0000-00LE3 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE3 | XPGDWT-B1-0000-00KE3 | XPGDWT-H1-0000-00KE3 |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE3 | XPGDWT-B1-0000-00JE3 | XPGDWT-H1-0000-00JE3 |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HE3 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      |                      |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FE3 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EE3 |
| F4           | 4750K  | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00MF4 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LF4 | XPGDWT-B1-0000-00LF4 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KF4 | XPGDWT-B1-0000-00KF4 | XPGDWT-H1-0000-00KF4 |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JF4 | XPGDWT-B1-0000-00JF4 | XPGDWT-H1-0000-00JF4 |                      |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00HF4 | XPGDWT-H1-0000-00HF4 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GF4 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FF4 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EF4 |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| 4E           | 4500K  | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00M4E |                      |                      |
|              |        | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L4E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K4E | XPGDWT-H1-0000-00K4E |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J4E | XPGDWT-H1-0000-00J4E |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H4E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00G4E |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00F4E |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E4E |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D4E |
| E4           | 4500 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00ME4 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE4 | XPGDWT-B1-0000-00LE4 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE4 | XPGDWT-B1-0000-00KE4 | XPGDWT-H1-0000-00KE4 |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE4 | XPGDWT-B1-0000-00JE4 | XPGDWT-H1-0000-00JE4 |                      |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00HE4 | XPGDWT-H1-0000-00HE4 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GE4 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FE4 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EE4 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DE4 |
| F5           | 4200 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00MF5 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LF5 | XPGDWT-B1-0000-00LF5 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KF5 | XPGDWT-B1-0000-00KF5 |                      |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JF5 | XPGDWT-B1-0000-00JF5 | XPGDWT-H1-0000-00JF5 |                      |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00HF5 | XPGDWT-H1-0000-00HF5 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GF5 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FF5 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EF5 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DF5 |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| 5E           | 4000 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00M5E |                      |                      |
|              |        | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L5E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K5E |                      |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J5E | XPGDWT-H1-0000-00J5E |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H5E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00G5E |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00F5E |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E5E |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D5E |
| E5           | 4000 K | S5                                  | 172               | 187                |                      | XPGDWT-B1-0000-00ME5 |                      |                      |
|              |        | S4                                  | 164               | 179                | XPGDWT-01-0000-00LE5 | XPGDWT-B1-0000-00LE5 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE5 | XPGDWT-B1-0000-00KE5 |                      |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE5 | XPGDWT-B1-0000-00JE5 | XPGDWT-H1-0000-00JE5 |                      |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00HE5 | XPGDWT-H1-0000-00HE5 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GE5 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      | XPGDWT-U1-0000-00FE5 |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EE5 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DE5 |
| F6           | 3700 K | S4                                  | 164               | 179                | XPGDWT-01-0000-00LF6 | XPGDWT-B1-0000-00LF6 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KF6 | XPGDWT-B1-0000-00KF6 |                      |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JF6 | XPGDWT-B1-0000-00JF6 | XPGDWT-H1-0000-00JF6 |                      |
|              |        | R5                                  | 139               | 152                | XPGDWT-01-0000-00HF6 | XPGDWT-B1-0000-00HF6 | XPGDWT-H1-0000-00HF6 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GF6 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EF6 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DF6 |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00CF6 |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.



# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                       |                       |                       |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|-----------------------|-----------------------|-----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum        | 80 CRI Minimum        | 90 CRI Minimum        |
| 6E           | 3500 K | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00LE6E |                       |                       |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00KE6E |                       |                       |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00JE6E | XPGDWT-H1-0000-00JE6E |                       |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00HE6E | XPGDWT-H1-0000-00HE6E |                       |
|              |        | R4                                  | 130               | 142                |                      |                       | XPGDWT-H1-0000-00GE6E |                       |
|              |        | R3                                  | 122               | 133                |                      |                       |                       |                       |
|              |        | R2                                  | 114               | 124                |                      |                       |                       | XPGDWT-U1-0000-00EE6E |
|              |        | Q5                                  | 107               | 117                |                      |                       |                       | XPGDWT-U1-0000-00DE6E |
|              |        | Q4                                  | 100               | 109                |                      |                       |                       | XPGDWT-U1-0000-00CE6E |
| 6G           | 3500 K | R2                                  | 114               | 124                |                      |                       |                       | XPGDWT-U1-0000-00EE6G |
|              |        | Q5                                  | 107               | 117                |                      |                       |                       | XPGDWT-U1-0000-00DE6G |
|              |        | Q4                                  | 100               | 109                |                      |                       |                       | XPGDWT-U1-0000-00CE6G |
| E6           | 3500 K | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00LE6  |                       |                       |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE6 | XPGDWT-B1-0000-00KE6  |                       |                       |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE6 | XPGDWT-B1-0000-00JE6  | XPGDWT-H1-0000-00JE6  |                       |
|              |        | R5                                  | 139               | 152                | XPGDWT-01-0000-00HE6 | XPGDWT-B1-0000-00HE6  | XPGDWT-H1-0000-00HE6  |                       |
|              |        | R4                                  | 130               | 142                |                      |                       | XPGDWT-H1-0000-00GE6  |                       |
|              |        | R3                                  | 122               | 133                |                      |                       |                       |                       |
|              |        | R2                                  | 114               | 124                |                      |                       |                       | XPGDWT-U1-0000-00EE6  |
|              |        | Q5                                  | 107               | 117                |                      |                       |                       | XPGDWT-U1-0000-00DE6  |
|              |        | Q4                                  | 100               | 109                |                      |                       |                       | XPGDWT-U1-0000-00CE6  |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85\text{ }^{\circ}\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| F7           | 3200K  | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00LF7 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KF7 | XPGDWT-B1-0000-00KF7 |                      |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JF7 | XPGDWT-B1-0000-00JF7 |                      |                      |
|              |        | R5                                  | 139               | 152                | XPGDWT-01-0000-00HF7 | XPGDWT-B1-0000-00HF7 | XPGDWT-H1-0000-00HF7 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GF7 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EF7 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DF7 |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00CF7 |
| 7E           | 3000 K | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L7E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K7E |                      |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J7E |                      |                      |
|              |        | R5                                  | 139               | 152                |                      | XPGDWT-B1-0000-00H7E | XPGDWT-H1-0000-00H7E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00G7E |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E7E |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D7E |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00C7E |
| 7G           | 3000 K | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E7G |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D7G |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00C7G |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical       | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| E7           | 3000 K | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00LE7 |                      |                      |
|              |        | S3                                  | 156               | 170                | XPGDWT-01-0000-00KE7 | XPGDWT-B1-0000-00KE7 |                      |                      |
|              |        | S2                                  | 148               | 161                | XPGDWT-01-0000-00JE7 | XPGDWT-B1-0000-00JE7 |                      |                      |
|              |        | R5                                  | 139               | 152                | XPGDWT-01-0000-00HE7 | XPGDWT-B1-0000-00HE7 | XPGDWT-H1-0000-00HE7 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GE7 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      |                      |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EE7 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DE7 |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00CE7 |
| F8           | 2850 K | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00HF8 |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00GF8 |                      |
|              |        | R3                                  | 122               | 133                |                      |                      | XPGDWT-H1-0000-00FF8 |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00EF8 |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00DF8 |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00CF8 |
| 8E           | 2700 K | S4                                  | 164               | 179                |                      | XPGDWT-B1-0000-00L8E |                      |                      |
|              |        | S3                                  | 156               | 170                |                      | XPGDWT-B1-0000-00K8E |                      |                      |
|              |        | S2                                  | 148               | 161                |                      | XPGDWT-B1-0000-00J8E |                      |                      |
|              |        | R5                                  | 139               | 152                |                      |                      | XPGDWT-H1-0000-00H8E |                      |
|              |        | R4                                  | 130               | 142                |                      |                      | XPGDWT-H1-0000-00G8E |                      |
|              |        | R3                                  | 122               | 133                |                      |                      | XPGDWT-H1-0000-00F8E |                      |
|              |        | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E8E |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D8E |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00C8E |
| 8G           | 2700 K | R2                                  | 114               | 124                |                      |                      |                      | XPGDWT-U1-0000-00E8G |
|              |        | Q5                                  | 107               | 117                |                      |                      |                      | XPGDWT-U1-0000-00D8G |
|              |        | Q4                                  | 100               | 109                |                      |                      |                      | XPGDWT-U1-0000-00C8G |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85\text{ }^{\circ}\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes    |                      |                      |                      |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------|----------------------|----------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Typical | 70 CRI Minimum       | 80 CRI Minimum       | 90 CRI Minimum       |
| E8           | 2700K  | S4                                  | 164               | 179                |                | XPGDWT-B1-0000-00LE8 |                      |                      |
|              |        | S3                                  | 156               | 170                |                | XPGDWT-B1-0000-00KE8 |                      |                      |
|              |        | S2                                  | 148               | 161                |                | XPGDWT-B1-0000-00JE8 |                      |                      |
|              |        | R5                                  | 139               | 152                |                |                      | XPGDWT-H1-0000-00HE8 |                      |
|              |        | R4                                  | 130               | 142                |                |                      | XPGDWT-H1-0000-00GE8 |                      |
|              |        | R3                                  | 122               | 133                |                |                      | XPGDWT-H1-0000-00FE8 |                      |
|              |        | R2                                  | 114               | 124                |                |                      |                      | XPGDWT-U1-0000-00EE8 |
|              |        | Q5                                  | 107               | 117                |                |                      |                      | XPGDWT-U1-0000-00DE8 |
|              |        | Q4                                  | 100               | 109                |                |                      |                      | XPGDWT-U1-0000-00CE8 |
| EA           | 2200 K | R3                                  | 122               | 133                |                | XPGDWT-B1-0000-00FEA |                      |                      |
|              |        | R2                                  | 114               | 124                |                | XPGDWT-B1-0000-00EEA |                      |                      |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

## FLUX CHARACTERISTICS - WHITE (S LINE) - $T_j = 85^\circ\text{C}$

The following table provides order codes for XLamp XP-G3 White (S Line) LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 38). For definitions of the chromaticity kits, please see the Cree's Standard Chromaticity Kits section (page 37).

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Minimum       |
| E1           | 6500 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE1 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KE1 |
| DV           | 6000 K | S5                                  | 172               | 187                | XPGDWT-BS-0000-00MDV |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LDV |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KDV |
| 50           | 6000 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L50 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00K50 |
| E2           | 5700 K | S5                                  | 172               | 187                | XPGDWT-BS-0000-00ME2 |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE2 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KE2 |
| 2E           | 5700 K | S5                                  | 172               | 187                | XPGDWT-BS-0000-00M2E |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L2E |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00K2E |
| 3E           | 5000 K | S6                                  | 180               | 196                | XPGDWT-BS-0000-00N3E |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00M3E |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L3E |
| E3           | 5000 K | S6                                  | 180               | 196                | XPGDWT-BS-0000-00NE3 |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00ME3 |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE3 |
| 4E           | 4500K  | S6                                  | 180               | 196                | XPGDWT-BS-0000-00N4E |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00M4E |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L4E |
| E4           | 4500 K | S6                                  | 180               | 196                | XPGDWT-BS-0000-00NE4 |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00ME4 |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE4 |

### Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS - WHITE (S LINE) - $T_j = 85\text{ }^{\circ}\text{C}$ (CONTINUED)

| Chromaticity |        | Minimum Luminous Flux (lm) @ 350 mA |                   |                    | Order Codes          |
|--------------|--------|-------------------------------------|-------------------|--------------------|----------------------|
| Kit          | CCT    | Code                                | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Minimum       |
| 5E           | 4000 K | S6                                  | 180               | 196                | XPGDWT-BS-0000-00N5E |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00M5E |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L5E |
| E5           | 4000 K | S6                                  | 180               | 196                | XPGDWT-BS-0000-00NE5 |
|              |        | S5                                  | 172               | 187                | XPGDWT-BS-0000-00ME5 |
|              |        | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE5 |
| 6E           | 3500 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L6E |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00K6E |
|              |        | S2                                  | 148               | 161                | XPGDWT-BS-0000-00J6E |
| E6           | 3500 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE6 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KE6 |
|              |        | S2                                  | 148               | 161                | XPGDWT-BS-0000-00JE6 |
| F7           | 3200K  | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LF7 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KF7 |
|              |        | S2                                  | 148               | 161                | XPGDWT-BS-0000-00JF7 |
| 7E           | 3000 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00L7E |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00K7E |
|              |        | S2                                  | 148               | 161                | XPGDWT-BS-0000-00J7E |
| E7           | 3000 K | S4                                  | 164               | 179                | XPGDWT-BS-0000-00LE7 |
|              |        | S3                                  | 156               | 170                | XPGDWT-BS-0000-00KE7 |
|              |        | S2                                  | 148               | 161                | XPGDWT-BS-0000-00JE7 |

## Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* Flux values @ 25 °C are calculated and for reference only.

## FLUX CHARACTERISTICS - COLOR ( $T_j = 25\text{ }^{\circ}\text{C}$ )

The following table provides the order code for XLamp XP-G3 color LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 38).


|            | PWL Kit Code | Peak Wavelength Range |          |         |          | Typical Dominant Wavelength (nm)<br>@ 350 mA, T <sub>j</sub> =25 °C | Minimum Radiant Flux (mW)<br>@ 350 mA, |                     | Calculated Minimum PPF (μmol/s)<br>@ 350 mA, 25 °C | Order Code           |
|------------|--------------|-----------------------|----------|---------|----------|---------------------------------------------------------------------|----------------------------------------|---------------------|----------------------------------------------------|----------------------|
|            |              | Minimum               |          | Maximum |          |                                                                     | Code                                   | Flux (mW)<br>@25 °C |                                                    |                      |
|            |              | Group                 | PWL (nm) | Group   | PWL (nm) |                                                                     |                                        |                     |                                                    |                      |
| Royal Blue | 01           | H26                   | 440      | H47     | 455      | 451                                                                 | E4                                     | 635                 | 2.41                                               | XPGDRY-L1-0000-00401 |
|            |              |                       |          |         |          | 451                                                                 | F2                                     | 680                 | 2.58                                               | XPGDRY-L1-0000-00501 |
|            |              |                       |          |         |          | 451                                                                 | F4                                     | 730                 | 2.77                                               | XPGDRY-L1-0000-00601 |

|           | PWL Kit Code | Peak Wavelength Range |          |         |          | Typical Dominant Wavelength (nm)<br>@ 350 mA, T <sub>j</sub> =25 °C | Minimum Radiant Flux (mW)<br>@ 350 mA, |                     | Calculated Minimum PPF (μmol/s)<br>@ 350 mA, 25 °C | Order Code           |
|-----------|--------------|-----------------------|----------|---------|----------|---------------------------------------------------------------------|----------------------------------------|---------------------|----------------------------------------------------|----------------------|
|           |              | Minimum               |          | Maximum |          |                                                                     | Code                                   | Flux (mW)<br>@25 °C |                                                    |                      |
|           |              | Group                 | PWL (nm) | Group   | PWL (nm) |                                                                     |                                        |                     |                                                    |                      |
| Photo Red | 01           | P2                    | 650      | P5      | 670      | 645                                                                 | 31                                     | 475                 | 2.61                                               | XPGDPR-L1-0000-00E01 |
|           |              | P2                    | 650      | P5      | 670      | 645                                                                 | 32                                     | 500                 | 2.75                                               | XPGDPR-L1-0000-00F01 |
|           |              | P2                    | 650      | P5      | 670      | 645                                                                 | 33                                     | 525                 | 2.88                                               | XPGDPR-L1-0000-00G01 |


### Notes

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 40).
- Cree XLamp XP-G3 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- Dominant wavelengths are calculated based on peak wavelength specifications and are for reference only.
- Calculated Photosynthetic Photon Flux (PPF) values are for reference only.

## RELATIVE SPECTRAL POWER DISTRIBUTION - WHITE (STANDARD)

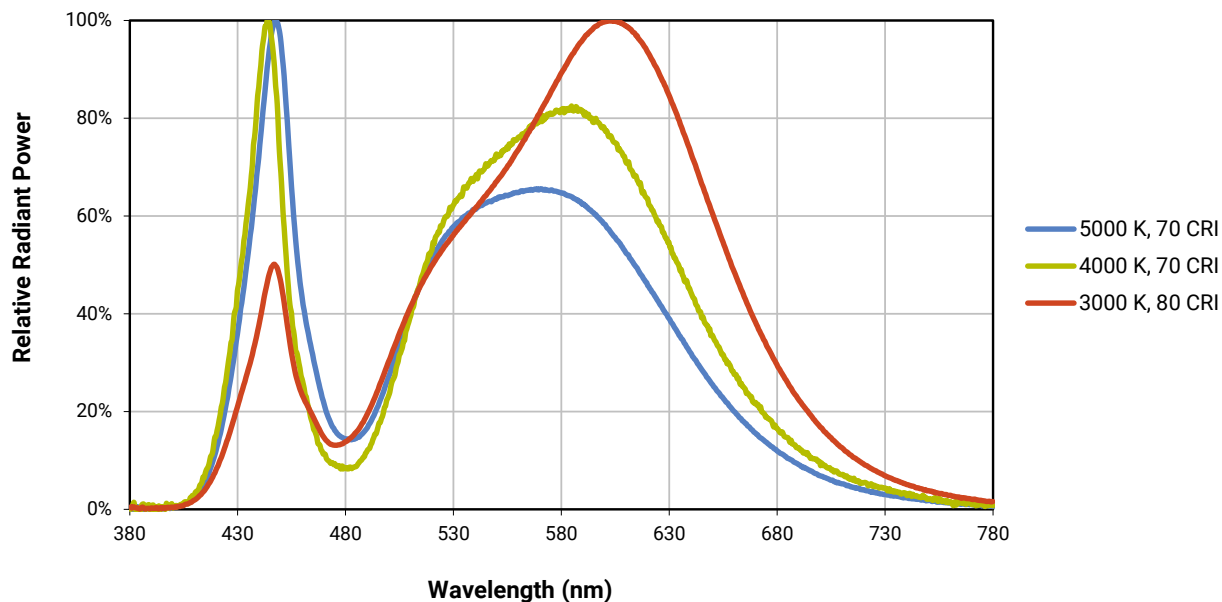


## RELATIVE SPECTRAL POWER DISTRIBUTION - WHITE (S LINE)

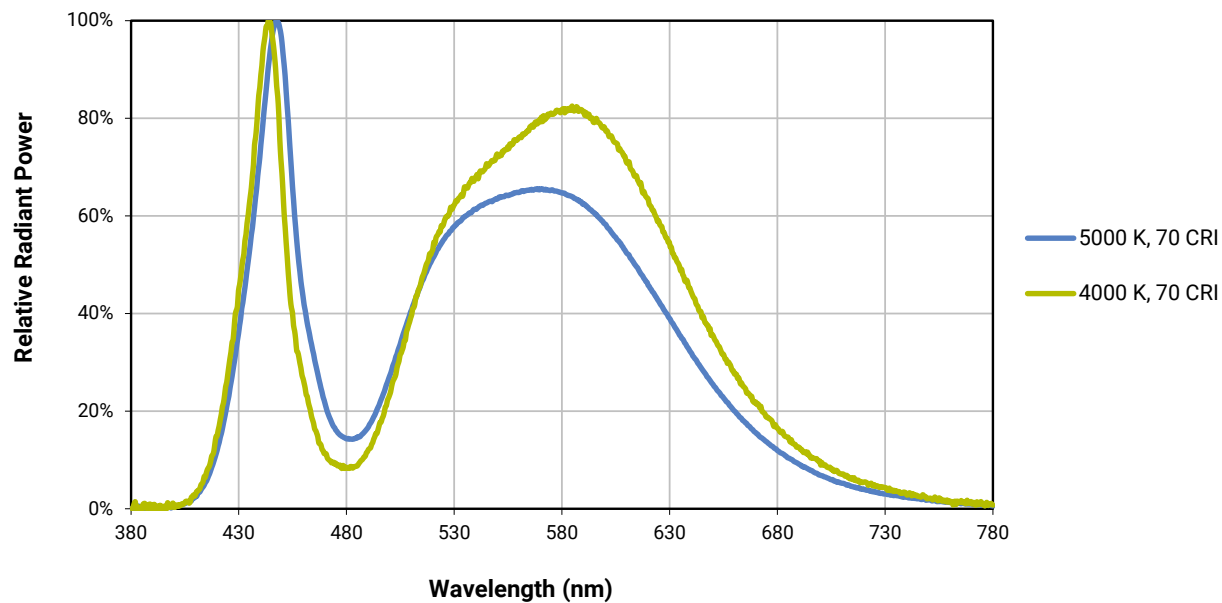





## RELATIVE SPECTRAL POWER DISTRIBUTION - COLOR

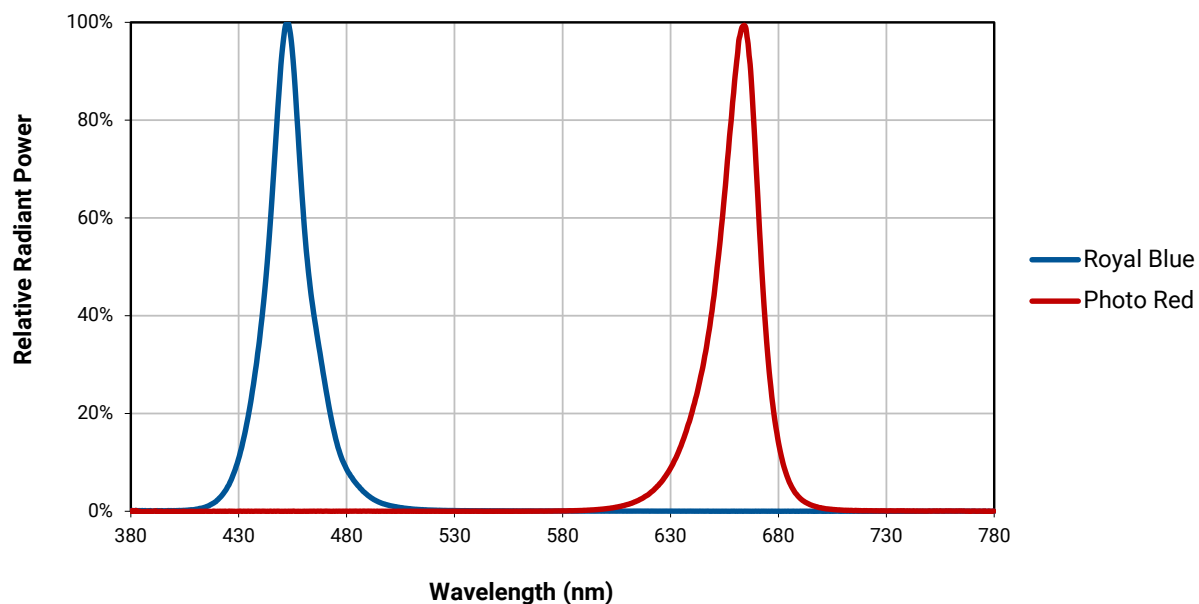


## RELATIVE FLUX VS. JUNCTION TEMPERATURE - WHITE (STANDARD) - $I_F = 350$ mA

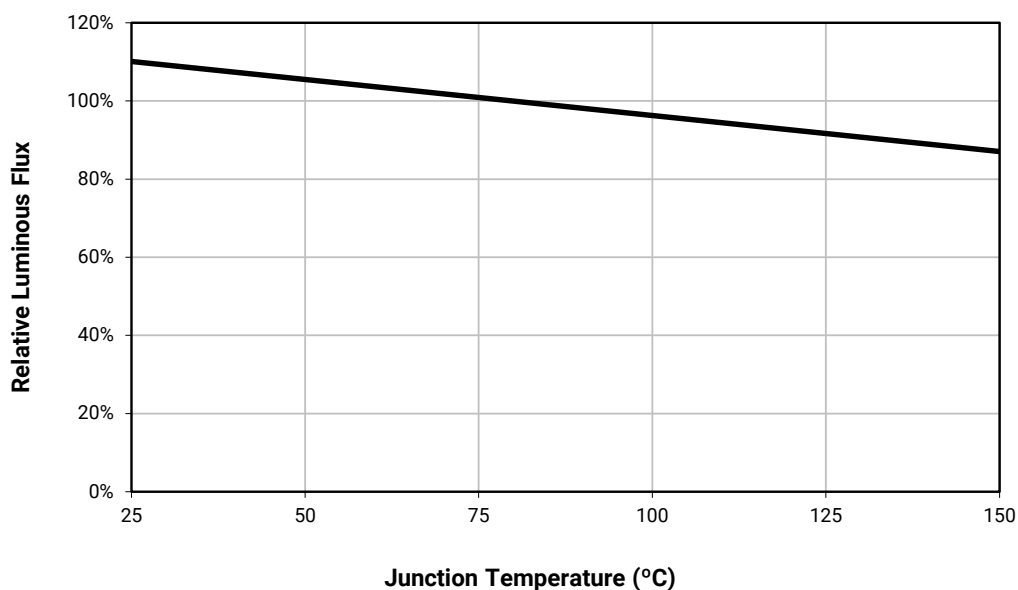


# RELATIVE FLUX VS. JUNCTION TEMPERATURE - WHITE (S LINE) - $I_F = 350\text{ mA}$

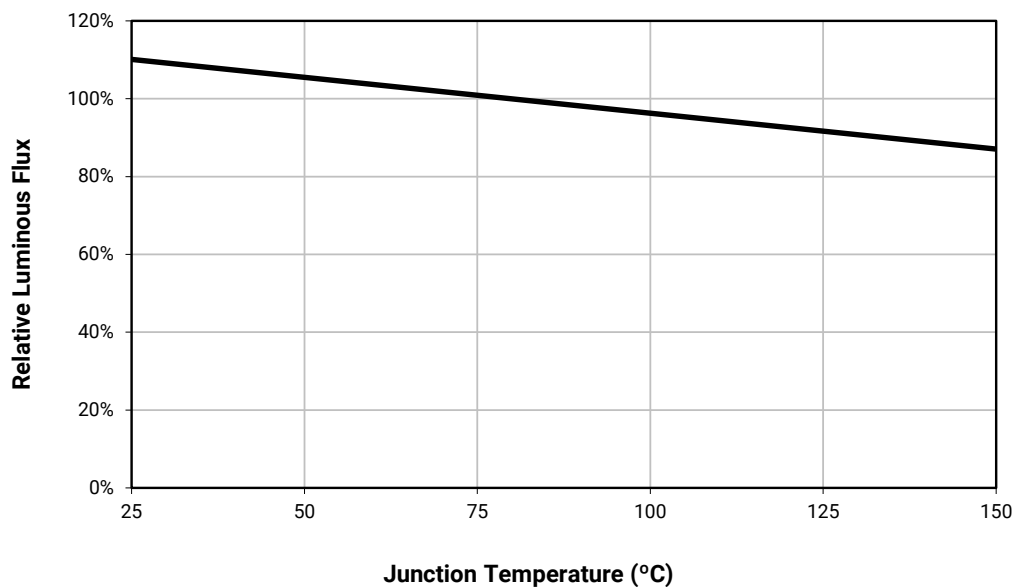


# RELATIVE FLUX VS. JUNCTION TEMPERATURE - COLOR - $I_F = 350\text{ mA}$

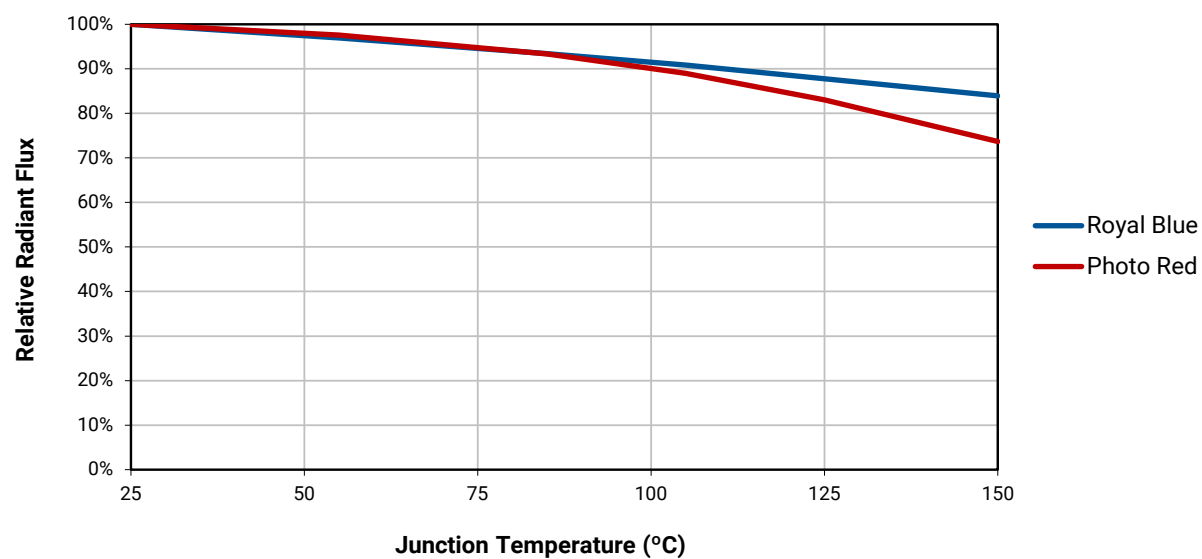


### ELECTRICAL CHARACTERISTICS - WHITE (STANDARD) - $T_j = 85^\circ\text{C}$

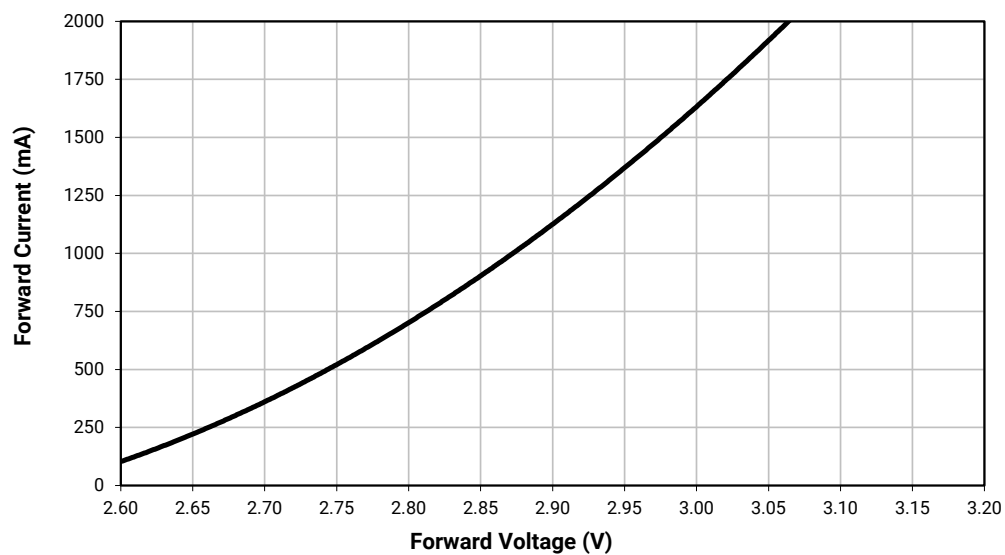


### ELECTRICAL CHARACTERISTICS - WHITE (S LINE) - $T_j = 85^\circ\text{C}$

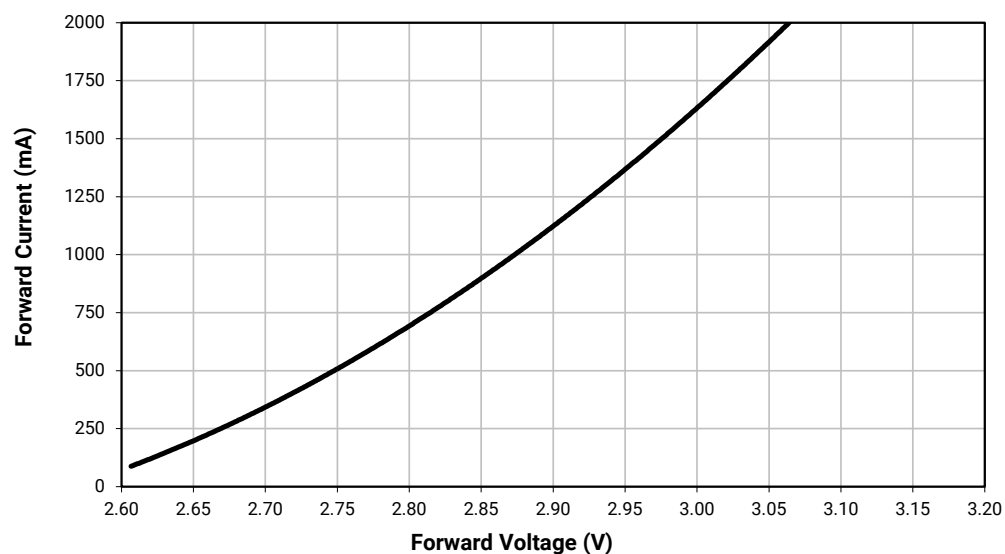


## ELECTRICAL CHARACTERISTICS - COLOR ( $T_J = 25\text{ }^{\circ}\text{C}$ )

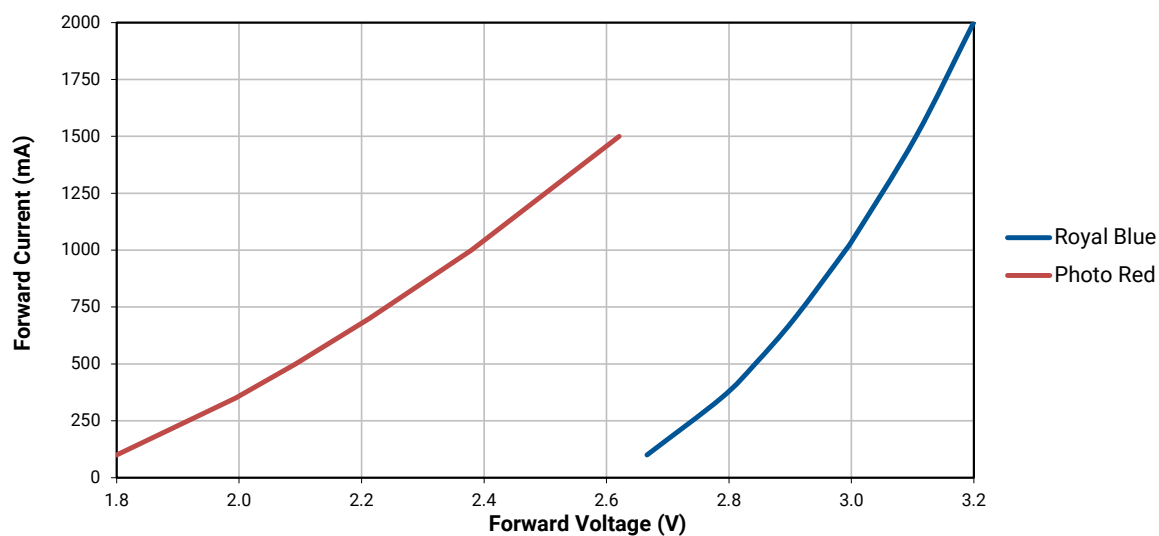


## RELATIVE LUMINOUS FLUX VS. CURRENT - WHITE (STANDARD) - $T_J = 85\text{ }^{\circ}\text{C}$

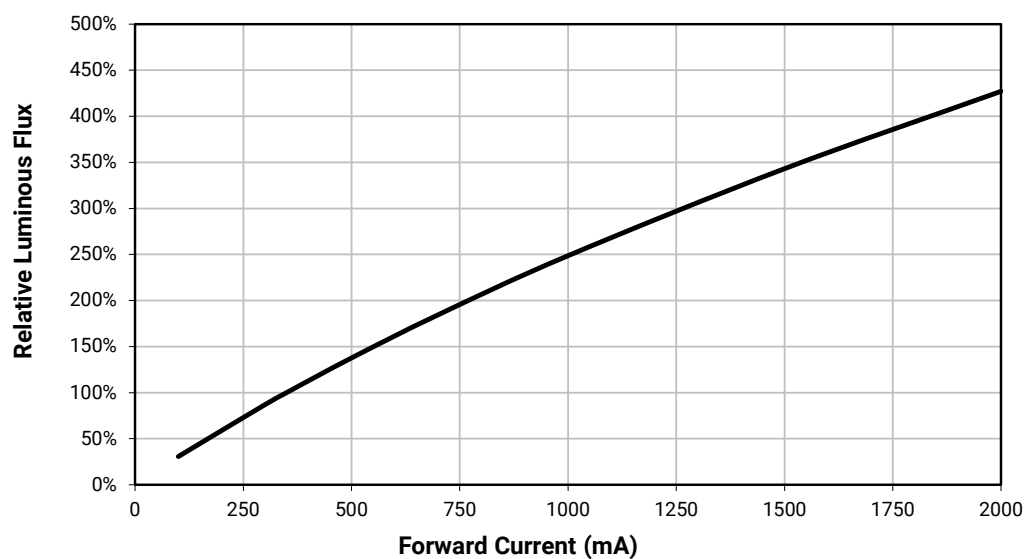

# RELATIVE LUMINOUS FLUX VS. CURRENT - WHITE (S LINE) - $T_j = 85\text{ }^{\circ}\text{C}$


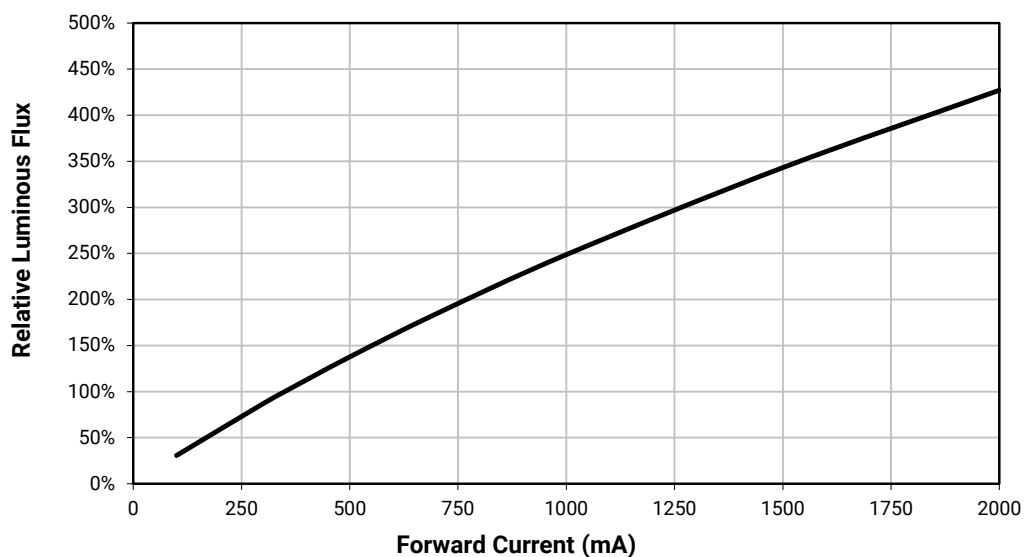


# RELATIVE RADIANT FLUX VS. CURRENT - COLOR ( $T_j = 25\text{ }^{\circ}\text{C}$ )

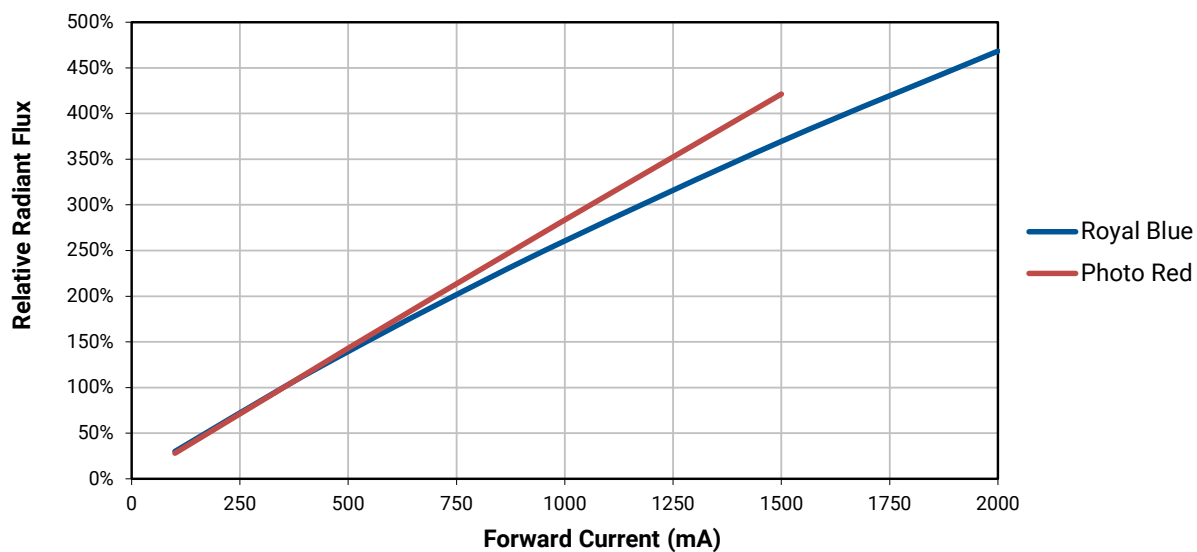


## RELATIVE CHROMATICITY VS. CURRENT AND TEMPERATURE


Data shown is representative of typical XP-G3 70 CRI performance.

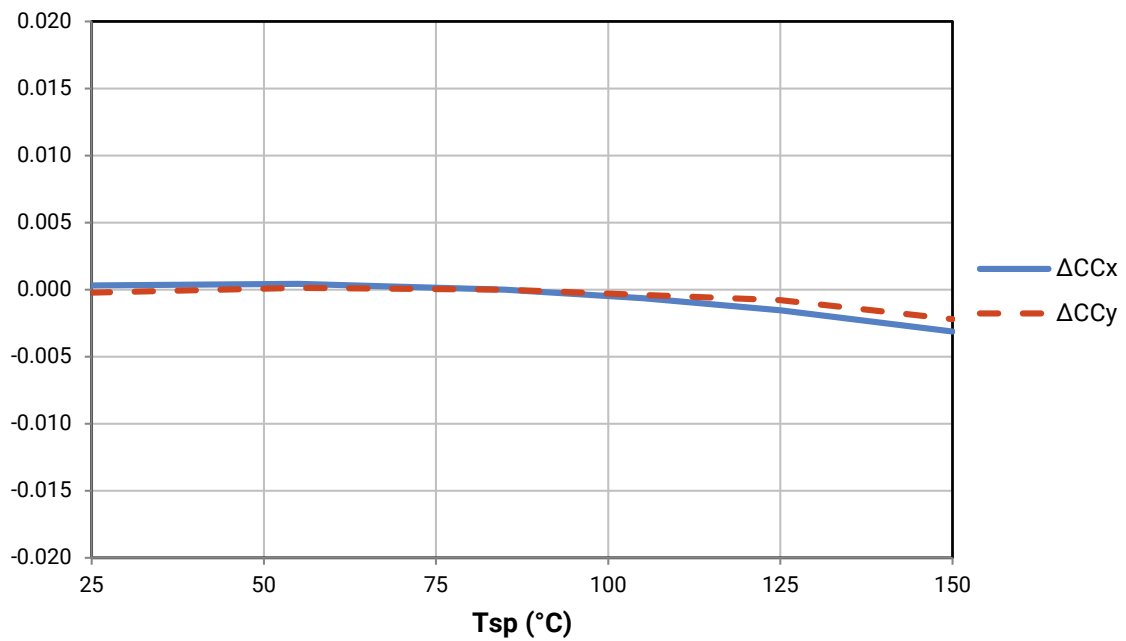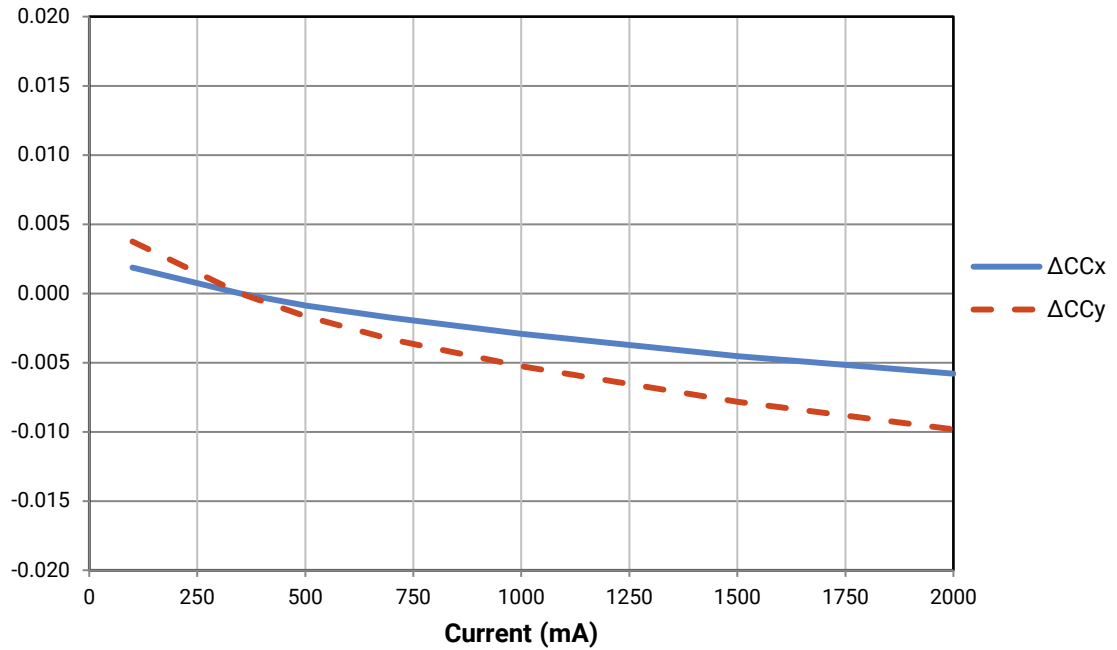


### TYPICAL SPATIAL DISTRIBUTION - WHITE (STANDARD)

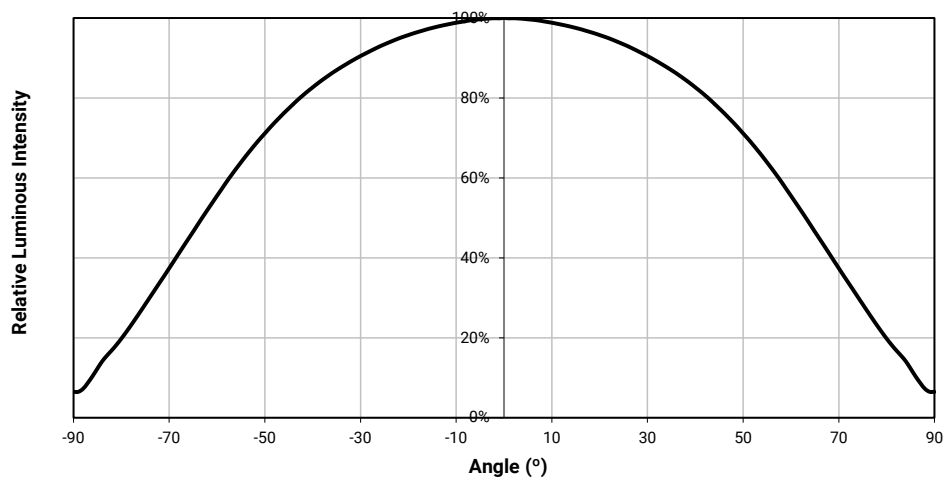

### TYPICAL SPATIAL DISTRIBUTION - WHITE (S LINE)

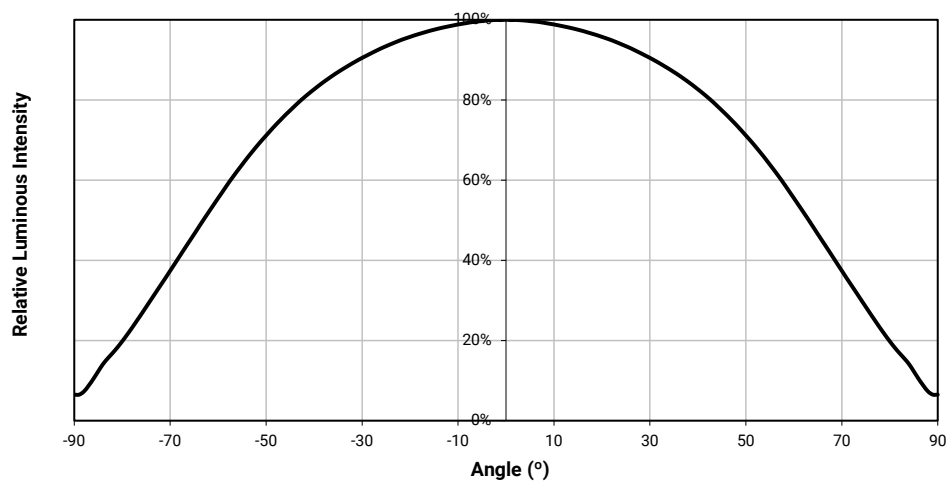

## TYPICAL SPATIAL DISTRIBUTION - COLOR

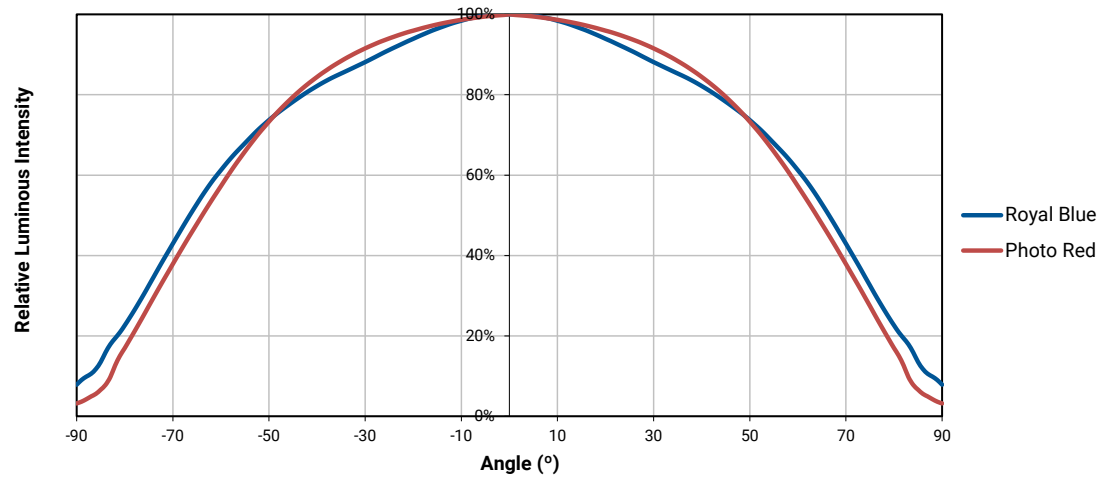





## THERMAL DESIGN

The maximum forward current is determined by the thermal resistance between the LED junction and ambient. It is crucial for the end product to be designed in a manner that minimizes the thermal resistance from the solder point to ambient in order to optimize lamp life and optical characteristics.

White (Standard)

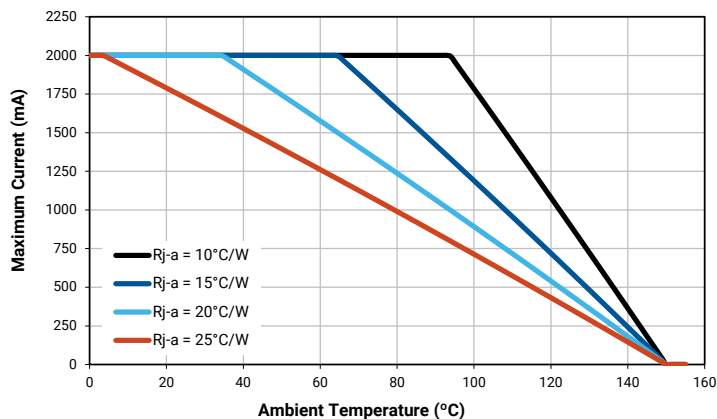

White (S Line)

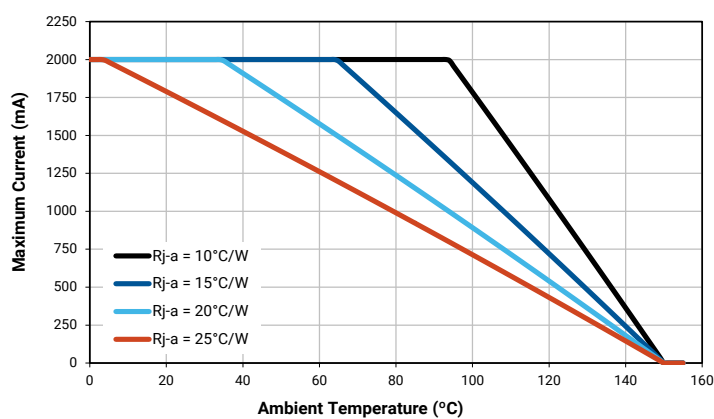

Royal Blue


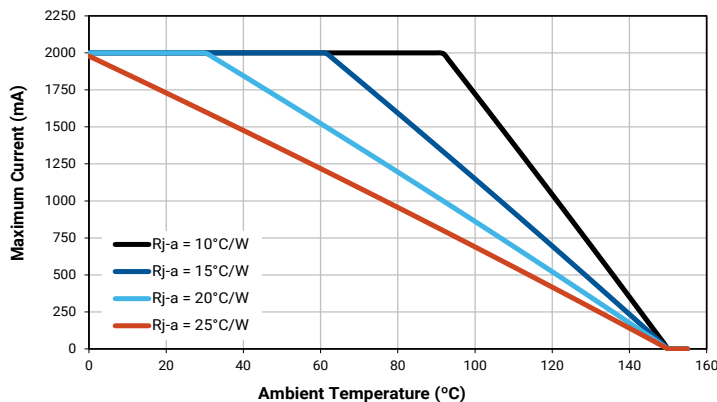


Photo Red

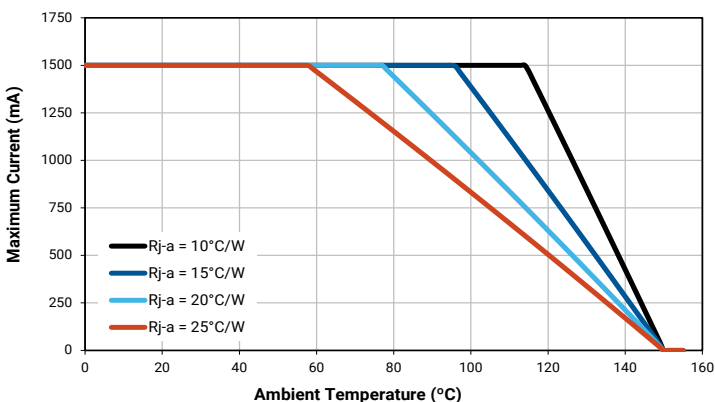

## PERFORMANCE GROUPS - LUMINOUS FLUX

XLamp XP-G3 white (Standard) and XP-G3 white (S Line) LEDs are tested for luminous flux and placed into one of the following luminous-flux groups.

| Group Code | Minimum Luminous Flux (lm)<br>@ 350 mA | Maximum Luminous Flux (lm)<br>@ 350 mA |
|------------|----------------------------------------|----------------------------------------|
| Q4         | 100                                    | 107                                    |
| Q5         | 107                                    | 114                                    |
| R2         | 114                                    | 122                                    |
| R3         | 122                                    | 130                                    |
| R4         | 130                                    | 139                                    |
| R5         | 139                                    | 148                                    |
| S2         | 148                                    | 156                                    |
| S3         | 156                                    | 164                                    |
| S4         | 164                                    | 172                                    |
| S5         | 172                                    | 180                                    |
| S6         | 180                                    | 188                                    |
| S7         | 188                                    | 196                                    |

## PERFORMANCE GROUPS - RADIANT FLUX ( $T_j = 25\text{ }^{\circ}\text{C}$ )

XLamp XP-G3 royal blue LEDs are tested for radiant flux and placed into one of the following bins.

| Group Code | Minimum Radiant Flux<br>(mW) | Maximum Radiant Flux<br>(mW) | Calculated PPF ( $\mu\text{mol/s}$ ) |         |
|------------|------------------------------|------------------------------|--------------------------------------|---------|
|            |                              |                              | Minimum                              | Maximum |
| E4         | 635                          | 680                          | 2.41                                 | 2.58    |
| F2         | 680                          | 730                          | 2.58                                 | 2.77    |
| F4         | 730                          | 780                          | 2.77                                 | 2.96    |

XLamp XP-G3 photo red LEDs are tested for radiant flux and placed into one of the following bins.

| Group Code | Minimum Radiant Flux<br>(mW) | Maximum Radiant Flux<br>(mW) | Calculated PPF ( $\mu\text{mol/s}$ ) |         |
|------------|------------------------------|------------------------------|--------------------------------------|---------|
|            |                              |                              | Minimum                              | Maximum |
| 31         | 475                          | 500                          | 2.60                                 | 2.74    |
| 32         | 500                          | 525                          | 2.74                                 | 2.90    |
| 33         | 525                          | 550                          | 2.90                                 | 3.03    |

### Note

- Calculated PPF values are for reference only.

## PERFORMANCE GROUPS - PEAK WAVELENGTH ( $T_j = 25\text{ }^{\circ}\text{C}$ )

XLamp XP-G3 royal blue LEDs are tested for peak wavelength and sorted into one of the PWL bins defined below.

| Group Code | Minimum Peak Wavelength (nm) | Maximum Peak Wavelength (nm) | Typical Dominant Wavelength (nm) |
|------------|------------------------------|------------------------------|----------------------------------|
| H26        | 440.0                        | 442.5                        | 446.5                            |
| H27        | 442.5                        | 445.0                        | 449.0                            |
| H36        | 445.0                        | 447.5                        | 451.5                            |
| H37        | 447.5                        | 450.0                        | 454.0                            |
| H46        | 450.0                        | 452.5                        | 456.5                            |
| H47        | 452.5                        | 455.0                        | 459.0                            |

XLamp XP-G3 photo red LEDs are tested for peak wavelength and sorted into one of the PWL bins defined below.

| Group Code | Minimum Peak Wavelength (nm) | Maximum Peak Wavelength (nm) | Typical Dominant Wavelength (nm) |
|------------|------------------------------|------------------------------|----------------------------------|
| P2         | 650                          | 655                          | 638                              |
| P3         | 655                          | 660                          | 643                              |
| P4         | 660                          | 665                          | 647                              |
| P5         | 665                          | 670                          | 652                              |

### Note

- Typical dominant wavelength values are calculated and for reference only.

## PERFORMANCE GROUPS - FORWARD VOLTAGE

XLamp XP-G3 photo red LEDs are tested for forward voltage and sorted into one of the forward voltage bins defined below.

| Forward Voltage Group | Minimum Forward Voltage (V) @ 350 mA | Maximum Forward Voltage (V) @ 350 mA |
|-----------------------|--------------------------------------|--------------------------------------|
| W                     | 1.8                                  | 1.9                                  |
| X                     | 1.9                                  | 2.0                                  |
| Y                     | 2.0                                  | 2.1                                  |
| Z                     | 2.1                                  | 2.2                                  |

# PERFORMANCE GROUPS - CHROMATICITY

| Region | x      | y      | Region | x      | y      | Region | x      | y      | Region | x      | y      |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0A     | 0.2950 | 0.2970 | 0B     | 0.2920 | 0.3060 | 0C     | 0.2984 | 0.3133 | 0D     | 0.2984 | 0.3133 |
|        | 0.2920 | 0.3060 |        | 0.2895 | 0.3135 |        | 0.2962 | 0.3220 |        | 0.3048 | 0.3207 |
|        | 0.2984 | 0.3133 |        | 0.2962 | 0.3220 |        | 0.3028 | 0.3304 |        | 0.3068 | 0.3113 |
|        | 0.3009 | 0.3042 |        | 0.2984 | 0.3133 |        | 0.3048 | 0.3207 |        | 0.3009 | 0.3042 |
| 0R     | 0.2980 | 0.2880 | 0S     | 0.2895 | 0.3135 | 0T     | 0.2962 | 0.3220 | 0U     | 0.3037 | 0.2937 |
|        | 0.2950 | 0.2970 |        | 0.2870 | 0.3210 |        | 0.2937 | 0.3312 |        | 0.3009 | 0.3042 |
|        | 0.3009 | 0.3042 |        | 0.2937 | 0.3312 |        | 0.3005 | 0.3415 |        | 0.3068 | 0.3113 |
|        | 0.3037 | 0.2937 |        | 0.2962 | 0.3220 |        | 0.3028 | 0.3304 |        | 0.3093 | 0.2993 |
| 1A     | 0.3048 | 0.3207 | 1B     | 0.3028 | 0.3304 | 1C     | 0.3115 | 0.3391 | 1D     | 0.3130 | 0.3290 |
|        | 0.3130 | 0.3290 |        | 0.3115 | 0.3391 |        | 0.3205 | 0.3481 |        | 0.3213 | 0.3373 |
|        | 0.3144 | 0.3186 |        | 0.3130 | 0.3290 |        | 0.3213 | 0.3373 |        | 0.3221 | 0.3261 |
|        | 0.3068 | 0.3113 |        | 0.3048 | 0.3207 |        | 0.3130 | 0.3290 |        | 0.3144 | 0.3186 |
| 1R     | 0.3068 | 0.3113 | 1S     | 0.3005 | 0.3415 | 1T     | 0.3099 | 0.3509 | 1U     | 0.3144 | 0.3186 |
|        | 0.3144 | 0.3186 |        | 0.3099 | 0.3509 |        | 0.3196 | 0.3602 |        | 0.3221 | 0.3261 |
|        | 0.3161 | 0.3059 |        | 0.3115 | 0.3391 |        | 0.3205 | 0.3481 |        | 0.3231 | 0.3120 |
|        | 0.3093 | 0.2993 |        | 0.3028 | 0.3304 |        | 0.3115 | 0.3391 |        | 0.3161 | 0.3059 |
| 2A     | 0.3215 | 0.3350 | 2B     | 0.3207 | 0.3462 | 2C     | 0.3290 | 0.3538 | 2D     | 0.3290 | 0.3417 |
|        | 0.3290 | 0.3417 |        | 0.3290 | 0.3538 |        | 0.3376 | 0.3616 |        | 0.3371 | 0.3490 |
|        | 0.3290 | 0.3300 |        | 0.3290 | 0.3417 |        | 0.3371 | 0.3490 |        | 0.3366 | 0.3369 |
|        | 0.3222 | 0.3243 |        | 0.3215 | 0.3350 |        | 0.3290 | 0.3417 |        | 0.3290 | 0.3300 |
| 2R     | 0.3222 | 0.3243 | 2S     | 0.3196 | 0.3602 | 2T     | 0.3290 | 0.3690 | 2U     | 0.3290 | 0.3300 |
|        | 0.3290 | 0.3300 |        | 0.3290 | 0.3690 |        | 0.3381 | 0.3762 |        | 0.3366 | 0.3369 |
|        | 0.3290 | 0.3180 |        | 0.3290 | 0.3538 |        | 0.3376 | 0.3616 |        | 0.3361 | 0.3245 |
|        | 0.3231 | 0.3120 |        | 0.3207 | 0.3462 |        | 0.3290 | 0.3538 |        | 0.3290 | 0.3180 |
| 3A     | 0.3371 | 0.3490 | 3B     | 0.3376 | 0.3616 | 3C     | 0.3463 | 0.3687 | 3D     | 0.3451 | 0.3554 |
|        | 0.3451 | 0.3554 |        | 0.3463 | 0.3687 |        | 0.3551 | 0.3760 |        | 0.3533 | 0.3620 |
|        | 0.3440 | 0.3427 |        | 0.3451 | 0.3554 |        | 0.3533 | 0.3620 |        | 0.3515 | 0.3487 |
|        | 0.3366 | 0.3369 |        | 0.3371 | 0.3490 |        | 0.3451 | 0.3554 |        | 0.3440 | 0.3427 |
| 3R     | 0.3366 | 0.3369 | 3S     | 0.3381 | 0.3762 |        |        |        |        |        |        |
|        | 0.3440 | 0.3428 |        | 0.3480 | 0.3840 |        |        |        |        |        |        |
|        | 0.3429 | 0.3307 |        | 0.3463 | 0.3687 |        |        |        |        |        |        |
|        | 0.3361 | 0.3245 |        | 0.3376 | 0.3616 |        |        |        |        |        |        |
| 4A     | 0.3530 | 0.3597 | 4B     | 0.3548 | 0.3736 | 4C     | 0.3641 | 0.3804 | 4D     | 0.3615 | 0.3659 |
|        | 0.3615 | 0.3659 |        | 0.3641 | 0.3804 |        | 0.3736 | 0.3874 |        | 0.3702 | 0.3722 |
|        | 0.3590 | 0.3521 |        | 0.3615 | 0.3659 |        | 0.3702 | 0.3722 |        | 0.3670 | 0.3578 |
|        | 0.3512 | 0.3465 |        | 0.3530 | 0.3597 |        | 0.3615 | 0.3659 |        | 0.3590 | 0.3521 |

# PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

| Region | x      | y      | Region | x      | y      | Region | x      | y      | Region | x      | y      |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 5A1    | 0.3670 | 0.3578 | 5A2    | 0.3686 | 0.3649 | 5A3    | 0.3744 | 0.3685 | 5A4    | 0.3726 | 0.3612 |
|        | 0.3686 | 0.3649 |        | 0.3702 | 0.3722 |        | 0.3763 | 0.3760 |        | 0.3744 | 0.3685 |
|        | 0.3744 | 0.3685 |        | 0.3763 | 0.3760 |        | 0.3825 | 0.3798 |        | 0.3804 | 0.3721 |
|        | 0.3726 | 0.3612 |        | 0.3744 | 0.3685 |        | 0.3804 | 0.3721 |        | 0.3783 | 0.3646 |
| 5B1    | 0.3702 | 0.3722 | 5B2    | 0.3719 | 0.3797 | 5B3    | 0.3782 | 0.3837 | 5B4    | 0.3763 | 0.3760 |
|        | 0.3719 | 0.3797 |        | 0.3736 | 0.3874 |        | 0.3802 | 0.3916 |        | 0.3782 | 0.3837 |
|        | 0.3782 | 0.3837 |        | 0.3802 | 0.3916 |        | 0.3869 | 0.3958 |        | 0.3847 | 0.3877 |
|        | 0.3763 | 0.3760 |        | 0.3782 | 0.3837 |        | 0.3847 | 0.3877 |        | 0.3825 | 0.3798 |
| 5C1    | 0.3825 | 0.3798 | 5C2    | 0.3847 | 0.3877 | 5C3    | 0.3912 | 0.3917 | 5C4    | 0.3887 | 0.3836 |
|        | 0.3847 | 0.3877 |        | 0.3869 | 0.3958 |        | 0.3937 | 0.4001 |        | 0.3912 | 0.3917 |
|        | 0.3912 | 0.3917 |        | 0.3937 | 0.4001 |        | 0.4006 | 0.4044 |        | 0.3978 | 0.3958 |
|        | 0.3887 | 0.3836 |        | 0.3912 | 0.3917 |        | 0.3978 | 0.3958 |        | 0.3950 | 0.3875 |
| 5D1    | 0.3783 | 0.3646 | 5D2    | 0.3804 | 0.3721 | 5D3    | 0.3863 | 0.3758 | 5D4    | 0.3840 | 0.3681 |
|        | 0.3804 | 0.3721 |        | 0.3825 | 0.3798 |        | 0.3887 | 0.3836 |        | 0.3863 | 0.3758 |
|        | 0.3863 | 0.3758 |        | 0.3887 | 0.3836 |        | 0.3950 | 0.3875 |        | 0.3924 | 0.3794 |
|        | 0.3840 | 0.3681 |        | 0.3863 | 0.3758 |        | 0.3924 | 0.3794 |        | 0.3898 | 0.3716 |
| 6A1    | 0.3889 | 0.3690 | 6A2    | 0.3915 | 0.3768 | 6A3    | 0.3981 | 0.3800 | 6A4    | 0.3953 | 0.3720 |
|        | 0.3915 | 0.3768 |        | 0.3941 | 0.3848 |        | 0.4010 | 0.3882 |        | 0.3981 | 0.3800 |
|        | 0.3981 | 0.3800 |        | 0.4010 | 0.3882 |        | 0.4080 | 0.3916 |        | 0.4048 | 0.3832 |
|        | 0.3953 | 0.3720 |        | 0.3981 | 0.3800 |        | 0.4048 | 0.3832 |        | 0.4017 | 0.3751 |
| 6B1    | 0.3941 | 0.3848 | 6B2    | 0.3968 | 0.3930 | 6B3    | 0.4040 | 0.3966 | 6B4    | 0.4010 | 0.3882 |
|        | 0.3968 | 0.3930 |        | 0.3996 | 0.4015 |        | 0.4071 | 0.4052 |        | 0.4040 | 0.3966 |
|        | 0.4040 | 0.3966 |        | 0.4071 | 0.4052 |        | 0.4146 | 0.4089 |        | 0.4113 | 0.4001 |
|        | 0.4010 | 0.3882 |        | 0.4040 | 0.3966 |        | 0.4113 | 0.4001 |        | 0.4080 | 0.3916 |
| 6C1    | 0.4080 | 0.3916 | 6C2    | 0.4113 | 0.4001 | 6C3    | 0.4186 | 0.4037 | 6C4    | 0.4150 | 0.3950 |
|        | 0.4113 | 0.4001 |        | 0.4146 | 0.4089 |        | 0.4222 | 0.4127 |        | 0.4186 | 0.4037 |
|        | 0.4186 | 0.4037 |        | 0.4222 | 0.4127 |        | 0.4299 | 0.4165 |        | 0.4259 | 0.4073 |
|        | 0.4150 | 0.3950 |        | 0.4186 | 0.4037 |        | 0.4259 | 0.4073 |        | 0.4221 | 0.3984 |
| 6D1    | 0.4017 | 0.3751 | 6D2    | 0.4048 | 0.3832 | 6D3    | 0.4116 | 0.3865 | 6D4    | 0.4082 | 0.3782 |
|        | 0.4048 | 0.3832 |        | 0.4080 | 0.3916 |        | 0.4150 | 0.3950 |        | 0.4116 | 0.3865 |
|        | 0.4116 | 0.3865 |        | 0.4150 | 0.3950 |        | 0.4221 | 0.3984 |        | 0.4183 | 0.3898 |
|        | 0.4082 | 0.3782 |        | 0.4116 | 0.3865 |        | 0.4183 | 0.3898 |        | 0.4147 | 0.3814 |
| 7A1    | 0.4147 | 0.3814 | 7A2    | 0.4183 | 0.3898 | 7A3    | 0.4242 | 0.3919 | 7A4    | 0.4203 | 0.3833 |
|        | 0.4183 | 0.3898 |        | 0.4221 | 0.3984 |        | 0.4281 | 0.4006 |        | 0.4242 | 0.3919 |
|        | 0.4242 | 0.3919 |        | 0.4281 | 0.4006 |        | 0.4342 | 0.4028 |        | 0.4300 | 0.3939 |
|        | 0.4203 | 0.3833 |        | 0.4242 | 0.3919 |        | 0.4300 | 0.3939 |        | 0.4259 | 0.3853 |

# PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

| Region | x      | y      | Region | x      | y      | Region | x      | y      | Region | x      | y      |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 7B1    | 0.4221 | 0.3984 | 7B2    | 0.4259 | 0.4073 | 7B3    | 0.4322 | 0.4096 | 7B4    | 0.4281 | 0.4006 |
|        | 0.4259 | 0.4073 |        | 0.4299 | 0.4165 |        | 0.4364 | 0.4188 |        | 0.4322 | 0.4096 |
|        | 0.4322 | 0.4096 |        | 0.4364 | 0.4188 |        | 0.4430 | 0.4212 |        | 0.4385 | 0.4119 |
|        | 0.4281 | 0.4006 |        | 0.4322 | 0.4096 |        | 0.4385 | 0.4119 |        | 0.4342 | 0.4028 |
| 7C1    | 0.4342 | 0.4028 | 7C2    | 0.4385 | 0.4119 | 7C3    | 0.4449 | 0.4141 | 7C4    | 0.4403 | 0.4049 |
|        | 0.4385 | 0.4119 |        | 0.4430 | 0.4212 |        | 0.4496 | 0.4236 |        | 0.4449 | 0.4141 |
|        | 0.4449 | 0.4141 |        | 0.4496 | 0.4236 |        | 0.4562 | 0.4260 |        | 0.4513 | 0.4164 |
|        | 0.4403 | 0.4049 |        | 0.4449 | 0.4141 |        | 0.4513 | 0.4164 |        | 0.4465 | 0.4071 |
| 7D1    | 0.4259 | 0.3853 | 7D2    | 0.4300 | 0.3939 | 7D3    | 0.4359 | 0.3960 | 7D4    | 0.4316 | 0.3873 |
|        | 0.4300 | 0.3939 |        | 0.4342 | 0.4028 |        | 0.4403 | 0.4049 |        | 0.4359 | 0.3960 |
|        | 0.4359 | 0.3960 |        | 0.4403 | 0.4049 |        | 0.4465 | 0.4071 |        | 0.4418 | 0.3981 |
|        | 0.4316 | 0.3873 |        | 0.4359 | 0.3960 |        | 0.4418 | 0.3981 |        | 0.4373 | 0.3893 |
| 8A1    | 0.4373 | 0.3893 | 8A2    | 0.4418 | 0.3981 | 8A3    | 0.4475 | 0.3994 | 8A4    | 0.4428 | 0.3906 |
|        | 0.4418 | 0.3981 |        | 0.4465 | 0.4071 |        | 0.4523 | 0.4085 |        | 0.4475 | 0.3994 |
|        | 0.4475 | 0.3994 |        | 0.4523 | 0.4085 |        | 0.4582 | 0.4099 |        | 0.4532 | 0.4008 |
|        | 0.4428 | 0.3906 |        | 0.4475 | 0.3994 |        | 0.4532 | 0.4008 |        | 0.4483 | 0.3919 |
| 8B1    | 0.4465 | 0.4071 | 8B2    | 0.4513 | 0.4164 | 8B3    | 0.4573 | 0.4178 | 8B4    | 0.4523 | 0.4085 |
|        | 0.4513 | 0.4164 |        | 0.4562 | 0.4260 |        | 0.4624 | 0.4274 |        | 0.4573 | 0.4178 |
|        | 0.4573 | 0.4178 |        | 0.4624 | 0.4274 |        | 0.4687 | 0.4289 |        | 0.4634 | 0.4193 |
|        | 0.4523 | 0.4085 |        | 0.4573 | 0.4178 |        | 0.4634 | 0.4193 |        | 0.4582 | 0.4099 |
| 8C1    | 0.4582 | 0.4099 | 8C2    | 0.4634 | 0.4193 | 8C3    | 0.4695 | 0.4207 | 8C4    | 0.4641 | 0.4112 |
|        | 0.4634 | 0.4193 |        | 0.4687 | 0.4289 |        | 0.4750 | 0.4304 |        | 0.4695 | 0.4207 |
|        | 0.4695 | 0.4207 |        | 0.4750 | 0.4304 |        | 0.4813 | 0.4319 |        | 0.4756 | 0.4221 |
|        | 0.4641 | 0.4112 |        | 0.4695 | 0.4207 |        | 0.4756 | 0.4221 |        | 0.4700 | 0.4126 |
| 8D1    | 0.4483 | 0.3919 | 8D2    | 0.4532 | 0.4008 | 8D3    | 0.4589 | 0.4021 | 8D4    | 0.4538 | 0.3931 |
|        | 0.4532 | 0.4008 |        | 0.4582 | 0.4099 |        | 0.4641 | 0.4112 |        | 0.4589 | 0.4021 |
|        | 0.4589 | 0.4021 |        | 0.4641 | 0.4112 |        | 0.4700 | 0.4126 |        | 0.4646 | 0.4034 |
|        | 0.4538 | 0.3931 |        | 0.4589 | 0.4021 |        | 0.4646 | 0.4034 |        | 0.4593 | 0.3944 |
| AA1    | 0.4822 | 0.3973 | AA2    | 0.4884 | 0.4067 | AA3    | 0.4942 | 0.4066 | AA4    | 0.4879 | 0.3972 |
|        | 0.4884 | 0.4067 |        | 0.4946 | 0.4162 |        | 0.5006 | 0.4160 |        | 0.4942 | 0.4066 |
|        | 0.4942 | 0.4066 |        | 0.5006 | 0.4160 |        | 0.5066 | 0.4158 |        | 0.5001 | 0.4064 |
|        | 0.4879 | 0.3972 |        | 0.4942 | 0.4066 |        | 0.5001 | 0.4064 |        | 0.4936 | 0.3970 |
| AB1    | 0.4946 | 0.4162 | AB2    | 0.5008 | 0.4256 | AB3    | 0.5069 | 0.4254 | AB4    | 0.5006 | 0.4160 |
|        | 0.5008 | 0.4256 |        | 0.5070 | 0.4350 |        | 0.5133 | 0.4348 |        | 0.5069 | 0.4254 |
|        | 0.5069 | 0.4254 |        | 0.5133 | 0.4348 |        | 0.5196 | 0.4346 |        | 0.5131 | 0.4252 |
|        | 0.5006 | 0.4160 |        | 0.5069 | 0.4254 |        | 0.5131 | 0.4252 |        | 0.5066 | 0.4158 |

# PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)


| Region | x      | y      | Region | x      | y      | Region | x      | y      | Region | x      | y      |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| AC1    | 0.5066 | 0.4158 | AC2    | 0.5131 | 0.4252 | AC3    | 0.5192 | 0.4250 | AC4    | 0.5126 | 0.4156 |
|        | 0.5131 | 0.4252 |        | 0.5196 | 0.4346 |        | 0.5258 | 0.4343 |        | 0.5192 | 0.4250 |
|        | 0.5192 | 0.4250 |        | 0.5258 | 0.4343 |        | 0.5321 | 0.4341 |        | 0.5253 | 0.4248 |
|        | 0.5126 | 0.4156 |        | 0.5192 | 0.4250 |        | 0.5253 | 0.4248 |        | 0.5186 | 0.4154 |
| AD1    | 0.4936 | 0.3970 | AD2    | 0.5001 | 0.4064 | AD3    | 0.5059 | 0.4062 | AD4    | 0.4993 | 0.3969 |
|        | 0.5001 | 0.4064 |        | 0.5066 | 0.4158 |        | 0.5126 | 0.4156 |        | 0.5059 | 0.4062 |
|        | 0.5059 | 0.4062 |        | 0.5126 | 0.4156 |        | 0.5186 | 0.4154 |        | 0.5118 | 0.4061 |
|        | 0.4993 | 0.3969 |        | 0.5059 | 0.4062 |        | 0.5118 | 0.4061 |        | 0.5050 | 0.3967 |

XLamp XP-G3 white (Standard) and XP-G3 white (S Line) LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.


| EasyWhite Color Temperatures – 3-Step Ellipse |        |              |        |            |            |                    |
|-----------------------------------------------|--------|--------------|--------|------------|------------|--------------------|
| Bin Code                                      | CCT    | Center Point |        | Major Axis | Minor Axis | Rotation Angle (°) |
|                                               |        | x            | y      | a          | b          |                    |
| 6G                                            | 3500 K | 0.4073       | 0.3917 | 0.00927    | 0.00414    | 53.2               |
| 7G                                            | 3000 K | 0.4338       | 0.4030 | 0.00834    | 0.00408    | 53.2               |
| 8G                                            | 2700 K | 0.4577       | 0.4099 | 0.00834    | 0.00420    | 48.5               |

| EasyWhite Color Temperatures – 5-Step Ellipse |        |              |        |            |            |                    |
|-----------------------------------------------|--------|--------------|--------|------------|------------|--------------------|
| Bin Code                                      | CCT    | Center Point |        | Major Axis | Minor Axis | Rotation Angle (°) |
|                                               |        | x            | y      | a          | b          |                    |
| 2E                                            | 5700 K | 0.3287       | 0.3417 | 0.01230    | 0.00600    | 72.0               |
| 3E                                            | 5000 K | 0.3447       | 0.3553 | 0.01400    | 0.00520    | 65.0               |
| 4E                                            | 4500 K | 0.3611       | 0.3658 | 0.01420    | 0.00550    | 61.5               |
| 5E                                            | 4000 K | 0.3818       | 0.3797 | 0.01565    | 0.00670    | 53.7               |
| 6E                                            | 3500 K | 0.4073       | 0.3917 | 0.01545    | 0.00690    | 54.0               |
| 7E                                            | 3000 K | 0.4338       | 0.4030 | 0.01390    | 0.00680    | 53.2               |
| 8E                                            | 2700 K | 0.4577       | 0.4099 | 0.01350    | 0.00700    | 48.5               |

## ANSI Cool White

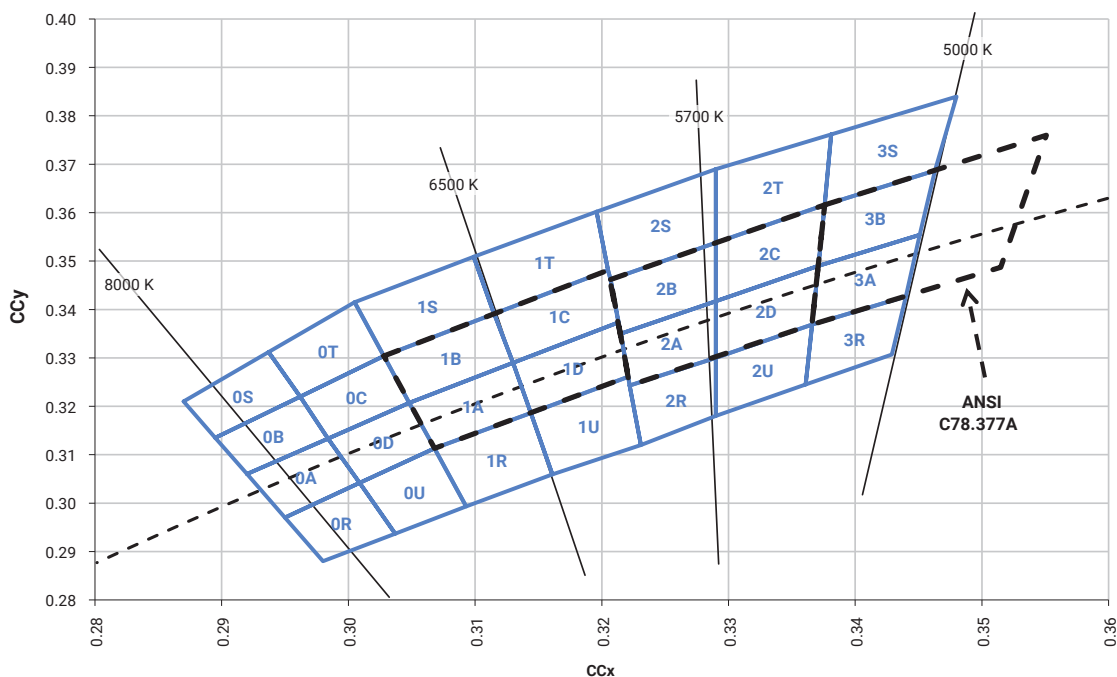


Neutral White

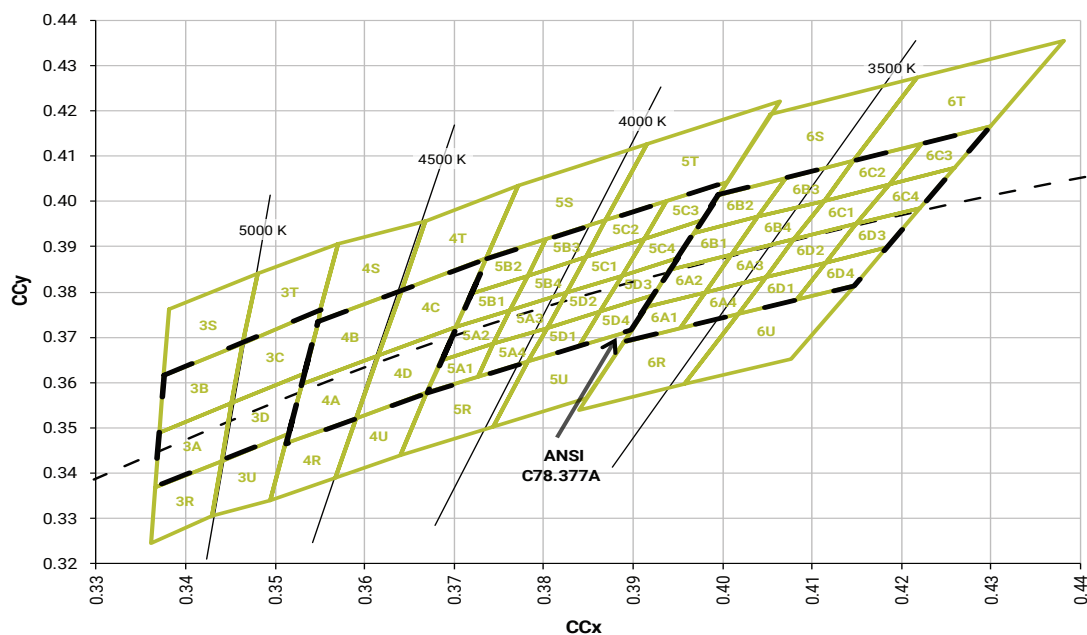




## CREE'S STANDARD CHROMATICITY REGIONS PLOTTED ON THE 1931 CIE CURVE - CONTINUED



### ANSI Neutral White and ANSI Warm White

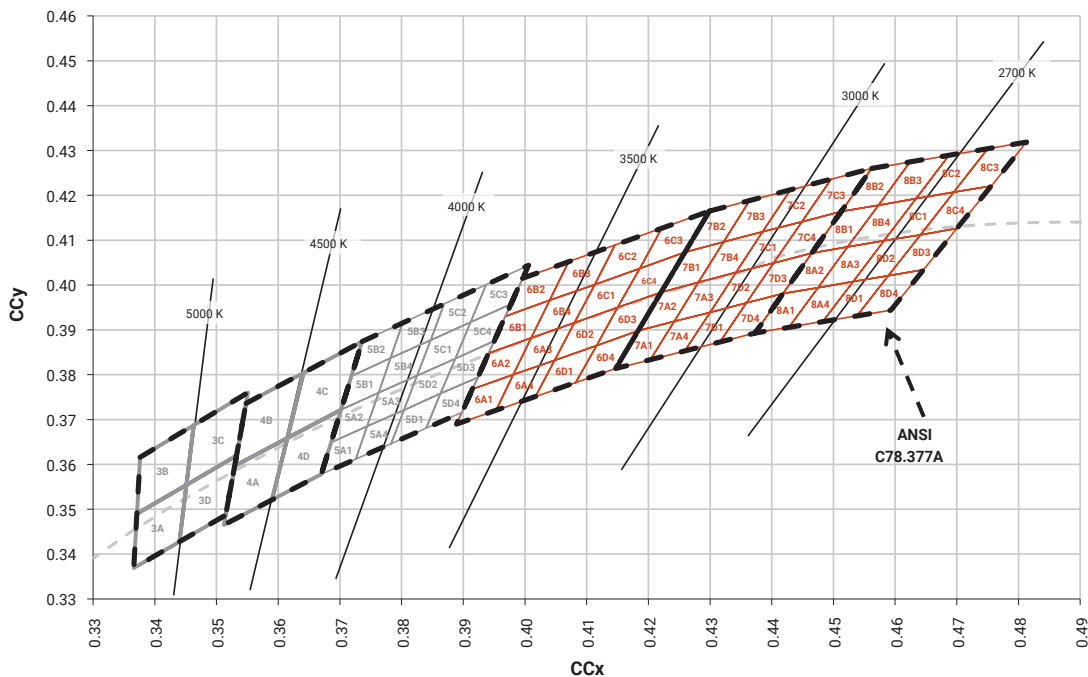


## CREE'S STANDARD COOL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

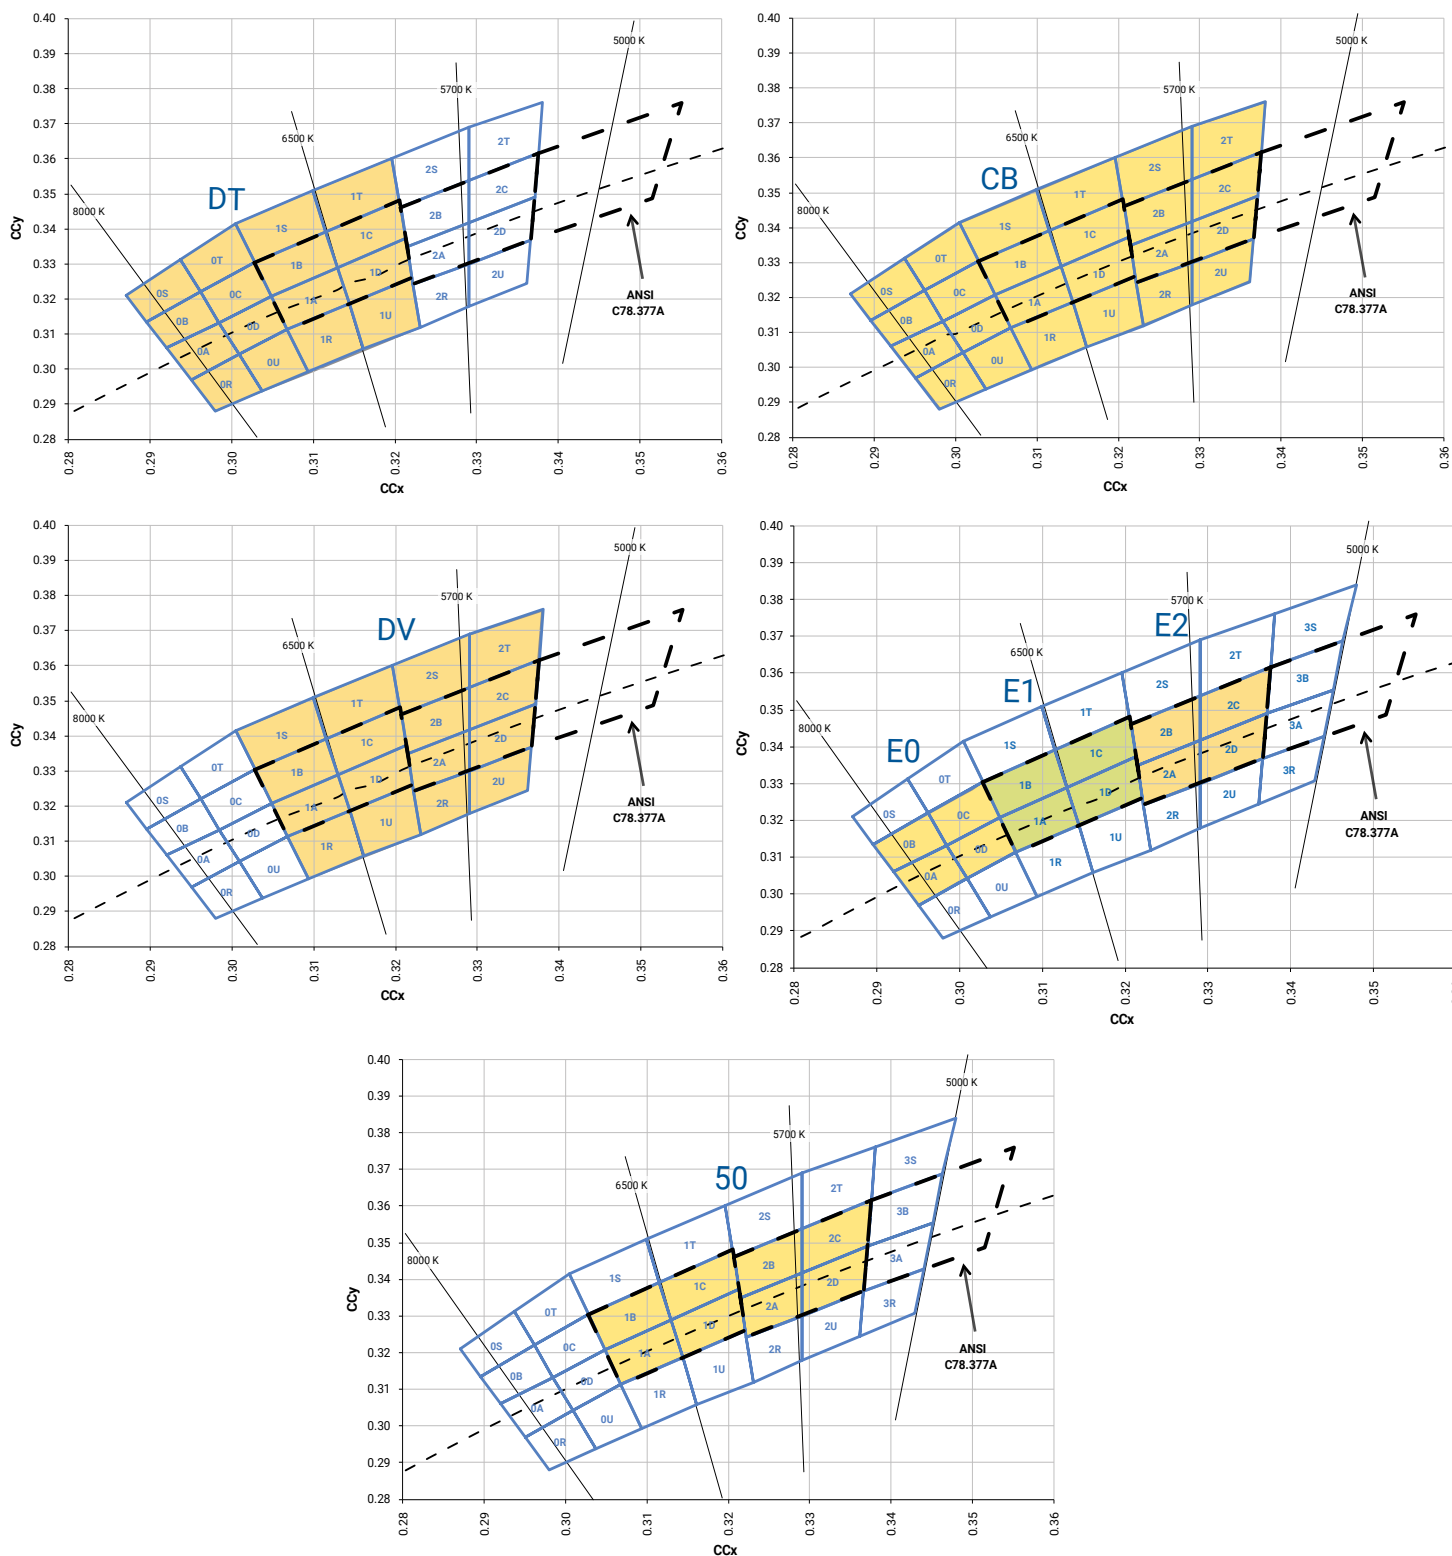


CREE'S STANDARD WARM AND NEUTRAL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

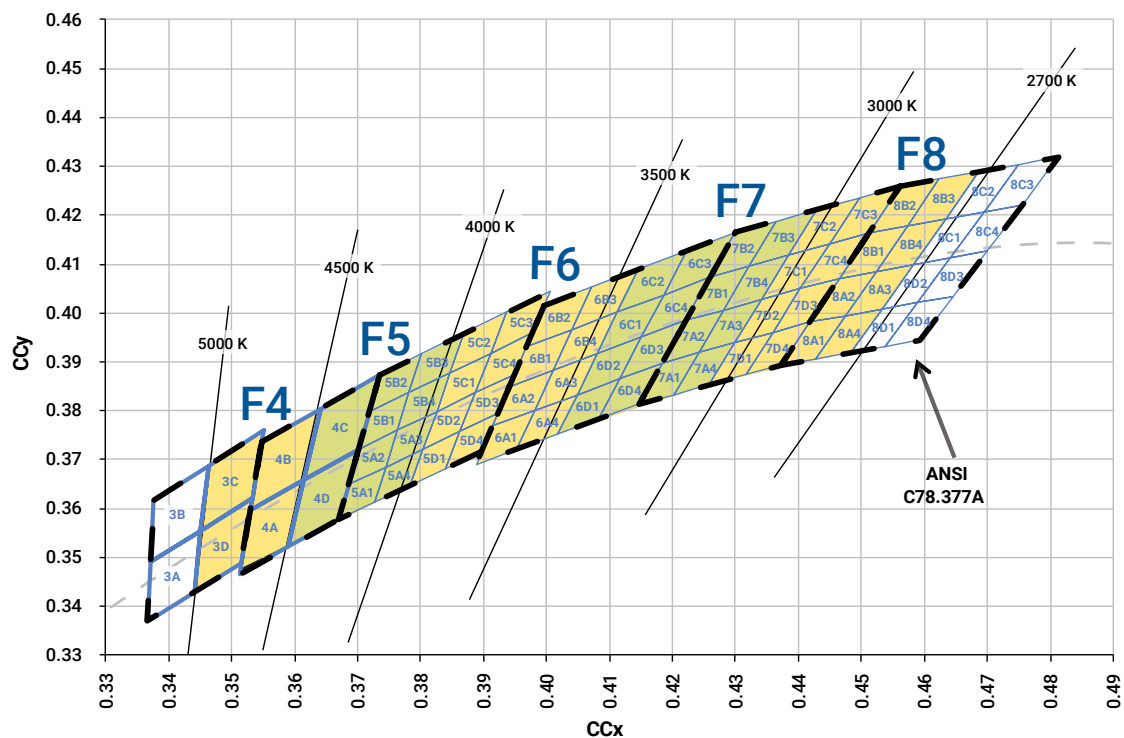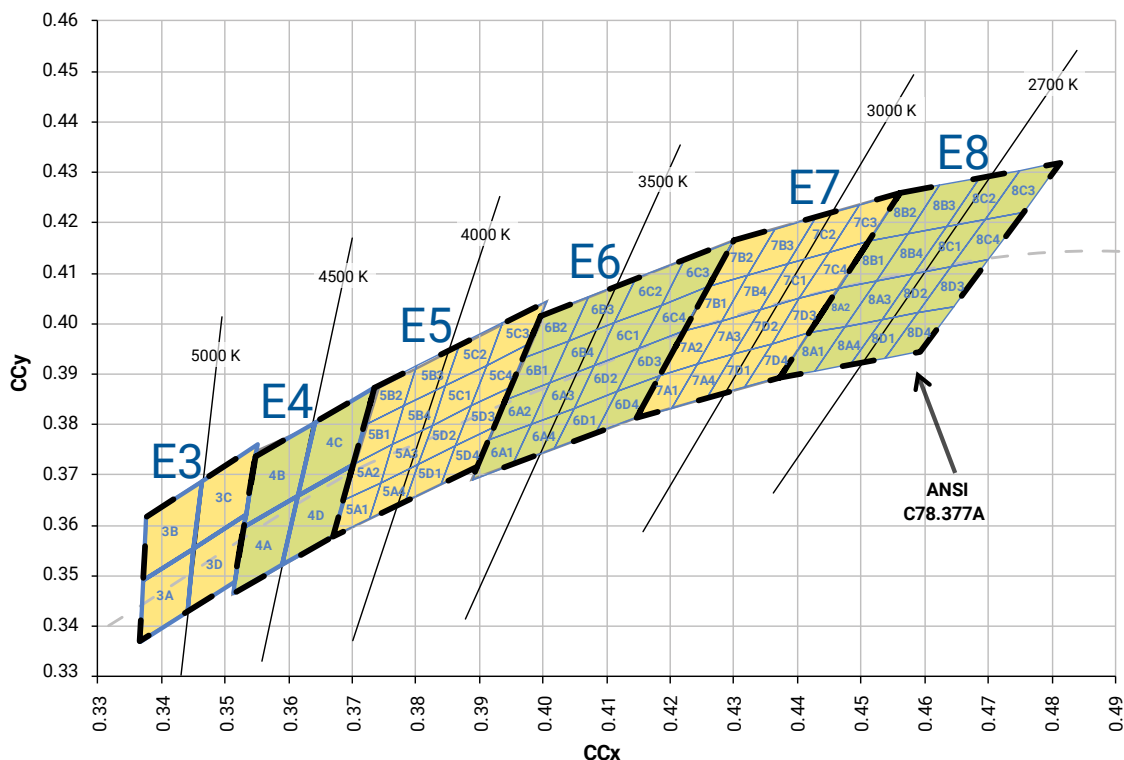

## CREE'S STANDARD WARM AND NEUTRAL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS - CONTINUED

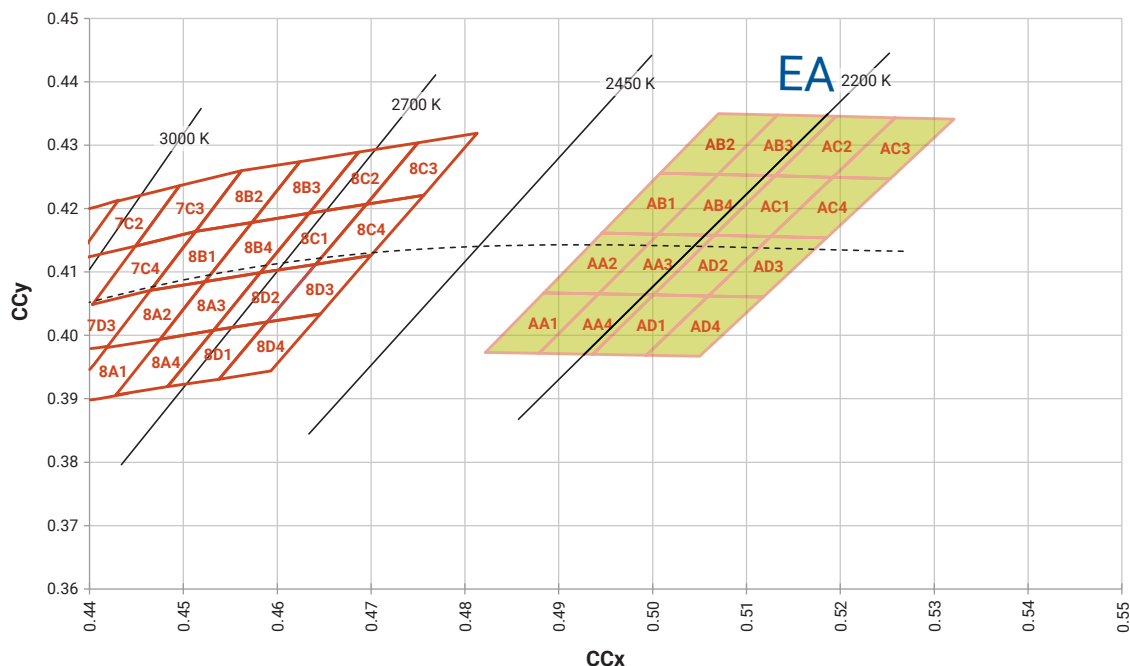

## CREE'S EASYWHITE® WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

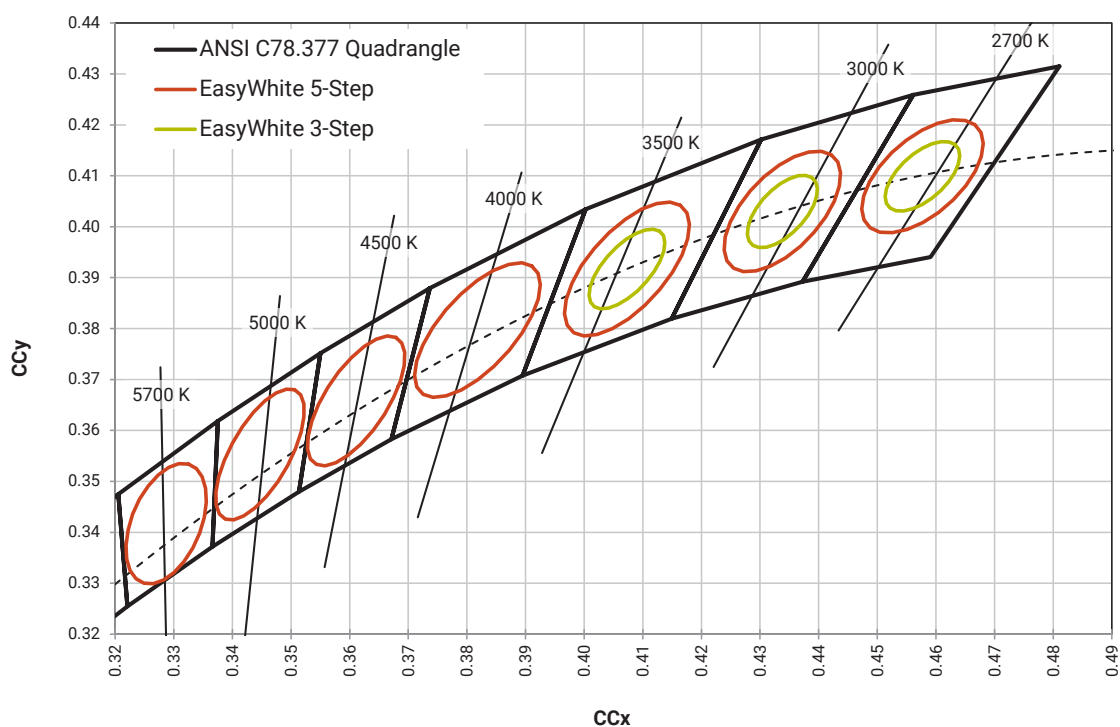



## CREE'S STANDARD CHROMATICITY KITS

The following table provides the chromaticity bins associated with chromaticity kits.

| Color         | CCT     | Kit | Chromaticity Bins                                                                              |
|---------------|---------|-----|------------------------------------------------------------------------------------------------|
| Cool White    | 7000 K  | DT  | 0A, 0B, 0C, 0D, 0R, 0S, 0T, 0U, 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U                                 |
|               | 6500 K  | CB  | 0A, 0B, 0C, 0D, 0R, 0S, 0T, 0U, 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 2U |
|               | >6500 K | E0  | 0A, 0B, 0C, 0D                                                                                 |
|               | 6500 K  | E1  | 1A, 1B, 1C, 1D                                                                                 |
|               | 6000 K  | DV  | 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 2U                                 |
|               | 6200 K  | 50  | 1A, 1B, 1C, 1D, 2A, 2B, 2C, 2D                                                                 |
|               | 5700 K  | E2  | 2A, 2B, 2C, 2D                                                                                 |
|               | 5700 K  | 2E  | 57E                                                                                            |
| Neutral White | 5000 K  | 3E  | 50E                                                                                            |
|               | 5000 K  | E3  | 3A, 3B, 3C, 3D                                                                                 |
|               | 4750 K  | F4  | 3C, 3D, 4A, 4B                                                                                 |
|               | 4500 K  | 4E  | 45E                                                                                            |
|               | 4500 K  | E4  | 4A, 4B, 4C, 4D                                                                                 |
|               | 4250 K  | F5  | 4C, 4D, 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4                                                 |
|               | 4000 K  | 5E  | 40E                                                                                            |
|               | 4000 K  | E5  | 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4, 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4                 |
| Warm White    | 3750 K  | F6  | 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4, 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4                 |
|               | 3500 K  | 6E  | 35E, 35G                                                                                       |
|               | 3500 K  | 6G  | 35G                                                                                            |
|               | 3500 K  | E6  | 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4, 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4                 |
|               | 3250 K  | F7  | 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4, 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4                 |
|               | 3000 K  | 7E  | 30E, 30G                                                                                       |
|               | 3000 K  | 7G  | 30G                                                                                            |
|               | 3000 K  | E7  | 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4, 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4                 |
|               | 2850 K  | F8  | 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4, 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4                 |
|               | 2700 K  | 8E  | 27E, 27G                                                                                       |
|               | 2700 K  | 8G  | 27G                                                                                            |
|               | 2700 K  | E8  | 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4, 8C1, 8C2, 8C3, 8C4, 8D1, 8D2, 8D3, 8D4                 |
|               | 2200 K  | EA  | AA1, AA2, AA3, AA4, AB1, AB2, AB3, AB4, AC1, AC2, AC3, AC4, AD1, AD2, AD3, AD4                 |

## BIN AND ORDER CODE FORMATS


XP-G3 bin codes and order codes are configured in the following manner:

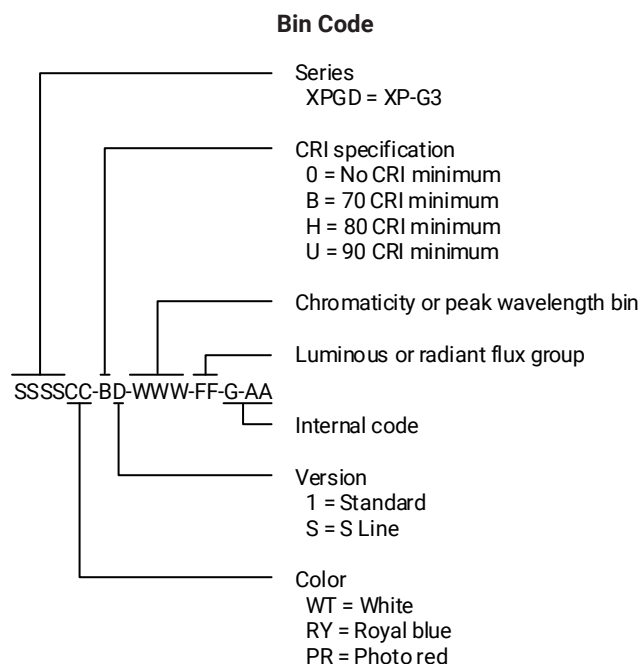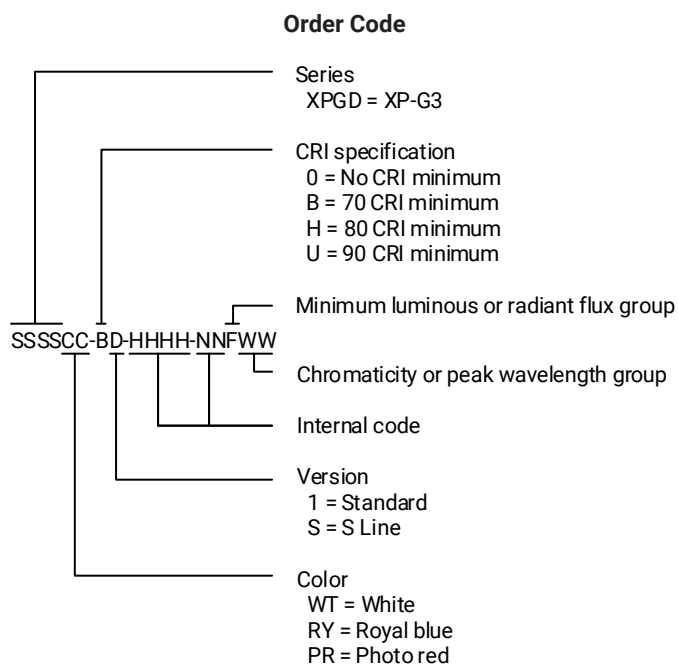

## REFLOW SOLDERING CHARACTERISTICS

In testing, Cree has found XLamp XP-G3 LEDs to be compatible with JEDEC J-STD-020C, with the exception of the peak temperature requirements listed in the table below. As a general guideline, Cree recommends that users follow the recommended soldering profile provided by the manufacturer of the solder paste used, and therefore it is the lamp or luminaire manufacturer's responsibility to determine applicable soldering requirements.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

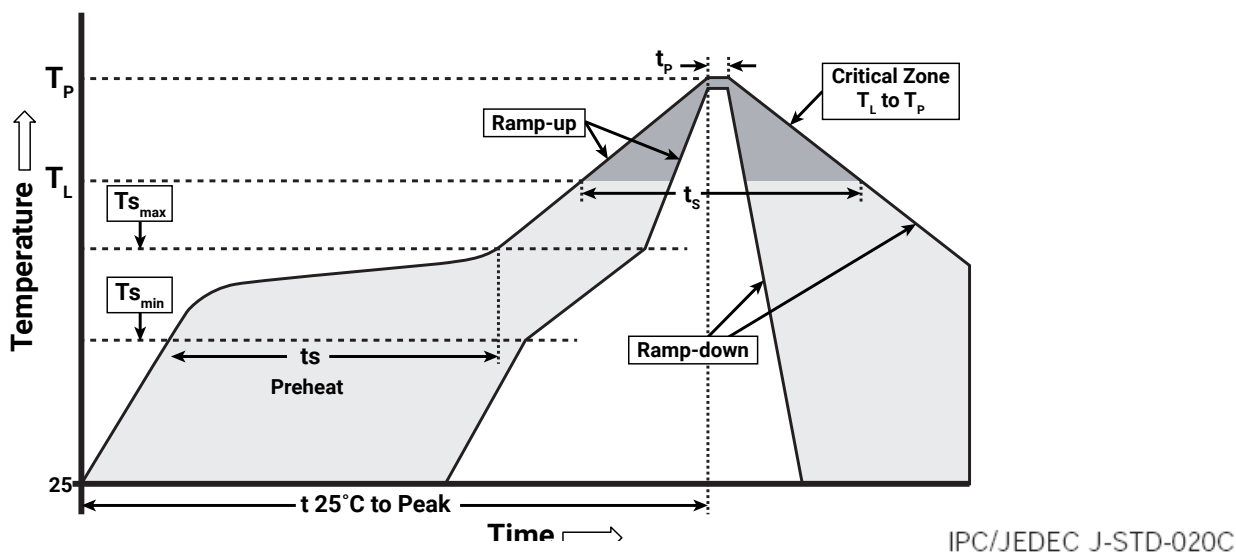

| Profile Feature                                       | Lead-Free Solder |
|-------------------------------------------------------|------------------|
| Average Ramp-Up Rate ( $T_{s_{max}}$ to $T_P$ )       | 1.2 °C/second    |
| Preheat: Temperature Min ( $T_{s_{min}}$ )            | 120 °C           |
| Preheat: Temperature Max ( $T_{s_{max}}$ )            | 170 °C           |
| Preheat: Time ( $t_{s_{min}}$ to $t_{s_{max}}$ )      | 65-150 seconds   |
| Time Maintained Above: Temperature ( $T_L$ )          | 217 °C           |
| Time Maintained Above: Time ( $t_L$ )                 | 45-90 seconds    |
| Peak/Classification Temperature ( $T_P$ )             | 235 - 245 °C     |
| Time Within 5 °C of Actual Peak Temperature ( $t_p$ ) | 20-40 seconds    |
| Ramp-Down Rate                                        | 1 - 6 °C/second  |
| Time 25 °C to Peak Temperature                        | 4 minutes max.   |

Note: All temperatures refer to topside of the package, measured on the package body surface.

## NOTES

### Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

### Pre-Release Qualification Testing

Please read the [LED Reliability Overview](#) for details of the qualification process Cree applies to ensure long-term reliability for XLamp LEDs and details of Cree's pre-release qualification testing for XLamp LEDs. Cree did not perform Room Temperature Operating Life (RTOL) testing on the XP-G3 LED.

### Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [LM-80 results document](#).

Please read the [Long-Term Lumen Maintenance application note](#) for more details on Cree's lumen maintenance testing and forecasting. Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

### Moisture Sensitivity

Cree recommends keeping XLamp LEDs in the provided, resealable moisture-barrier packaging (MBP) until immediately prior to soldering. Unopened MBPs that contain XLamp LEDs do not need special storage for moisture sensitivity.

Once the MBP is opened, XLamp XP-G3 LEDs may be stored as MSL 1 per JEDEC J-STD-033, meaning they have unlimited floor life in conditions of  $\leq 30^{\circ}\text{C}/85\%$  relative humidity (RH). Regardless of the storage condition, Cree recommends sealing any unsoldered LEDs in the original MBP.

### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the [Product Ecology](#) section of the Cree website.

### REACH Compliance

REACH substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH Declaration. REACH banned substance information (REACH Article 67) is also available upon request.



**NOTES - CONTINUED**

---

**UL® Recognized Component**

This product meets the requirements to be considered a UL Recognized Component with Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

**Vision Advisory**

**WARNING:** Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [LED Eye Safety application note](#).

Thermal vias, if present, are not shown on these drawings.

All measurements are  $\pm 13$  mm unless otherwise indicated.




- Cree recommends using thermal pad kickouts to maximize component thermal performance.
- Cree recommends using white solder mask material to minimize system optical loss.
- \* This stencil has been tested and optimized for the avoidance of voiding when using ALPHA® LUMET® P30 Maxrel solder paste. For other solder pastes, a “window pane” design for the thermal pad stencil may result in a lower voiding percentage. Contact your local Cree Field Applications Engineer for consultation regarding your specific application.

## TAPE AND REEL



All Cree carrier tapes conform to EIA-481D, Automated Component Handling Systems Standard.

All dimensions in mm.

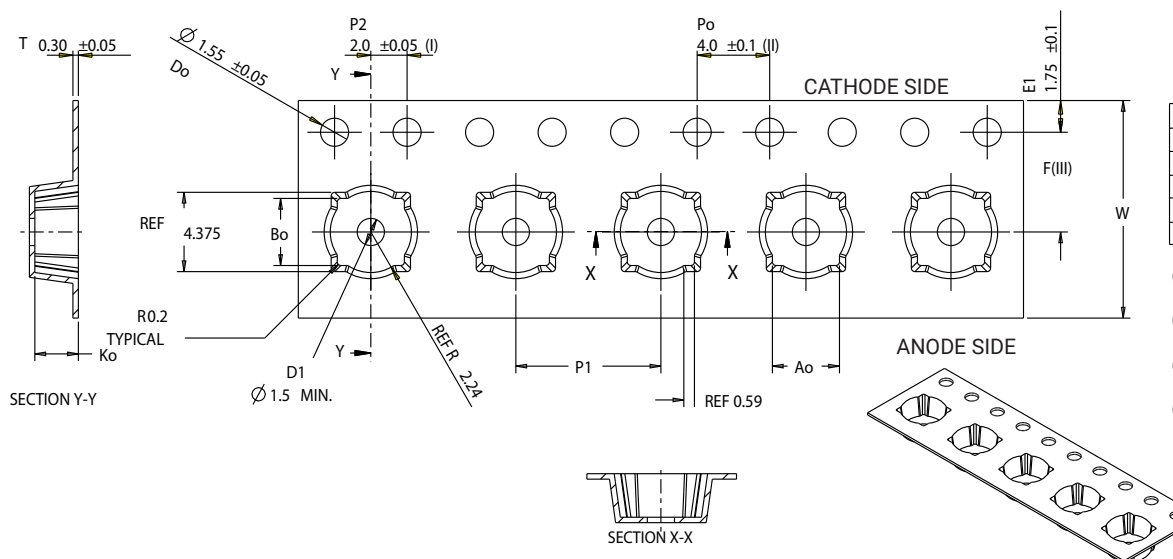


|     |       |           |
|-----|-------|-----------|
| Ao  | 3.70  | +/- 0.1   |
| Bo  | 3.70  | +/- 0.1   |
| Ko  | 2.40  | +0.0/-0.1 |
| F   | 5.50  | +/- 0.05  |
| P 1 | 8.00  | +/- 0.1   |
| W   | 12.00 | +0.3/-0.1 |

- (I) Measured from centerline of sprocket hole to centerline of pocket.
- (II) Cumulative tolerance of 10 sprocket holes is ±0.20.
- (III) Measured from centerline of sprocket hole to centerline of pocket.
- (IV) Other material available.

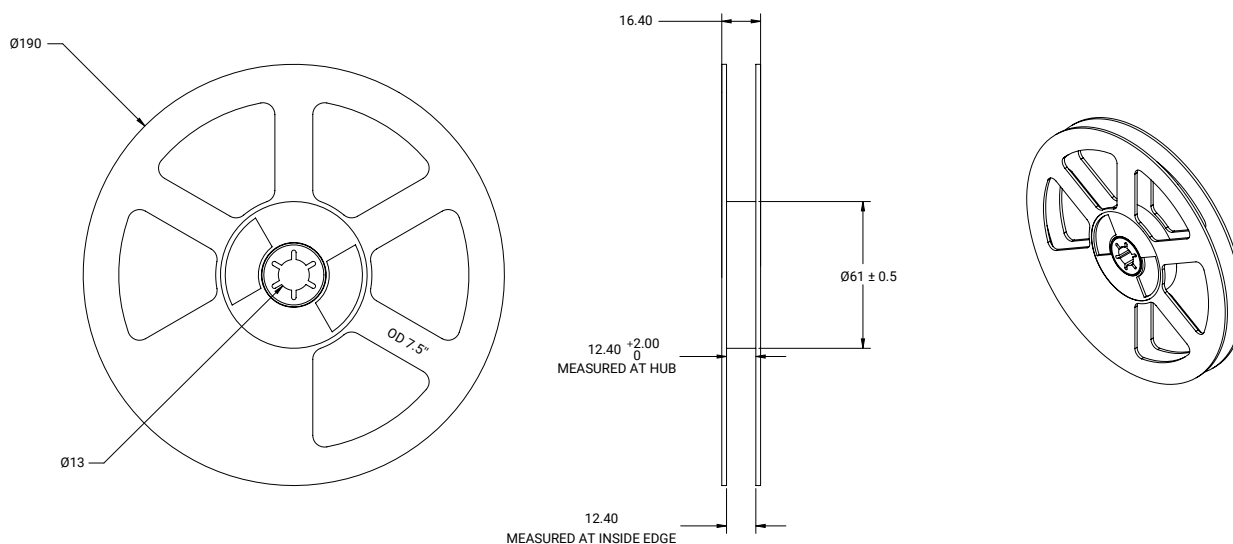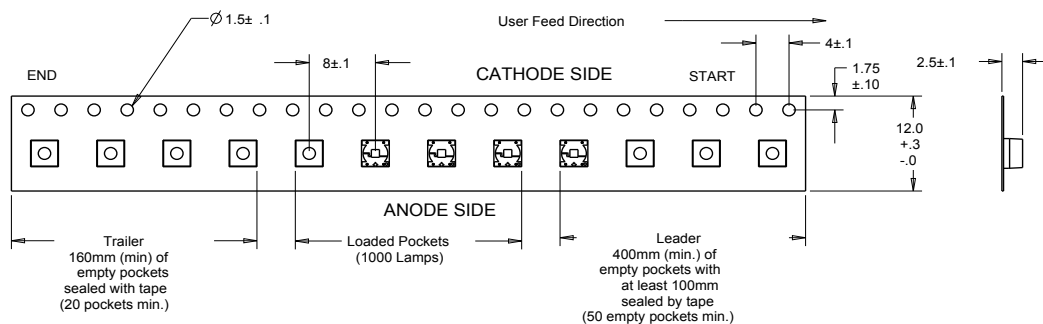


## PACKAGING

### Unpackaged Reel

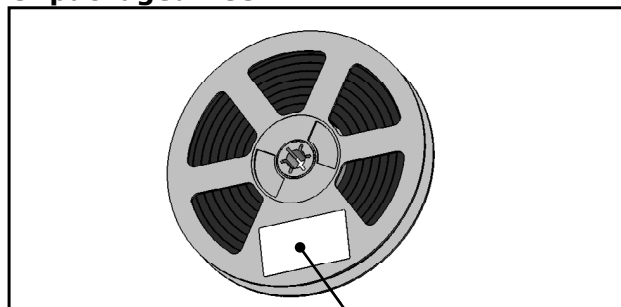

Label with Cree Bin Code,  
Quantity, Reel ID

### Packaged Reel

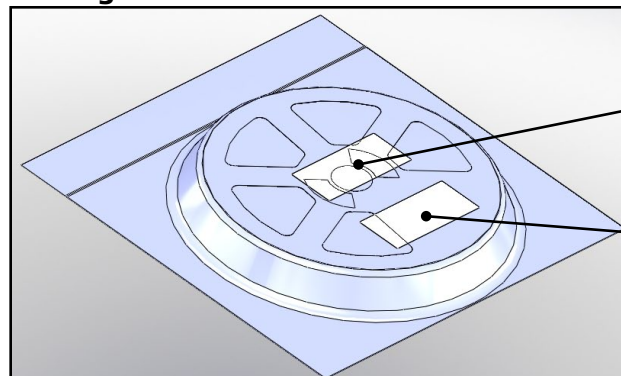


Label with Cree Order Code,  
Quantity, Reel ID, PO #

Label with Cree Bin Code,  
Quantity, Reel ID

### Boxed Reel

Label with Cree Order Code,  
Quantity, Reel ID, PO #

Label with Cree Bin Code,  
Quantity, Reel ID

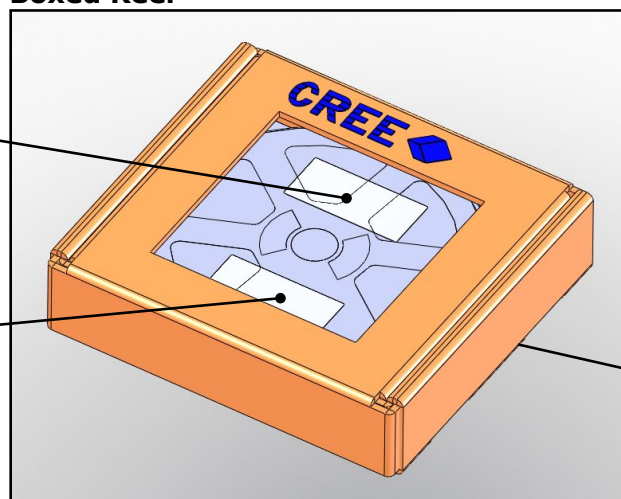

Patent Label  
(on bottom of box)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)