






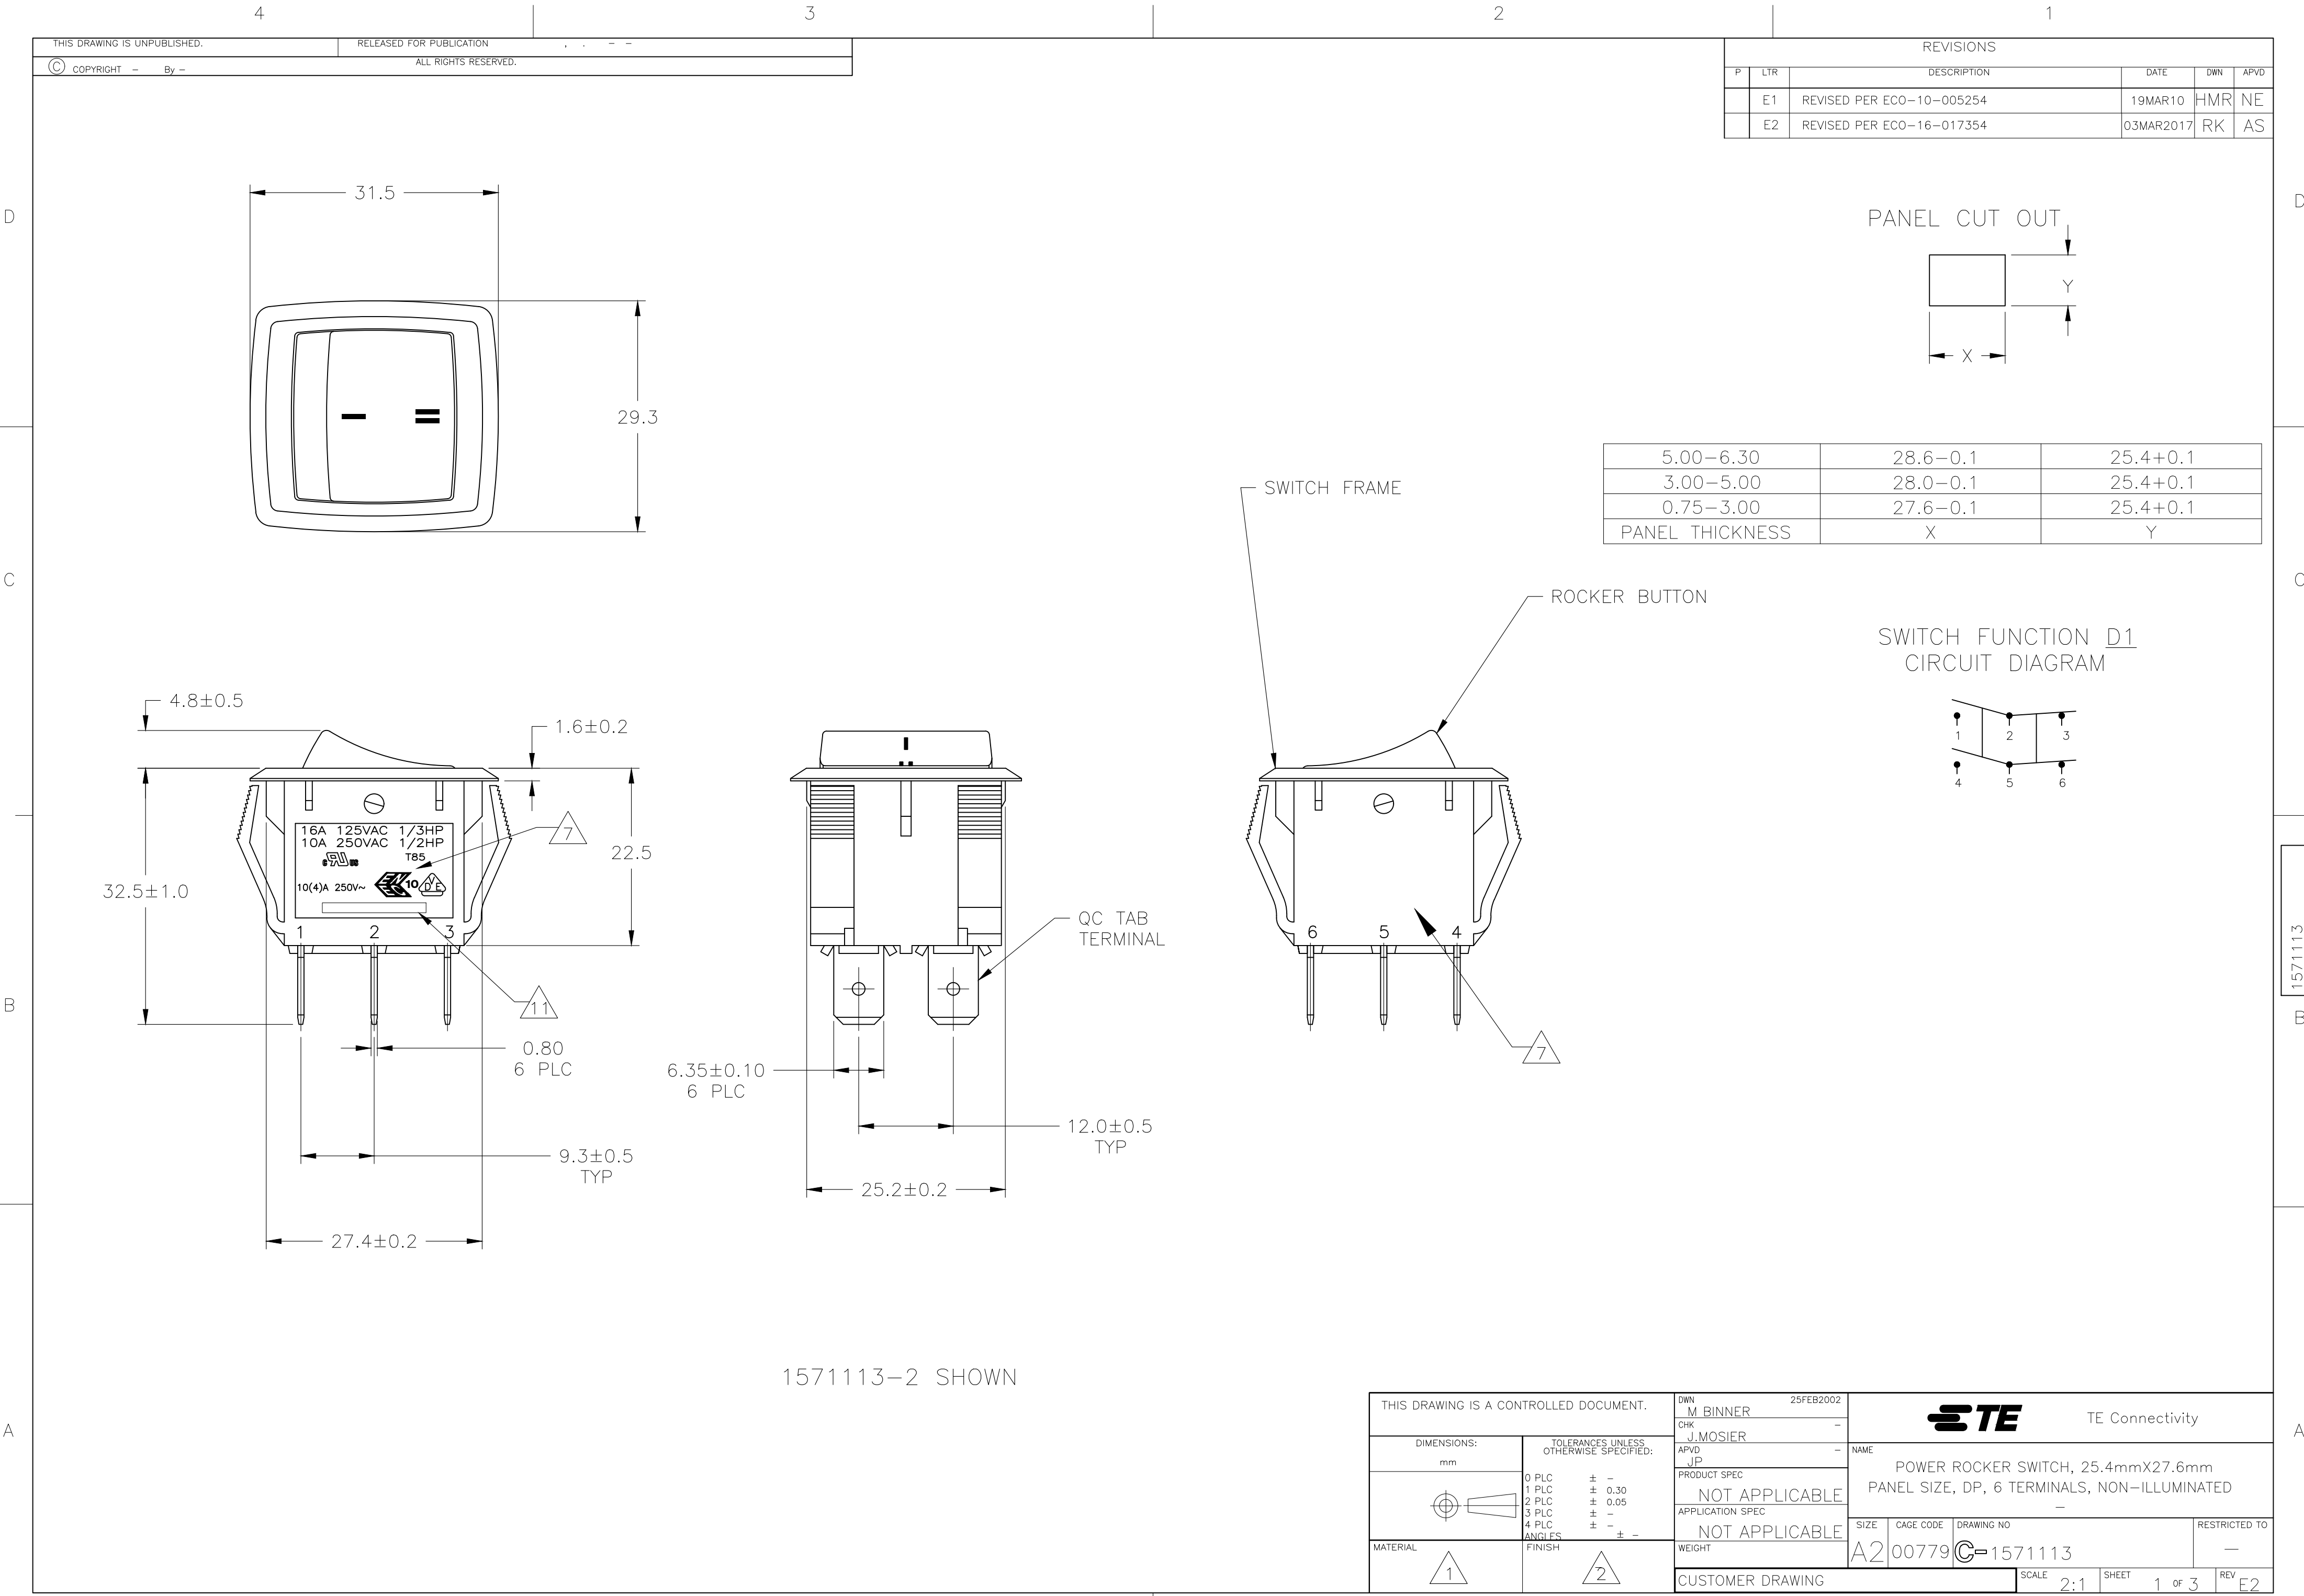


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECO-10-005254	19MAR10	HMR	NE
	E2	REVISED PER ECO-16-017354	03MAR2017	RK	AS


1571113-2 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M BINNER 25FEB2002	TE Connectivity		
DIMENSIONS: mm		CHK J.MOSIER			
		APVD JP	NAME POWER ROCKER SWITCH, 25.4mmX27.6mm PANEL SIZE, DP, 6 TERMINALS, NON-ILLUMINATED		
		PRODUCT SPEC	NOT APPLICABLE		
		APPLICATION SPEC	NOT APPLICABLE		
MATERIAL		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO. C-1571113
FINISH		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 OF 3	REV E2

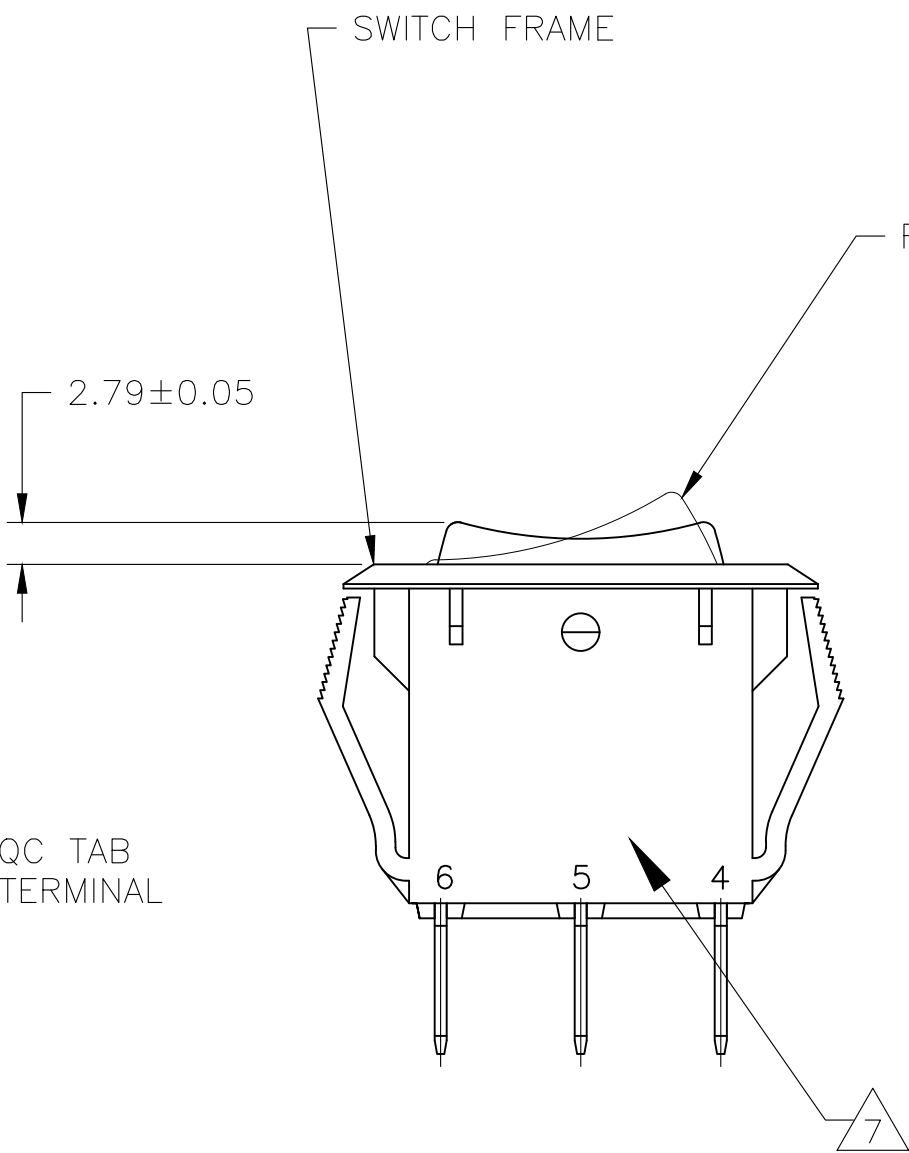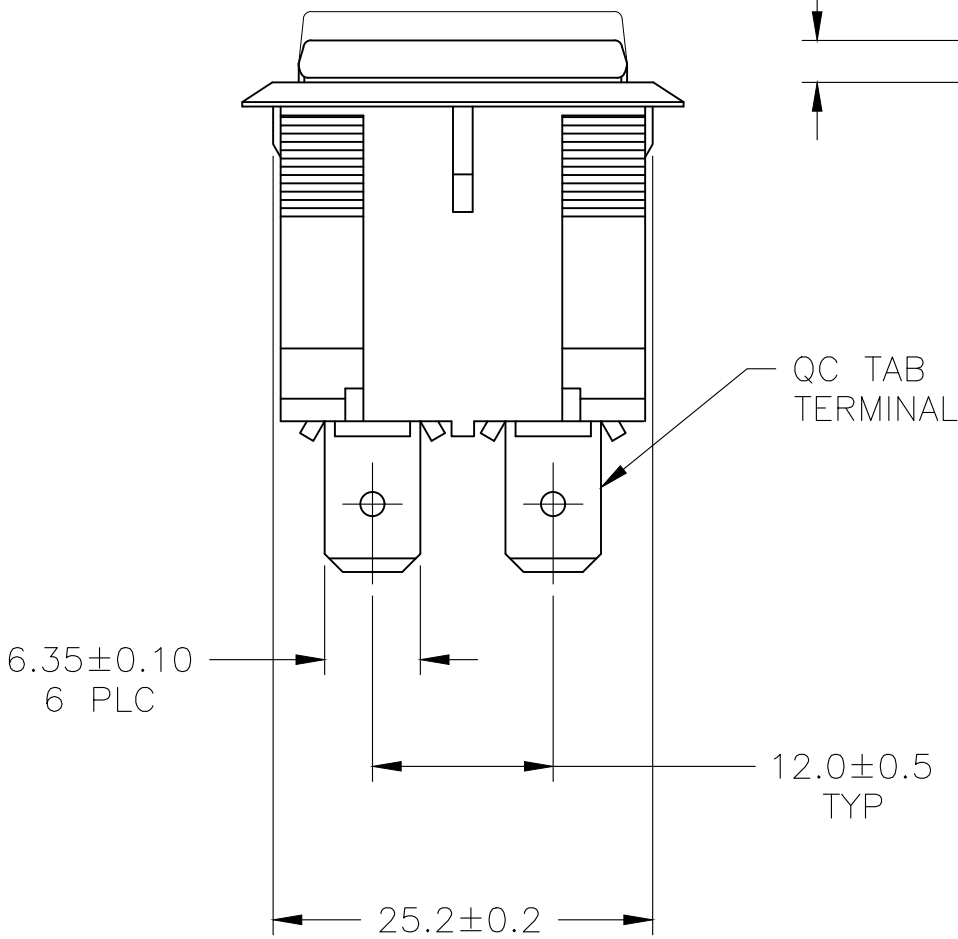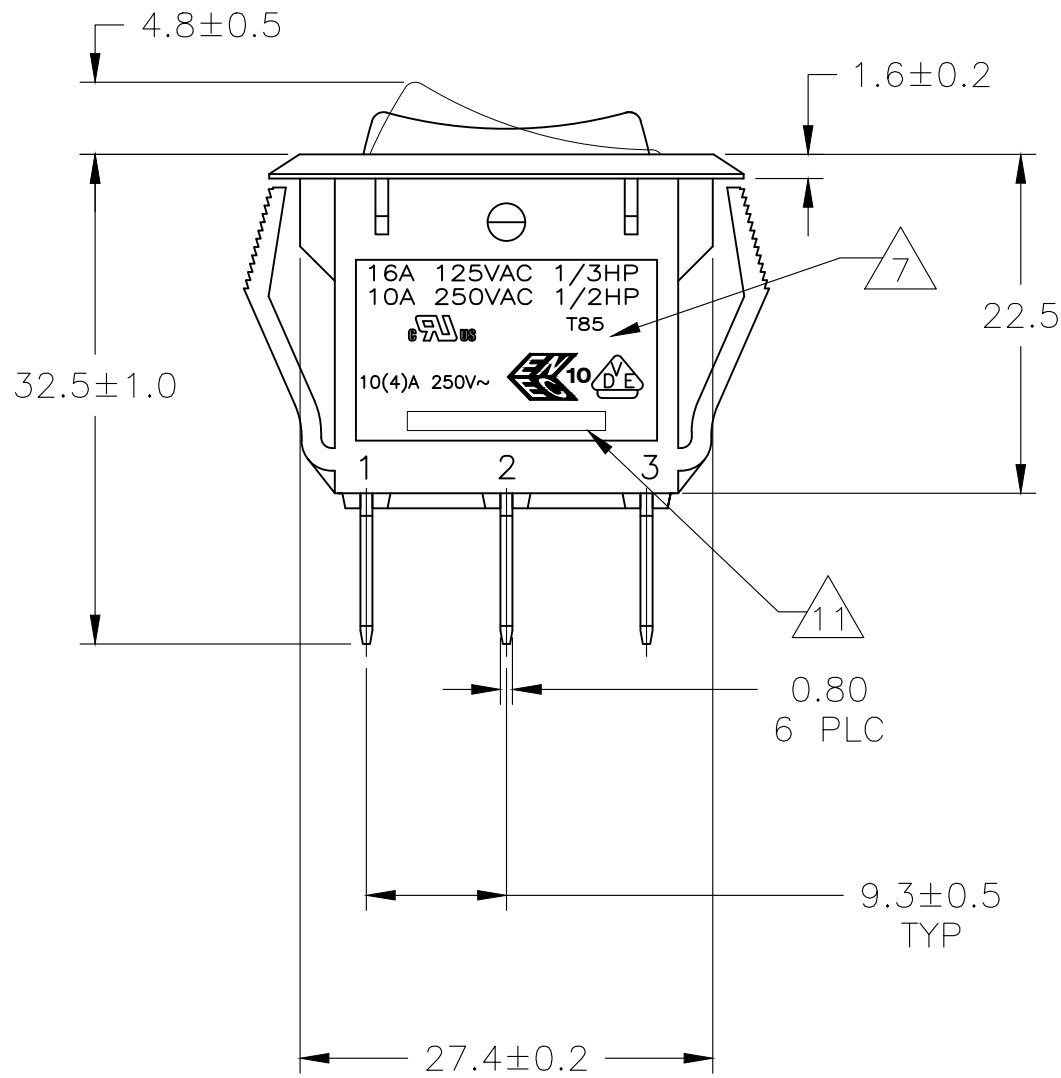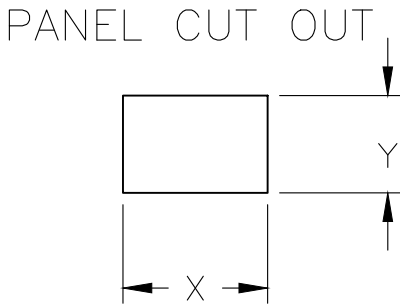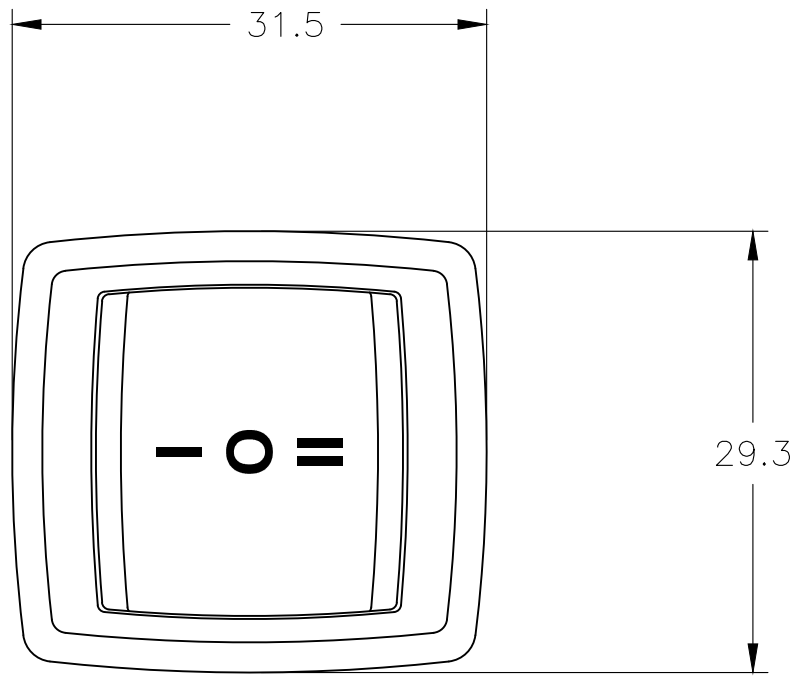

5.00-6.30	28.6-0.1	25.4+0.1
3.00-5.00	28.0-0.1	25.4+0.1
0.75-3.00	27.6-0.1	25.4+0.1
PANEL THICKNESS	X	Y

SWITCH FUNCTION D3
CIRCUIT DIAGRAM



OBSOLETE 1571113=5 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M BINNER 25FEB2002		 TE Connectivity													
DIMENSIONS: mm		CHK J.MOSIER															
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.30 2 PLC ± 0.05 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD JP		NAME POWER ROCKER SWITCH, 25.4mmX27.6mm PANEL SIZE, DP, 6 TERMINALS, NON-ILLUMINATED												
			PRODUCT SPEC NOT APPLICABLE														
			APPLICATION SPEC NOT APPLICABLE		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO						
			MATERIAL 		FINISH 		A2		00779		C=1571113		-				
CUSTOMER DRAWING				SCALE		2:1		SHEET		2 of 3		REV		E2			

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

LEGACY PART NUMBER

X₁X₂

X₃

X₄

X₅X₆

—

X₇X₈

X₉

—

X₁₀X₁₁X₁₂X₁₃X₁₄

SWITCH TYPE: X₁X₂ = PR — POWER ROCKER

NOMINAL PANEL CUT OUT SIZE: X₃ = D — 25.4x27.6

NUMBER OF POLES: X₄ = D — DOUBLE

SWITCH FUNCTION: X₅X₆ = D1 — ON—ON, WITH OPAQUE, SINGLE—COLOR ROCKER BUTTON.

D3 — ON—OFF—ON, WITH OPAQUE, SINGLE—COLOR ROCKER BUTTON.

CURRENT RATING: X₇X₈ = 16 — 6

TERMINAL TYPE: X₉ = E — QC TAB

FRAME COLOR: X₁₀ = B — BLACK
W — WHITE

ROCKER COLOR: X₁₁ = B — BLACK
G — GREEN
R — RED
W — WHITE

SECONDARY ROCKER COLOR: X₁₂ = Ø — NOT APPLICABLE

LEGEND TEXT PATTERN: X₁₃ =

Ø

D

E

F

G

— =

I II

— o =

I o II

LEGEND TEXT COLOR: X₁₄ = Ø — NOT APPLICABLE
G — GREEN
R — RED
B — BLACK
W — WHITE

1

MATERIALS:

ROCKER BUTTON & HOUSING: NYLON 66, UL 94 V-2.

TERMINAL, ACTIVE CONTACTOR: COPPER ALLOY PER ASTM B152/B152M

PLUNGER: COPPER ALLOY PER ASTM B036

SPRING: STEEL WIRE PER ASTM A228/A228M

CONTACT: SILVER—TIN OXIDE

2

FINISH:

TERMINAL, ACTIVE CONTACTOR: 1.0µm MIN SILVER

PLUNGER: 3.0µm MIN NICKEL

3

ELECTRICAL SPECIFICATIONS:

CURRENT & VOLTAGE 6

CONTACT RESISTANCE (INITIAL): <50mΩ

DIELECTRIC STRENGTH (INITIAL): >1000 VAC, 1 MINUTE

INSULATION RESISTANCE (INITIAL): >100MΩ MIN (500VDC BETWEEN OPEN CONTACTS)

INRUSH CURRENT: 50A / 3msec (CAPACITIVE LOAD)

ELECTRICAL LIFE ENDURANCE: >6000 OPERATIONS

TEMPERATURE RISE AT TERMINALS: <30°C, 6000 OPERATIONS

(AMBIENT CONDITIONS: 25±2°C AND 65±5%R.H)

4

MECHANICAL SPECIFICATIONS:

ACTUATING FORCE: 850g MIN, 1250g MAX

OPERATING LIFE ENDURANCE: >100,000 OPERATIONS

TERMINAL STRENGTH : >10.0kg— QC TAB

5

ENVIRONMENTAL SPECIFICATIONS:

AMBIENT TEMPERATURE: -20°C TO +85°C

HUMIDITY: MAX 85%

SALT SPRAY: NO REMAKABLE RUST IN METAL PARTS (5%SALT / 35°C 24HRS)

SHOCK: NO MECHANICAL DEFECT OR DAMAGE (100g / 10MSEC/ X,Y,Z 3 TIMES)

VIBRATION: NO MECHANICAL DEFECT OR DAMAGE (10-55Hz /1.5mm/ X,Y,Z 2HRS)

6

UL: 16A@125VAC ⅓HP / 10A@250VAC ½HP

ENEC: 10(4)A 250V~

7

ELECTRICAL RATINGS, APPROVED AGENCY LOGOS, TERMINAL IDENTIFICATION NUMBERS, MOLDED APPROXIMATELY AS SHOWN ON THE SIDES OF THE SWITCH HOUSING.

11

TYCO ELECTRONICS LOGO LOCATED APPROXIMATELY AS SHOWN

8

COMPONENT—RECONIZED TO US & CANADIAN STANDARDS

UL FILE NO. E46765

9

COMPONENT—RECOGNIZED TO EUROPEAN STANDARDS

(ENEC & VDE) MARKS LICENSE NO 40020317

10

ROHS 2002/95/EC COMPLIANT

OBSOLETE	2	PRDDD3-16F-BR000	5-1571113-7
	2	PRDDD3-16F-BB0GW	1571113-6
OBSOLETE	2	PRDDD3-16F-BB0FW	1571113-5
	2	PRDDD3-16F-BB000	1571113-4
OBSOLETE	1	PRDDD1-16F-BB0EW	1571113-3
	1	PRDDD1-16F-BB0DW	1571113-2
	1	PRDDD1-16F-BB000	1571113-1
SHEET REF.		LEGACY PART NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

0 PLC ± -

1 PLC ± 0.30

2 PLC ± 0.05

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL

FINISH

-

DWN

M BINNER

25FEB2002

CHK

J.MOSIER

-

APVD

JP

-

PRODUCT SPEC

NOT APPLICABLE

APPLICATION SPEC

NOT APPLICABLE

WEIGHT

-

CUSTOMER DRAWING

SCALE

2:1

SHEET

3 of 3

REV

E2

TE

TE Connectivity

NAME

POWER ROCKER SWITCH, 25.4mmX27.6mm

PANEL SIZE, DP, 6 TERMINALS, NON-ILLUMINATED

SIZE

A2

CAGE CODE

00779

DRAWING NO

1571113

RESTRICTED TO

-

1471-9 (1/15)

1571113

1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru