

Ultra-high Voltage Ceramic Capacitors

Molded type with metal terminals

For high voltage power supply/laser

UHV(Edc: 20 to 50kV) series

FHV(Edc: 15 to 50kV) series

Issue date: September 2006

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Ultra-high Voltage Ceramic Capacitors

Molded Type with Metal Terminals UHV, FHV Series

Conformity to RoHS Directive

CLASS 2 HIGH DIELECTRIC**DC. 20 TO 50kV: UHV-1A TO 12A, 221A TO 253A TYPES****DC. 15 TO 50kV: FHV-1AN TO 12AN, 153AN TYPES**

TDK UHV and FHV series high voltage ceramic capacitors feature low dissipation and excellent voltage-capacitance characteristics using patented strontium titanate for dielectric material. They are epoxy-encapsulated to meet requirement of high voltage applications.

**FEATURES**

- Small size.
- Low dissipation factor.
- Excellent voltage-capacitance characteristics.
- Screw terminals for easy mounting.
- FHV series: High capacitance and low temperature characteristics of capacitance.

APPLICATIONS

High voltage power supplies, laser equipment.


INITIAL CHARACTERISTICS

| Series | UHV | FHV |
|---|---|---|
| Operating temperature range | -30 to +85°C | -30 to +85°C |
| Rated voltage | DC. 20 to 50kV | DC. 15 to 50kV |
| Insulation resistance | 100,000MΩ min. | 100,000MΩ min. |
| Nominal capacitance range | 100 to 4,000pF | 700 to 7,000pF |
| Capacitance tolerance | ±10% | ±10% |
| Dissipation factor(tanδ) | 0.2% max. | 0.2% max. |
| Capacitance temperature characteristics | Z5T:+22, -33%[+10 to +85°C, 25°C] | Y5S:±22%[-30 to +85°C, 25°C] |
| AC Corona starting voltage | 3PC* max. at 50% of rated voltage min.(50Hz rms) | 3PC* max. at 50% of rated voltage min.(50Hz rms) |
| Withstanding voltage | No breakdown at 1.5 times of rated voltage, 60s(in oil) | No breakdown at 1.5 times of rated voltage, 60s(in oil) |

* PC: Pico coulomb

SHAPES AND DIMENSIONS**UHV-1A to 12A****UHV-221A to 253A**

Dimensions in mm

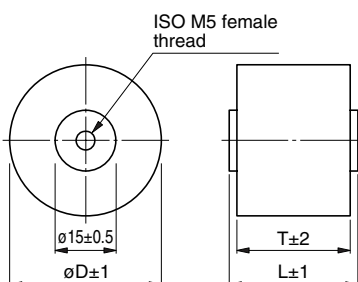FHV-1AN to 12AN**MARKING**

| Item | Marking example |
|---|-----------------|
| 1. Part No. | |
| 2. Nominal capacitance and tolerance code | 1 → UHV-5A |
| 3. Rated voltage | 2 → 172K |
| 4. Manufacturer's name (TDK or TDK logo mark) | 3 → 30kV |
| 5. Lot No. | 4 → TDK |
| | 5 → 1234 |

MARKING

| Item | Marking example |
|---|-----------------|
| 1. Part No. | |
| 2. Nominal capacitance and tolerance code | 1 → FHV-5A |
| 3. Rated voltage | 2 → 172K |
| 4. Manufacturer's name (TDK or TDK logo mark) | 3 → 30kV |
| 5. Lot No. | 4 → TDK |
| | 5 → 1234 |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS/DIMENSIONS

TYPICAL CAPACITANCE CHARACTERISTICS

UHV SERIES(DC. 20 to 50kV, TC:Z5T)

| Rated voltage Edc(kV) | Part No. | Rated capacitance (pF)±10% | Dimensions (mm) | | | Female thread |
|--------------------------|----------|-------------------------------|-----------------|--------|----|---------------|
| | | | øD | T | L | |
| 20 | UHV-221A | 200 | 20 | 19 | 23 | ISO M4 |
| | UHV-222A | 400 | 25 | | | |
| | UHV-223A | 700 | 30 | | | |
| | UHV-224A | 1,000 | 34 | | | ISO M5 |
| | UHV-1A | 1,400 | 38 | | | |
| | UHV-2A | 2,500 | 48 | | | |
| | UHV-3A | 4,000 | 60 | | | |
| 30 | UHV-231A | 200 | 25 | 22 | 26 | ISO M4 |
| | UHV-232A | 400 | 30 | | | |
| | UHV-233A | 700 | 34 | | | |
| | UHV-4A | 940 | 38 | | | ISO M5 |
| | UHV-5A | 1,700 | 48 | | | |
| | UHV-6A | 2,700 | 60 | | | |
| | 40 | UHV-241A | 100 | | | |
| UHV-242A | | 200 | 25 | | | |
| UHV-243A | | 400 | 34 | | | |
| UHV-7A | | 700 | 38 | ISO M5 | | |
| UHV-8A | | 1,300 | 48 | | | |
| UHV-9A | 2,000 | 60 | | | | |
| 50 | UHV-251A | 100 | 20 | 31 | 35 | ISO M4 |
| | UHV-252A | 200 | 30 | | | |
| | UHV-253A | 400 | 34 | | | |
| | UHV-10A | 560 | 38 | | | ISO M5 |
| | UHV-11A | 1,000 | 48 | | | |
| UHV-12A | 1,700 | 60 | | | | |

FHV SERIES(DC. 15 to 50kV, TC:Y5S)

| Rated voltage Edc(kV) | Part No. | Rated capacitance (pF)±10% | Dimensions (mm) | | | Female thread |
|--------------------------|-----------|-------------------------------|-----------------|------|------|---------------|
| | | | øD | T | L | |
| 15 | FHV-153AN | 7,000 | 60 | 16.5 | 20.5 | ISO M5 |
| | FHV-1AN | 1,700 | 38 | 18.5 | 22.5 | ISO M5 |
| 20 | FHV-2AN | 3,000 | 48 | | | |
| | FHV-3AN | 5,200 | 60 | | | |
| | FHV-4AN | 1,200 | 38 | | | |
| 30 | FHV-5AN | 2,100 | 48 | 22 | 26 | ISO M5 |
| | FHV-6AN | 3,500 | 60 | 26 | 30 | ISO M5 |
| | 40 | FHV-7AN | 850 | | | |
| FHV-8AN | | 1,500 | 48 | | | |
| 50 | FHV-9AN | 2,600 | 60 | 29 | 33 | ISO M5 |
| | FHV-10AN | 700 | 38 | | | |
| | FHV-11AN | 1,300 | 48 | | | |
| | FHV-12AN | 2,100 | 60 | | | |


TYPICAL CAPACITANCE CHARACTERISTICS

CAPACITANCE vs. TEMPERATURE CHARACTERISTICS

UHV SERIES(DC. 20 to 50kV, TC:Z5T)



FHV SERIES(DC. 15 to 50kV, TC:Y5S)

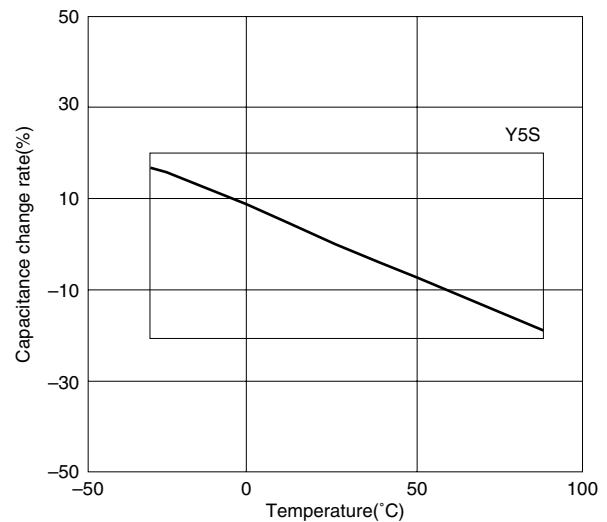

CAPACITANCE vs. DC BIAS CHARACTERISTICS

UHV SERIES(DC. 20 to 50kV, TC:Z5T)



FHV SERIES(DC. 15 to 50kV, TC:Y5S)



PRECAUTIONS

(1) During transportation and storage

- Do not transport or store where the capacitor will be exposed to high temperature or high humidity.
- Do not expose to poisonous gases such as H₂SO₄, HCl, or HNO₃.
- Avoid excessive impact such as that caused by falling.

(2) During operation

- Avoid contact with electrolytes such as perspiration. Do not touch with bare hands.
- Avoid excessive impact such as that caused by falling.
- Do not apply solder to stud terminals.
- Do not re-machine the terminals.

(3) Usage

- When the capacitor is used for high-speed pulses such as with a laser, make sure that the impressed voltage (peak-to-peak voltage) is within the capacitor's rated specifications.
- Make sure that the capacitor is not exposed to radiant heat from chambers or transformers.

• For more information about products with other capacitance or other data, please contact us.

• All specifications are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru