

# SHRINK BOOT ADAPTOR



Amphenol shrink boot adapter is a good option when the unshielded cables are terminated with heat shrink boots. It has a groove where the boot lip can be held which provides good grip apart from sufficient space inside for the cable looping.

Using the heat shrink boot is one way of providing environmental protection and strain relief to cable termination. Using a suitable adapter is essential here to ensure the repairability. Amphenol shrink boot adapter is designed to provide excellent characteristics in all these parameters.




| For Connector Group |   | Page No.         |
|---------------------|---|------------------|
| <b>J</b>            | → | <b>V-1 - V-2</b> |
| <b>K</b>            | → | <b>V-3 - V-4</b> |
| <b>L</b>            | → | <b>V-5</b>       |
| <b>M</b>            | → | <b>V-6</b>       |
| <b>N</b>            | → | <b>V-7</b>       |

**Note:** For Connector group Identification refer Table 1 - A, B, C, D ([Page 7-11](#)) and for Material / Plating Finish, Refer Table-2 ([Page 12](#))



### Connector Group - J

Straight, 90°, 45°

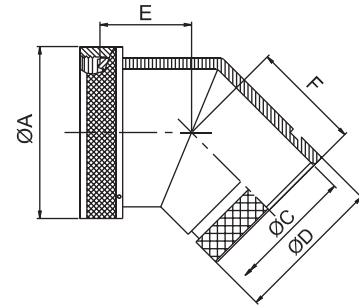

#### Amphenol Part Number

BB1 X X J 99 99 9 X X

Series

Angle

S: straight  
A: 90deg  
B: 45deg

Coupling

R: spin  
D: direct

Connector group

Finish: see Table-2

Constant: X

Length  
9 - for standard  
Length in table / figure

Entry Size  
99 - for standard  
Entry Size in table / figure

Shell size  
See Table-A

#### MIL Part Number

M85049 / 99-9 X 9

MIL Series

Dash Number:  
See Table-A

Finish:  
See Table-2

Slash sheet  
60-1: Straight, spin coupling

**NOTE:** \* For more cable entry and length options, contact factory

TABLE - A

| AMPHENOL<br>PART NUMBER<br>DESIGNATOR | MIL PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE | A DIA. (MAX) |       | B (MAX) |       | C DIA. (MIN) |       | D DIA. (MAX) |       |
|---------------------------------------|----------------------------------|-------------------------|--------------|-------|---------|-------|--------------|-------|--------------|-------|
| SHELL SIZE                            | DASH NO                          |                         | INCH         | MM    | INCH    | MM    | INCH         | MM    | INCH         | MM    |
| 08                                    | 08                               | 8                       | 0.62         | 15.67 | 1.19    | 30.15 | 0.25         | 6.35  | 0.53         | 13.54 |
| 10                                    | 10                               | 10                      | 0.73         | 18.64 | 1.19    | 30.15 | 0.36         | 9.02  | 0.61         | 15.37 |
| 12                                    | 12                               | 7/12                    | 0.86         | 21.79 | 1.19    | 30.15 | 0.49         | 12.47 | 0.77         | 19.66 |
| 14                                    | 14                               | 12/14                   | 0.98         | 24.99 | 1.19    | 30.15 | 0.57         | 14.35 | 0.84         | 21.29 |
| 16                                    | 16                               | 19/16                   | 1.11         | 28.24 | 1.19    | 30.15 | 0.69         | 17.53 | 0.96         | 24.46 |
| 18                                    | 18                               | 27/18                   | 1.22         | 30.94 | 1.19    | 30.15 | 0.77         | 19.53 | 1.04         | 26.47 |
| 20                                    | 20                               | 37/20                   | 1.35         | 34.16 | 1.19    | 30.15 | 0.89         | 22.71 | 1.22         | 30.91 |
| 22                                    | 22                               | 22                      | 1.47         | 37.29 | 1.19    | 30.15 | 1.02         | 25.88 | 1.36         | 34.42 |
| 24                                    | 24                               | 24                      | 1.59         | 40.46 | 1.19    | 30.15 | 1.13         | 28.80 | 1.44         | 36.65 |
| 28                                    | 28                               | 28                      | 1.97         | 50.01 | 1.51    | 38.38 | 1.37         | 34.77 | 1.71         | 43.41 |
| 32                                    | 32                               | 32                      | 2.22         | 56.36 | 1.51    | 38.38 | 1.62         | 41.02 | 1.92         | 48.74 |
| 36                                    | 36                               | 36                      | 2.47         | 62.71 | 1.51    | 38.38 | 1.83         | 46.48 | 2.17         | 55.09 |
| 40                                    | 40                               | 40                      | 2.72         | 69.06 | 1.51    | 38.38 | 2.05         | 51.94 | 2.40         | 61.01 |
| 44                                    | 44                               | 44                      | 2.97         | 75.41 | 1.51    | 38.38 | 2.30         | 58.42 | 2.66         | 67.49 |
| 48                                    | 48                               | 48                      | 3.22         | 81.76 | 1.51    | 38.38 | 2.55         | 64.77 | 2.91         | 73.84 |

Table Continued




Connector Group - J

Straight, 90°, 45°

| TABLE - A                             |                                  |                         |         |       |         |       |         |       |         |       |
|---------------------------------------|----------------------------------|-------------------------|---------|-------|---------|-------|---------|-------|---------|-------|
| AMPHENOL<br>PART NUMBER<br>DESIGNATOR | MIL PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE | E (MAX) |       | F (MAX) |       | G (MAX) |       | H (MAX) |       |
| SHELL SIZE                            | DASH NO                          |                         | INCH    | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    |
| 08                                    | 08                               | 8                       | 0.64    | 16.23 | 0.81    | 20.57 | 0.75    | 19.05 | 0.92    | 23.37 |
| 10                                    | 10                               | 10                      | 0.66    | 16.87 | 0.84    | 21.34 | 0.81    | 20.57 | 0.98    | 24.89 |
| 12                                    | 12                               | 7/12                    | 0.69    | 17.48 | 0.86    | 21.84 | 0.87    | 22.10 | 1.04    | 26.42 |
| 14                                    | 14                               | 12/14                   | 0.71    | 17.91 | 0.89    | 22.61 | 0.92    | 23.37 | 1.11    | 28.19 |
| 16                                    | 16                               | 19/16                   | 0.73    | 18.59 | 0.91    | 23.11 | 0.98    | 24.89 | 1.17    | 29.72 |
| 18                                    | 18                               | 27/18                   | 0.75    | 19.00 | 0.92    | 23.37 | 1.02    | 25.91 | 1.19    | 30.23 |
| 20                                    | 20                               | 37/20                   | 0.77    | 19.63 | 0.94    | 23.88 | 1.08    | 27.43 | 1.25    | 31.75 |
| 22                                    | 22                               | 22                      | 0.80    | 20.32 | 0.98    | 24.89 | 1.14    | 28.96 | 1.33    | 33.78 |
| 24                                    | 24                               | 24                      | 0.82    | 20.90 | 1.01    | 25.65 | 1.20    | 30.48 | 1.40    | 35.56 |
| 28                                    | 28                               | 28                      | 1.04    | 26.44 | 1.18    | 29.97 | 1.48    | 37.59 | 1.64    | 41.66 |
| 32                                    | 32                               | 32                      | 1.09    | 27.74 | 1.37    | 34.80 | 1.61    | 40.89 | 1.88    | 47.75 |
| 36                                    | 36                               | 36                      | -----   | ----- | -----   | ----- | -----   | ----- | -----   | ----- |
| 40                                    | 40                               | 40                      | -----   | ----- | -----   | ----- | -----   | ----- | -----   | ----- |
| 44                                    | 44                               | 44                      | -----   | ----- | -----   | ----- | -----   | ----- | -----   | ----- |
| 48                                    | 48                               | 48                      | -----   | ----- | -----   | ----- | -----   | ----- | -----   | ----- |

### Connector Group - K

Straight, 90°, 45°

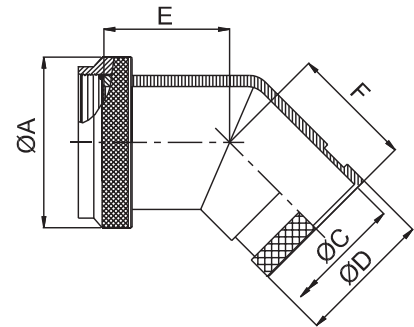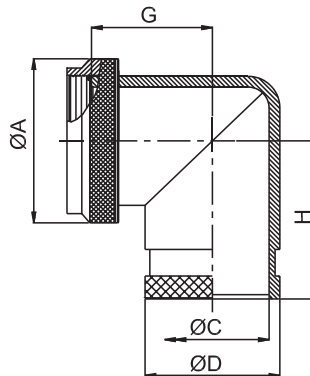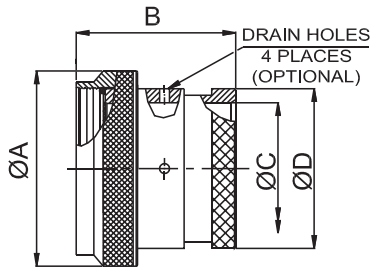

#### Amphenol Part Number

BB1 X X K 99 99 9 X X

Series ————  
Angle ————  
S: straight  
A: 90deg  
B: 45deg  
Coupling ————  
R: spin  
D: direct  
Connector group ————

Finish: see Table-2  
Constant: X  
Length  
9 - for standard  
Length in table / figure  
Entry Size  
99 - for standard  
Entry Size in table / figure  
Shell size  
See Table-A

#### MIL Part Number

M85049 / 99 - 9 X D

MIL Series ————  
Slash sheet  
62 : Straight, spin coupling  
D: Drain hole option  
Finish:  
See Table-2  
Dash Number:  
See Table-A

**NOTE:** \* For more cable entry and length options, contact factory

| TABLE - A                                |                                  |                                        |              |       |         |       |               |       |               |       |         |       |
|------------------------------------------|----------------------------------|----------------------------------------|--------------|-------|---------|-------|---------------|-------|---------------|-------|---------|-------|
| AMPHENOL<br>PART<br>NUMBER<br>DESIGNATOR | MIL PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE<br>SE - II / I | A DIA. (MAX) |       | B (MAX) |       | C DIA. ( MIN) |       | D DIA. ( MAX) |       | E (MAX) |       |
| SHELL SIZE                               | DASH NO.                         |                                        | INCH         | MM    | INCH    | MM    | INCH          | MM    | INCH          | MM    | INCH    | MM    |
| 08                                       | 08                               | 8 / 9                                  | 0.75         | 19.05 | 1.00    | 25.40 | 0.25          | 6.35  | 0.53          | 13.54 | 0.64    | 16.23 |
| 10                                       | 10                               | 10 / 11                                | 0.85         | 21.59 | 1.00    | 25.40 | 0.38          | 9.53  | 0.61          | 15.37 | 0.66    | 16.87 |
| 12                                       | 12                               | 12 / 13                                | 1.00         | 25.40 | 1.00    | 25.40 | 0.50          | 12.70 | 0.77          | 19.66 | 0.69    | 17.48 |
| 14                                       | 14                               | 14 / 15                                | 1.10         | 27.94 | 1.00    | 25.40 | 0.63          | 15.88 | 0.84          | 21.29 | 0.71    | 17.91 |
| 16                                       | 16                               | 16 / 17                                | 1.25         | 31.75 | 1.00    | 25.40 | 0.75          | 19.05 | 0.94          | 23.77 | 0.73    | 18.59 |
| 18                                       | 18                               | 18 / 19                                | 1.40         | 35.56 | 1.00    | 25.40 | 0.81          | 20.62 | 1.04          | 26.47 | 0.75    | 19.00 |
| 20                                       | 20                               | 20 / 21                                | 1.50         | 38.10 | 1.00    | 25.40 | 0.94          | 23.80 | 1.22          | 30.91 | 0.77    | 19.63 |
| 22                                       | 22                               | 22 / 23                                | 1.65         | 41.91 | 1.00    | 25.40 | 1.06          | 26.97 | 1.36          | 34.42 | 0.80    | 20.32 |
| 24                                       | 24                               | 24 / 25                                | 1.75         | 44.45 | 1.00    | 25.40 | 1.19          | 30.18 | 1.44          | 36.65 | 0.82    | 20.90 |




Table Continued

| TABLE - A                                |                                  |                                        |         |       |         |       |         |       |
|------------------------------------------|----------------------------------|----------------------------------------|---------|-------|---------|-------|---------|-------|
| AMPHENOL<br>PART<br>NUMBER<br>DESIGNATOR | MIL PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE<br>SE - II / I | F (MAX) |       | G (MAX) |       | H (MAX) |       |
| SHELL SIZE                               | DASH NO.                         |                                        | INCH    | MM    | INCH    | MM    | INCH    | MM    |
| 08                                       | 08                               | 8 / 9                                  | 0.81    | 20.57 | 0.75    | 19.05 | 0.92    | 23.37 |
| 10                                       | 10                               | 10 / 11                                | 0.84    | 21.34 | 0.81    | 20.57 | 0.98    | 24.89 |
| 12                                       | 12                               | 12 / 13                                | 0.86    | 21.84 | 0.87    | 22.10 | 1.04    | 26.42 |
| 14                                       | 14                               | 14 / 15                                | 0.89    | 22.61 | 0.92    | 23.37 | 1.11    | 28.19 |
| 16                                       | 16                               | 16 / 17                                | 0.91    | 23.11 | 0.98    | 24.89 | 1.17    | 29.72 |
| 18                                       | 18                               | 18 / 19                                | 0.92    | 23.37 | 1.02    | 25.91 | 1.19    | 30.23 |
| 20                                       | 20                               | 20 / 21                                | 0.94    | 23.88 | 1.08    | 27.43 | 1.25    | 31.75 |
| 22                                       | 22                               | 22 / 23                                | 0.98    | 24.89 | 1.14    | 28.96 | 1.33    | 33.78 |
| 24                                       | 24                               | 24 / 25                                | 1.01    | 25.65 | 1.20    | 30.48 | 1.40    | 35.56 |



### Connector Group - L

**Straight, 90°, 45°**

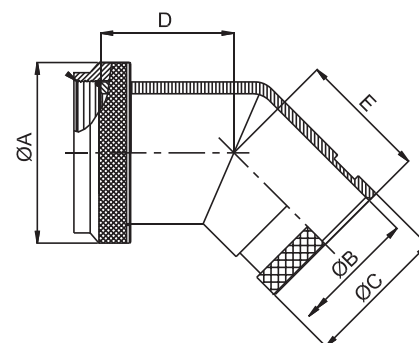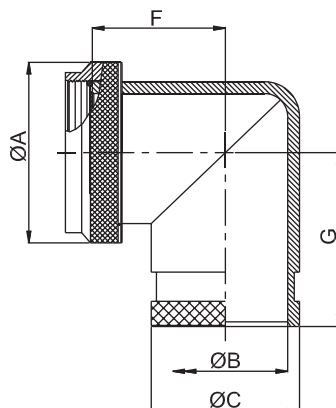

## Amphenol Part Number

BB1 X X L 99 99 9 X X

Series

Angle -

S: straight  
A: 90deg  
B: 45deg

## Coupling

R: spin  
D: direct

Connector group

Finish: see Table-2

Constant: X

Length  
9 - for standard  
Length in table / figure

Entry Size  
99 - for standard  
Entry Size in table / figure

Shell size  
See Table-A

## MIL Part Number

M85049 / 99 - 9 X D

## MIL Series

Slash sheet \_\_\_\_\_  
69 : Straight, spin coupling

- D: Drain hole option

- Finish:  
See Table-2

- Shell size:  
See Table-A


**NOTE:** \* For more cable entry and length options, contact factory

TABLE - A

| TABLE - A                                |                                  |                                           |              |       |              |       |              |       |         |       |         |       |         |       |         |       |
|------------------------------------------|----------------------------------|-------------------------------------------|--------------|-------|--------------|-------|--------------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
| AMPHENOL<br>PART<br>NUMBER<br>DESIGNATOR | MIL PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL<br>SIZE/CODE<br>(REF.) | A DIA. (MAX) |       | B DIA. (MIN) |       | C DIA. (MAX) |       | D (MAX) |       | E (MAX) |       | F (MAX) |       | G (MAX) |       |
|                                          |                                  |                                           | INCH         | MM    | INCH         | MM    | INCH         | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    |
| 08                                       | 09                               | 09 / A                                    | 0.75         | 19.05 | 0.25         | 6.35  | 0.53         | 13.54 | 0.64    | 16.23 | 0.81    | 20.57 | 0.75    | 19.05 | 0.92    | 23.37 |
| 10                                       | 11                               | 11 / B                                    | 0.85         | 21.59 | 0.38         | 9.53  | 0.61         | 15.37 | 0.66    | 16.87 | 0.84    | 21.34 | 0.81    | 20.57 | 0.98    | 24.89 |
| 12                                       | 13                               | 13 / C                                    | 1.00         | 25.40 | 0.50         | 12.70 | 0.77         | 19.66 | 0.69    | 17.48 | 0.86    | 21.84 | 0.87    | 22.10 | 1.04    | 26.42 |
| 14                                       | 15                               | 15 / D                                    | 1.15         | 29.21 | 0.63         | 15.88 | 0.84         | 21.29 | 0.71    | 17.91 | 0.89    | 22.61 | 0.92    | 23.37 | 1.11    | 28.19 |
| 16                                       | 17                               | 17 / E                                    | 1.25         | 31.75 | 0.75         | 19.05 | 0.94         | 23.77 | 0.73    | 18.59 | 0.91    | 23.11 | 0.98    | 24.89 | 1.17    | 29.72 |
| 18                                       | 19                               | 19 / F                                    | 1.40         | 35.56 | 0.81         | 20.62 | 1.04         | 26.47 | 0.75    | 19.00 | 0.92    | 23.37 | 1.02    | 25.91 | 1.19    | 30.23 |
| 20                                       | 21                               | 21 / G                                    | 1.55         | 39.37 | 0.94         | 23.80 | 1.22         | 30.91 | 0.77    | 19.63 | 0.94    | 23.88 | 1.08    | 27.43 | 1.25    | 31.75 |
| 22                                       | 23                               | 23 / H                                    | 1.65         | 41.91 | 1.06         | 26.97 | 1.36         | 34.42 | 0.80    | 20.32 | 0.98    | 24.89 | 1.14    | 28.96 | 1.33    | 33.78 |
| 24                                       | 25                               | 25 / J                                    | 1.85         | 46.99 | 1.19         | 30.18 | 1.44         | 36.65 | 0.82    | 20.90 | 1.01    | 25.65 | 1.20    | 30.48 | 1.40    | 35.56 |

## Connector Group - M

Straight, 90°, 45°

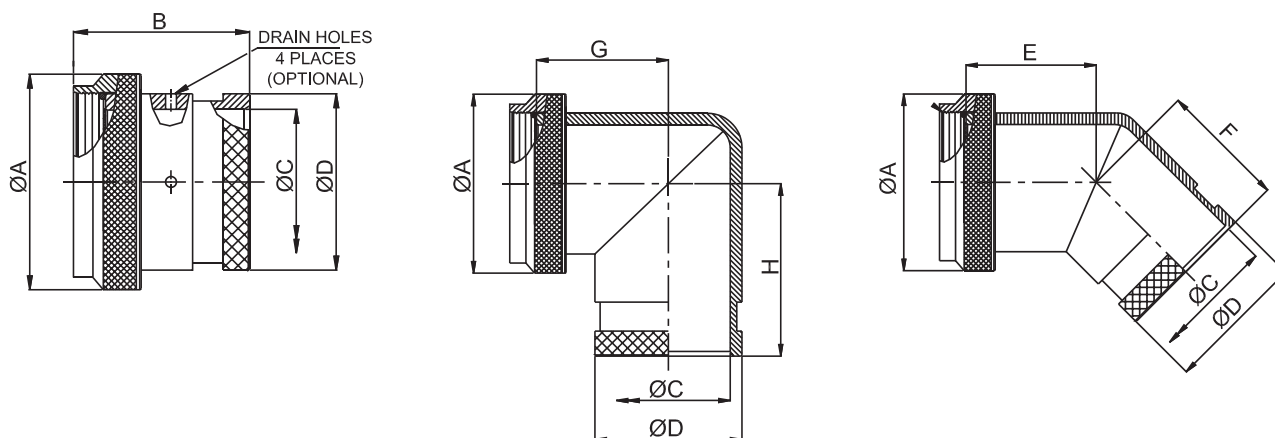

## Amphenol Part Number

|                 |     |   |   |   |    |    |   |   |   |                              |
|-----------------|-----|---|---|---|----|----|---|---|---|------------------------------|
|                 | BB1 | X | X | M | 99 | 99 | 9 | X | X |                              |
| Series          |     |   |   |   |    |    |   |   |   | Finish: see Table-2          |
| Angle           |     |   |   |   |    |    |   |   |   | Constant: X                  |
| S: straight     |     |   |   |   |    |    |   |   |   |                              |
| A: 90deg        |     |   |   |   |    |    |   |   |   |                              |
| B: 45deg        |     |   |   |   |    |    |   |   |   |                              |
| Coupling        |     |   |   |   |    |    |   |   |   | Length                       |
| R: spin         |     |   |   |   |    |    |   |   |   | 9 - for standard             |
| D: direct       |     |   |   |   |    |    |   |   |   | Length in table / figure     |
| Connector group |     |   |   |   |    |    |   |   |   | Entry Size                   |
|                 |     |   |   |   |    |    |   |   |   | 99 - for standard            |
|                 |     |   |   |   |    |    |   |   |   | Entry Size in table / figure |
|                 |     |   |   |   |    |    |   |   |   | Shell size                   |
|                 |     |   |   |   |    |    |   |   |   | See Table-A                  |




NOTE: \* For more cable entry and length options, contact factory

TABLE - A

| AMPHENOL<br>PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE | A DIA. (MAX) |       | B (MAX) |       | C DIA. ( MIN) |       | D DIA. ( MAX) |       | E (MAX) |       | F (MAX) |       | G (MAX) |       | H (MAX) |       |
|------------------------------------------|-------------------------|--------------|-------|---------|-------|---------------|-------|---------------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
|                                          |                         | INCH         | MM    | INCH    | MM    | INCH          | MM    | INCH          | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    |
| 08                                       | 8                       | 0.75         | 19.05 | 1.00    | 25.40 | 0.25          | 6.35  | 0.53          | 13.54 | 0.64    | 16.23 | 0.81    | 20.57 | 0.75    | 19.05 | 0.92    | 23.37 |
| 10                                       | 10                      | 0.85         | 21.59 | 1.00    | 25.40 | 0.38          | 9.53  | 0.61          | 15.37 | 0.66    | 16.87 | 0.84    | 21.34 | 0.81    | 20.57 | 0.98    | 24.89 |
| 12                                       | 12                      | 1.00         | 25.40 | 1.00    | 25.40 | 0.50          | 12.70 | 0.77          | 19.66 | 0.69    | 17.48 | 0.86    | 21.84 | 0.87    | 22.10 | 1.04    | 26.42 |
| 14                                       | 14                      | 1.10         | 27.94 | 1.00    | 25.40 | 0.63          | 15.88 | 0.84          | 21.29 | 0.71    | 17.91 | 0.89    | 22.61 | 0.92    | 23.37 | 1.11    | 28.19 |
| 16                                       | 16                      | 1.25         | 31.75 | 1.00    | 25.40 | 0.75          | 19.05 | 0.94          | 23.77 | 0.73    | 18.59 | 0.91    | 23.11 | 0.98    | 24.89 | 1.17    | 29.72 |
| 18                                       | 18                      | 1.40         | 35.56 | 1.00    | 25.40 | 0.81          | 20.62 | 1.04          | 26.47 | 0.75    | 19.00 | 0.92    | 23.37 | 1.02    | 25.91 | 1.19    | 30.23 |
| 20                                       | 20                      | 1.50         | 38.10 | 1.00    | 25.40 | 0.94          | 23.80 | 1.22          | 30.91 | 0.77    | 19.63 | 0.94    | 23.88 | 1.08    | 27.43 | 1.25    | 31.75 |
| 22                                       | 22                      | 1.65         | 41.91 | 1.00    | 25.40 | 1.06          | 26.97 | 1.36          | 34.42 | 0.80    | 20.32 | 0.98    | 24.89 | 1.14    | 28.96 | 1.33    | 33.78 |
| 24                                       | 24                      | 1.75         | 44.45 | 1.00    | 25.40 | 1.19          | 30.18 | 1.44          | 36.65 | 0.82    | 20.90 | 1.01    | 25.65 | 1.20    | 30.48 | 1.40    | 35.56 |

### Connector Group - N

Straight, 90°, 45°

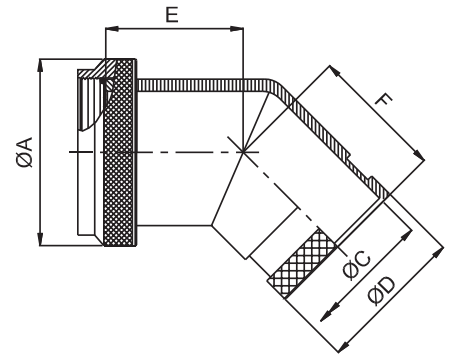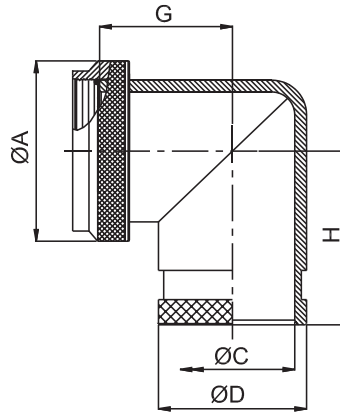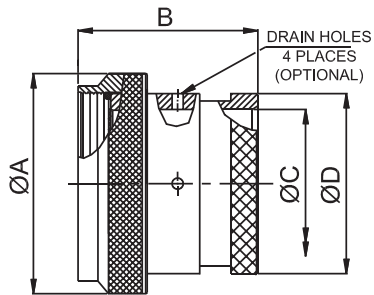

#### Amphenol Part Number

|                 |     |   |   |   |    |    |   |   |   |                              |
|-----------------|-----|---|---|---|----|----|---|---|---|------------------------------|
| Series          | BB1 | X | X | N | 99 | 99 | 9 | X | X | Finish: see Table-2          |
| Angle           |     |   |   |   |    |    |   |   |   | Constant: X                  |
| S: straight     |     |   |   |   |    |    |   |   |   |                              |
| A: 90deg        |     |   |   |   |    |    |   |   |   |                              |
| B: 45deg        |     |   |   |   |    |    |   |   |   |                              |
| Coupling        |     |   |   |   |    |    |   |   |   | Length                       |
| R: spin         |     |   |   |   |    |    |   |   |   | 9 - for standard             |
| D: direct       |     |   |   |   |    |    |   |   |   | Length in table / figure     |
| Connector group |     |   |   |   |    |    |   |   |   | Entry Size                   |
|                 |     |   |   |   |    |    |   |   |   | 99 - for standard            |
|                 |     |   |   |   |    |    |   |   |   | Entry Size in table / figure |
|                 |     |   |   |   |    |    |   |   |   | Shell size                   |
|                 |     |   |   |   |    |    |   |   |   | See Table-A                  |

NOTE: \* For more cable entry and length options, contact factory

| TABLE - A                                |                         |              |       |         |       |               |       |               |       |         |       |         |       |         |       |         |       |
|------------------------------------------|-------------------------|--------------|-------|---------|-------|---------------|-------|---------------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
| AMPHENOL<br>PART<br>NUMBER<br>DESIGNATOR | CONNECTOR<br>SHELL SIZE | A DIA. (MAX) |       | B (MAX) |       | C DIA. ( MIN) |       | D DIA. ( MAX) |       | E (MAX) |       | F (MAX) |       | G (MAX) |       | H (MAX) |       |
|                                          |                         | INCH         | MM    | INCH    | MM    | INCH          | MM    | INCH          | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    | INCH    | MM    |
| 08                                       | 8                       | 0.75         | 19.05 | 1.00    | 25.40 | 0.25          | 6.35  | 0.53          | 13.54 | 0.64    | 16.23 | 0.81    | 20.57 | 0.75    | 19.05 | 0.92    | 23.37 |
| 10                                       | 10                      | 0.85         | 21.59 | 1.00    | 25.40 | 0.38          | 9.53  | 0.61          | 15.37 | 0.66    | 16.87 | 0.84    | 21.34 | 0.81    | 20.57 | 0.98    | 24.89 |
| 12                                       | 12                      | 1.00         | 25.40 | 1.00    | 25.40 | 0.50          | 12.70 | 0.77          | 19.66 | 0.69    | 17.48 | 0.86    | 21.84 | 0.87    | 22.10 | 1.04    | 26.42 |
| 14                                       | 14                      | 1.10         | 27.94 | 1.00    | 25.40 | 0.63          | 15.88 | 0.84          | 21.29 | 0.71    | 17.91 | 0.89    | 22.61 | 0.92    | 23.37 | 1.11    | 28.19 |
| 16                                       | 16                      | 1.25         | 31.75 | 1.00    | 25.40 | 0.75          | 19.05 | 0.94          | 23.77 | 0.73    | 18.59 | 0.91    | 23.11 | 0.98    | 24.89 | 1.17    | 29.72 |
| 18                                       | 18                      | 1.40         | 35.56 | 1.00    | 25.40 | 0.81          | 20.62 | 1.04          | 26.47 | 0.75    | 19.00 | 0.92    | 23.37 | 1.02    | 25.91 | 1.19    | 30.23 |
| 20                                       | 20                      | 1.50         | 38.10 | 1.00    | 25.40 | 0.94          | 23.80 | 1.22          | 30.91 | 0.77    | 19.63 | 0.94    | 23.88 | 1.08    | 27.43 | 1.25    | 31.75 |
| 22                                       | 22                      | 1.65         | 41.91 | 1.00    | 25.40 | 1.06          | 26.97 | 1.36          | 34.42 | 0.80    | 20.32 | 0.98    | 24.89 | 1.14    | 28.96 | 1.33    | 33.78 |
| 24                                       | 24                      | 1.75         | 44.45 | 1.00    | 25.40 | 1.19          | 30.18 | 1.44          | 36.65 | 0.82    | 20.90 | 1.01    | 25.65 | 1.20    | 30.48 | 1.40    | 35.56 |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)