lumbergautomation
A BELDEN BRAND

M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST-RKWT/LED

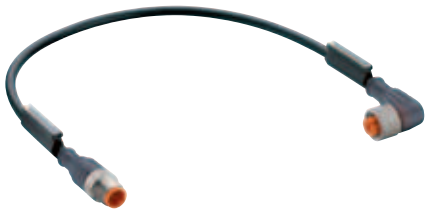

3- and 4-Poles

Actuator/sensor cordset, double-ended, M12, 3- and 4-poles, male straight to female 90° connector with LED operation and function indicator, self-locking thread and molded cable.

RST-RKWT/LED

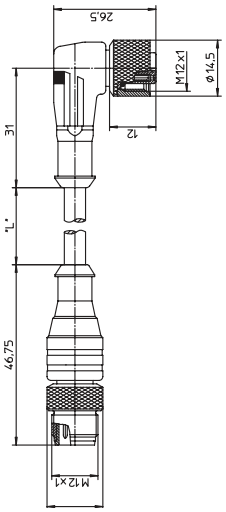

Pin Assignments

M12 - Male

3 poles

1 = brown
2 = n.c.
3 = blue
4 = black

4 poles

1 = brown
2 = white
3 = blue
4 = black

Wiring Diagrams / LED

A pnp Normally open yellow-green



P pnp Normally closed/open yellow-green



R pnp Normally closed/open yellow-red-green



M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST-RKWT/LED

Technical Data

Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body	TPU
Insert	TPU
Contact	RST: CuSn, pre-nickeled and 0.8 microns gold-plated RKWT/LED: CuSn, pre-nickeled and 0.3 microns gold-plated
Coupling nut	CuZn, nickel-plated
O-ring	FKM (only RKWT/LED)

Electrical

Nominal current at 40°C	4 A
Nominal voltage	10–30 V DC
Rated voltage	32 V
Insulation resistance	$> 10^9\ \Omega$
Pollution degree	3

Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
224	**PUR**, halogen-free	**3** x 0.34 mm²	Black	.169" (4.3 mm)
225	**PUR**, halogen-free	**4** x 0.34 mm²	Black	.185" (4.7 mm)
251	**PUR**, halogen-free welding spark proof	**4** x 0.34 mm²	Orange	.185" (4.7 mm)
260	**PUR**, halogen-free welding spark proof	**3** x 0.34 mm²	Orange	.177" (4.5 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-RKWT/LED A 4-3-224/...M	**3**	PUR, halogen-free	0.3 M / 0.6 M / 1 M / 1.5 M / 2 M / 5 M	
RST 3-RKWT/LED A 4-3-260/...M		PUR, halogen-free	0.3 M / 0.6 M / 1 M / 1.5 M / 2 M / 5 M	
RST 4-RKWT/LED P 4-225/...M	**4**	PUR, halogen-free, weld spark proof	0.3 M / 0.6 M / 1 M / 1.5 M / 2 M / 5 M	
RST 4-RKWT/LED P 4-251/...M		PUR, halogen-free	0.3 M / 0.6 M / 1 M / 1.5 M / 2 M / 5 M	
RST 4-RKWT/LED R 4-251/...M	**4**	PUR, halogen-free, weld spark proof	0.3 M / 0.6 M / 1 M / 1.5 M / 2 M / 5 M	

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru