

# Controller - ILC 200 UNI-PAC - 2862291

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline controller with an INTERBUS local bus interface for the Inline installation system, with programming facility in acc. with IEC 61131-3, complete with accessories (connector and labeling field)

## Product Description

Inline controller

ILC 200 UNI transforms every Inline station into a distributed functional unit. ILC 200 UNI is installed below an Inline bus coupler (INTERBUS, PROFIBUS, DeviceNet™, Ethernet...). It then controls all the signals of the Inline station in every fieldbus system. This ensures maximum independence from the higher-level fieldbus system.

The functions which can be executed on ILC 200 UNI range from emergency operation functions in the event of a failure of the higher-level fieldbus, to redundancy functions and process data preprocessing, through to the distributed functional unit.

Plant engineering with its constantly changing customer requirements regarding both the fieldbus system and centralized control systems is the main field of application. ILC 200 UNI makes it possible to use identical functional units even when the higher-level fieldbus changes. This saves costs during plant engineering and at startup.

Direct fast inputs and outputs which can be used flexibly in different operating modes such as interrupt input, event counting and pulse generation ensure short response times on site.


All programming of the Inline controller is carried out with PC WORX, the automation software according to IEC 61131.

## Your advantages

- Fast inputs for interrupt processing, event counting, and period measurement
- 24 V high-speed outputs for pulse width modulation



## Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 909116
GTIN	4017918909116

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

### Dimensions

Width	73 mm
Height	140.5 mm

# Controller - ILC 200 UNI-PAC - 2862291

## Technical data

### Dimensions

Depth	71.5 mm
-------	---------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 75 °C
Permissible humidity (operation)	5 % ... 85 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 85 % (non-condensing)
Air pressure (operation)	70 kPa ... 108 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Shock	25g, Criterion 1, according to IEC 60068-2-27
Vibration (operation)	2g, criterion 1 according to IEC 60068-2-6

### Control system

Engineering tool	PC WORX
Diagnostics tool	DIAG+ from version 1.14

### Mechanical design

Weight	260 g
Diagnostics display	No
Controller redundancy	No

### Data interfaces

Interface	INTERBUS local bus (master)
Number	1
Connection method	Inline data jumper
Transmission speed	500 kBaud / 2 MBaud (can be switched)
Interface	Higher-level INTERBUS local bus (slave)
Number	1
Connection method	Inline data jumper
Transmission speed	500 kBaud
Interface	Parameterization/operation/diagnostics
Number	1
Connection method	6-pos. MINI DIN socket (PS/2)
Transmission speed	19200 Baud

### Power supply

Typical current consumption	250 mA (no local bus device connected during idling, bus inactive)
Supply voltage	7.5 V DC (the power supply comes from the upstream bus coupler)
Supply voltage range	19.2 V DC ... 30 V DC
Residual ripple	±5 %
Power dissipation	max. 1.875 W
Max. total permissible current consumption of all I/O terminal blocks	Communications power (7,5 V DC) the power supply comes from the upstream bus coupler

# Controller - ILC 200 UNI-PAC - 2862291

## Technical data

### Power supply

	Analog supply (24 V DC) = 0.5 A
--	---------------------------------

### Fieldbus function

Amount of process data	max. 4096 Bit (INTERBUS-Master)
	192 Bit (INTERBUS-Slave)
Number of parameter data	max. 8 Byte (configurable)
Number of supported devices	max. 512
Number of local bus devices that can be connected	max. 63 (observe current consumption)
Number of devices with parameter channel	max. 62
Number of supported branch terminals with remote bus branch	max. 15

### Direct I/Os

Input name	Digital inputs
Number of inputs	4
Connection method	Inline potential distributor
Connection technology	2, 3, 4-wire
Description of the input	Interrupt input, fast counter, pulse generator
Output name	Digital outputs
Number of outputs	2
Connection method	Spring-cage connection
Connection technology	2, 3, 4-wire
Maximum output current per channel	500 mA
Number of pulse direction outputs	2
Limit frequency	20 kHz
Number of inputs	4
Input frequency	40 kHz

### IEC 61131 runtime system

Engineering tool	PC WORX
Program memory	typ. 384 kByte (32 K instructions (IL))
Mass storage	330 kByte
Retentive mass storage	8 kByte (NVRAM)
Number of control tasks	8
Realtime clock	Integrated (battery backup)

### Standards and Regulations

Vibration (storage/transport)	2g, criterion 1 according to IEC 60068-2-6
Connection in acc. with standard	CUL
Shock	25g, Criterion 1, according to IEC 60068-2-27
Vibration (operation)	2g, criterion 1 according to IEC 60068-2-6

### Environmental Product Compliance

REACH SVHC	1,2-dimethoxyethane,ethylene glycol dimethyl ether (EGDME) 110-71-4
------------	---

# Controller - ILC 200 UNI-PAC - 2862291


## Technical data

### Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Dimensional drawing

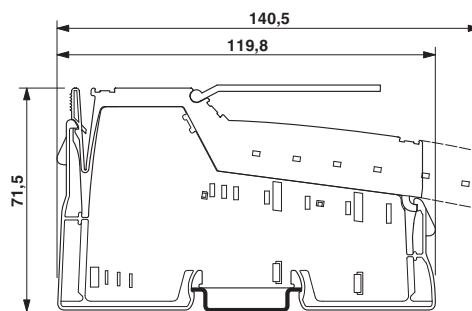

## Approvals

### Approvals

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

UL Recognized / cUL Recognized / cULus Recognized

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 140324
---------------	--	---	---------------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 140324
----------------	--	---	---------------

## Controller - ILC 200 UNI-PAC - 2862291

### Approvals

EAC		RU *- DE.A*30.B.00238
-----	---	--------------------------

cULus Recognized	
------------------	---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)