

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0432550043

Status:

Active

Description:

6.35mm (.250) Pitch MLX Power Connector Receptacle, 2.13mm(.084") Contact Diameter, Vertical, with Plastic Polarizing Peg, 12 Circuits, Lead free

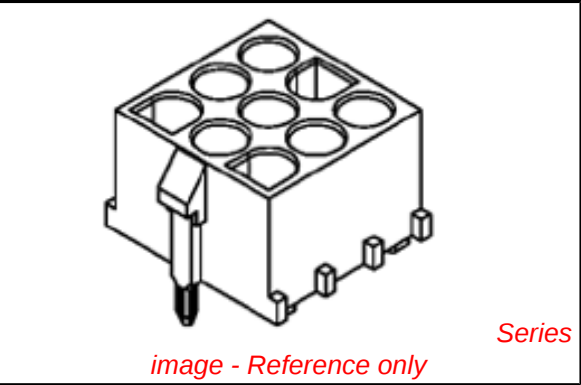

Documents:	
3D Model	Product Specification PSX-42002-0001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Receptacles
Series	43255
Application	Wire-to-Board
Comments	High Vibration Application
Product Name	MLX™
Physical	
Circuits (Loaded)	12
Color - Resin	White
Durability (mating cycles max)	50
Flammability	94V-2
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Number of Rows	3
Orientation	Vertical
PC Tail Length (in)	0.169 In
PC Tail Length (mm)	4.30 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.250 In
Pitch - Mating Interface (mm)	6.35 mm
Pitch - Term. Interface (in)	0.250 In
Pitch - Term. Interface (mm)	6.35 mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13.5A
Voltage - Maximum	600V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	10

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

43255Series

Mates With

42021 , 42023

Lead-free Process Capability
Process Temperature max. C

Wave Capable (TH only)
260

Material Info


Reference - Drawing Numbers

Product Specification
Sales Drawing

PSX-42002-0001
SDA-43255-00**

This document was generated on 04/20/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

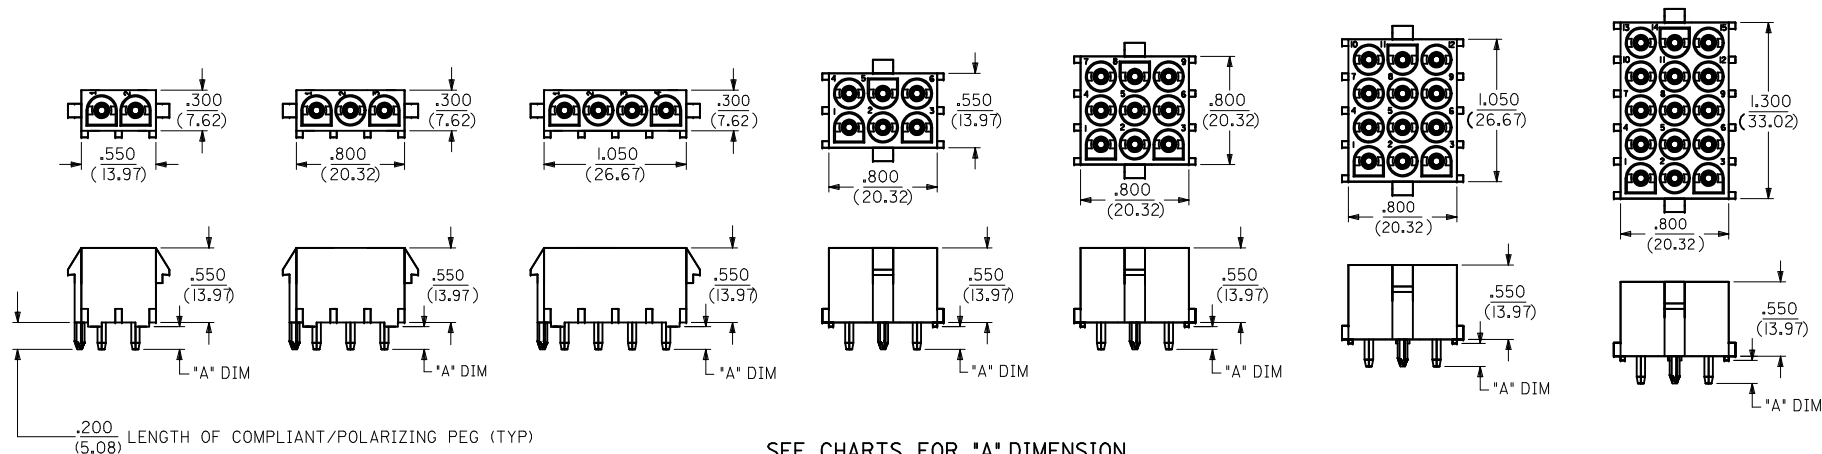


SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

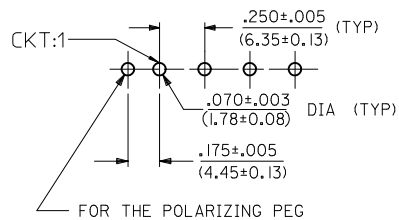

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

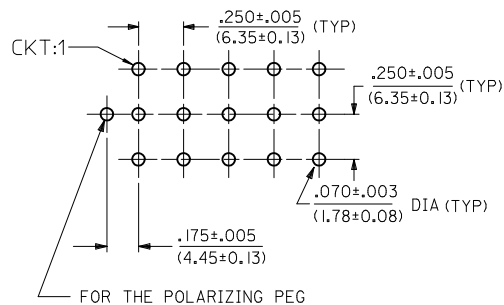

NOTES:

1) MATERIAL CODES:

- 'A'= UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C'= NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D'= NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E'= PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**)

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: 12010-0191		2009/12/31		mm		IN/MM		1:1	INCH		
DRWN: HMR01		2010/01/05		4 PLACES ± --- ± ---		DRAWN BY DATE		TITLE			
CHKD: KPRASAD		2010/01/05		3 PLACES ± --- ± 0.005		SUDHIR 2004/06/08		HEADER HOUSING ASSEMBLY			
APPR: KPRASAD		2010/01/13		2 PLACES ± 0.13 ± 0.01		CHECKED BY DATE		.084/(2.13) SERIES			
				1 PLACE ± 0.25 ± ---		GJLOWE 2004/06/08		COMPLIANT-POLARIZING PEG			
				ANGULAR ± 1/2°		APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
				DRAFT WHERE APPLICABLE		GJLOWE 2004/06/08		DOCUMENT NO.		SHEET NO.	
E2		REV		MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-43255-00**		1 OF 2	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
		ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015	PACKAGING (SEE NOTE 7)												
M		43255-0003	2	A	2	A		.17/(14,3)	A												M
		43255-0059		A	1	A			A												
		43255-0113		C	1	A			A												
		43255-0115		C	2	A			A												
		36759-0021		D	1	A			A												
		36759-0061		D	2	A			A												
L		36757-0021	3	E	1	A			A												L
		36757-0061		E	2	A			A												
		43255-0011		A	2	A		.17/(14,3)	A												
		43255-0067		A	1	A			A												
		43255-0121		C	1	A			A												
		43255-0123		C	2	A			A												
K		36759-0022	4	D	1	A			A												K
		36759-0062		D	2	A			A												
		36757-0022		E	1	A			A												
		36757-0062		E	2	A			A												
		43255-0019		A	2	A		.17/(14,3)	A												
		43255-0075		A	1	A			A												
J		43255-0129	6	C	1	A			A												J
		43255-0131		C	2	A			A												
		36759-0023		D	1	A			A												
		36759-0063		D	2	A			A												
		36757-0023		E	1	A			A												
		36757-0063		E	2	A			A												
I		43255-0027	9	A	2	A		.17/(14,3)	A												I
		43255-0083		A	1	A			A												
		43255-0137		C	1	A			A												
		43255-0139		C	2	A			A												
		36759-0024		D	1	A			A												
		36759-0064		D	2	A			A												
H		36757-0024	12	E	1	A			A												H
		36757-0064		E	2	A			A												
		43255-0035		A	2	A		.17/(14,3)	A												
		43255-0091		A	1	A			A												
		43255-0145		C	1	A			A												
		43255-0147		C	2	A			A												
G		36759-0025	15	D	1	A			A												G
		36759-0065		D	2	A			A												
		36757-0025		E	1	A			A												
		36757-0065		E	2	A			A												
		43255-0043		A	2	A		.17/(14,3)	A												
		43255-0099		A	1	A			A												
F		43255-0153	2	C	1	A			A												F
		43255-0155		C	2	A			A												
		36759-0026		D	1	A			A												
		36759-0066		D	2	A			A												
		36757-0026		E	1	A			A												
		36757-0066		E	2	A			A												
E		43255-0051	3	A	2	A		.17/(14,3)	A												E
		43255-0107		A	1	A			A												
		43255-0161		C	1	A			A												
		43255-0163		C	2	A			A												
		36759-0027		D	1	A			A												
		36759-0067		D	2	A			A												
D		36757-0027	4	E	1	A			A												D
		36757-0067		E	2	A			A												
		36766-0001		C	1	A		.17/(14,3)	B												
		36766-0002		C	1	A			B												
		36766-0003		C	1	A			B												
				C	1	A			B												

RoHS COMPLIANT

ENTER DESCRIPTION E2 DEC NO: 12010-0191 2009/12/31 DRWN:HM01 CHYKOKPRASAD APPR:KPRASAD 2010/01/05 2010/01/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE INCH	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± 0.005 2 PLACES ± 0.13 ± 0.01 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	mm INCH	DRAWN BY SUDHIR	DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(12.13) SERIES COMPLIANT-POLARIZING PEG		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	CHECKED BY GJLOWE	DATE 2004/06/08	MOLEX INCORPORATED		
		MATERIAL NO. SDA-43255-00**	DOCUMENT NO. SDA-43255-00**	SHEET NO. 2 OF 2				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru