


C&K RTA Series 1-4 Poles Coded Rotary Switches



Features/Benefits

- **PCB or hand soldering versions**
- **Bushing mounting**
- **Multiple poles**
- **Decimal and hexadecimal codes**
- **Screwdriver slot or extended actuator**

Typical Applications

- ***Appliances***
- ***Electronic alarm systems***
- ***Medical***
- ***Building automation***
- ***HVAC air conditioning***

Specifications

CONTACT RATING: 5 AMPS
ELECTRICAL LIFE: 10,000 operations.
OPERATING TORQUE: 5 Ncm±20%.
END STOP TORQUE: > 6 Ncm.
CONTACT RESISTANCE: < 150 mΩ
INSULATION RESISTANCE: 10⁹ Ω
DIELECTRIC STRENGTH: 500 V rms

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING: PETP Thermoplastic
STATIONARY CONTACTS & TERMINALS: Nickel alloy, gold or silver plated.
ROTOR: Printed circuit, gold or silver plated.
CODING PLATE: PA thermoplastic
ACTUATOR: Polysulfon thermoplastic
BUSHING: Washer: PA. Nut: Brass.
HARDWARE: Stop pin: Aluminum. Ball & Spring: Stainless steel.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-9 thru K-11. For additional options not shown in catalog, consult Customer Service Center.



Designation

RTAP (STD.) With Pc pins
RTAC (STD.) With solder lugs

Indexing

22.5 (STD.) 22.5 index (coded only)
30 (STD.) 30° index (12 positions max.)
36 (STD.) 36° index (10 positions max.)

Switch Function

112S	(STD.) SP, 30° Index, 12 pos. no stop
110S	(STD.) SP, 36° Index, 10 pos. no stop
102B02	SP, 30° /36° Index, 2 pos.
103B03	SP, 30° /36° Index, 3 pos.
104B04	SP, 30° /36° Index, 4 pos.
105B05	SP, 30° Index, 5 pos.
106B06	SP, 30° /36° Index, 6 pos.
107B07	SP, 30° /36° Index, 7 pos.
108B08	SP, 30° /36° Index, 8 pos.
109B09	SP, 30° /36° Index, 9 pos.
110B10	(STD.) SP, 30° /36° Index, 10 pos.
111B11	SP, 30° Index, 11 pos.
112B12	(STD.) SP, 30° Index, 12 pos.
206S	(STD.) DP, 30° Index, 6 pos. no stop
205S	(STD.) DP, 36° Index, 5 pos. no stop
202B02	DP, 30° /36° Index, 2 pos.
203B03	DP, 30° /36° Index, 3 pos.
204B04	DP, 30° /36° Index, 4 pos.
205B05	DP, 30° /36° Index, 5 pos.
206B06	(STD.) DP, 30° Index, 6 pos.
303S	3P, 30° /36° Index, 3 pos. no stop
302B02	3P, 30° /36° Index, 2 pos.
303B03	3P, 30° /36° Index, 3 pos.
402S	4P, 30° /36° Index, 2 pos. no stop
402B02	4P, 30° /36° Index, 2 pos.

Mounting Style

SD (STD.) Without
AD (STD.) With

Actuator (max.)

25 (STD.) .984 (25,0)
50 1.97 (50,0)
F (STD.) Screwdriver slot
M25 Flat shaft, .984 (25,0)
M50 Flat shaft, 1.97 (50,0)

Contact Material

S (STD.) Silver plated
G Gold plated

BCS (STD.) Direct + complement, 30° /36° Index, no stop
BS (STD.) Direct, 22.5° Index, no stop
GS Gray, 22.5° Index, no stop
BCB Direct + complement, with stop (indicate position)
GB Gray, 22.5° Index, with stop (indicate position)
BB Direct, 22.5° Index, with stop (indicate position)




Cannon

Dimensions are shown: IN (mm)
Dimensions subject to change




www.ittcannon.com

C&K RTA Series 1-4 Poles Coded Rotary Switches

DESIGNATION







RTAP (STD.) WITH PC PINS

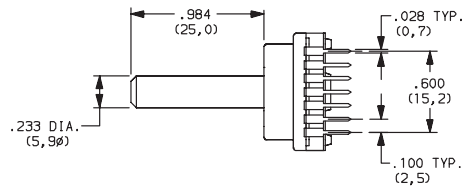

PART NUMBER	FUNCTION	INDEX
RTAP22.5BSSD25S	Binary	22.5
RTAP30112SSD25S	SP 12 positions no stop	30
RTAP36110SSD25S	SP 10 positions no stop	36

RTAC (STD.) WITH SOLDER LUGS

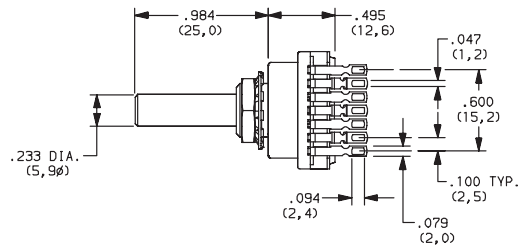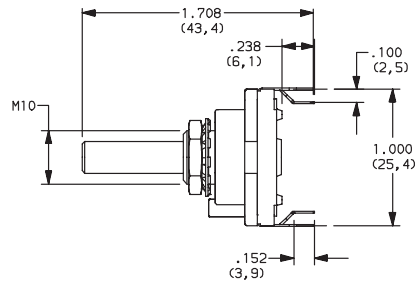

PART NUMBER	FUNCTION	INDEX
RTAC22.5BSAD25S	Binary	22.5
RTAC30112SAD25S	SP 12 positions no stop	30
RTAC36110SAD25S	SP 10 positions no stop	36



K

Rotary

INDEXING



22.5 (STD.) 22.5 index, 16 positions max.

30 (STD.) 30 index, 12 positions max.

36 (STD.) 36 index, 10 positions max.

C&K RTA Series


1-4 Poles Coded Rotary Switches

SWITCH FUNCTION




NO. POLES	MODEL NO.	SWITCH FUNCTION	INDEX
SP	112S	12 Positions No Stop	30°
	110S	10 Positions No Stop	36°
	102B02	2 Positions	30° / 36°
	103B03	3 Positions	30° / 36°
	104B04	4 Positions	30° / 36°
	105B05	5 Positions	30°
	106B06	6 Positions	30° / 36°
	107B07	7 Positions	30° / 36°
	108B08	8 Positions	30° / 36°
	109B09	9 Positions	30° / 36°
	110B10	10 Positions	30° / 36°
	111B11	11 Positions	30°
	112B12	12 Positions	30°


SP MODELS SCHEMATIC




3P MODELS SCHEMATIC



DP MODELS SCHEMATIC




4P MODELS SCHEMATIC



NO. POLES	MODEL NO.	SWITCH FUNCTION	INDEX
DP	206S	6 Positions No Stop	30°
	205S	5 Position No Stop	36°
	202B02	2 Positions	30° / 36°
	203B03	3 Positions	30° / 36°
	204B04	4 Positions	30° / 36°
	205B05	5 Positions	30° / 36°
	206B06	6 Positions	30°
3P	303S	3 Positions No Stop	30° / 36°
	302B02	2 Positions	30° / 36°
	303B03	3 Positions	30° / 36°
4P	402S	3 Positions No Stop	30° / 36°
	402B02	2 Positions	30° / 36°

22.5°	30°	36°	Pos.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Term.	Term.	Term.																	
E,J	L,N	M,N	C	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
F,I	D	H	1		•		•		•		•		•		•				•
D,K	B	D	2			•	•			•	•			•	•			•	•
A,N	I	A	4					•	•	•	•					•	•	•	•
B	J	J	8									•	•	•	•	•	•	•	•
—	K	C	<u>1</u>	•		•		•		•		•		•		•		•	
—	H	K	<u>2</u>	•	•			•	•			•	•			•	•		
—	A	B	<u>4</u>	•	•	•	•					•	•	•	•				
—	C	I	<u>8</u>	•	•	•	•	•	•	•	•								

30 INDEXING ANGLE PCB LAYOUT



1 POLE




2 POLES



3 POLES




4 POLES



BCD + COMPLEMENTS

22.5 INDEXING ANGLE PCB LAYOUT



BCD ONLY

36 INDEXING ANGLE PCB LAYOUT



1 POLE




2 POLES



3 POLES



4 POLES



BCD + COMPLEMENTS


NOTE: Layout view from component side.

C&K RTA Series 1-4 Poles Coded Rotary Switches


MOUNTING STYLE




SD (STD.) WITHOUT BUSHING



AD (STD.) WITH BUSHING




PANEL MOUNTING




ACTUATOR




25 (STD.) 0,25 mm (.984)

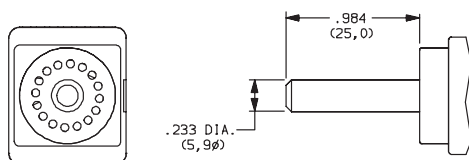


50 0,50 mm (1.97)

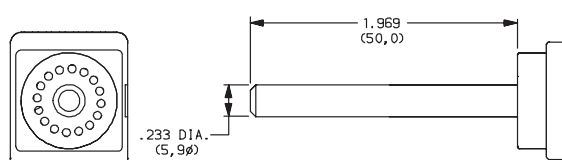


F (STD.) SCREWDRIVER SLOT

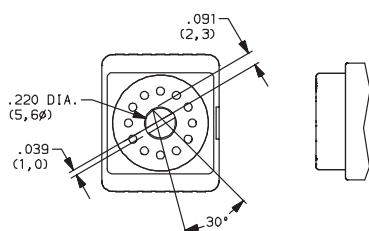

M25 FLAT SHAFT

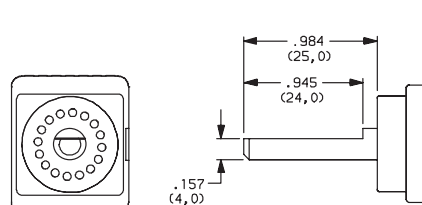

M50 FLAT SHAFT

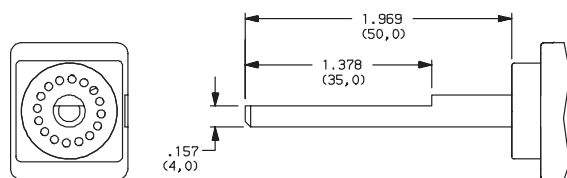

CONTACT MATERIAL



OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATINGS	
		LOW LEVEL/DRY CIRCUIT	SWITCH: 150 mA maximum, 60 V nominal. POWER: 5 VA maximum. CARRY: 5 AMPS maximum.
S (STD.)	SILVER		
G	GOLD	LOW LEVEL/DRY CIRCUIT OR POWER	SWITCH: 20 mA maximum, 25 V nominal. POWER: 0.5 VA maximum. CARRY: 1 AMP maximum.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru