


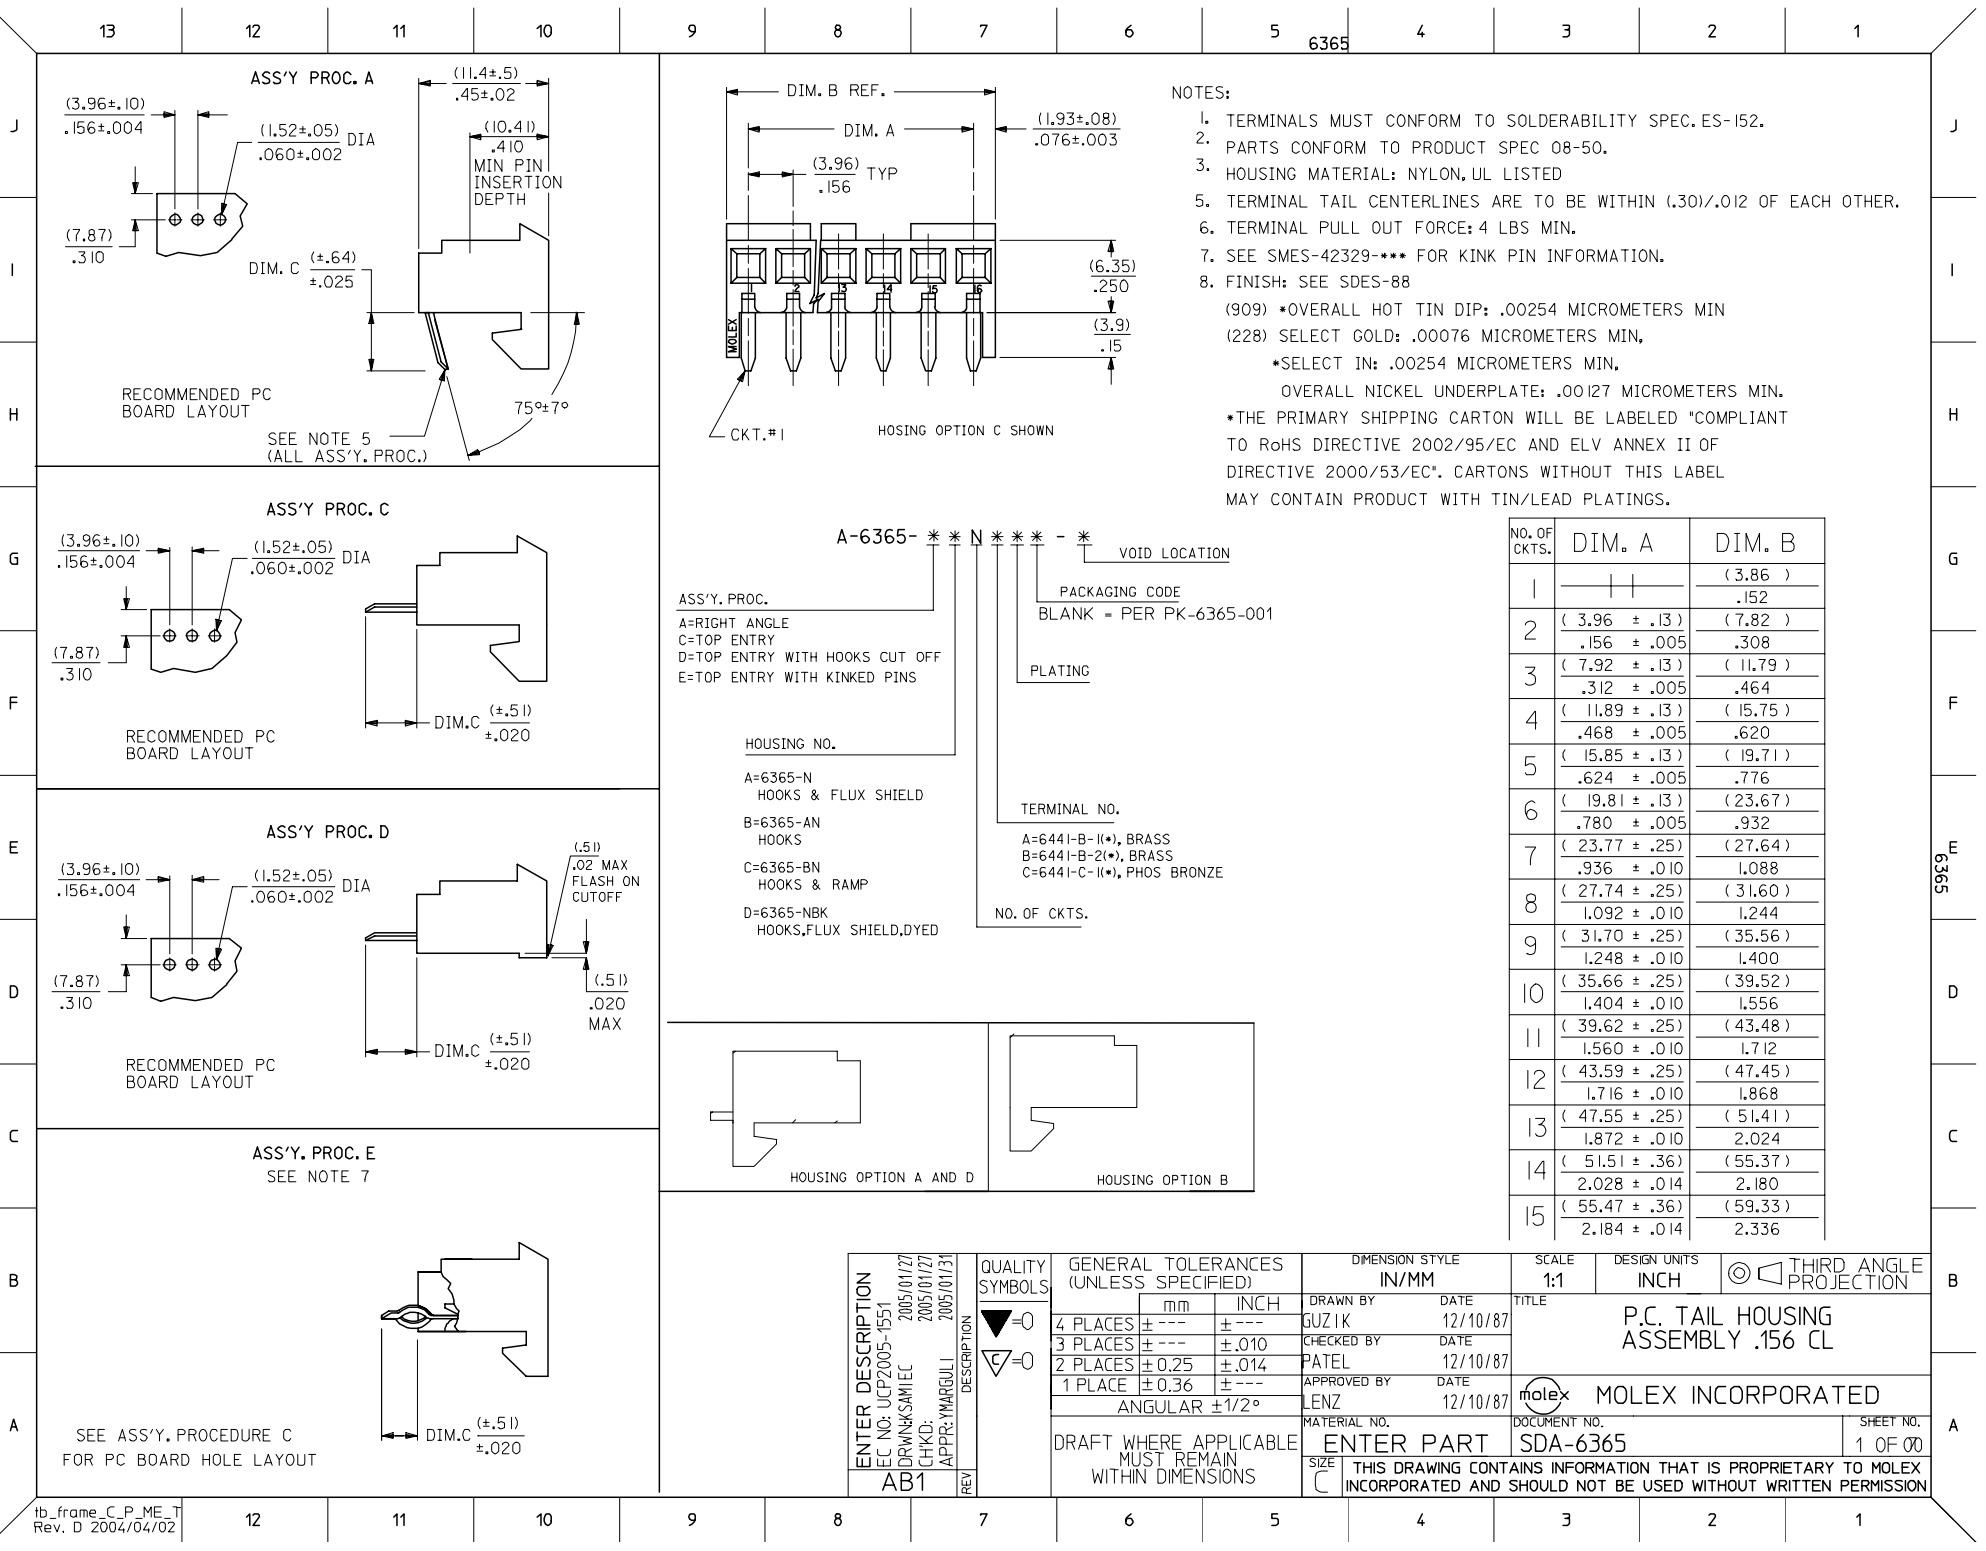

- NOTES:
1. TERMINALS MUST CONFORM TO SOLDERABILITY SPEC. ES-152.
2. PARTS CONFORM TO PRODUCT SPEC 08-50.
3. HOUSING MATERIAL: NYLON, UL LISTED
5. TERMINAL TAIL CENTERLINES ARE TO BE WITHIN (.30)/.012 OF EACH OTHER.
6. TERMINAL PULL OUT FORCE: 4 LBS MIN.
7. SEE SMES-42329-*** FOR KINK PIN INFORMATION.
8. FINISH: SEE SDES-88
(909) *OVERALL HOT TIN DIP: .00254 MICROMETERS MIN
(228) SELECT GOLD: .00076 MICROMETERS MIN,
*SELECT IN: .00254 MICROMETERS MIN.
OVERALL NICKEL UNDERPLATE: .00127 MICROMETERS MIN.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD PLATING.

Table with 3 columns: NO. OF CKTS., DIM. A, DIM. B. Rows 1-15 showing dimensions for different configurations.

ENTER DESCRIPTION, GENERAL TOLERANCES, DIMENSION STYLE, SCALE, DESIGN UNITS, THIRD ANGLE PROJECTION, P.C. TAIL HOUSING ASSEMBLY .156 CL, molex, SDA-6365, ENTER PART, THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

	I3	I2	I1	I0	9	8	7	6		6365	4	3	2	I																							
J	ENG. NO.		HOUSING NO.		TERMINAL NO.		DIM. C		EDP ON SHT. / COL.							J																					
	A-6365-ABNA(P909)-*		6365-AN-*		644I-B- I(P909)C		(3.94) / .155		3 / 1																												
	A-6365-CBNA(P909)-*		6365-AN-*		644I-B- I(P909)C		(3.18) / .125		3 / 2																												
	A-6365-AANA(P909)-*		6365-N-*		644I-B- I(P909)C		(3.94) / .155		3 / 3																												
	A-6365-ACNA(P909)-*		6365-BN-*		644I-B- I(P909)C		(3.94) / .155		3 / 4																												
I	A-6365-ADNA(P909)-*		6365-NBK-*		644I-B- I(P909)C		(3.94) / .155		4 / 1							I																					
	A-6365-ABNA(I02)-*		6365-AN-*		644I-B- I(I02)C		(3.94) / .155		4 / 2																												
	A-6365-AANA(I02)-*		6365-N-*		644I-B- I(I02)C		(3.94) / .155		4 / 3																												
	A-6365-ACNA(P228)-*		6365-BN-*		644I-B- I(P228)C		(3.94) / .155		4 / 4																												
	A-6365-CBNA(P228)-*		6365-AN-*		644I-B- I(P228)C		(3.18) / .125		5 / 1																												
	A-6365-DBNA(P909)-*		6365-AN-*		644I-B- I(P909)C		(3.18) / .125		5 / 2																												
H	A-6365-CBNB(P909)-*		6365-AN-*		644I-B-2(P909)C		(4.50) / .177		5 / 3							H																					
	A-6365-AANC(50 I)-*		6365-N-*		644I-C- I(50 I)C		(4.42) / .174		5 / 4																												
	A-6365-CCNC(50 I)-*		6365-BN-*		644I-C- I(50 I)C		(3.18) / .125		6 / 1																												
	A-6365-ABNC(P909)-*		6365-AN-*		644I-C- I(P909)C		(4.42) / .174		6 / 2																												
	A-6365-CBNA(50 I)-*		6365-AN-*		644I-B- I(50 I)C		(3.18) / .125		6 / 3																												
G	A-6365-DBNA(50 I)-*		6365-AN-*		644I-B- I(50 I)C		(3.18) / .125		6 / 4							G																					
	A-6365-CCNC(P909)-*		6365-BN-*		644I-C- I(P909)C		(3.18) / .125		7 / 1																												
	A-6365-CCNA(P909)-*		6365-BN-*		644I-B- I(P909)C		(3.18) / .125		7 / 2																												
							/		/																												
F							/		/							F																					
							/		/																												
							/		/																												
							/		/																												
							/		/																												
							/		/																												
E							/		/							E																					
							/		/																												
							/		/																												
							/		/																												
							/		/																												
D							/		/							D																					
							/		/																												
							/		/																												
							/		/																												
							/		/																												
C							/		/							C																					
							/		/																												
							/		/																												
							/		/																												
B							/		/							B																					
							/		/																												
							/		/																												
A							/		/							A																					
										DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR + 1/2°<table><tr><td>3 PLACE</td><td>±</td><td>INCH</td><td>METRIC</td></tr><tr><td>2 PLACE</td><td>±</td><td></td><td>±</td></tr><tr><td>1 PLACE</td><td></td><td></td><td>±</td></tr></table> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS <table><tr><td>DRWG. BY</td><td>GUZIK</td><td>CHK'D. BY</td><td>PATEL</td></tr><tr><td>APP'D. BY</td><td>LENZ</td><td>SCALE</td><td>:</td></tr></table>		3 PLACE	±	INCH	METRIC	2 PLACE	±		±	1 PLACE			±	DRWG. BY	GUZIK	CHK'D. BY	PATEL	APP'D. BY	LENZ	SCALE	:	▽ = 0 ▽ = 0 REVISIONS LTR. SEE SHEET I SEE SHEET I		TITLE HOUSING ASS'Y P.C.TAIL (3.96)/.156 & TRIFURCON ASSEMBLY MOLEX INCORPORATED U.S.A. LITSE,ILL. 60532 SHEET NO. 2 DATE 12 / 10 / 87		PART NO. SDA-6365 FILE NAME S6365X2 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIV. KK SIZE C	
3 PLACE	±	INCH	METRIC																																		
2 PLACE	±		±																																		
1 PLACE			±																																		
DRWG. BY	GUZIK	CHK'D. BY	PATEL																																		
APP'D. BY	LENZ	SCALE	:																																		
I3	I2	I1	I0	9	8	7	6	5	4	3	2	I																									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru