



# M74HC564

## OCTAL D-TYPE FLIP FLOP WITH 3 STATE OUTPUT INVERTING


- HIGH SPEED:  
 $f_{MAX} = 90\text{MHz}$  (TYP.) at  $V_{CC} = 6\text{V}$
- LOW POWER DISSIPATION:  
 $I_{CC} = 4\mu\text{A}$ (MAX.) at  $T_A = 25^\circ\text{C}$
- HIGH NOISE IMMUNITY:  
 $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (MIN.)
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OH}| = I_{OL} = 6\text{mA}$  (MIN.)
- BALANCED PROPAGATION DELAYS:  
 $t_{PLH} \approx t_{PHL}$
- WIDE OPERATING VOLTAGE RANGE:  
 $V_{CC}$  (OPR) = 2V to 6V
- PIN AND FUNCTION COMPATIBLE WITH  
74 SERIES 564

### DESCRIPTION

The M74HC564 is an high speed CMOS OCTAL D-TYPE FLIP FLOP WITH 3-STATE OUTPUTS INVERTING fabricated with silicon gate C<sup>2</sup>MOS technology.

This 8 bit D-TYPE FLIP FLOP is controlled by a clock input (CK) and an output enable input ( $\overline{OE}$ ). On the positive transition of the clock, the Q outputs will be set to the logic state that were setup at the D inputs.

While the  $\overline{OE}$  input is at low level, the eight outputs will be in a normal logic state (high or low logic

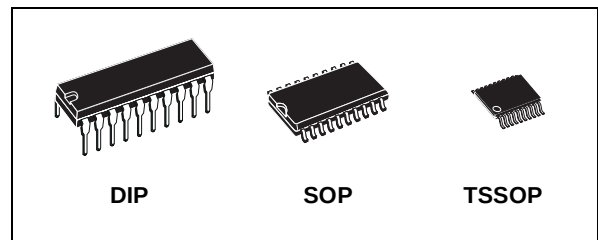

### ORDER CODES


| PACKAGE | TUBE        | T & R          |
|---------|-------------|----------------|
| DIP     | M74HC564B1R |                |
| SOP     | M74HC564M1R | M74HC564RM13TR |
| TSSOP   |             | M74HC564TTR    |

level) and while high level the outputs will be in a high impedance state.


The output control does not affect the internal operation of flip-flops; that is, the old data can be retained or the new data can be entered even while the outputs are off.

All inputs are equipped with protection circuits against static discharge and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

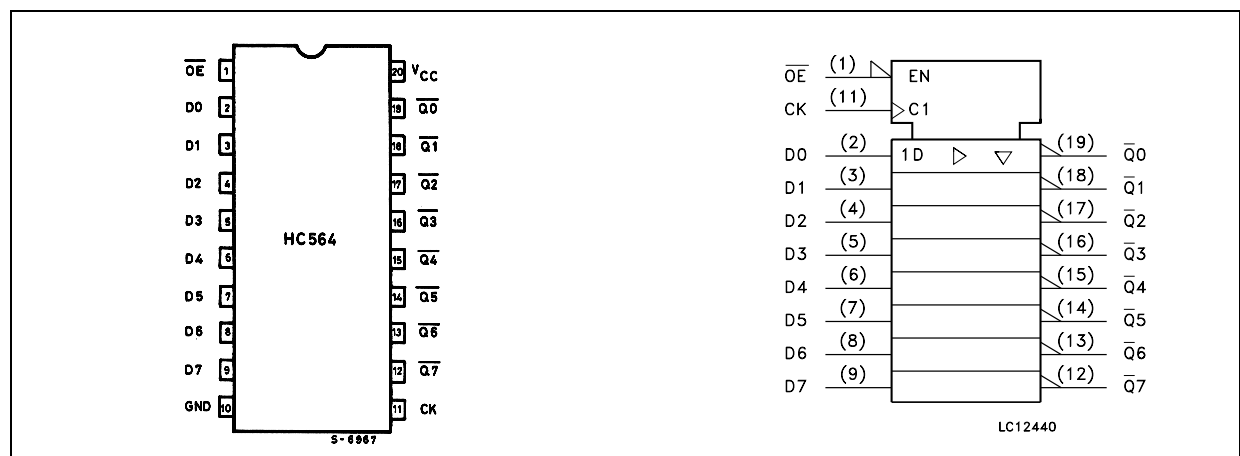

## INPUT AND OUTPUT EQUIVALENT CIRCUIT

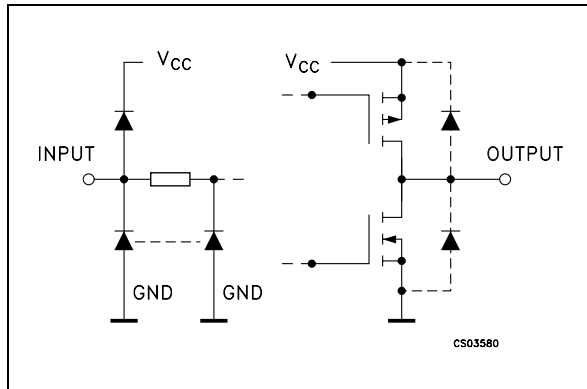

## PIN DESCRIPTION


| PIN No                         | SYMBOL          | NAME AND FUNCTION                         |
|--------------------------------|-----------------|-------------------------------------------|
| 1                              | $\overline{OE}$ | 3 State Output Enable Input (Active LOW)  |
| 2, 3, 4, 5, 6, 7, 8, 9, 10     | D0 to D7        | Data Inputs                               |
| 12, 13, 14, 15, 16, 17, 18, 19 | Q0 to Q7        | 3 State Outputs                           |
| 11                             | CLOCK           | Clock Input (LOW to HIGH, edge triggered) |
| 10                             | GND             | Ground (0V)                               |
| 20                             | V <sub>CC</sub> | Positive Supply Voltage                   |

## TRUTH TABLE

| INPUTS          |    |   | OUTPUT         |
|-----------------|----|---|----------------|
| $\overline{OE}$ | CK | D | $\overline{Q}$ |
| H               | X  | X | Z              |
| L               |    | X | NO CHANGE      |
| L               |    | L | H              |
| L               |    | H | L              |

X: Don't Care  
Z: High Impedance

## LOGIC DIAGRAM

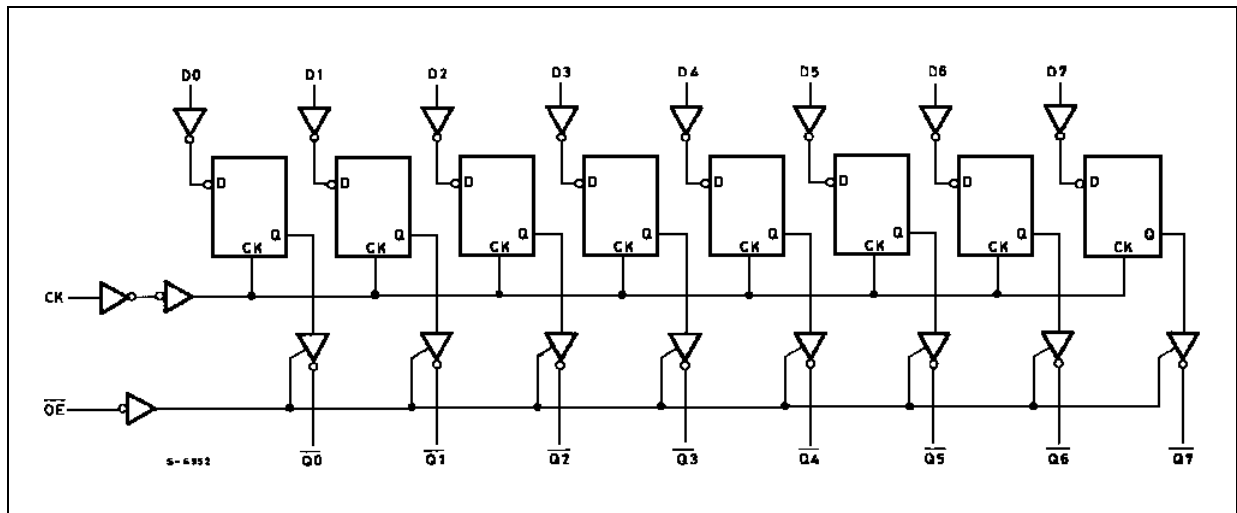

This logic diagram has not be used to estimate propagation delays

**ABSOLUTE MAXIMUM RATINGS**

| Symbol                | Parameter                     | Value                  | Unit |
|-----------------------|-------------------------------|------------------------|------|
| $V_{CC}$              | Supply Voltage                | -0.5 to +7             | V    |
| $V_I$                 | DC Input Voltage              | -0.5 to $V_{CC} + 0.5$ | V    |
| $V_O$                 | DC Output Voltage             | -0.5 to $V_{CC} + 0.5$ | V    |
| $I_{IK}$              | DC Input Diode Current        | $\pm 20$               | mA   |
| $I_{OK}$              | DC Output Diode Current       | $\pm 20$               | mA   |
| $I_O$                 | DC Output Current             | $\pm 35$               | mA   |
| $I_{CC}$ or $I_{GND}$ | DC $V_{CC}$ or Ground Current | $\pm 70$               | mA   |
| $P_D$                 | Power Dissipation             | 500(*)                 | mW   |
| $T_{stg}$             | Storage Temperature           | -65 to +150            | °C   |
| $T_L$                 | Lead Temperature (10 sec)     | 300                    | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied

(\*) 500mW at 65 °C; derate to 300mW by 10mW/°C from 65°C to 85°C

**RECOMMENDED OPERATING CONDITIONS**

| Symbol                          | Parameter                |                        | Value                | Unit |
|---------------------------------|--------------------------|------------------------|----------------------|------|
| V <sub>CC</sub>                 | Supply Voltage           |                        | 2 to 6               | V    |
| V <sub>I</sub>                  | Input Voltage            |                        | 0 to V <sub>CC</sub> | V    |
| V <sub>O</sub>                  | Output Voltage           |                        | 0 to V <sub>CC</sub> | V    |
| T <sub>op</sub>                 | Operating Temperature    |                        | -55 to 125           | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise and Fall Time | V <sub>CC</sub> = 2.0V | 0 to 1000            | ns   |
|                                 |                          | V <sub>CC</sub> = 4.5V | 0 to 500             | ns   |
|                                 |                          | V <sub>CC</sub> = 6.0V | 0 to 400             | ns   |

## DC SPECIFICATION

| Symbol          | Parameter                             | Test Condition         |                                                                                                | Value                 |      |       |             |      |              |      | Unit |  |
|-----------------|---------------------------------------|------------------------|------------------------------------------------------------------------------------------------|-----------------------|------|-------|-------------|------|--------------|------|------|--|
|                 |                                       | V <sub>CC</sub><br>(V) |                                                                                                | T <sub>A</sub> = 25°C |      |       | -40 to 85°C |      | -55 to 125°C |      |      |  |
|                 |                                       |                        |                                                                                                | Min.                  | Typ. | Max.  | Min.        | Max. | Min.         | Max. |      |  |
| V <sub>IH</sub> | High Level Input Voltage              | 2.0                    |                                                                                                | 1.5                   |      |       | 1.5         |      | 1.5          |      | V    |  |
|                 |                                       | 4.5                    |                                                                                                | 3.15                  |      |       | 3.15        |      | 3.15         |      |      |  |
|                 |                                       | 6.0                    |                                                                                                | 4.2                   |      |       | 4.2         |      | 4.2          |      |      |  |
| V <sub>IL</sub> | Low Level Input Voltage               | 2.0                    |                                                                                                |                       |      | 0.5   |             | 0.5  |              | 0.5  | V    |  |
|                 |                                       | 4.5                    |                                                                                                |                       |      | 1.35  |             | 1.35 |              | 1.35 |      |  |
|                 |                                       | 6.0                    |                                                                                                |                       |      | 1.8   |             | 1.8  |              | 1.8  |      |  |
| V <sub>OH</sub> | High Level Output Voltage             | 2.0                    | I <sub>O</sub> =-20 μA                                                                         | 1.9                   | 2.0  |       | 1.9         |      | 1.9          |      | V    |  |
|                 |                                       | 4.5                    | I <sub>O</sub> =-20 μA                                                                         | 4.4                   | 4.5  |       | 4.4         |      | 4.4          |      |      |  |
|                 |                                       | 6.0                    | I <sub>O</sub> =-20 μA                                                                         | 5.9                   | 6.0  |       | 5.9         |      | 5.9          |      |      |  |
|                 |                                       | 4.5                    | I <sub>O</sub> =-6.0 mA                                                                        | 4.18                  | 4.31 |       | 4.13        |      | 4.10         |      |      |  |
|                 |                                       | 6.0                    | I <sub>O</sub> =-7.8 mA                                                                        | 5.68                  | 5.8  |       | 5.63        |      | 5.60         |      |      |  |
| V <sub>OL</sub> | Low Level Output Voltage              | 2.0                    | I <sub>O</sub> =20 μA                                                                          |                       | 0.0  | 0.1   |             | 0.1  |              | 0.1  | V    |  |
|                 |                                       | 4.5                    | I <sub>O</sub> =20 μA                                                                          |                       | 0.0  | 0.1   |             | 0.1  |              | 0.1  |      |  |
|                 |                                       | 6.0                    | I <sub>O</sub> =20 μA                                                                          |                       | 0.0  | 0.1   |             | 0.1  |              | 0.1  |      |  |
|                 |                                       | 4.5                    | I <sub>O</sub> =6.0 mA                                                                         |                       | 0.17 | 0.26  |             | 0.33 |              | 0.40 |      |  |
|                 |                                       | 6.0                    | I <sub>O</sub> =7.8 mA                                                                         |                       | 0.18 | 0.26  |             | 0.33 |              | 0.40 |      |  |
| I <sub>I</sub>  | Input Leakage Current                 | 6.0                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                       |      | ± 0.1 |             | ± 1  |              | ± 1  | μA   |  |
| I <sub>OZ</sub> | High Impedance Output Leakage Current | 6.0                    | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>O</sub> = V <sub>CC</sub> or GND |                       |      | ± 0.5 |             | ± 5  |              | ± 10 | μA   |  |
| I <sub>CC</sub> | Quiescent Supply Current              | 6.0                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                       |      | 4     |             | 40   |              | 80   | μA   |  |

**AC ELECTRICAL CHARACTERISTICS** ( $C_L = 50 \text{ pF}$ , Input  $t_r = t_f = 6 \text{ ns}$ )


| Symbol                                 | Parameter                                        | Test Condition         |                        |                       | Value                 |      |      |             |      |              |      | Unit |
|----------------------------------------|--------------------------------------------------|------------------------|------------------------|-----------------------|-----------------------|------|------|-------------|------|--------------|------|------|
|                                        |                                                  | V <sub>CC</sub><br>(V) | C <sub>L</sub><br>(pF) |                       | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |      |
|                                        |                                                  |                        |                        |                       | Min.                  | Typ. | Max. | Min.        | Max. | Min.         | Max. |      |
| t <sub>TLH</sub> t <sub>THL</sub>      | Output Transition Time                           | 2.0                    | 50                     |                       |                       | 25   | 60   |             | 75   |              | 90   | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 7    | 12   |             | 15   |              | 18   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 6    | 10   |             | 13   |              | 15   |      |
| t <sub>PLH</sub> t <sub>PHL</sub>      | Propagation Delay Time<br>(CK - $\overline{Q}$ ) | 2.0                    | 50                     |                       |                       | 70   | 150  |             | 190  |              | 225  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 20   | 30   |             | 38   |              | 45   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 15   | 26   |             | 32   |              | 38   |      |
|                                        |                                                  | 2.0                    | 150                    |                       |                       | 88   | 190  |             | 240  |              | 285  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 25   | 38   |             | 48   |              | 57   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 19   | 32   |             | 41   |              | 48   |      |
| t <sub>PZL</sub> t <sub>PZH</sub>      | High Impedance Output Enable Time                | 2.0                    | 50                     | R <sub>L</sub> = 1 KΩ |                       | 48   | 125  |             | 155  |              | 190  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 15   | 25   |             | 31   |              | 38   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 12   | 21   |             | 26   |              | 32   |      |
|                                        |                                                  | 2.0                    | 150                    | R <sub>L</sub> = 1 KΩ |                       | 60   | 165  |             | 205  |              | 250  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 20   | 33   |             | 41   |              | 50   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 16   | 28   |             | 35   |              | 43   |      |
| t <sub>PLZ</sub> t <sub>PHZ</sub>      | High Impedance Output Disable Time               | 2.0                    | 50                     | R <sub>L</sub> = 1 KΩ |                       | 34   | 125  |             | 155  |              | 190  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 17   | 25   |             | 31   |              | 38   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 15   | 21   |             | 26   |              | 32   |      |
| f <sub>MAX</sub>                       | Maximum Clock Frequency                          | 2.0                    | 50                     |                       | 6.2                   | 18   |      | 5           |      | 4.2          |      | MHz  |
|                                        |                                                  | 4.5                    |                        |                       | 31                    | 75   |      | 25          |      | 21           |      |      |
|                                        |                                                  | 6.0                    |                        |                       | 37                    | 90   |      | 30          |      | 25           |      |      |
| t <sub>W(L)</sub><br>t <sub>W(H)</sub> | Minimum Pulse Width (CK)                         | 2.0                    | 50                     |                       |                       | 15   | 75   |             | 95   |              | 110  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 6    | 15   |             | 19   |              | 22   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 6    | 13   |             | 16   |              | 19   |      |
| t <sub>s</sub>                         | Minimum Set-up Time                              | 2.0                    | 50                     |                       |                       | 25   | 75   |             | 95   |              | 110  | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       | 6    | 15   |             | 19   |              | 22   |      |
|                                        |                                                  | 6.0                    |                        |                       |                       | 4    | 13   |             | 16   |              | 19   |      |
| t <sub>h</sub>                         | Minimum Hold Time                                | 2.0                    | 50                     |                       |                       |      | 0    |             | 0    |              | 0    | ns   |
|                                        |                                                  | 4.5                    |                        |                       |                       |      | 0    |             | 0    |              | 0    |      |
|                                        |                                                  | 6.0                    |                        |                       |                       |      | 0    |             | 0    |              | 0    |      |

**CAPACITIVE CHARACTERISTICS**

| Symbol           | Parameter                              | Test Condition         |  |  | Value                 |      |      |             |      |              | Unit |      |
|------------------|----------------------------------------|------------------------|--|--|-----------------------|------|------|-------------|------|--------------|------|------|
|                  |                                        | V <sub>CC</sub><br>(V) |  |  | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |      |
|                  |                                        |                        |  |  | Min.                  | Typ. | Max. | Min.        | Max. | Min.         |      | Max. |
| C <sub>IN</sub>  | Input Capacitance                      |                        |  |  |                       | 5    | 10   |             | 10   |              | 10   | pF   |
| C <sub>OUT</sub> | Output Capacitance                     |                        |  |  |                       | 10   |      |             |      |              |      | pF   |
| C <sub>PD</sub>  | Power Dissipation Capacitance (note 1) |                        |  |  |                       | 54   |      |             |      |              |      | pF   |

1)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}/8$  (per flip-flop)


TEST CIRCUIT


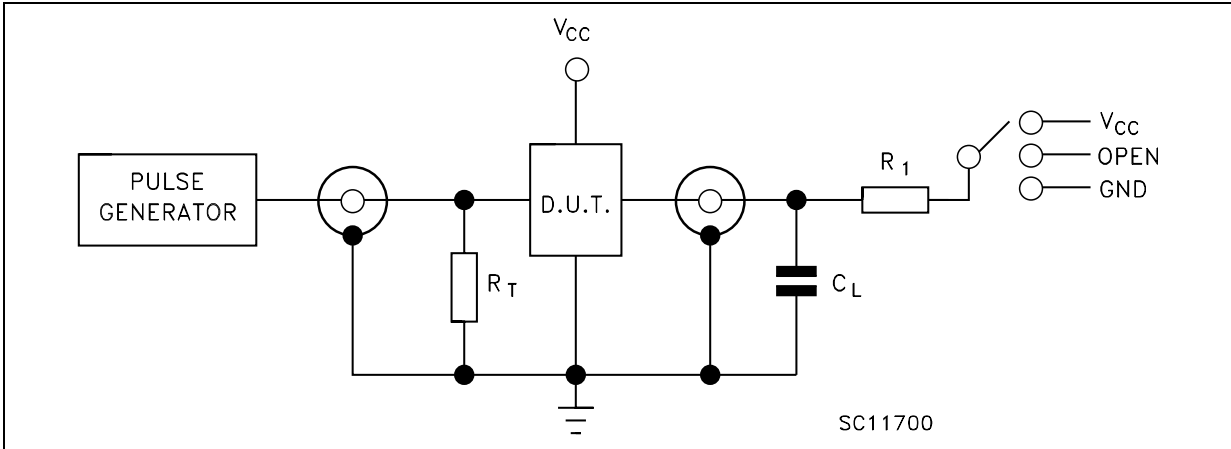


| TEST               | SWITCH   |
|--------------------|----------|
| $t_{PLH}, t_{PHL}$ | Open     |
| $t_{PZL}, t_{PLZ}$ | $V_{CC}$ |
| $t_{PZH}, t_{PHZ}$ | GND      |

$C_L$  = 50pF/150pF or equivalent (includes jig and probe capacitance)  
 $R_1$  = 1K $\Omega$  or equivalent  
 $R_T$  =  $Z_{OUT}$  of pulse generator (typically 50 $\Omega$ )


WAVEFORM 1: CK TO  $\overline{Qn}$  PROPAGATION DELAYS,  $Dn$  TO CK SETUP AND HOLD TIMES, CK MAXIMUM FREQUENCY ( $f=1\text{MHz}$ ; 50% duty cycle)

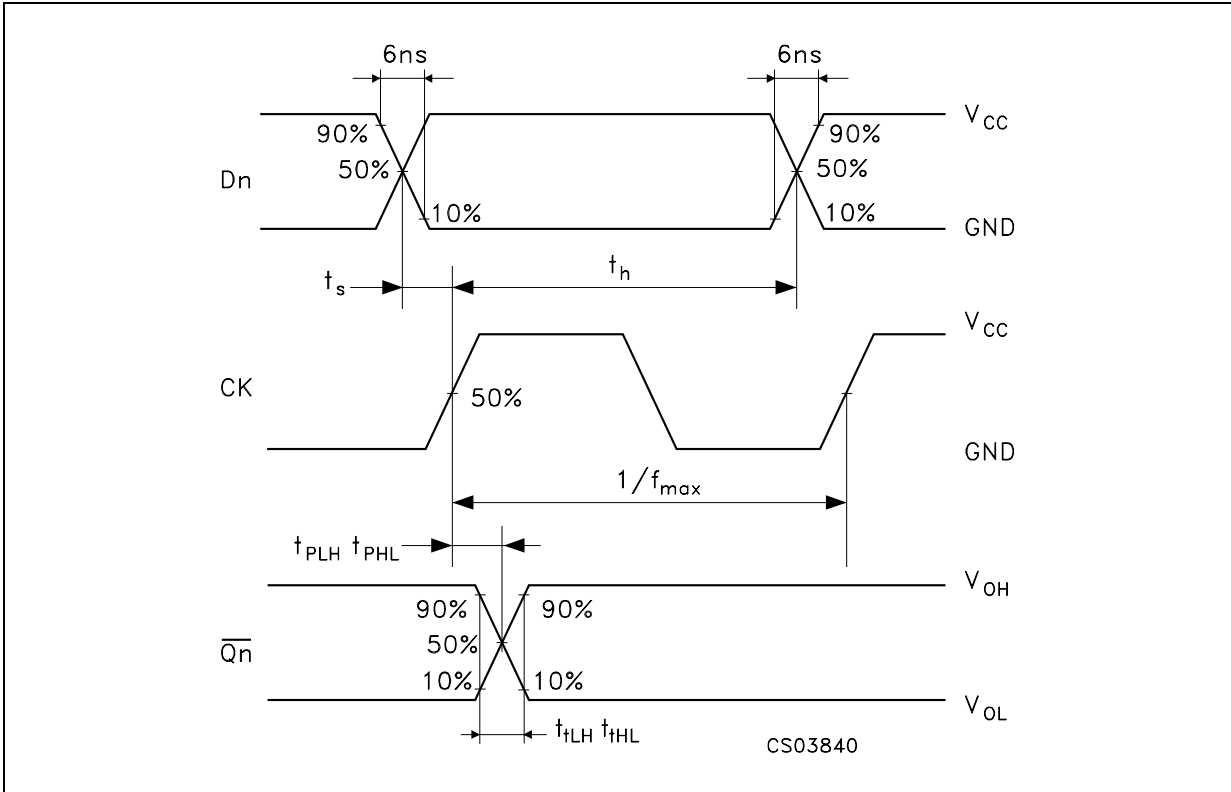

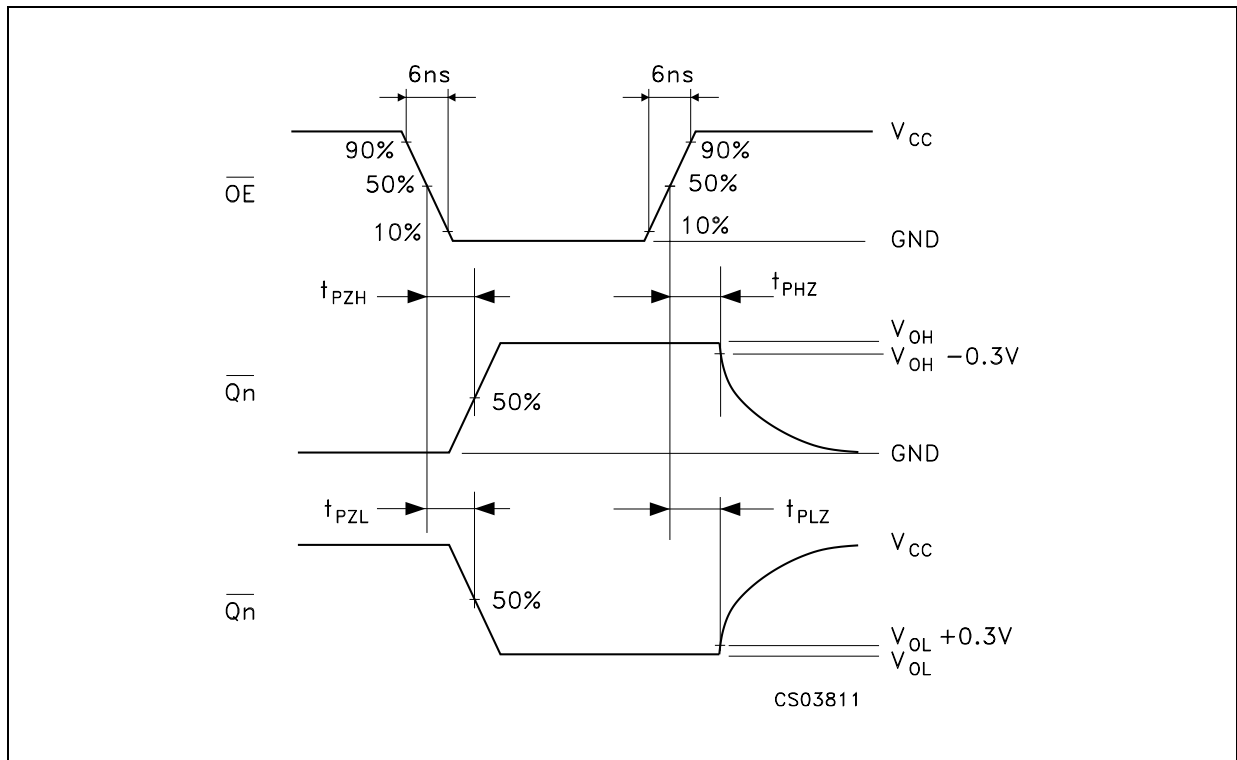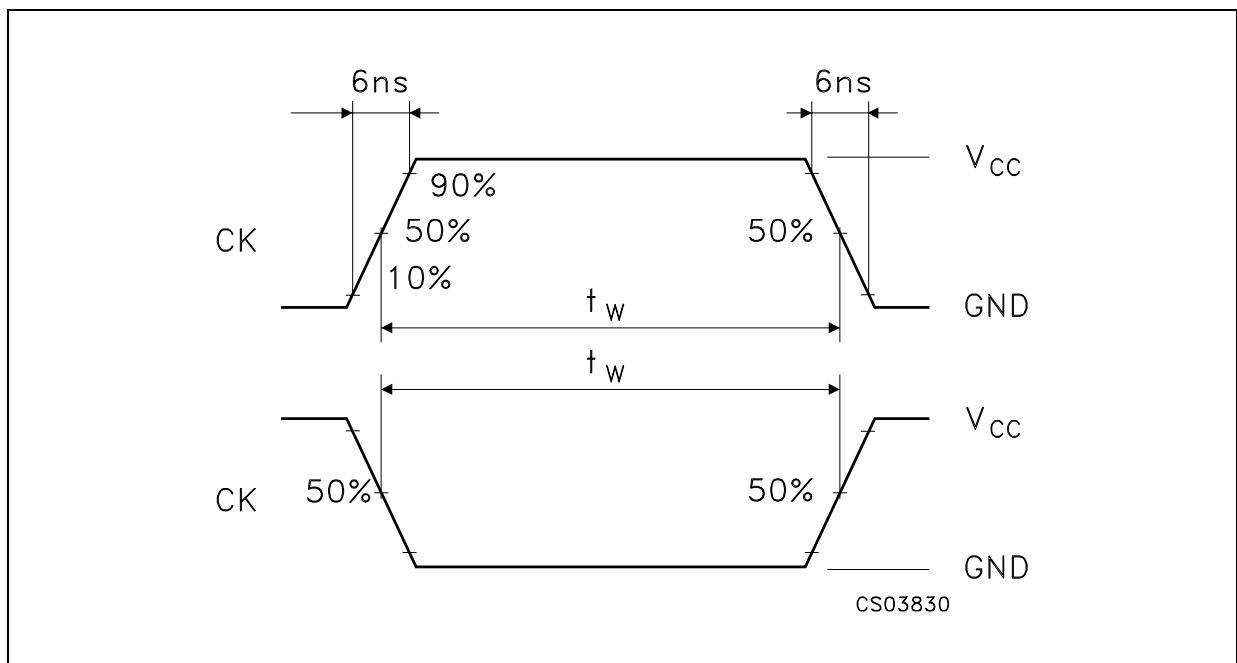**WAVEFORM 2: OUTPUT ENABLE AND DISABLE TIMES ( $f=1\text{MHz}$ ; 50% duty cycle)****WAVEFORM 3: CK MINIMUM PULSE WIDTH ( $f=1\text{MHz}$ ; 50% duty cycle)**

### Plastic DIP-20 (0.25) MECHANICAL DATA


| DIM. | mm.   |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.254 |       |      | 0.010 |       |       |
| B    | 1.39  |       | 1.65 | 0.055 |       | 0.065 |
| b    |       | 0.45  |      |       | 0.018 |       |
| b1   |       | 0.25  |      |       | 0.010 |       |
| D    |       |       | 25.4 |       |       | 1.000 |
| E    |       | 8.5   |      |       | 0.335 |       |
| e    |       | 2.54  |      |       | 0.100 |       |
| e3   |       | 22.86 |      |       | 0.900 |       |
| F    |       |       | 7.1  |       |       | 0.280 |
| I    |       |       | 3.93 |       |       | 0.155 |
| L    |       | 3.3   |      |       | 0.130 |       |
| Z    |       |       | 1.34 |       |       | 0.053 |

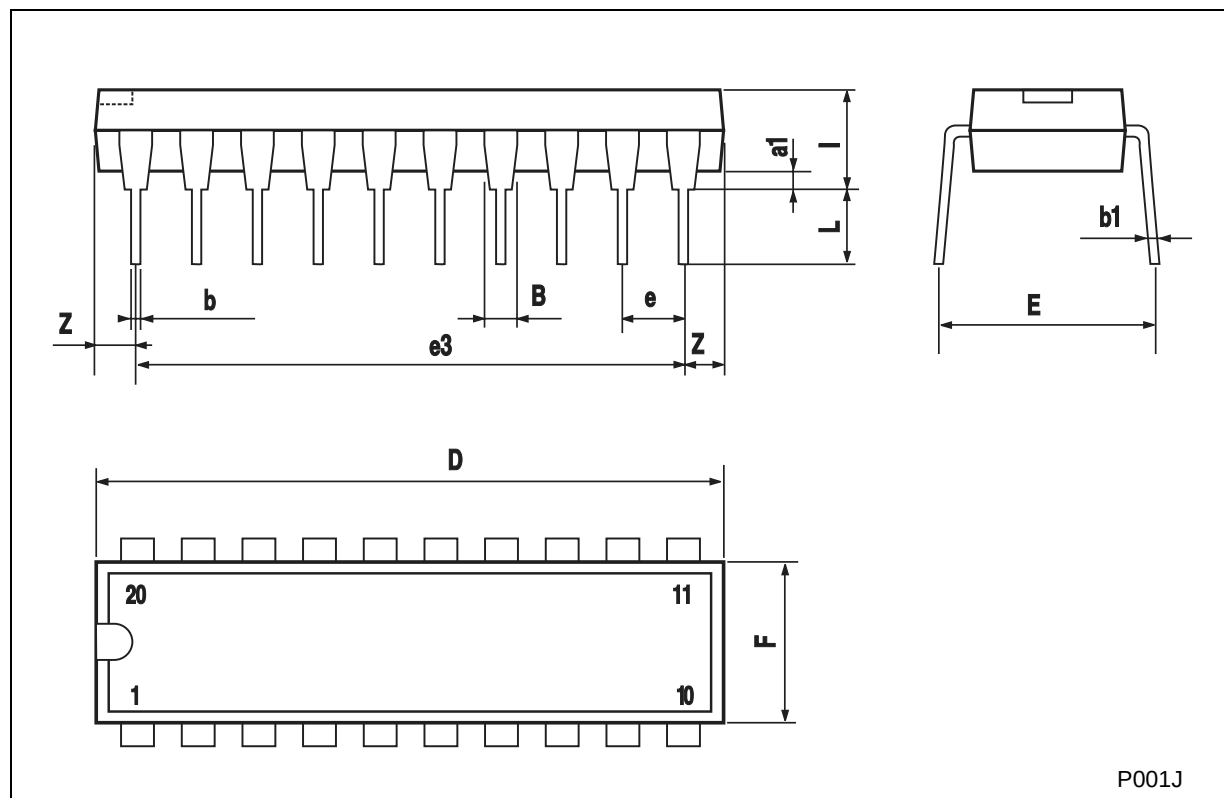



## SO-20 MECHANICAL DATA


| DIM. | mm.        |       |       | inch  |       |       |
|------|------------|-------|-------|-------|-------|-------|
|      | MIN.       | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |       | 2.65  |       |       | 0.104 |
| a1   | 0.1        |       | 0.2   | 0.004 |       | 0.008 |
| a2   |            |       | 2.45  |       |       | 0.096 |
| b    | 0.35       |       | 0.49  | 0.014 |       | 0.019 |
| b1   | 0.23       |       | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.5   |       |       | 0.020 |       |
| c1   | 45° (typ.) |       |       |       |       |       |
| D    | 12.60      |       | 13.00 | 0.496 |       | 0.512 |
| E    | 10.00      |       | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27  |       |       | 0.050 |       |
| e3   |            | 11.43 |       |       | 0.450 |       |
| F    | 7.40       |       | 7.60  | 0.291 |       | 0.300 |
| L    | 0.50       |       | 1.27  | 0.020 |       | 0.050 |
| M    |            |       | 0.75  |       |       | 0.029 |
| S    | 8° (max.)  |       |       |       |       |       |

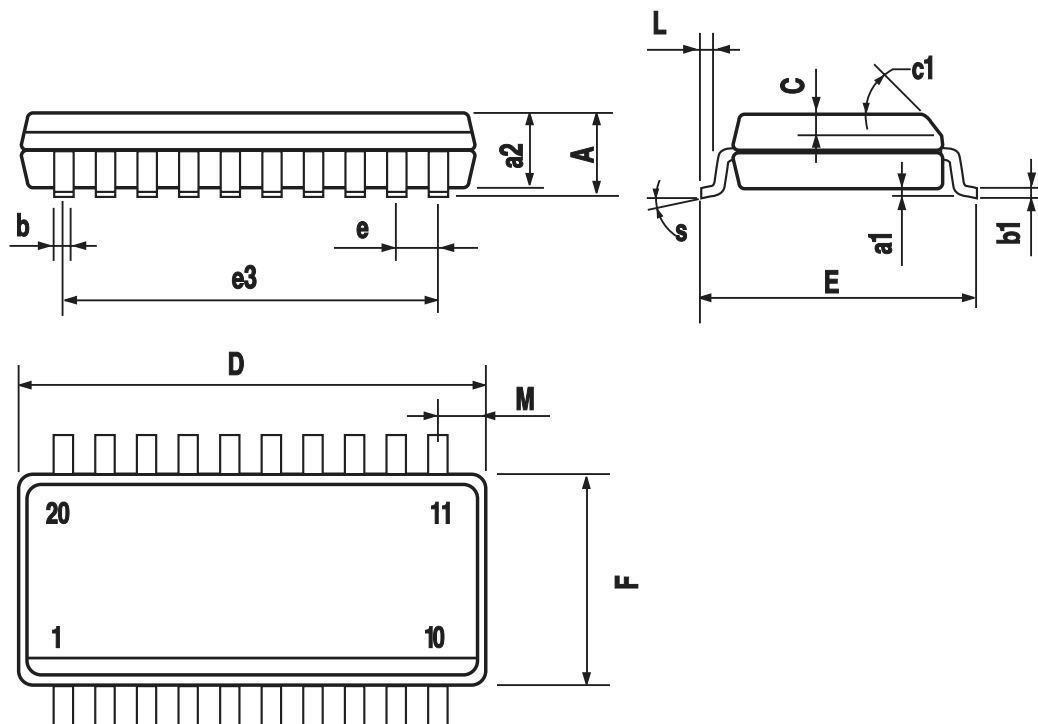

PO13L

## TSSOP20 MECHANICAL DATA

| DIM. | mm.  |          |      | inch  |            |        |
|------|------|----------|------|-------|------------|--------|
|      | MIN. | TYP      | MAX. | MIN.  | TYP.       | MAX.   |
| A    |      |          | 1.2  |       |            | 0.047  |
| A1   | 0.05 |          | 0.15 | 0.002 | 0.004      | 0.006  |
| A2   | 0.8  | 1        | 1.05 | 0.031 | 0.039      | 0.041  |
| b    | 0.19 |          | 0.30 | 0.007 |            | 0.012  |
| c    | 0.09 |          | 0.20 | 0.004 |            | 0.0089 |
| D    | 6.4  | 6.5      | 6.6  | 0.252 | 0.256      | 0.260  |
| E    | 6.2  | 6.4      | 6.6  | 0.244 | 0.252      | 0.260  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169 | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°    |            | 8°     |
| L    | 0.45 | 0.60     | 0.75 | 0.018 | 0.024      | 0.030  |

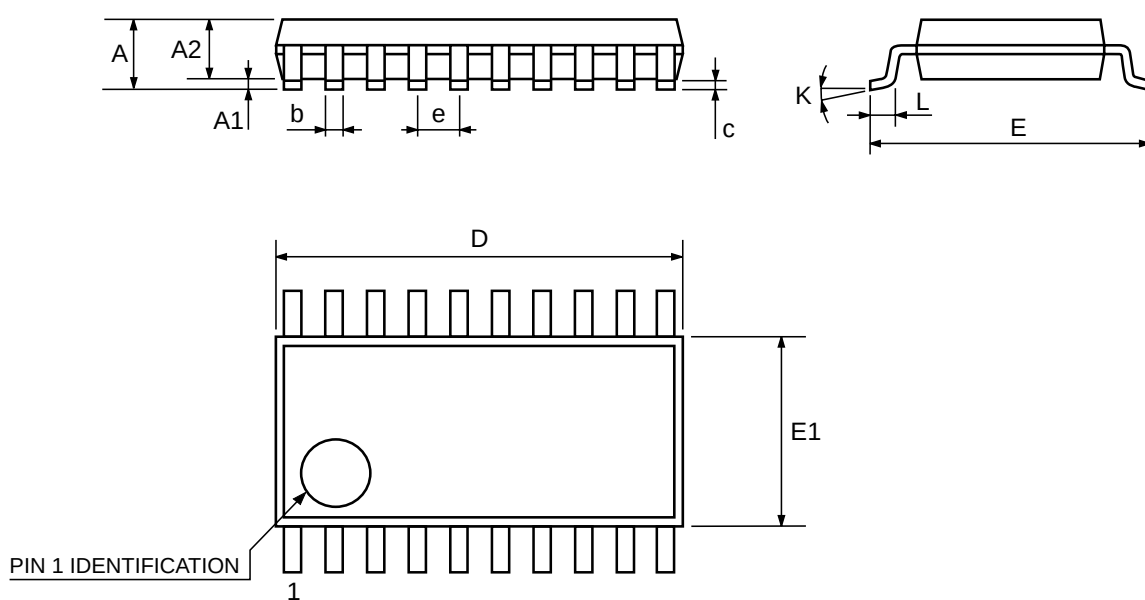

0087225C

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)