




8		7		6		
CATALOG NO.	TERMINAL TYPE	IP20 FINGER SAFE COVERS		NO. OF POLES		
		W/O INDICATION	INDICATION			
BCM603-1SQ	SCREW W/ QUICK CONNECT	CVR-CCM-QC SEE NOTES 7 & 9	CVRI-CCM-QC SEE NOTES 7 & 9	1		
BCM603-2SQ	SCREW W/ QUICK CONNECT			2		
BCM603-3SQ	SCREW W/ QUICK CONNECT			3		
BCM603-1PQ	PRESSURE PLATE W/ QUICK CONNECT	CVR-CCM-QC SEE NOTES 7 & 9	CVRI-CCM-QC SEE NOTES 7 & 9	1		
BCM603-2PQ	PRESSURE PLATE W/ QUICK CONNECT			2		
BCM603-3PQ	PRESSURE PLATE W/ QUICK CONNECT			3		
BCM603-1S	SCREW	CVR-CCM SEE NOTES 8 & 9	CVRI-CCM SEE NOTES 8 & 9	1		
BCM603-2S	SCREW			2		
BCM603-3S	SCREW			3		
BCM603-1P	PRESSURE PLATE	CVR-CCM SEE NOTES 8 & 9	CVRI-CCM SEE NOTES 8 & 9	1		
BCM603-2P	PRESSURE PLATE			2		
BCM603-3P	PRESSURE PLATE			3		
BCM603-1C	BOX LUG	CVR-CCM SEE NOTES 8 & 9	CVRI-CCM SEE NOTES 8 & 9	1		
BCM603-2C	BOX LUG			2		
BCM603-3C	BOX LUG			3		

4		3		2		1		
REVISIONS								
REV	ZONE	DESCRIPTION				DATE	ECN	BY
A		PRE-RELEASE				5/8/14	BU-SB14TBD	AVM

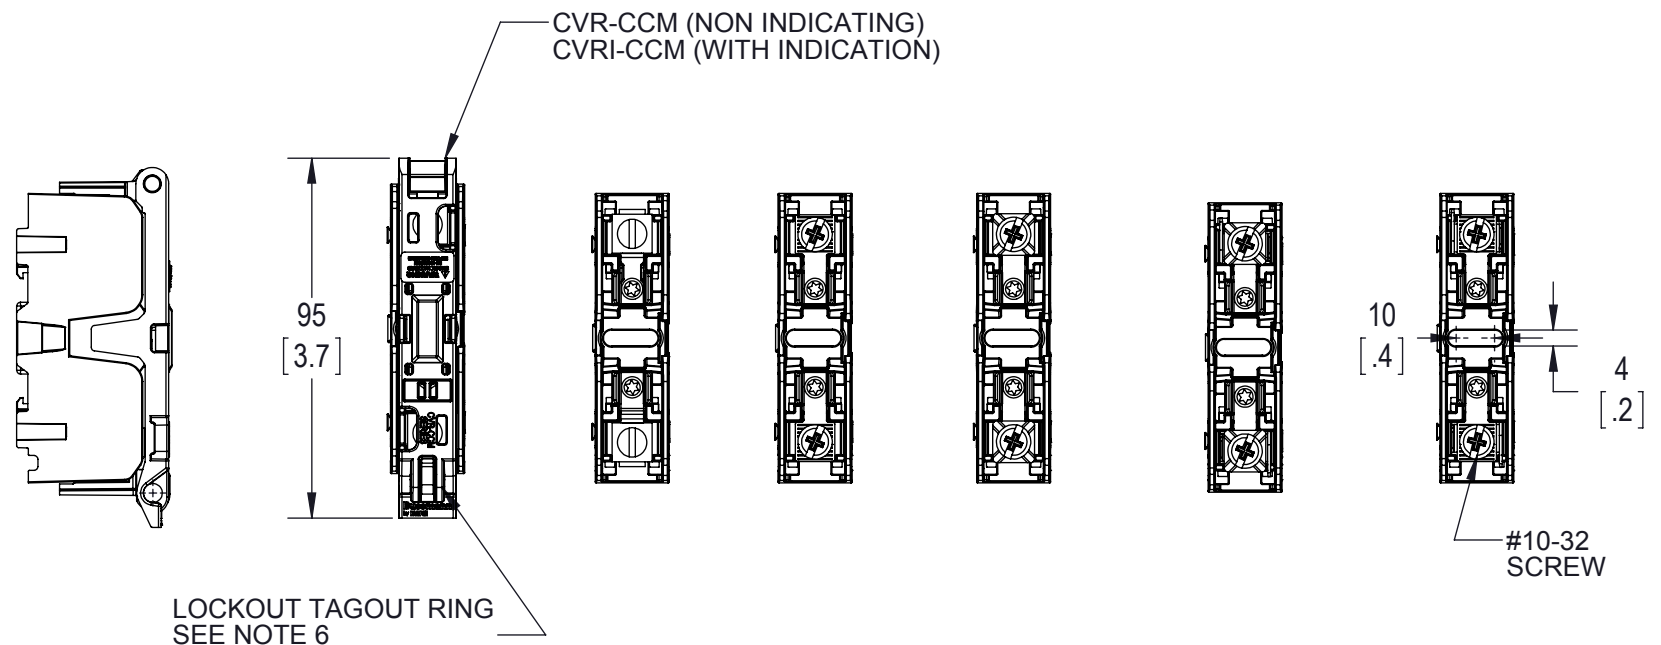

3D VIEW FOR BCM603-1S
SCALE NONE



3D VIEW FOR BCM603-1P
SCALE NONE

NOTES:

- 1) VOLTAGE RATING: 600V
2) AMPERAGE: 30A (20A QUICK CONNECT)
3) WITHSTAND RATING: 200kA
4) -C: WIRE RANGE: (1) CU 75/90C

- (1) CU 75/90C
2-3 AWG = 50 LB-IN (5.6NM)
4-6 AWG = 45 LB-IN (5.1NM)
8-14 AWG = 35 LB-IN (4.0 NM)
- (1) AL 75/90C
2-6 AWG = 50 LB-IN (5.6NM)
8 AWG = 40 LB-IN (4.5NM)

- 5) -S/P/SQ/PQ WIRE RANGE: (1) CU 75/90C
10-18 AWG = 20 LB-IN (2.3NM)


- 6) USE 4MM DIA. CABLE LOCK
7) CVR-CCM-QC AND CVRI-CC-QC

- 8) CVR-CCM AND CVRI-CCM
4AWG MAX WIRE + QUICK CONNECT OPENINGS AT TOP ONLY
FITS WITH MOST RING AND FORK CONNECTORS


- 9) ALL COVERS FIT ON ALL BASES
10) RECOMMEND USING DIN-RAIL END STOPS FOR DIN RAIL MOUNTED APPLICATIONS
BUSSMANN PART NUMBERS BRKT-ND OR BRKT-NDSCREW2

- 11) USE BUSSMANN MARKER LABEL TM26CB


- 12) ALL DIMENSIONS ARE TYPICAL UNLESS OTHERWISE INDICATED




3D VIEW FOR BCM603-1C
WITH COVER CVRI-CCM
SCALE NONE




3D VIEW FOR BCM603-1C
SCALE NONE



3D VIEW FOR BCM603-1SC
SCALE NONE



3D VIEW FOR BCM603-1PQ
SCALE NONE




3D VIEW FOR BCM603-1xQ
WITH COVER CVRI-CCM-QC
SCALE NONE

CUSTOMER PRINT

MODEL SOURCE DATA BMM603-XPQ		MODEL VERSION		GENERAL DRAWING PRACTICES IN ACCORDANCE WITH ASME - Y14.100-2004 DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME - Y14.5M-1994		APPROVALS PRODUCT MANAGER D. McDowell		DATE 5/08/2014		Bussmann by EATON			
THIS DRAWING IS AN UNCONTROLLED COPY IF PRINTED OR SENT ELECTRONICALLY, DO NOT SCALE DRAWING						ENGINEER A.VZM		5/08/2014					
EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION AND IS MERELY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THE DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES TO BE ONE PLACE X.X = ±0.3 mm TWO PLACE X.X X = ±0.13 mm ALL ANGLES X.X = ±1°		QUALITY --		--/--/----					
				SPECIAL CHARACTERISTIC $\diamond (0)$ SIGNIFICANT CHARACTERISTIC $\triangle (0)$		MATERIAL N/A				TITLE 600V / 30A 10X38 CC FUSE BLOCK			
				THIRD ANGLE PROJECTION		FINISH N/A		SIZE A3		DWG NO. BCM603-SERIES-CP		REV A	
								SCALE: 1:2				SHEET 1 OF 3	

© 2012 Eaton Corporation. All Rights Reserved.

SLA3_BUSS_NAE_GENRL_REV_A

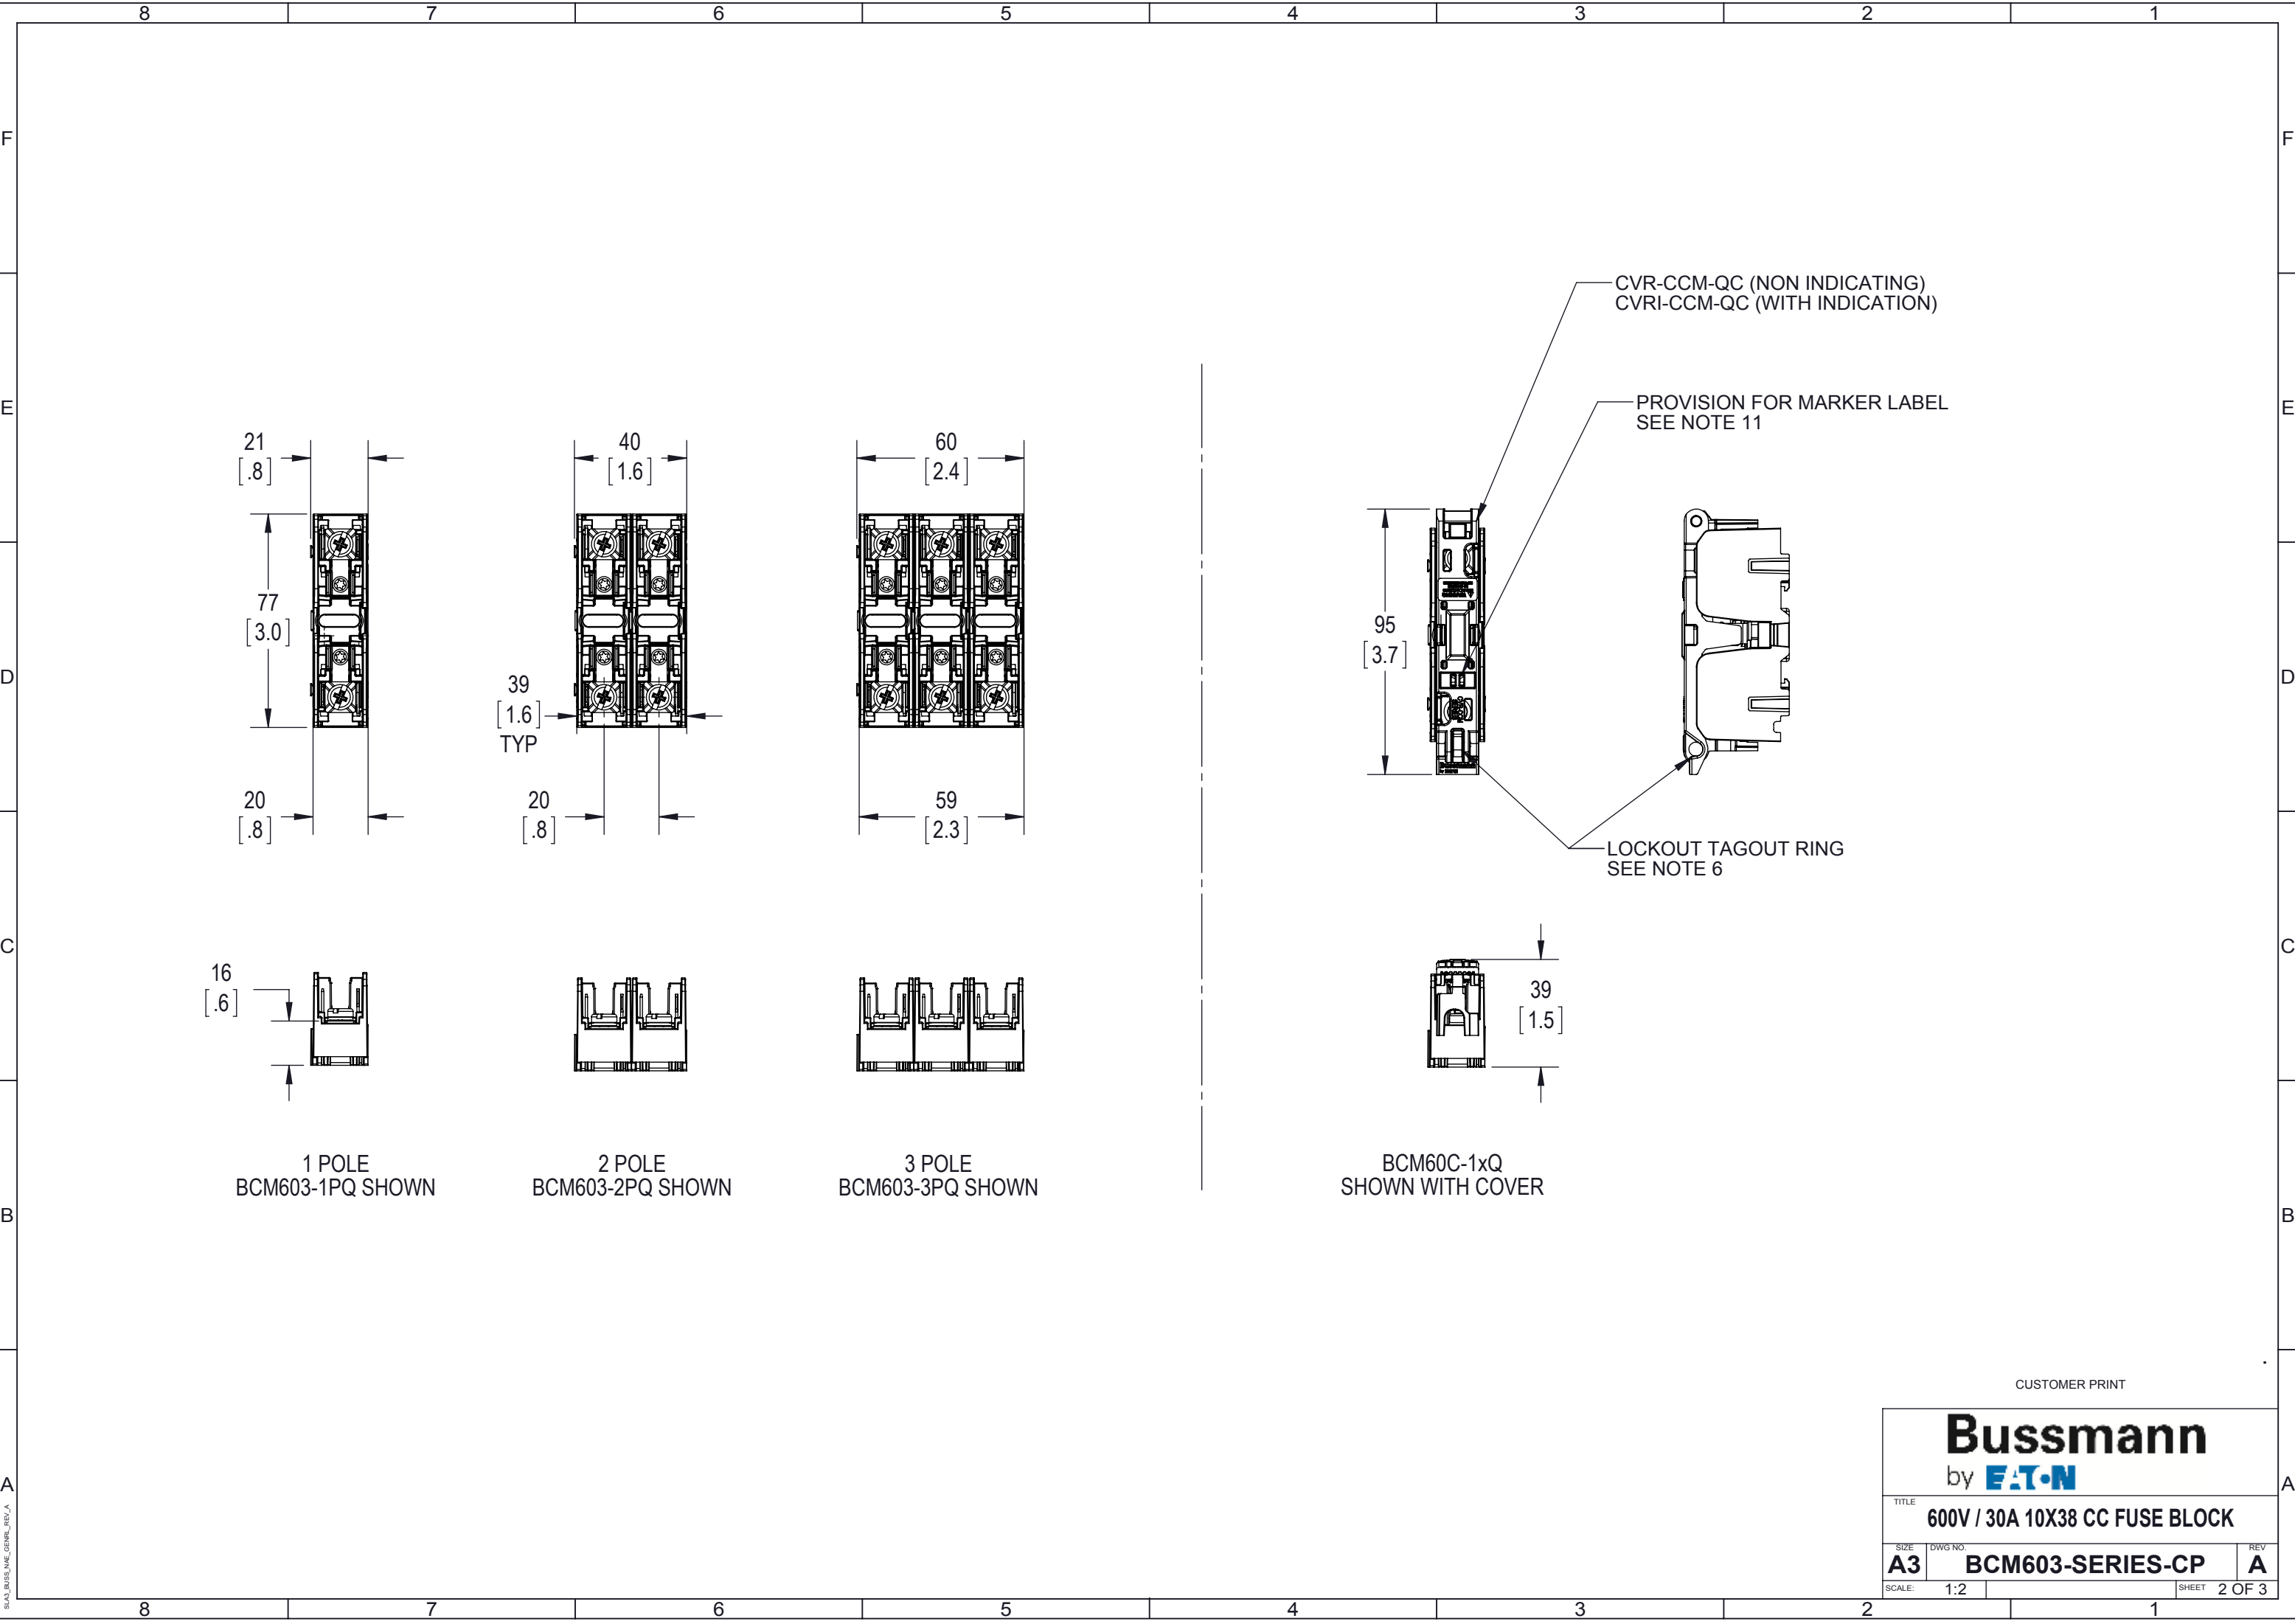


F
E
D
C
B
A

F
E
D
C
B
A

SLA3_BUSSMAN_GEMBL_REV_A


CUSTOMER PRINT			
Bussmann by E.T.N			
TITLE 600V / 30A 10X38 CC FUSE BLOCK			
SIZE A3	DWG NO. BCM603-SERIES-CP	REV A	
SCALE: 1:2	SHEET 2 OF 3		

THIS SECTION MAY BE CUT
OUT FOR USE WITH VERTICALLY
ORIENTED QUICK CONNECTS

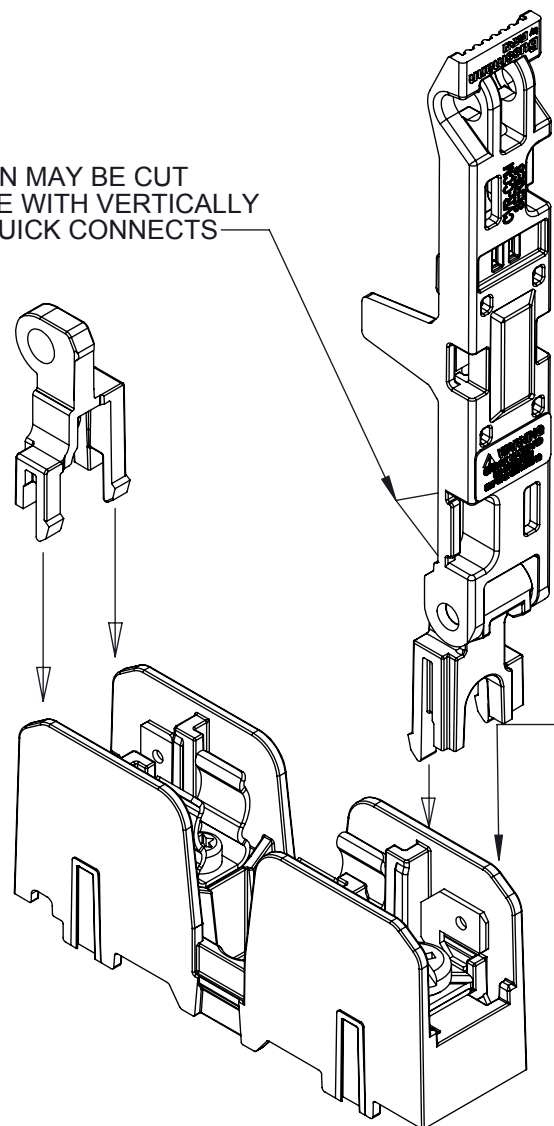


PUSH COVER PIVOT
AND END PIECE
SNAPS INTO SLOTS
IN BASE. THE COVER
MAY BE ORIENTED IN
EITHER DIRECTION.

COVER INSTALLATION
ONCE INSTALLED THE COVER CANNOT BE
REMOVED

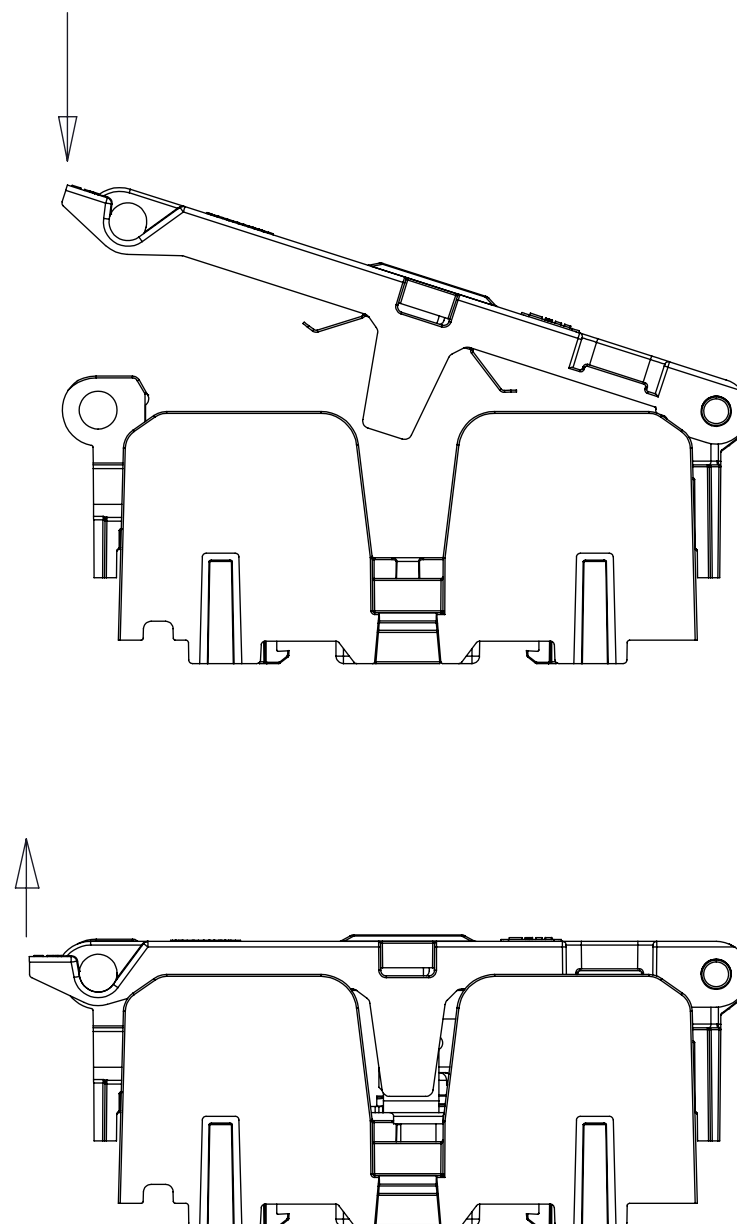


OPENING AND CLOSING
PUSH/PULL ON END TAB, ROTATE UNTIL
CLOSED/OPEN

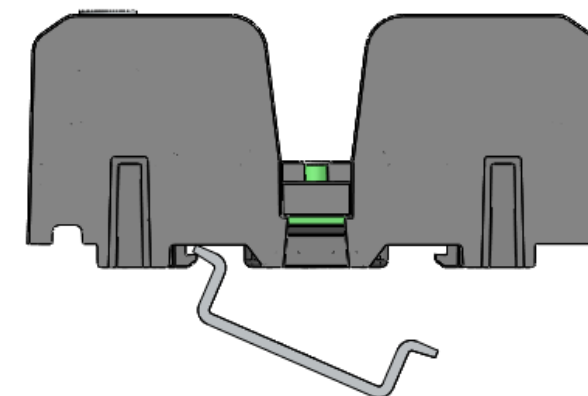

1. HOOK DIN RAIL SNAPS ON ONE SIDE OF THE DIN RAIL

2. PUSH DOWN TO DEFLECT THE SNAPS

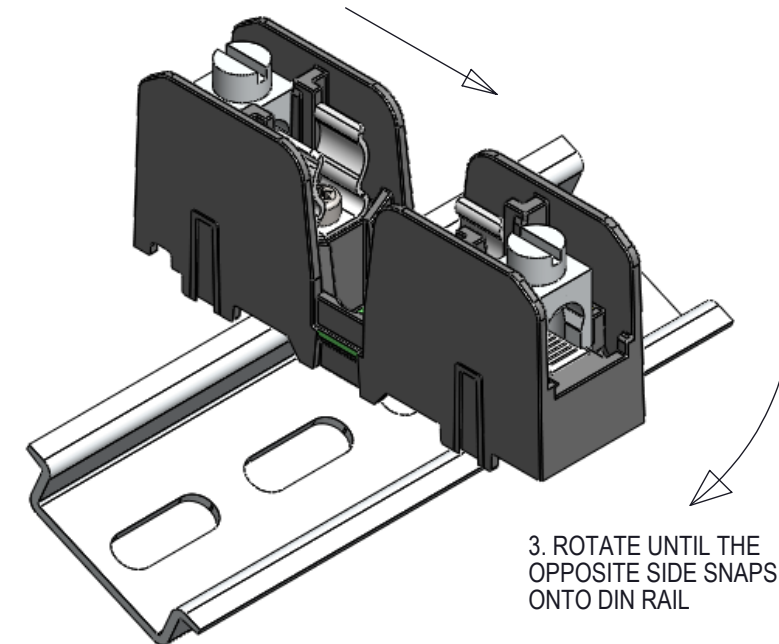

3. ROTATE UNTIL THE
OPPOSITE SIDE SNAPS
ONTO DIN RAIL

INSTALLATION ON DIN RAIL
END STOPS MAY BE NECESSARY FOR SOME
ASSEMBLY CONDITIONS - SEE NOTE 10

CUSTOMER PRINT

Bussmann
by **E.T.N.**

TITLE
600V / 30A 10X38 CC FUSE BLOCK

SIZE DWG NO. REV
A3 **BCM603-SERIES-CP** **A**

SCALE: 1:2 SHEET 3 OF 3

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru