


# SFP650-12BG

## AC-DC Power Supply

### 12V Output, 650 Watts

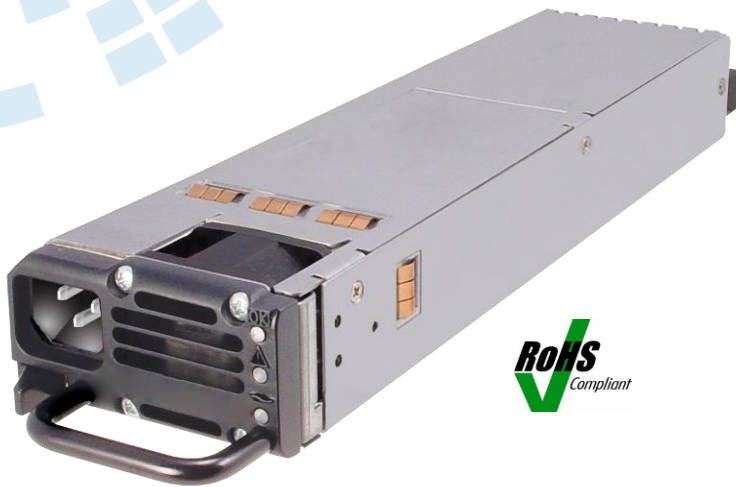

#### Key Features & Benefits

- Ideal server form factor optimizes, space, efficiency, and load variations
- High efficiency maximized between 30-80% load conditions
- Unconditionally stable under any load condition
- Wide range DC-input model available (SFD550-12BG)
- Wide input voltage range (90-264 VAC) with PFC
- 1U or 2U height configurations
- Active current share with ORing FET
- I2C interface status monitoring
- Standby voltage of 3.3 VDC @ 3 A
- Overtemperature, overload, and overvoltage protection
- Status LEDs: AC OK, POWER GOOD, PS FAIL

The Bel Power Solutions SFP650-12BG is a 650 W, power factor corrected (PFC) front-end which provides a 12 VDC output for datacom and other distributed power applications. Its compact size enables mounting in both 1U and 2U height racks. High efficiencies, advanced thermal management techniques, and an internal fan increase reliability over a broad range of operating conditions. Internal ORing diodes facilitate use in hot-swap (plug)\*, redundant configurations.

Status is provided with front panel LEDs, logic signals, and via the I2C management interface bus.

The SFP650-12BG meets international safety requirements and is CE marked to the Low Voltage Directive (LVD).

\* Proper hot-swap (plug) operation instruction: Power supply is not intended to be inserted into the system with AC cord already applied. Alternatively, if there is an application where power supply insertion with AC cord is required; PS\_ON must be toggled or AC recycled after insertion into the system to reset the power supply.

#### Applications

- Datacom
- Distributed Power Systems

#### North America

+1-866.513.2839

#### Asia-Pacific

+86.755.29885888

#### Europe, Middle East

+353 61 225 977

tech.support@psbel.com  
[belpowersolutions.com](http://belpowersolutions.com)

# SFP650-12BG

## Model Selection

MODEL	NOMINAL OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	REGULATION	RIPPLE & NOISE @ 20 MHz BW
SFP650-12BG	12 VDC 3.3 VDC (Standby)	N/A N/A	53.3 A 3 A	±3 % ±3 %	100 mV 100 mV

## Input Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
AC Input Voltage	Single-phase continuous input range.	90		264	VAC
Input Frequency	AC input.	47		63	Hz
Hold-up Time	After last AC line peak at full power.	At 115 VAC	14		ms
Input Current	At full-rated load.	At 90 VAC		9	Arms
Inrush Surge Current	Excluding Xcap. Vin = 264 VAC, T = 25 °C			15	Apk
Power Factor	Per EN61000-3-2	> 0.95			W/VA

## Output Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency <sup>1</sup>	With Vin at 115 VAC and 50% to 75% load on V1.	86			%
	With Vin at 115 AC and 75% to 100% load on V1.	86			%
	With Vin at 230 VAC and 50% to 75% load on V1.	87			%
	With Vin at 230 VAC and 75% to 100% load on V1.	89			%
Minimum Load	Minimum loading required to maintain regulation.	0			A
Output Power				650	W
Overshoot	Output voltage overshoot at turn-on.			< 5	%
Transient Response	Maximum recovery time to within 1% of initial set point due to a 25% load change, 1A/μs.	12V output:		5	ms
		Standby output:		5	ms
Turn-On Delay with PS_ON signal	Time required for initial output voltage stabilization after application of AC input or ON/OFF signal.	12V output:		3	%
		Standby output:		3	%
Output Regulation	See Model Selection table above.			1500	ms

## I<sup>2</sup>C Bus Management Interface<sup>2</sup>

PARAMETER	CONDITIONS / DESCRIPTION
<b>Static</b>	Includes static information such as: part number and revision level, output rating, serial number, date code, and manufacturing location.
<b>Status</b> (Logic 1 or 0)	AC Input OK. DC Output OK. Overtemperature. Overcurrent. Fan OK. Overvoltage Alert Undervoltage Alert
<b>Real-Time Monitoring</b>	Output voltage (main output). LSB = 20 mV Output current (main output). LSB = 100 mA

<sup>1</sup> Internal fan is considered part of the load as it is driven from the 12 V output; Vaux load is set to 0 A for efficiency measurements.

<sup>2</sup> Reference "I<sup>2</sup>C Management Interface" and "EEPROM Table of Contents" documents for SFP650-12BG (consult factory).

+1.866.513.2839

tech.support@psbel.com

[belpowersolutions.com](http://belpowersolutions.com)

# SFP650-12BG

## Interface Signals & Internal Protection<sup>3</sup>

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Latch-style overvoltage protection.			15 4.3	V
Overcurrent Protection	Current limit (Latching Mode). 12V output: Standby output:	56.0 3.2		69.3 6	A
Short-Circuit Protection	Latching Mode.				
Overtemperature/ Fan Failure Warning	12 V output will shut down in the event of an overtemperature condition or blocked fan rotor. OT setpoint is 62 ±3 °C. Supply's fan and Vaux are active. Power supply will recover when OT condition is removed. Amber OT LED will turn ON to indicate fault condition.				
PS_KILL	Output enable. Pulled low on conjunction with PS_ON being pulled low allows V1 to be activated. PSKILL will cause the PSU to latch off the 12 V rail, the latch can be cleared by recycling PSON or recycling the AC supply.				
+12V Current Share	0 to 8V signal used for active current sharing.				
Write Protect	For factory use only.				
PS A0	I <sup>2</sup> C Address.				
SDA	I <sup>2</sup> C Data line (3.3 V).				
SCL	I <sup>2</sup> C Clock line (3.3 V).				
Tach	Two pulses per fan revolution.				
AC_OK/H	High signal indicates AC is within PSU limits.				
Present/L	100 Ohm resistor internally connected to RTN allowing the PSU to be detected on insertion.				
Alert/L	Low signal indicates PSU fan is running below speed or an overtemperature limit was exceeded.				
PWROK/H	High signal indicates both outputs are within regulation limits.				

## Safety, Regulatory and EMI Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards: UL/CSA60950-1, IEC60950-1 and EN60950-1. CE Mark for LVD				
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B, EN55022/CISPR 22.	Conducted: Radiated:	A A		Class
Harmonics	Per IEC61000-3-2.		A		Class
Voltage Fluctuation and Flicker	Per IEC61000-3-3.		Pass		
ESD Susceptibility	Per EN 61000-4-2, Level 4 Performance criteria A	Contact Discharge: Air Discharge:	±8 ±15		kV
Radiated Susceptibility	Per EN 61000-4-3, Level 3., Performance criteria A		10		V/M
EFT/Burst	Per EN 61000-4-4, Level 4 Performance criteria A		±4		kV
Input Transient Protection	Per EN 61000-4-5, Class 3 Performance criteria A	Line-to-Line: Line-to-Ground:	1 2		kV
RF Conducted Disturbances	Per EN 61000-4-6, Level 2., Performance criteria A		3		V
Voltage Interruptions	Per EN 61000-4-11, performance criterion B 30%. Per EN 61000-4-11, performance criterion C 60%. Per EN 61000-4-11, performance criterion C 95%.		10 100 5		ms ms sec
Voltage Sag Immunity	Per SEMI F47-0999 > 100 VAC. No output voltage interruption.				
Leakage Current	Per EN60950.	At 240 VAC:		1.75	mA

<sup>3</sup> Refer to product specification for internal pull up impedances and timing of these signals.

# SFP650-12BG

## Environmental Specifications



PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating. Non-Operating.			10K 40K	ASL ft
Operating Temperature	Internal DC fan for cooling. At 100% load:	0		50	°C
Storage Temperature		-40		85	°C
Temperature Coefficient	0 °C to 45 °C (after 15-minute warm-up).			0.02	%/°C
Relative Humidity	Non-condensing.			95	%RH
Shock	Operating: half-sine, 11 ms, 3-axis.			±10	Gpk
Vibration	Operating: swept sine 5-500 Hz. Non-operating: random 10-2000 Hz.			2 6.15	Gpk Grms
Reliability MTBF	(Calculated) MILHDBK 217F Ground Benign. Demonstrated. Useful Life	100 000 200 000 10			hrs hrs yrs

## LED Indicators


Indicator	LED Color
Power Good	GREEN
AC OK	GREEN
PS FAIL	AMBER

## Mechanical Specifications

PARAMETER	CONDITIONS / DESCRIPTION
Dimensions	78 x 40 x 337.4 mm
Weight	1.46 kg (3.22 lb)

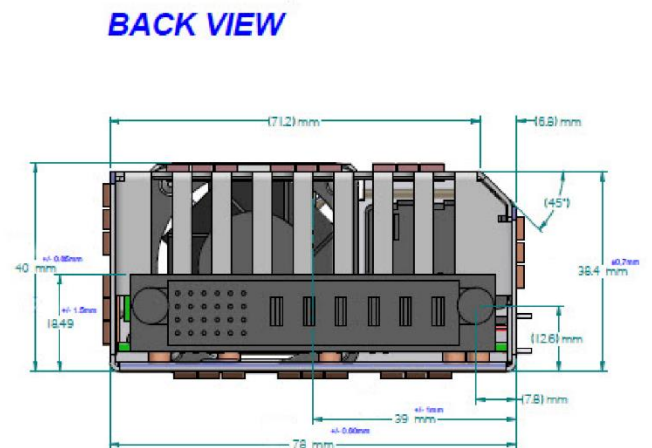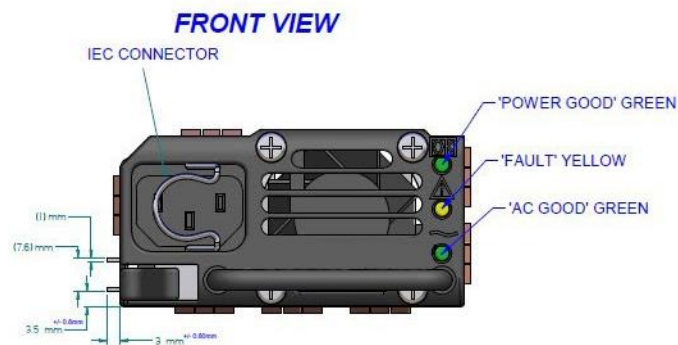

# SFP650-12BG

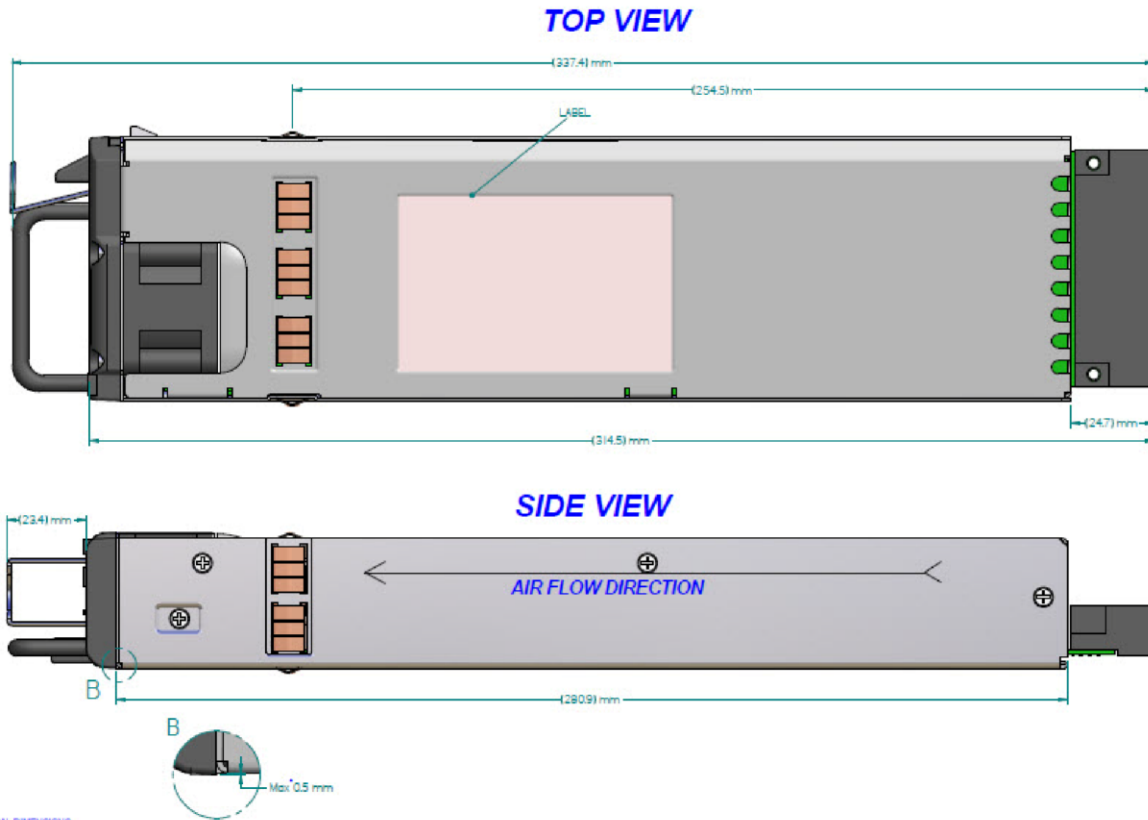



\* DENOTES CRITICAL DIMENSIONS  
 NOTE: UNLESS OTHERWISE SPECIFIED.

## Connector Information

<b>Power Supply:</b>	Input - IEC 320 input (Male) standard line cord connection Output - P/N FCI 51721-10002406AA or equivalent	
<b>Mating Connections:</b>	Input - IEC 320 output (Socket) Standard line cord (15A) Output - P/N: FCI 51741-10002406CC	
<b>Input IEC Connector:</b>	<b>Input</b>	<b>Location</b>
	Chassis (Safety) Ground	Ground
	Line 1 (Line)	L
	Line 2 (Neutral)	N

# SFP650-12BG

## Output Connector Details

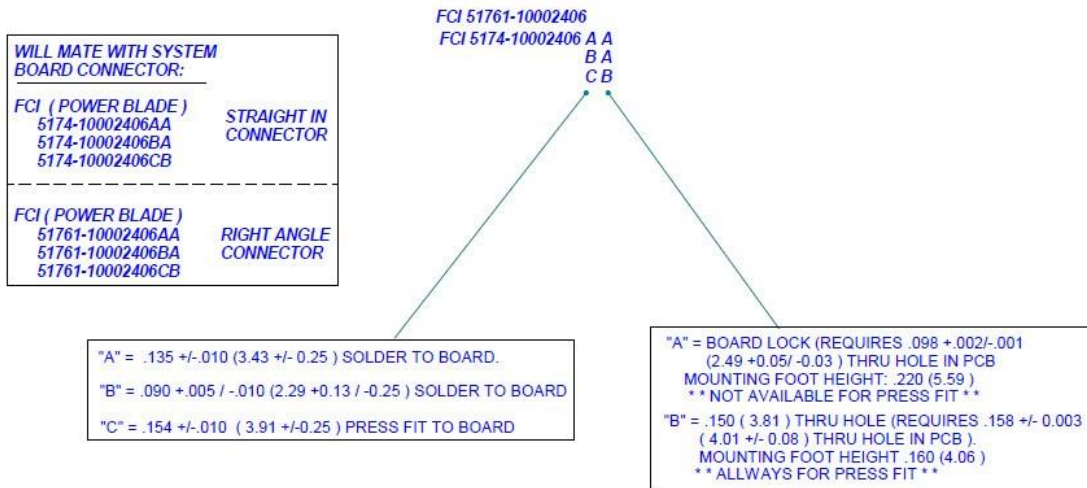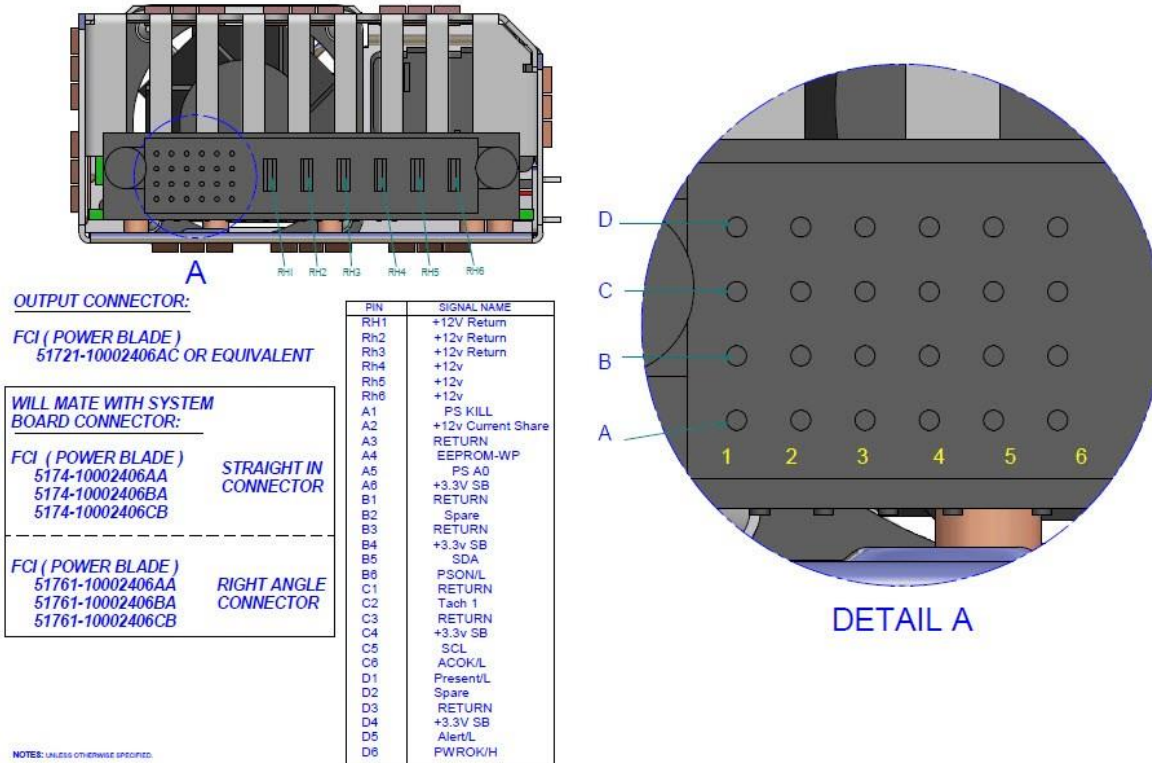

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)