

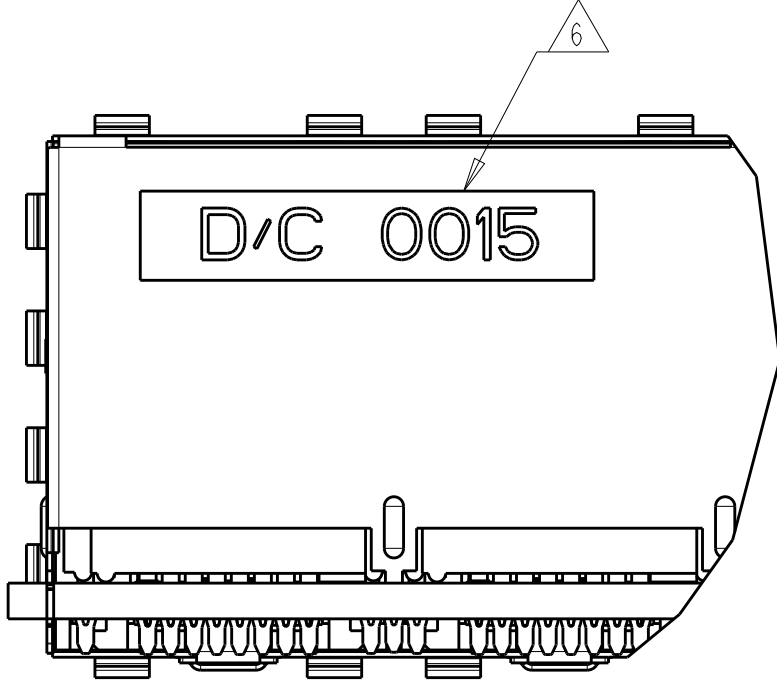
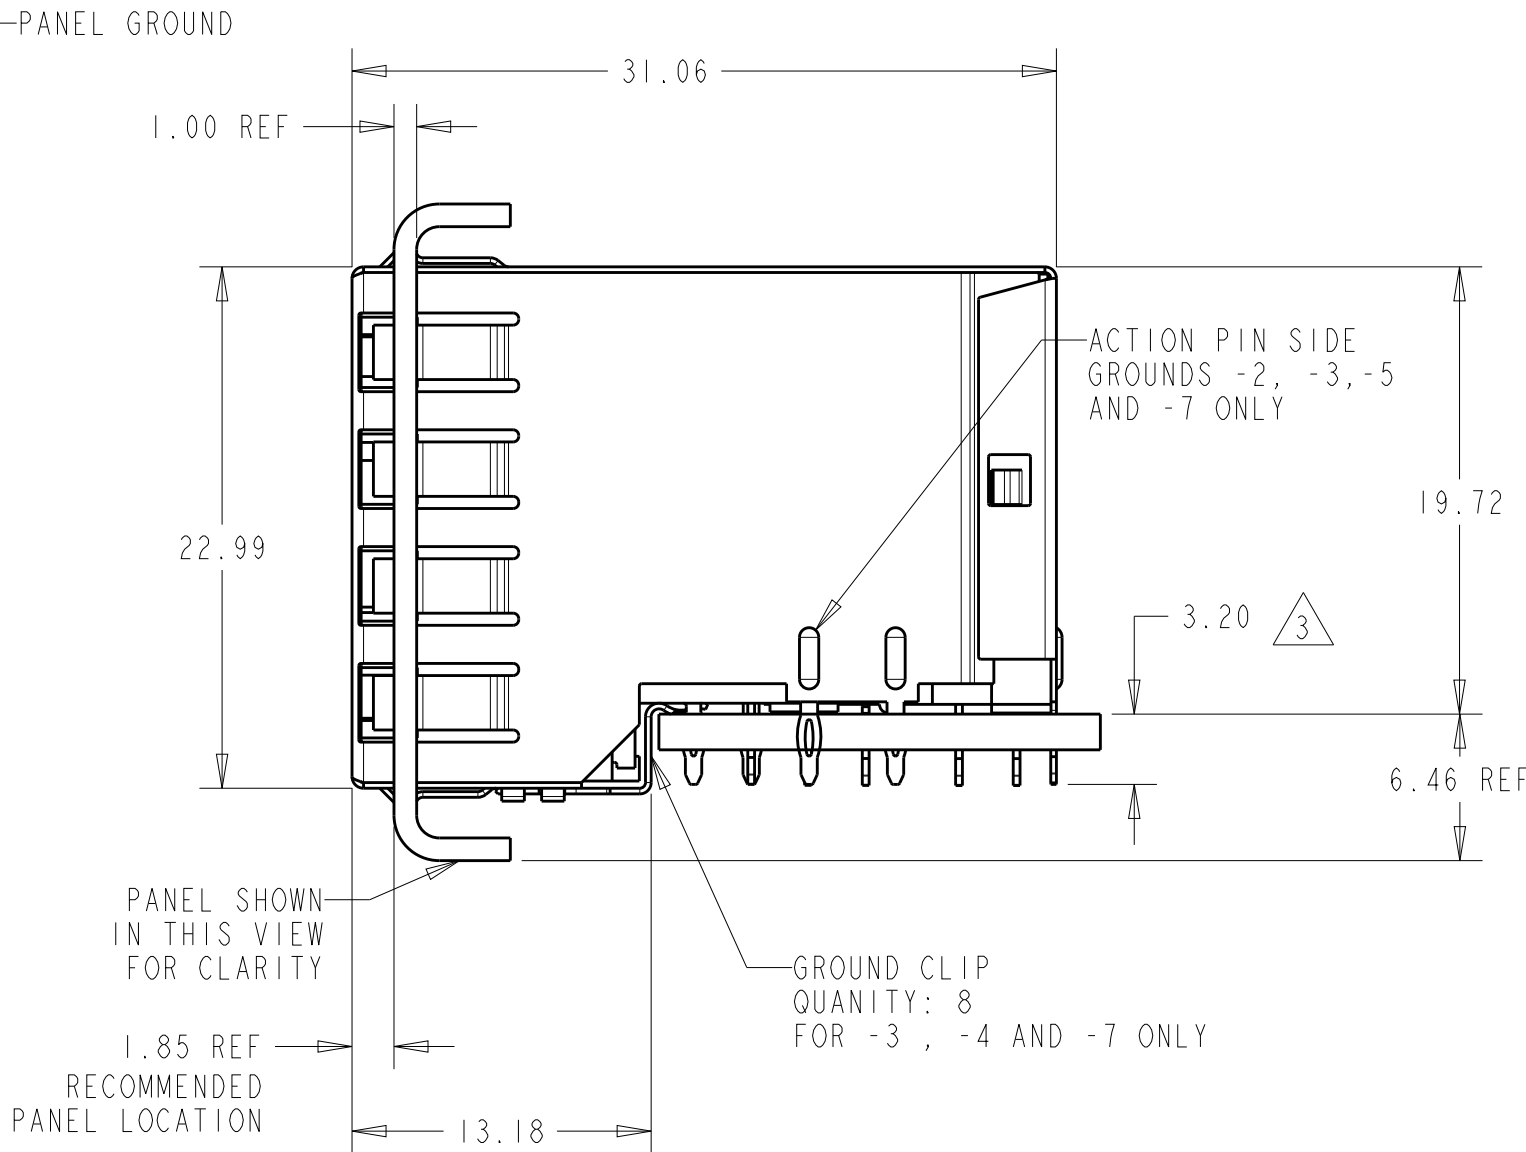


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D		REV PER ECR-09-024937	12NOV2009	DZ	SY
E		ECO-15-006810	22JAN2016	LL	SH

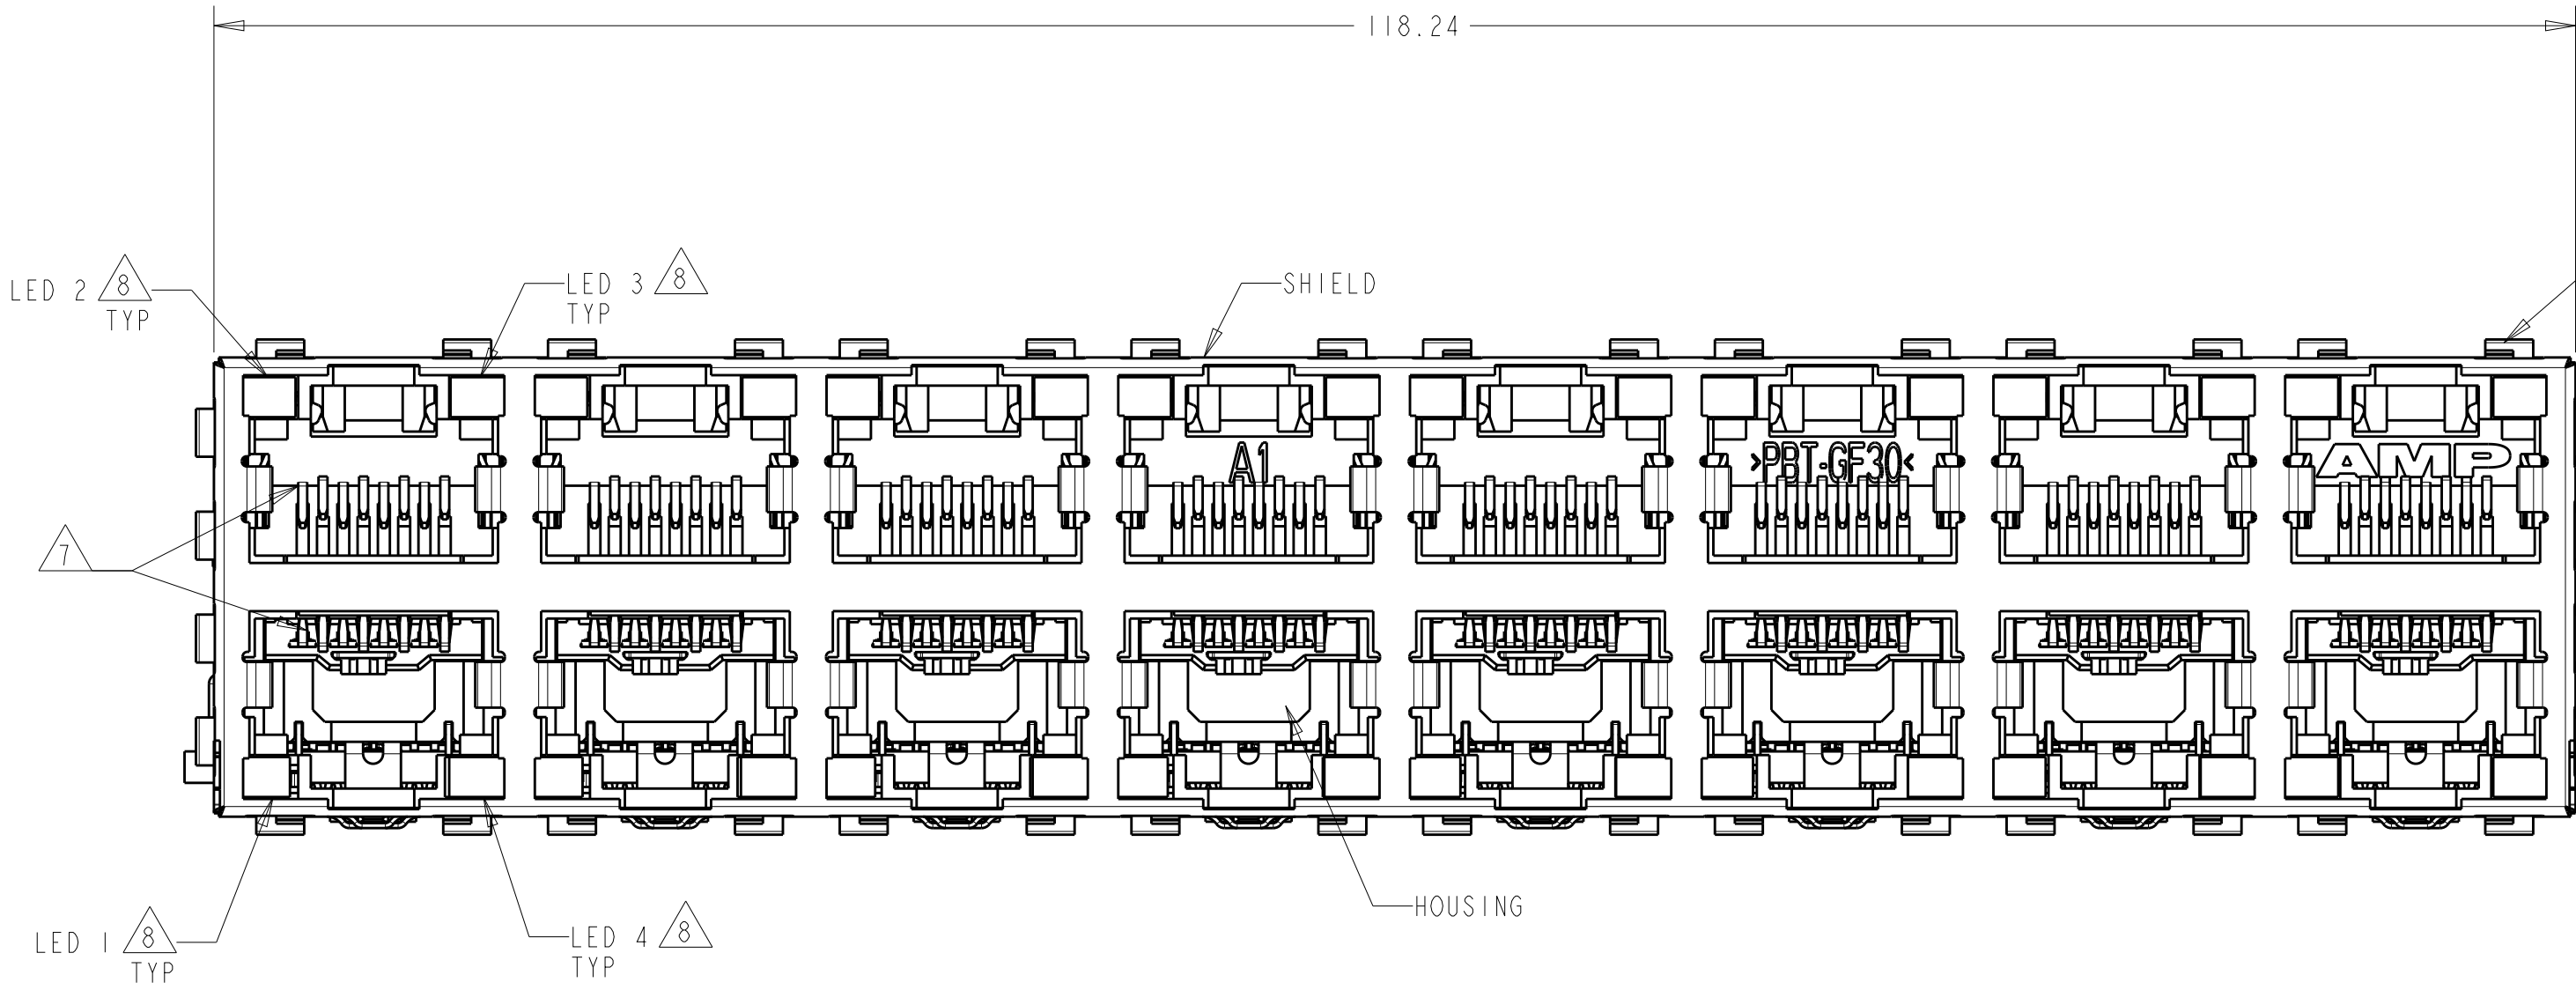

ATCA PANEL AND
PRINTED CIRCUIT BOARD
ASSEMBLY LAYOUT

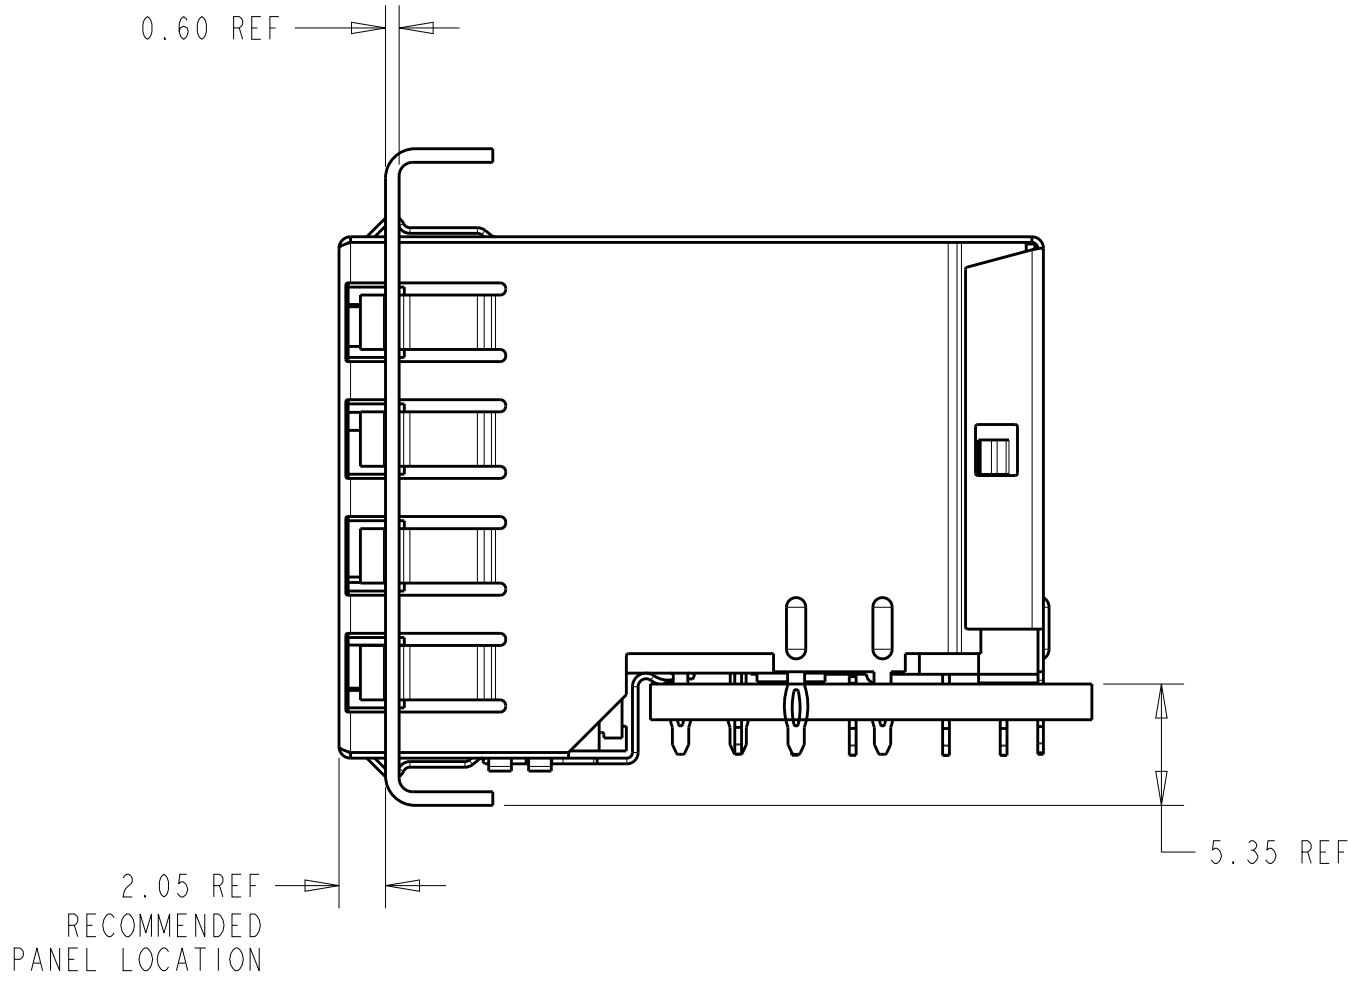

AMC PANEL AND
PRINTED CIRCUIT BOARD
ASSEMBLY LAYOUT

1. MATERIAL:
HOUSING:
PBT POLYESTER, BLACK, UL 94V-0
TERMINALS:
0.33 THICK PHOSPHOR BRONZE PLATED WITH 1.27µm MINIMUM THICK
HARD GOLD IN LOCALIZED AREA AND 2.0µm MINIMUM THICK
MATTE TIN IN COMPLIANT PIN TERMINAL AREA
OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE

SHIELD:
0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM TIN
OVER 1.27 µm MINIMUM NICKEL

GROUND CLIP: 0.25 THICK COPPER ALLOY PRE-PLATED WITH 2.03µm
MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL


LIGHT EMITTING DIODE (LED):
DIFFUSED EPOXY LENS, 12.95 CARBON STEEL WIREFRAME LEADS
PREPLATED WITH 8.89µm THICK Sn/Cu OVER 2.03µm THICK Ag
OVER 1.02µm THICK Cu OVER 3.56µm THICK Ni OVER
1.02µm THICK Cu UNDERPLATE

LED COMPLIANT PIN CONTACTS:
0.3 THICK BRASS PLATED WITH 2µm MINIMUM MATTE TIN OVER
1.27µm MINIMUM NICKEL UNDERPLATE.
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68
SUBPART F.

- 3 MAXIMUM PIN LENGTH 3.40 FROM TOP SURFACE OF PC BOARD
4 FINISHED PLATED THROUGH HOLE DIAMETER - ANNULAR RING
DIAMETER 1.3 TO 1.5
5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
6 DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN
7 CONTACTS ARE NOT INTENDED TO BE ALIGNED WITH EACH OTHER
8 SUGGESTED OPERATING CURRENT FOR LEDS IS 20mA


15.88	GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	YES	WITH GROUND CLIP	1888655-7
16.13	YELLOW	YELLOW	GREEN/YELLOW	GREEN/YELLOW	YES	WITHOUT GROUND CLIP	1888655-6
16.13	YELLOW	YELLOW	GREEN	GREEN	YES	WITHOUT GROUND CLIP	1888655-5
15.88	GREEN	GREEN	GREEN	GREEN	NO	WITH GROUND CLIP	1888655-4
15.88	GREEN	GREEN	GREEN	GREEN	YES	WITH GROUND CLIP	1888655-3 (SHOWN)
16.13	GREEN	GREEN	GREEN	GREEN	YES	WITHOUT GROUND CLIP	1888655-2
16.13	GREEN	GREEN	GREEN	GREEN	NO	WITHOUT GROUND CLIP	1888655-1
M DIM	LED #4 (LOWER-RIGHT)	LED #3 (UPPER-RIGHT)	LED #2 (UPPER-LEFT)	LED #1 (LOWER-LEFT)	SHIELD SIDE ACTION PIN	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.A.MAYER 31OCT2006	NAME STACKED MODULAR JACK ASSEMBLY, 2 X 8, 8 POSN, SHIELDED, PANEL GROUND, OFFSET, CAT 5	SIZE A1	CAGE CODE 00779	DRAWING NO 1888655	RESTRICTED TO -
DIMENSIONS:		CHK J.WESTMAN 31OCT2006					
mm		APVD S.FLICKINGER 31OCT2006					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1854					
0 PLC ± 1 PLC ±0.13 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±1° FINISH -		APPLICATION SPEC 114-2160					
MATERIAL SEE NOTE 1		WEIGHT -					
		CUSTOMER DRAWING					
		SCALE 3:1					
		SHEET 1					
		OF 2					
		REV E					

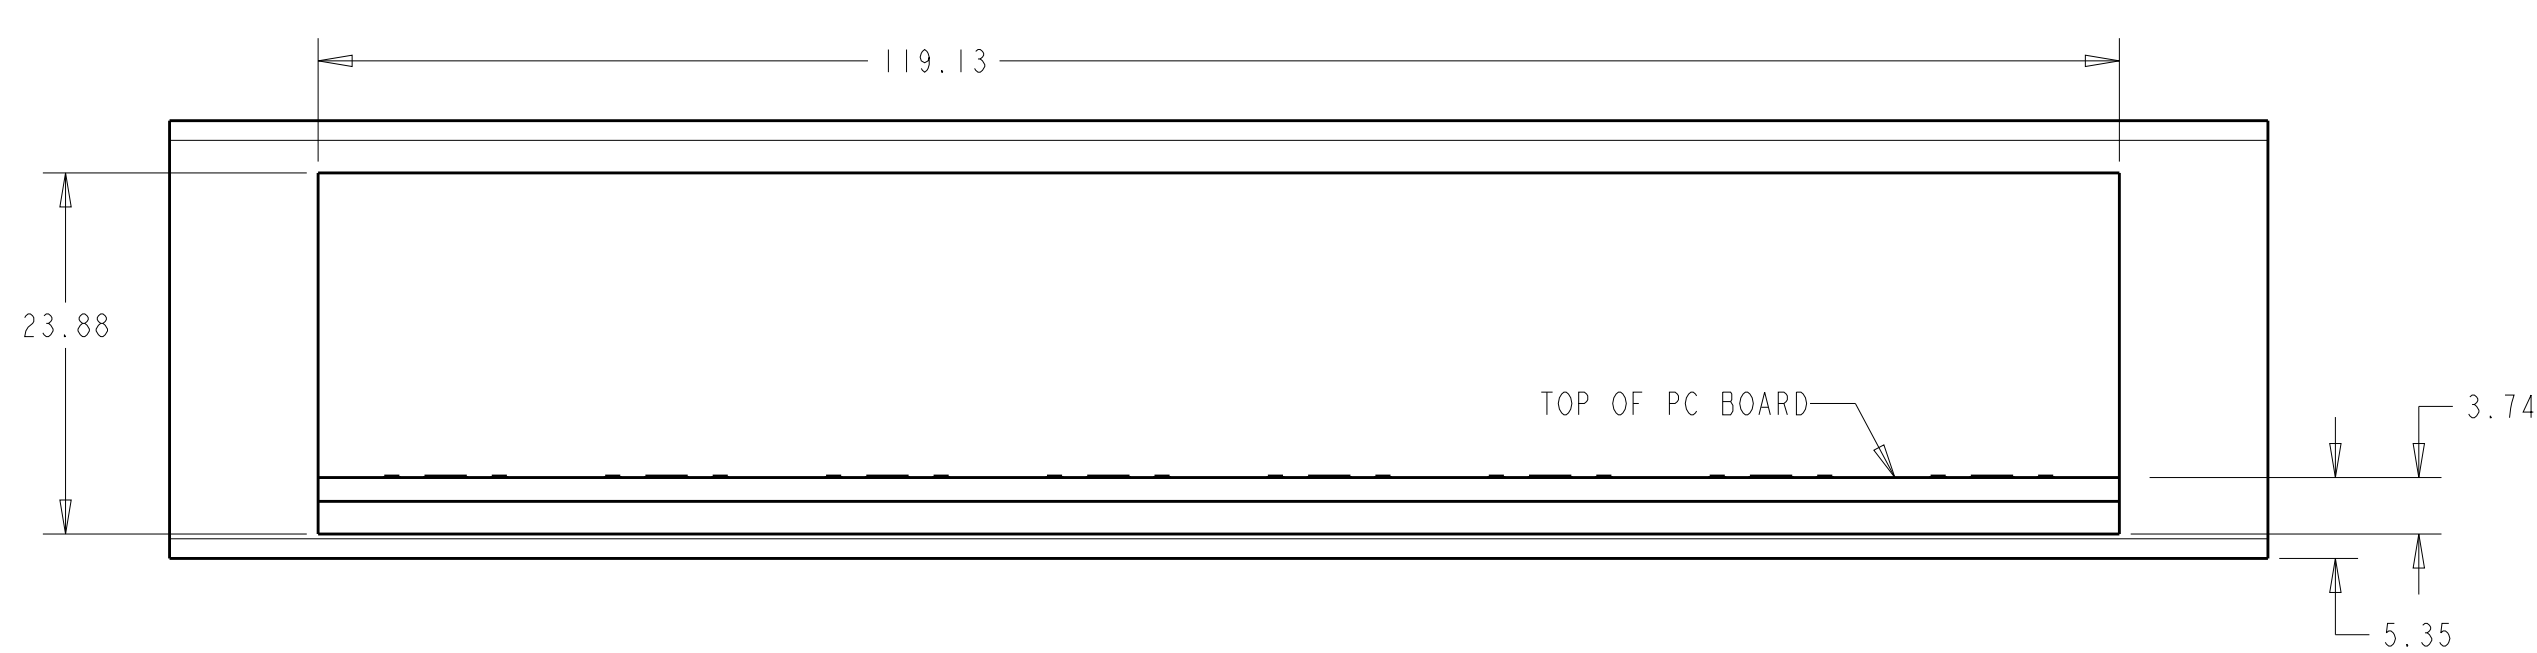


AMC PANEL AND PRINTED CIRCUIT BOARD LAYOUT

SCALE 2:1

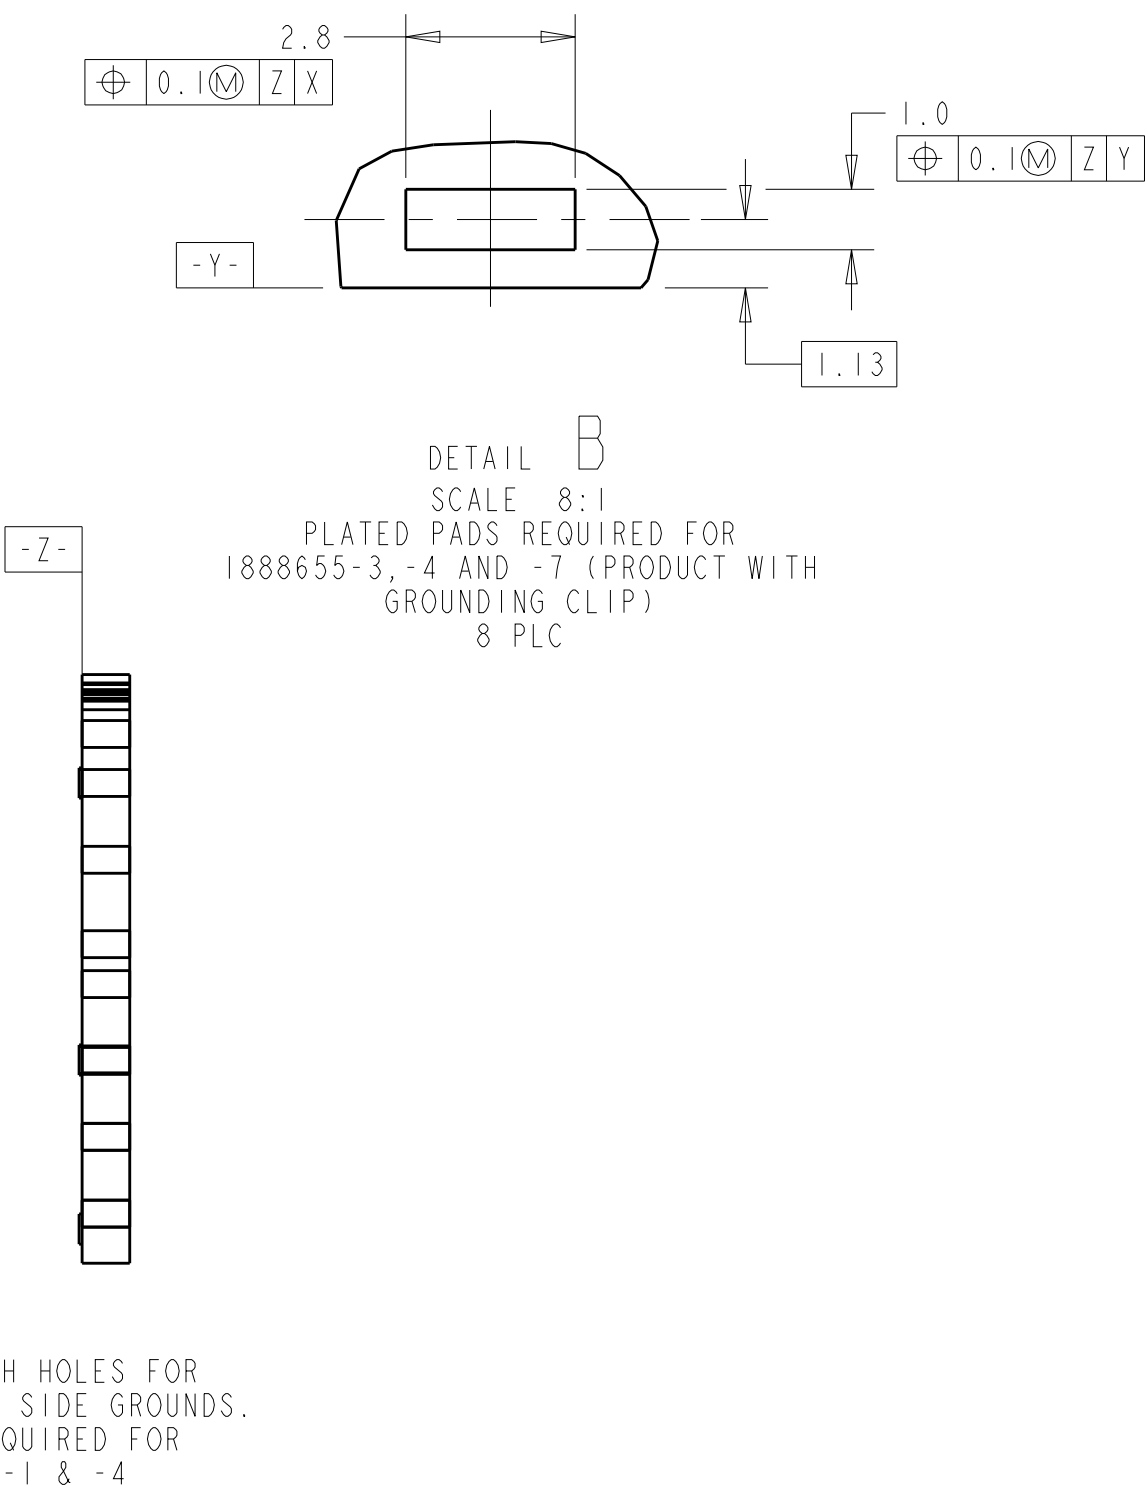

PC BOARD LAYOUT (COMPONENET SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 310CT2006 L.A. MAYER CWN 310CT2006 J. WESTMAN APVD 310CT2006 S. FLICKINGER		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ±: 1 P/LC ±: 2 P/LC ±0.13 3 P/LC ±: 4 P/LC ±: FINISH ±.11		NAME STACKED MODULAR JACK ASSEMBLY, 2 X 8, 8 POSN, SHIELDED, PANEL GROUND, OFFSET, CAT 5	
		PRODUCT SPEC 108-1854		SIZE A	
MATERIAL SEE NOTE 1		APPLICATION SPEC 114-2160		CASE CODE 00779	
CUSTOMER DRAWING		DRAWING NO. C-1888655		RESTRICTED TO -	
		SCALE 2:1		SHEET 2 OF 2	
				REV E	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru