


Type ESRD Solid Polymer Aluminum SMT Capacitors

Filtering power of 3 or more tantalum chips and 50 year life

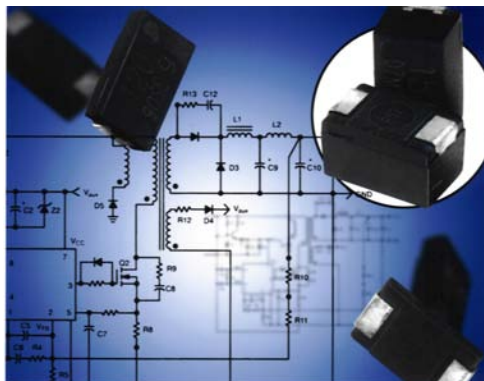

Solid Polymer Aluminum capacitors combine the high capacitance capability of an electrolytic component with the high frequency performance of film capacitors. When the need for low impedance at high frequency is critical for your design, one ESRD chip is capable of replacing several liquid electrolyte aluminum or tantalum capacitors connected in parallel. This is due to the ultra-low ESR which results in significantly lower impedance than either aluminum or tantalum capacitors at frequencies of 100 kHz and above. There is no longer a need to stack capacitors to lower the impedance at high frequency. The low ESR and high capacitance make them ideal for bypassing high frequency noise, and for switching frequency filtering in DC/DC conversion. ESRD capacitors are packaged in a molded resin case with the same footprint (7.3 x 4.3 mm) as the industry standard tantalum "D" and "E" case sizes. The solid electrolyte results in a capacitor with stable impedance and equivalent series resistance over the entire operating temperature range and they have more than twice the ripple current handling capability of tantalum capacitors. In addition, the solid electrolyte delivers a typical expected operating life of more than 50 years, and it is ignition free.

Applications

Motherboard By-Pass

Switching Supply Input/Output Filters

Power Supply Decoupling


High Frequency Noise Reduction

Laptop LCD Displays


Automotive Digital Equipment

Portable Electronic Equipment

Markings

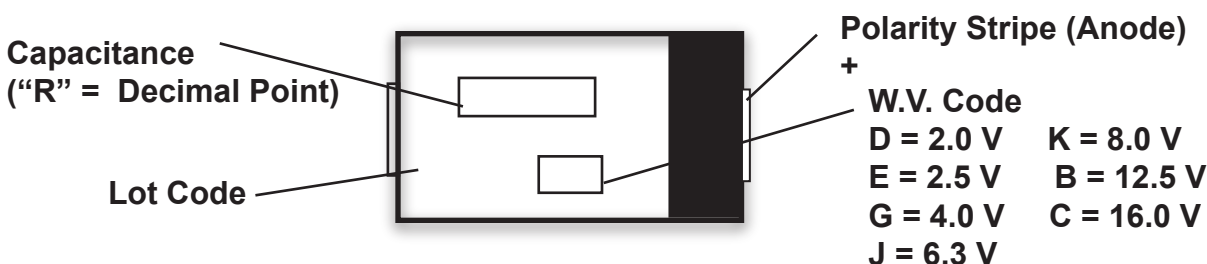


Ordering Information

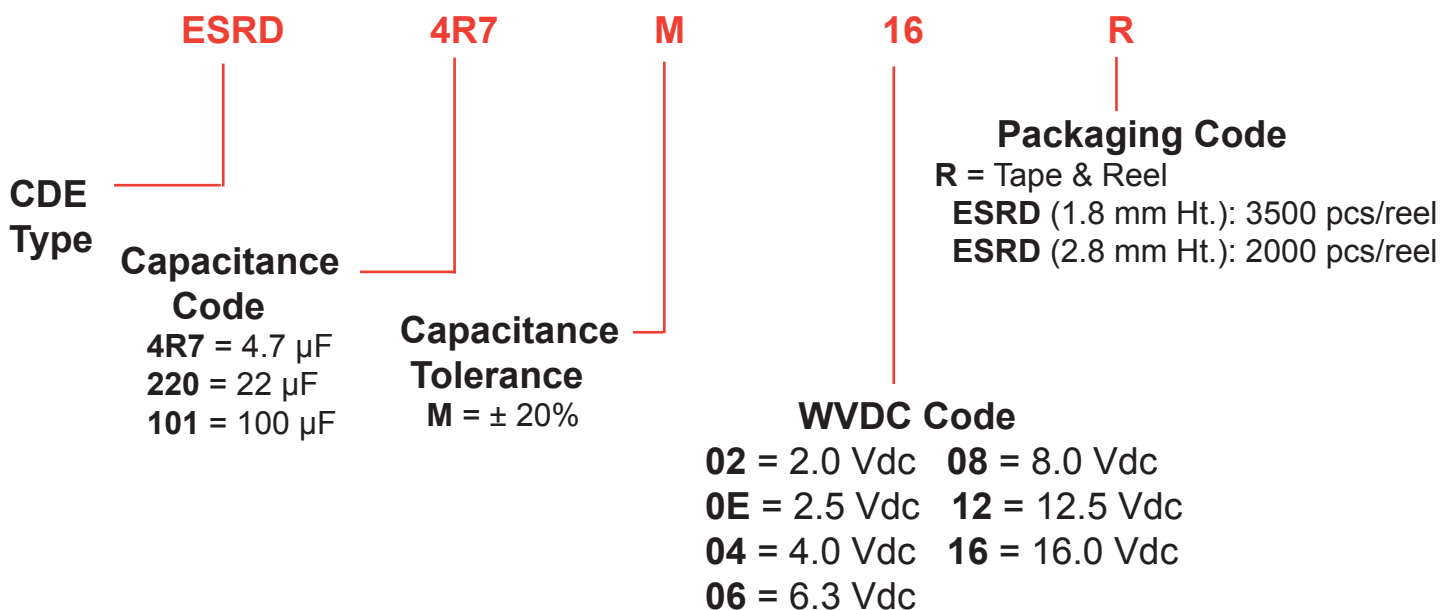

Type ESRD Solid Polymer Aluminum SMT Capacitors

High Voltage

Outline Drawing

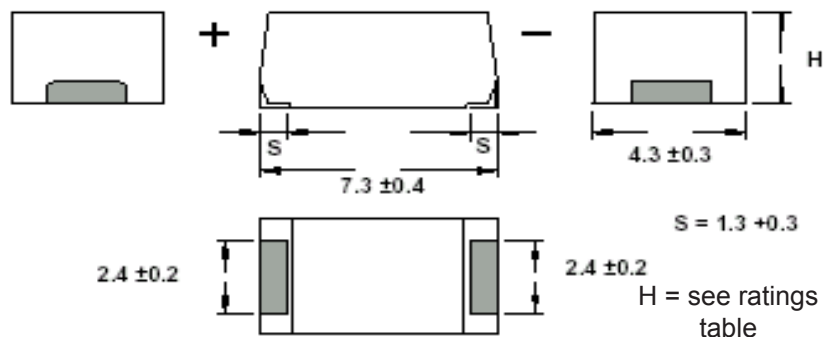

Ratings

Capacitance (μF)	Catalog Part Number (Tape & Reel)	Maximum E.S.R 100 kHz/20 °C (Ω)	Maximum ¹ Ripple Current 100 kHz/105 °C (Amps)	Case Height H (mm)
2.0 Vdc				
100	ESRD101M02R	0.018	2.5	1.8 $\pm$ 0.1
120	ESRD121M02XR	0.015	2.7	1.8 $\pm$ 0.1
180	ESRD181M02R	0.015	3.0	2.8 $\pm$ 0.2
220	ESRD221M02R	0.015	3.0	2.8 $\pm$ 0.2
270	ESRD271M02XR	0.012	3.3	2.8 $\pm$ 0.2
2.5 Vdc				
82	ESRD820M0ER	0.018	2.5	1.8 $\pm$ 0.1
100	ESRD101M0EXR	0.015	2.7	1.8 $\pm$ 0.1
150	ESRD151M0ER	0.015	3.0	2.8 $\pm$ 0.2
180	ESRD181M0ER	0.015	3.0	2.8 $\pm$ 0.2
220	ESRD221M0EXR	0.012	3.3	2.8 $\pm$ 0.2
4.0 Vdc				
56	ESRD560M04R	0.018	2.5	1.8 $\pm$ 0.1
82	ESRD820M04XR	0.015	2.7	1.8 $\pm$ 0.1
120	ESRD121M04R	0.015	3.0	2.8 $\pm$ 0.2
150	ESRD151M04XR	0.012	3.3	2.8 $\pm$ 0.2
6.3 Vdc				
10	ESRD100M06R	0.055	1.4	1.8 $\pm$ 0.1
22	ESRD220M06R	0.040	1.6	1.8 $\pm$ 0.1
33	ESRD330M06R	0.028	2.0	1.8 $\pm$ 0.1
47	ESRD470M06R	0.018	2.5	1.8 $\pm$ 0.1
68	ESRD680M06XR	0.015	2.7	1.8 $\pm$ 0.1
100	ESRD101M06R	0.015	3.0	2.8 $\pm$ 0.2
120	ESRD121M06XR	0.012	3.3	2.8 $\pm$ 0.2
8.0 Vdc				
8.2	ESRD8R2M08R	0.055	1.4	1.8 $\pm$ 0.1
15	ESRD150M08R	0.040	1.6	1.8 $\pm$ 0.1
22	ESRD220M08R	0.028	2.0	1.8 $\pm$ 0.1
33	ESRD330M08R	0.018	2.5	1.8 $\pm$ 0.1
68	ESRD680M08R	0.015	3.0	2.8 $\pm$ 0.2
12.5 Vdc				
4.7	ESRD4R7M12R	0.080	1.0	1.8 $\pm$ 0.1
10	ESRD100M12R	0.060	1.0	1.8 $\pm$ 0.1
15	ESRD150M12R	0.050	1.3	1.8 $\pm$ 0.1
22	ESRD220M12R	0.030	1.6	1.8 $\pm$ 0.1
16.0 Vdc				
2.2	ESRD2R2M16R	0.110	1.0	1.8 $\pm$ 0.1
4.7	ESRD4R7M16R	0.080	1.0	1.8 $\pm$ 0.1
6.8	ESRD6R8M16R	0.070	1.0	1.8 $\pm$ 0.1
8.2	ESRD8R2M16R	0.045	1.3	1.8 $\pm$ 0.1

Specifications

Operating Temperature Range:

–55 °C to +105 °C, at 100% rated voltage

Surge Voltage:

125% of the rated working Vdc

Capacitance Range:

2.2 µF to 270 µF

Capacitance Tolerance:

±20% at 120 Hz and +20 °C

DC Leakage Current (DCL):

After a two minute application of the rated working voltage at +20 °C:

2V — 4V: $I \leq 0.06CV$

6.3V — 16V: $I \leq 0.04CV$ or 3 µA
(whichever greater)

Dissipation Factor (DF):

The ratio of the capacitor's equivalent series resistance to its reactance at 120Hz and +20 °C
ESRD (1.8 mm ht.): DF is 0.06 Max.
ESRD (2.8 mm ht.): DF is 0.10 Max.

Resistance to Soldering Heat:

Heat the capacitors at 235 °C in an oven for 200 seconds. The capacitors will meet the following limits after stabilizing at 20 °C:

$\Delta C = \pm 10\%$ of the initial measured value

DF $\leq$ the initial specified value

DCL $\leq$ the initial specified value

Vibration:

No abnormal change shall occur to capacitors that have been soldered (and attached) to a board when subjected to a vibration of 1.5 mm amplitude that is varied from 10 Hz to 2000 Hz in 20 min. cycles. The test duration is 2 hours for each right angle direction (total 6 hours). Capacitance is monitored during the last cycle of the test for stability.

Moisture Resistance:

After 500 hours storage at +60 °C and 90% to 95% RH without load, the capacitor will meet the following limits:

$\Delta C = +70\%/-20\%$ of the initial measured value (2.0 Vdc, 2.5 Vdc),

+60%/-20% of the initial measured value (4.0 Vdc),

+50%/-20% of the initial measured value (6.3 Vdc),

+40%/-20% of the initial measured value (all other voltages)

DF $\leq$ two times the initial specified value

DCL $\leq$ the initial specified value

Life Test:

Apply rated DC working voltage at 105 °C for 1000 hours, and then stabilize them to +20 °C. Capacitors will meet the following limits:

$\Delta C = \pm 10\%$ of the initial measured value

DF $\leq$ the initial specified value

DCL $\leq$ the initial specified value

Shelf Life Test:

Shelf life is typically 5 to 10 years. Accelerated test: after 500 hours at 105 °C, capacitors will meet the following limits after stabilization at 20 °C:

$\Delta C = \pm 10\%$ of the initial measured value

DF $\leq$ the initial specified value

DCL $\leq$ the initial specified value

Shear Test:

No damage shall be visible after subjecting a mounted capacitor to a side force of 5 N for 10 seconds

(For more information on this product please see the Solid Polymer Aluminum Capacitors Application Guide)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru