

**FEATURES/BENEFITS**


- Latest generation MOSFET technology
- Ultra low on-state resistance
- Low output leakage current
- Built-in overvoltage protection
- Reverse protected triggered control input to avoid linear control risks
- No radiated or conducted disturbances
- IP20 touch-proof flaps



IP20 touch-proof flaps

| Part Number | Description                    |
|-------------|--------------------------------|
| SH10DC40    | 40A, 100 Vdc Solid-State Relay |
| SH10DC40-16 | 40A, 60 Vdc Solid-State Relay  |
| SH20DC20-16 | 20A, 200 Vdc Solid-State Relay |
| SH20DC40-16 | 40A, 200 Vdc Solid-State Relay |
| SH75DC60-16 | 60A, 75 Vdc Solid-State Relay  |

**Part Number Explanation**

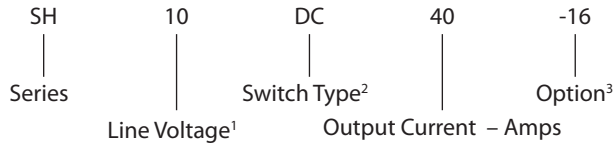

- NOTES**  
 1) Line Voltage (peak): 10 = 100 Vdc  
 2) Switch Type: DC = DC  
 3) Option: Internal Voltage Protection

**ELECTRICAL SPECIFICATIONS**  
(+25°C ambient temperature unless otherwise specified)

**INPUT (CONTROL) SPECIFICATIONS**

|                       | Min | Max | Units |
|-----------------------|-----|-----|-------|
| Control Range         | 3.5 | 32  | Vdc   |
| Must Turn-Off Voltage | 1   |     | Vdc   |
| Reverse Voltage       |     | 32  | Vdc   |

**CONTROL CHARACTERISTIC**


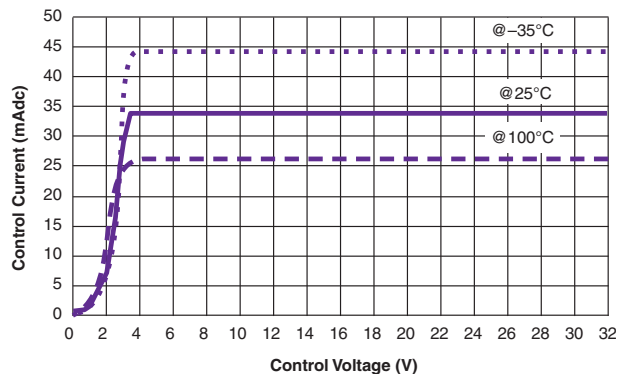


Figure 2

**MECHANICAL SPECIFICATION**

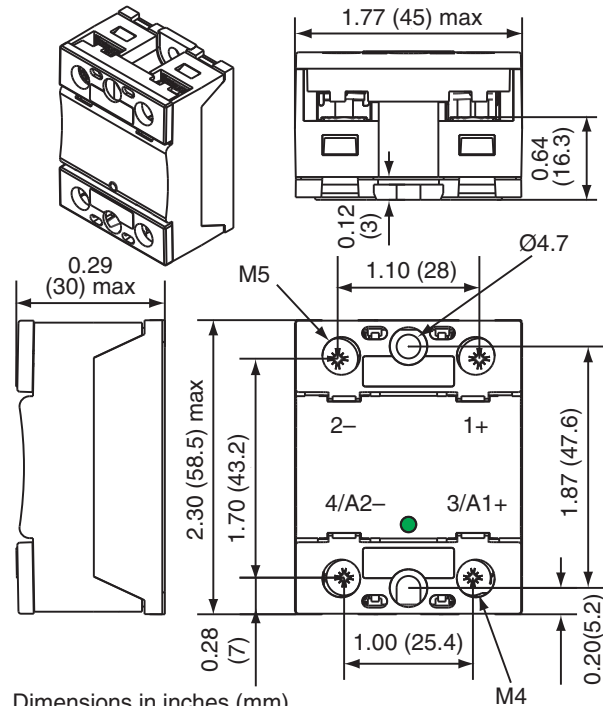

Dimensions in inches (mm)  
Weight: 2.82 oz. (80g)

Figure 1

**BLOCK DIAGRAM**

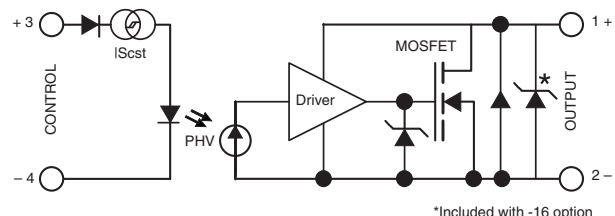


Figure 3

**ELECTRICAL SPECIFICATIONS**  
(+25°C ambient temperature unless otherwise specified)

**OUTPUT (LOAD) SPECIFICATIONS**

|  | Min    | Max                            | Units |
|--|--------|--------------------------------|-------|
| <b>Operating Range</b>                                   |        |                                |       |
| SH10DC40   | 5      | 100                            | Vdc   |
| SH10DC40-16  | 5      | 60                             | Vdc   |
| SH20DC20-16  | 5      | 110                            | Vdc   |
| SH20DC40-16  | 5      | 110                            | Vdc   |
| SH75DC60-16  | 5      | 40                             | Vdc   |
| <b>Peak Voltage</b>                                      |        |                                |       |
| SH10DC40   |        | 100                            | Vdc   |
| SH10DC40-16  |        | 100                            | Vdc   |
| SH20DC20-16  |        | 200                            | Vdc   |
| SH20DC40-16  |        | 200                            | Vdc   |
| SH75DC60-16  |        | 75                             | Vdc   |
| <b>Overvoltage Protection (Built-In)</b>                 |        |                                |       |
| SH10DC40-16  |        | 56V (TVS) <sup>1</sup>         |       |
| SH20DCXX-16  |        | 75V (MOV Size 20) <sup>2</sup> |       |
| SH75DC60-16  |        | 39V (TVS) <sup>1</sup>         |       |
| 1) Transient Voltage Suppressor; 2) Metal Oxide Varistor |        |                                |       |
| <b>Reverse Voltage Drop</b>                              |        |                                |       |
| SH10DC40-16  |        | 1.3                            | V     |
| SH20DCXX-16  |        | 1.5                            | V     |
| SH75DC60-16  |        | 0.92                           | V     |
| <b>Nominal Current (Resistive)</b>                       |        |                                |       |
| SH10   |        | 40                             | A     |
| SH20DC20-16  |        | 20                             | A     |
| SH20DC40-16  |        | 40                             | A     |
| SH75DC60-16  |        | 60                             | A     |
| <b>Non-Repetitive Peak Overload Current</b>              |        |                                |       |
| SH10   |        | 320                            | A     |
| SH20DC20-16  |        | 160                            | A     |
| SH20DC40-16  |        | 380                            | A     |
| SH75DC60-16  |        | 750                            | A     |
| <b>Leakage Current</b>                                   |        |                                |       |
|  |        | 3                              | mA    |
| <b>On-State Resistance (@ 25°C)</b>                      |        |                                |       |
|  | @25 °C | @125 °C                        |       |
| SH10   | 15     | 30                             | mΩ    |
| SH20DC20-16  | 45     | 90                             | mΩ    |
| SH20DC40-16  | 23     | 46                             | mΩ    |
| SH75DC60-16  | 4.5    | 8.2                            | mΩ    |

**ELECTRICAL SPECIFICATIONS (continued)**  
(+25°C ambient temperature unless otherwise specified)

**OUTPUT (LOAD) SPECIFICATIONS**

|   | Min | Max   | Units |
|---|-----|-------|-------|
| <b>Output Capacitance (Typical)</b>                               |     |       |       |
| SH10  | 0.7 |       | nF    |
| SH20DC20-16   | 0.6 |       | nF    |
| SH20DC40-16   | 1.1 |       | nF    |
| SH75DC60-16   | 1.5 |       | nF    |
| <b>Junction-Case Thermal Resistance</b>                           |     |       |       |
| SH10  |     | 0.9   | °C/W  |
| SH20DC20-16   |     | 1.2   | °C/W  |
| SH20DC40-16   |     | 0.7   | °C/W  |
| SH75DC60-16   |     | 1.2   | °C/W  |
| <b>Built-In Heat Sink Thermal Resistance (Vertically Mounted)</b> |     |       |       |
|   |     | 10    | °C/W  |
| <b>Heat Sink Thermal Time Constant</b>                            |     |       |       |
|   |     | 10    | min   |
| <b>Control Inputs/Power Outputs</b>                               |     |       |       |
| <b>Insulation Voltage</b>   |     |       |       |
|   |     | 2.5   | kV    |
| <b>Turn-On Time</b>   |     |       |       |
|   |     | 20    | μs    |
| <b>Turn-On Delay</b>  |     |       |       |
|   |     | 20    | μs    |
| <b>Turn-Off Time</b>  |     |       |       |
|   |     | 20    | μs    |
| <b>Turn-Off Delay</b>   |     |       |       |
|   |     | 20    | μs    |
| <b>On-Off Frequency</b>   |     |       |       |
|   |     | 1000* | Hz    |

\*For high frequency, take two times the load current to calculate the heat sink.

**TIME DIAGRAMS**


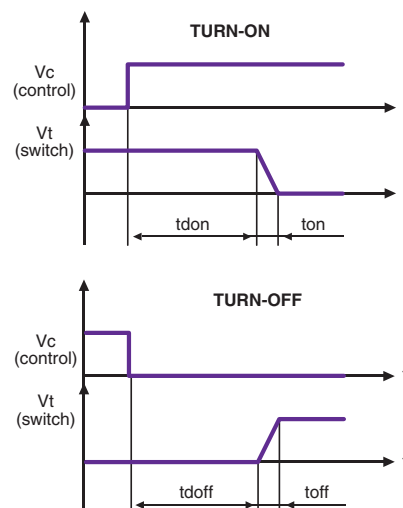


Figure 4

BUILT IN OVERVOLTAGE PROTECTION CHARACTERISTICS

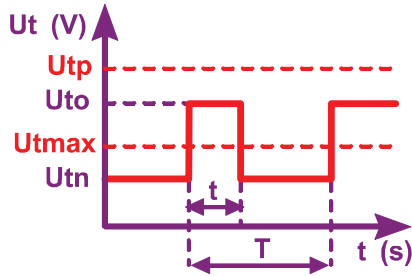

$$U_{to} < U_{tp}$$

$$t_{max} = \frac{0.75}{(U_{to} - U_{tmax}) \times I_e}$$

$$P_{(protection)} = I W_{max}$$

$$\Rightarrow \frac{(U_{to} - U_{tmax}) \times I_e \times t}{T} \leq 1$$

- $I_{elk}$  : Leakage current of relay
- $I_e$  : User load nominal current
- $U_{tp}$  : Relay max. non repetitive peak voltage
- $U_{tmax}$  : Max. nominal voltage of relay

- $U_{to}$  : Possible overvoltage above  $U_{tmax}$
- $U_{tn}$  : User power supply voltage
- $t$  : Overvoltage duration
- $T$  : Time between 2 overvoltages

SH10DC40-16

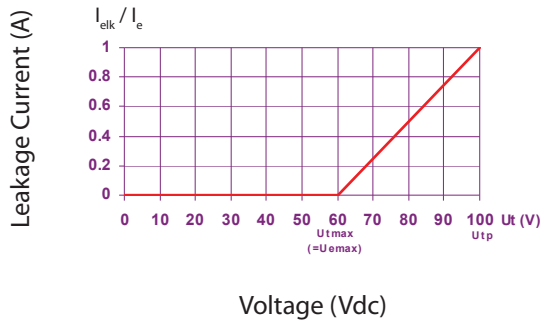


Figure 5a

SH20DC20-16 & SH20DC40-16

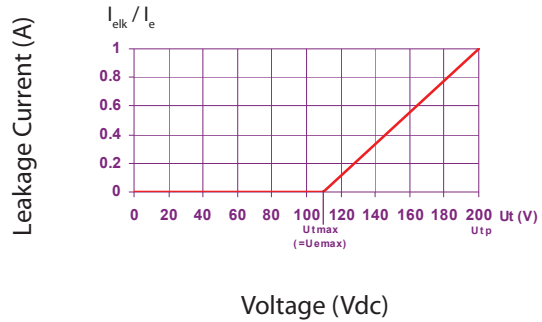


Figure 5b

SH75DC-16

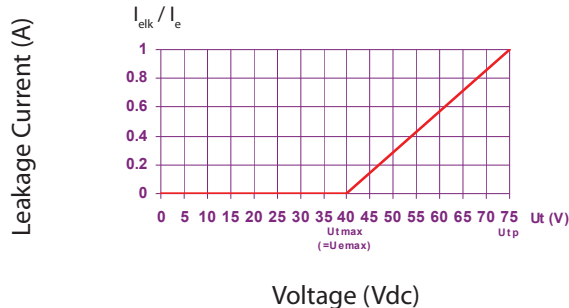


Figure 5c

**HIGH SIDE WIRING DIAGRAM**  
(Load Connected to “—”)

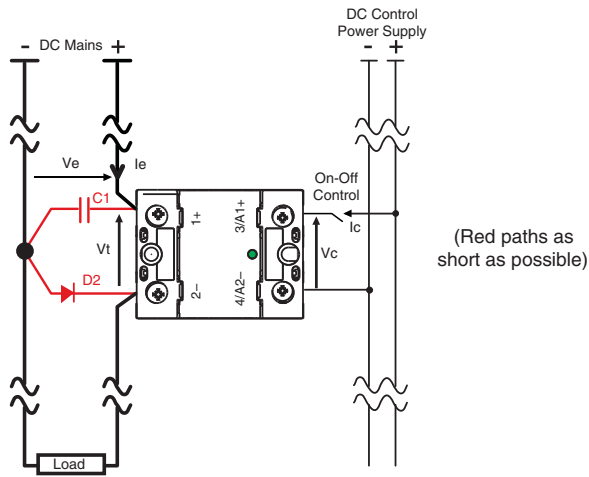


Figure 6a

**LOW SIDE WIRING DIAGRAM**  
(Load Connected to “+”)

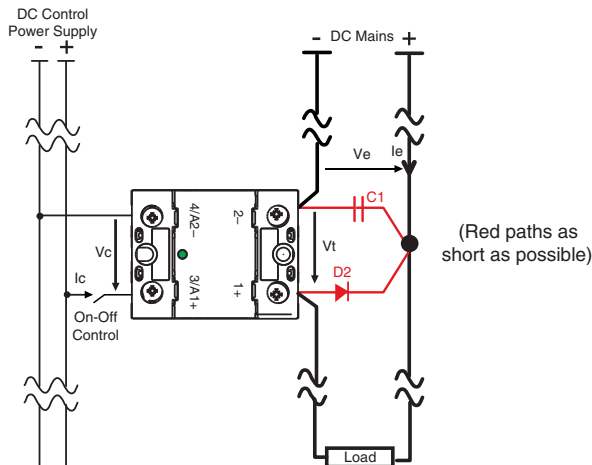


Figure 6b

**GENERAL SPECIFICATIONS**  
(+25°C ambient temperature unless otherwise specified)

**ENVIRONMENTAL SPECIFICATIONS**

|                        | Min | Max  | Units |
|------------------------|-----|------|-------|
| Operating Temperature  | -25 | +90  | °C    |
| Storage Temperature    | -40 | +100 | °C    |
| Input-Output Isolation |     | 2.5  | kV    |
| Insulation Resistance  | 1   |      | GΩ    |
| Insulation Capacitance | 8   |      | pF    |
| Junction Temperature   |     |      |       |
| Steady State           |     | 125  | °C    |
| Transient              |     | 175  | °C    |
| Case Temperature       |     | 100  | °C    |

**CONNECTIONS**

|  | Power     | Control |
|--|-----------|---------|
| Screwdriver  | POZIDRIV2 |         |
| Tightening Torque                                      | 2 N.m     | 1.2 N.m |
| Insulated crimp terminals<br>(Round Tabs, Eyelet Type) | M5        | M4      |

**MISCELLANEOUS**

|             |                    |
|-------------|--------------------|
| Display     | Green LED (ON)     |
| Housing     | UL94V0             |
| Mounting    | 2 screws (M4x12mm) |
| Noise Level | No audible noise   |

**GENERAL**

|                                 |            |
|---------------------------------|------------|
| Standards                       | IEC60947-1 |
| Protection Level                | IP20       |
| Protection Against Direct Touch | Yes        |
| CE Marking                      | Yes        |

**E.M.C. EMISSION**

Radiated & Conducted Disturbances Pending

**ACCESSORIES**

Faston: Contact Factory



**NOTES**

1. For additional/custom options, contact factory.

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH10DC40 & SH10DC40-16

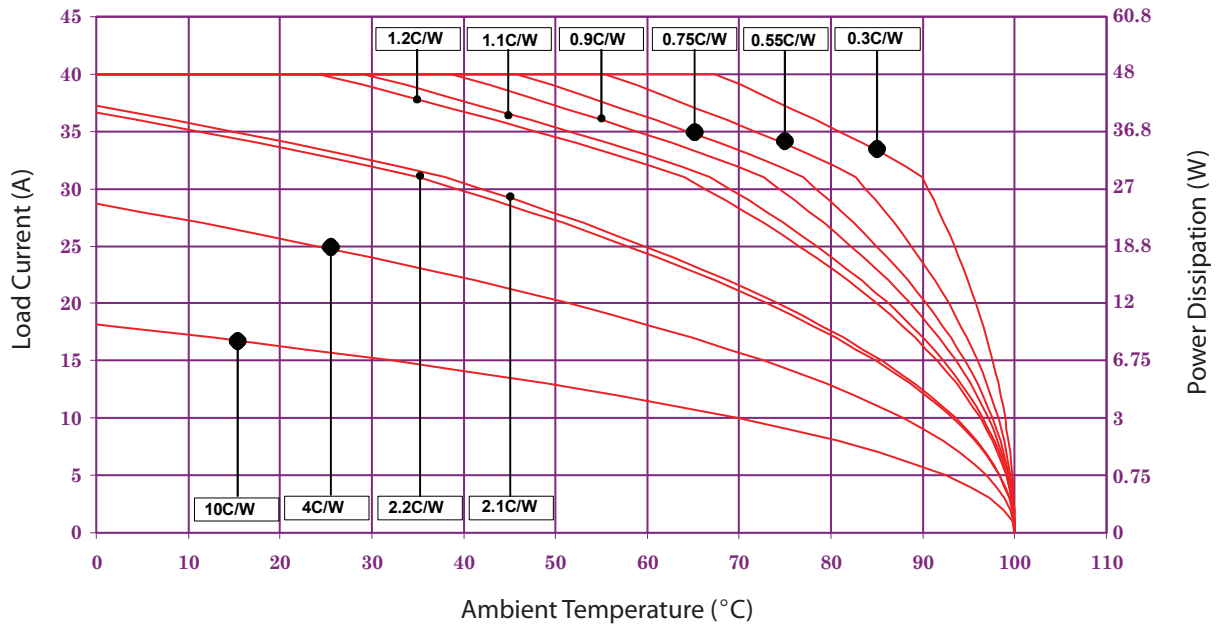


Figure 7a

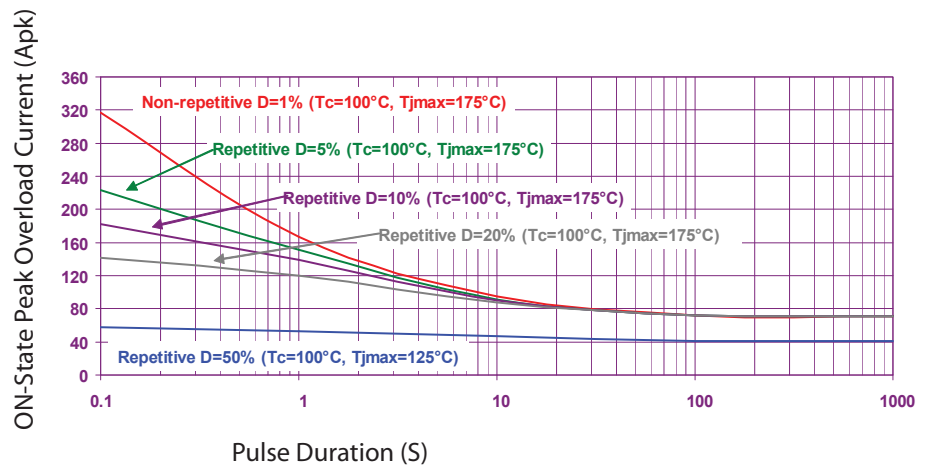



Figure 7b

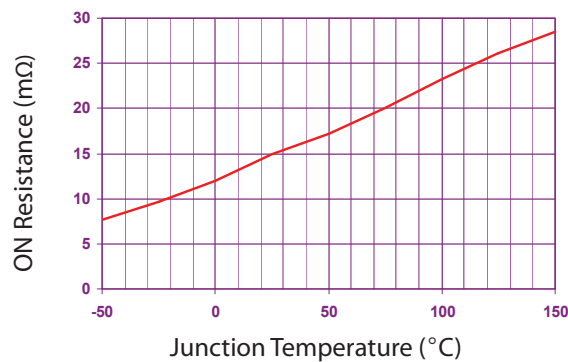


Figure 7c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH20DC20-16

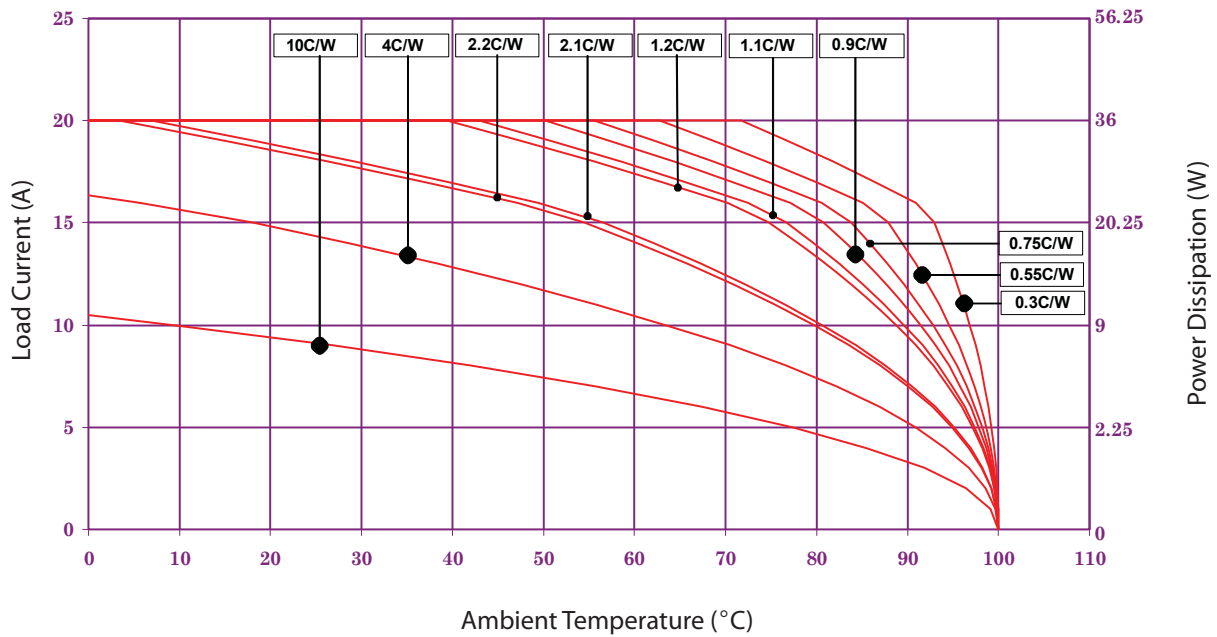


Figure 8a

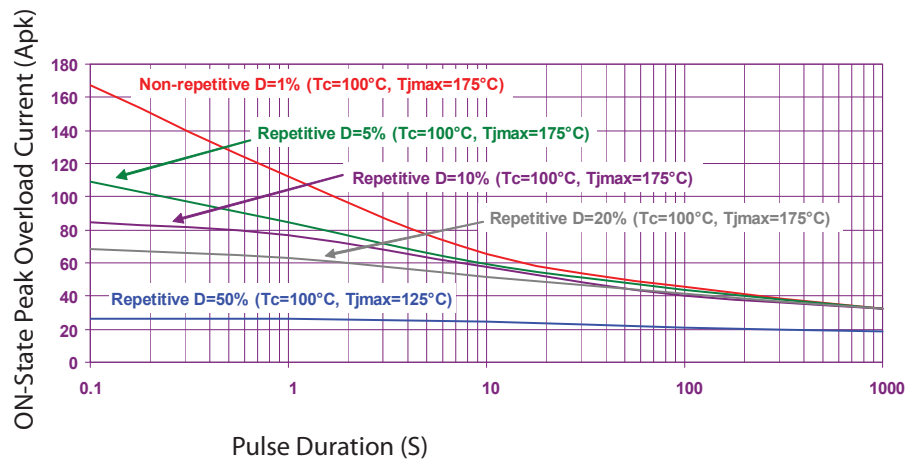



Figure 8b

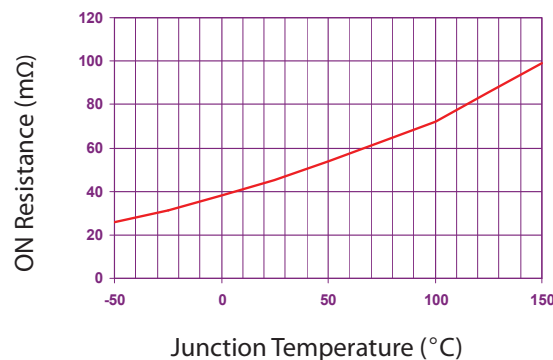


Figure 8c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH20DC40-16

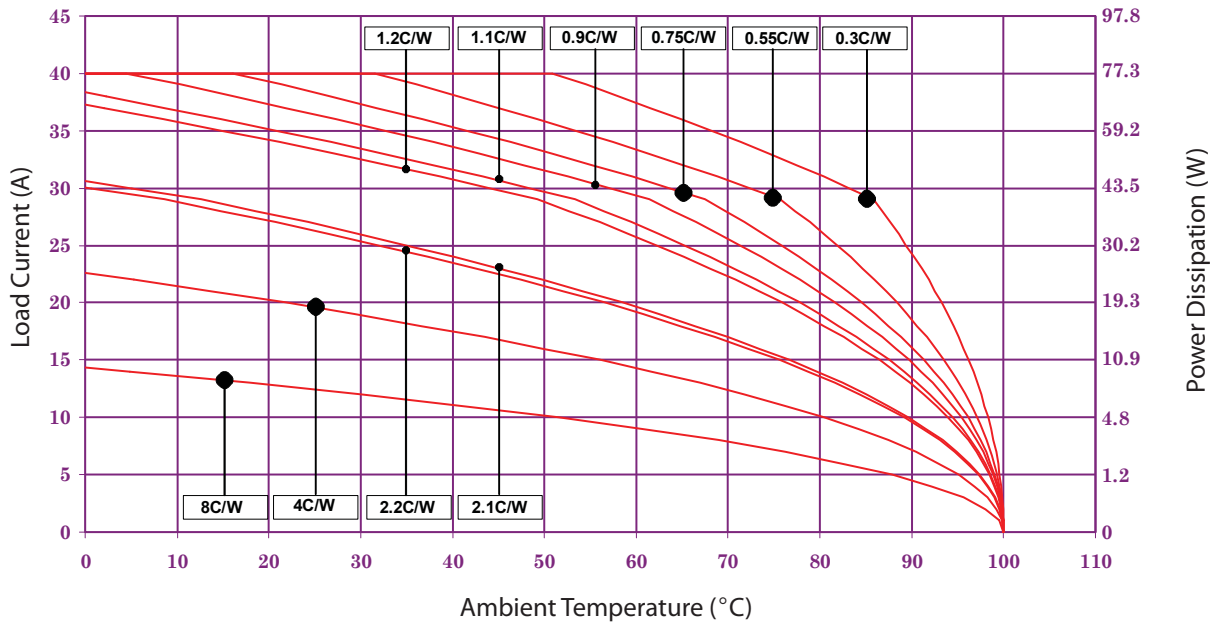


Figure 9a

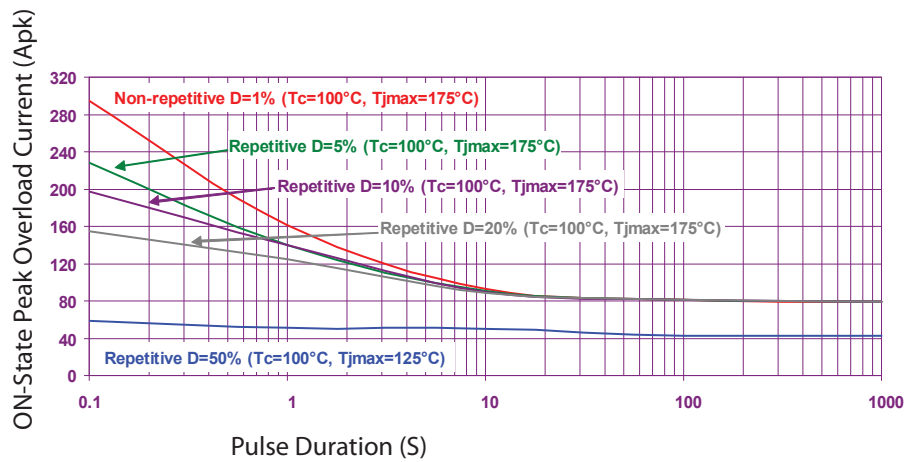



Figure 9b

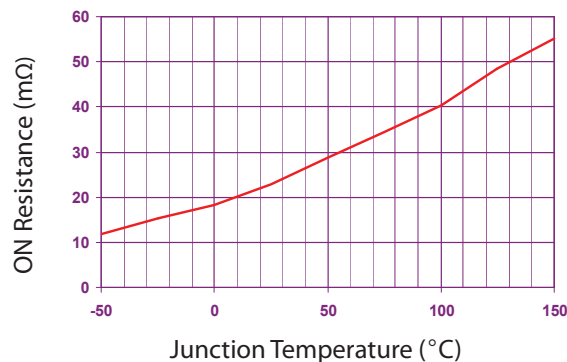


Figure 9c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH75DC60-16

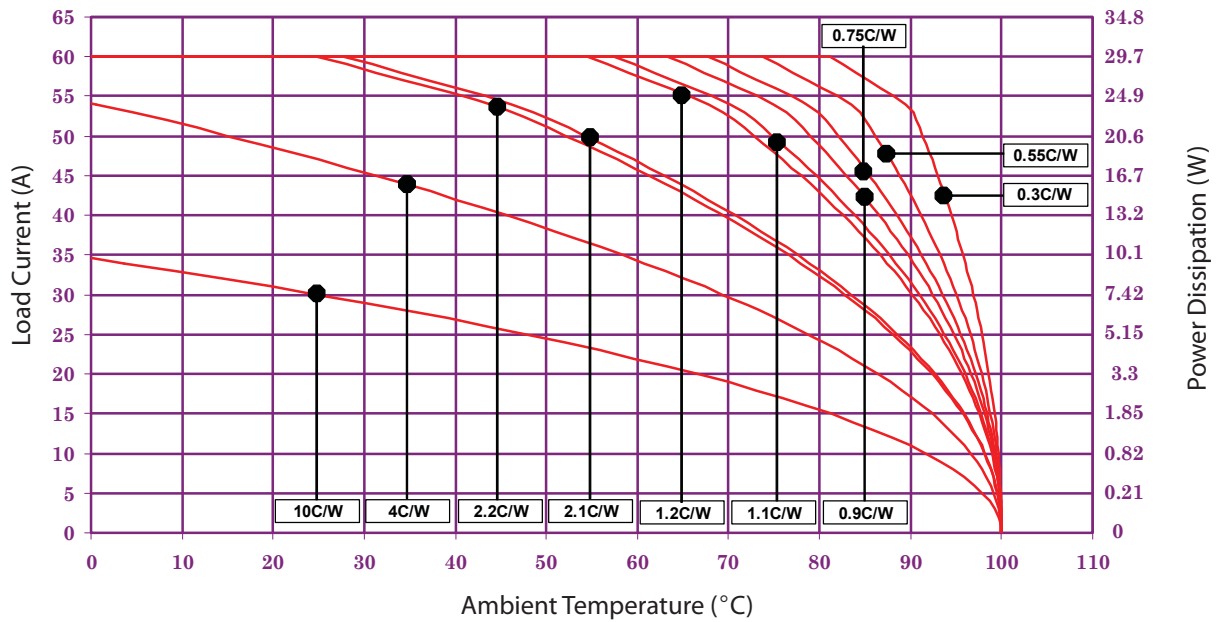


Figure 10a

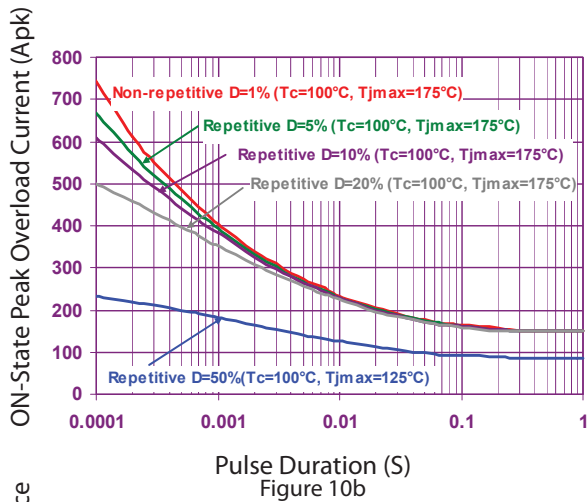


Figure 10b

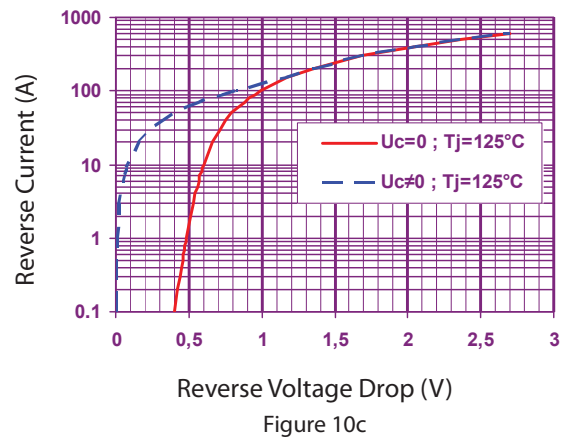


Figure 10c

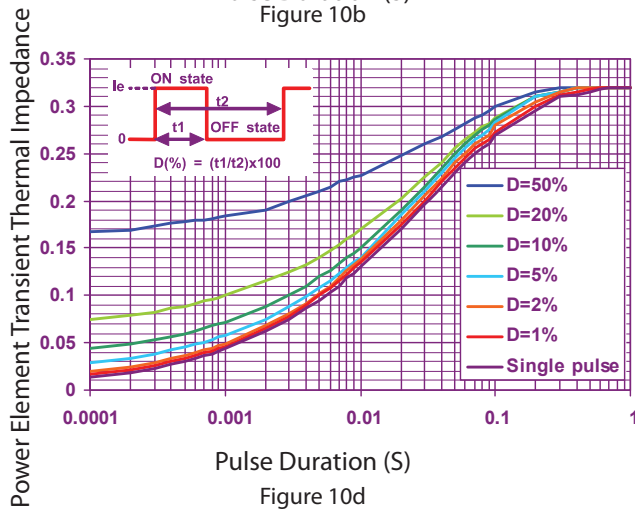


Figure 10d

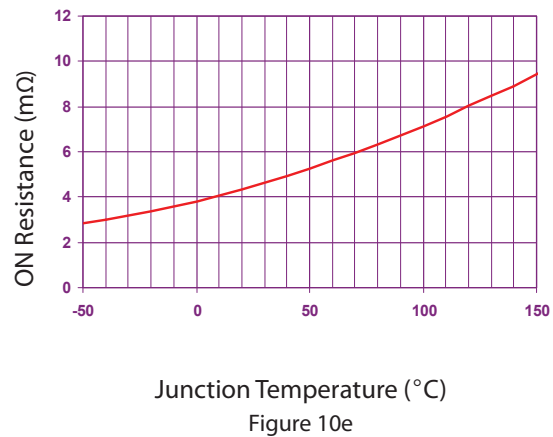


Figure 10e



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)