microLED®

Dialight

Surface Mount LED Bi-Color

597-77x1-1xx

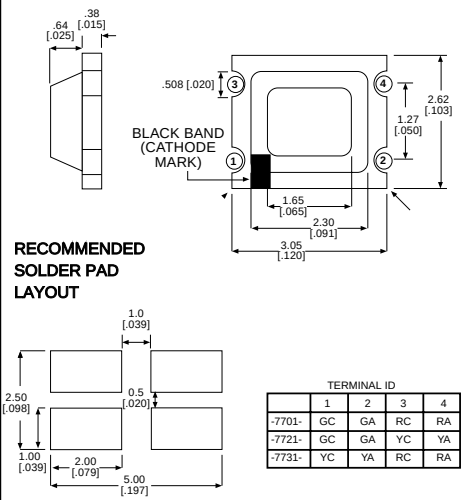

TERMINAL ID

	1	2	3	4
-7701-	GC	GA	RC	RA
-7721-	GC	GA	YC	YA
-7731-	YC	YA	RC	RA

Dimensions in mm [inches]

TAPING SPECIFICATIONS
(rear side of tape)

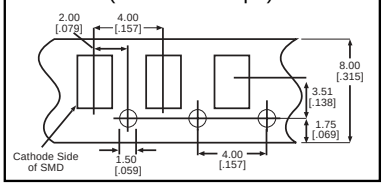

PART NO.*	COLOR
597-7701-1xx	Red/Green
597-7721-1xx	Yellow/Green
597-7731-1xx	Red/Yellow

Features

- Compatible with automatic placement equipment
- Compatible with infrared reflow processes
- Packaged on 8mm tape, 7" reels (meets EIA-481-1 standard)
- Helps to eliminate mixed technology PC board processing
- Compatible with Dialight's Optopipe™ Series light pipes

***ORDERING INFORMATION**

597-77x1-1xx

packaging option

02	20 pieces on tape
07	7" reel, 3000 pcs/reel

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Red/Green -7701	Yellow/Green -7721	Red/Yellow -7731
Power Dissipation (mW)	65/65	70/65	65/70
Forward Current (mA)	25	25	25
Derating (mA/°C)	.33	.33	33
Peak Current (mA) *Pulse width = 1 µs*	100	100	100
Operating Temperature (°C)	-25/+75	-25/+75	-25/+75
Storage Temperature (°C)	-30/+85	-30/+85	-30/+85
Soldering Profile	240°C to 260°C for 10 seconds		

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T_A=25°C)		Red/Green -7701	Yellow/Green -7721	Red/Yellow -7731
Luminous Intensity (mcd)	Min.	1.6/6	3/6	1.6/3
I_F=20mA	Typical	4/12	8/12	4/8
Peak Wavelength (nm) λ Peak	Typical	630/565	585/565	630/585
Viewing Angle (2Θ ½)	Typical	170°	170°	170°
Forward Voltage (V)	Typical	2/2	2.1/2	2/2.1
I_F=20mA	Max.	2.6/2.6	2.8/2.6	2.6/2.8
Reverse Voltage (V), I_R=10µA	Min.	4	4	4

Θ ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity

Dialight Corporation • 1501 Route 34 South • Farmingdale, NJ 07727 • TEL: (732) 919-3119 • FAX: (732) 751-5778 •www.dialight.com

ООО «ЛайфЭлектроникс» “LifeElectronics” LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru