

SMALL SIGNAL DIODE

VOLTAGE RANGE 75 Volts CURRENT 150mAmpere

FEATURES



- * Compact surface mount with same foot print as mini-melf
- * High Breakdown Voltage
- * Fast Switching Speed
- * 400mW Power Dissipation
- * General Purpose Switching Applications
- * High Conductance

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-O rate flame retardant
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.01 gram



SOD-123



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	1N4148W	UNITS
Non-Repetitive Peak Reverse Voltage	VRM	100	Volts
Maximum Repetitive Peak Reverse Voltage	VPRM	75	Volts
Maximum Working Peak reverse Voltage	VRWM		
Maximum DC Blocking Voltage	VR		
Maximum RMS Voltage	VRMS	53	Volts
Maximum Forward Continuous Current	IFM	300	mAmps
Maximum Average Forward Rectified Current	IO	150	mAmps
Non-Repetitive Peak Forward Surge Current	IFSM	@t=1.0uS	2.0
		@t=1.0S	1.0
Typical Reverse Recovery Time	Trr	4	nS
Typical Junction Capacitance	CT	2	pF
Maximum Power Dissipation	PD	400	mW
Typical Thermal Resistance	RθJA	315	°C/W
Operating and Storage Temperature Range	TJ, TSTG	-65 to + 150	°C

ELECTRICAL CHARACTERISTICS (@TA=25 °C unless otherwise noted)

CHARACTERISTICS	SYMBOL	1N4148W	UNITS
Maximum Instantaneous Forward Voltage	VF	@IF=1.0mA	0.715
		@IF=10mA	0.855
		@IF=50mA	1.0
		@IF=150mA	25
Maximum Instantaneous Reverse Current	IR	@VR=20V	25
		@VR=75V	1.0

RATING AND CHARACTERISTICS CURVES (1N4148W)

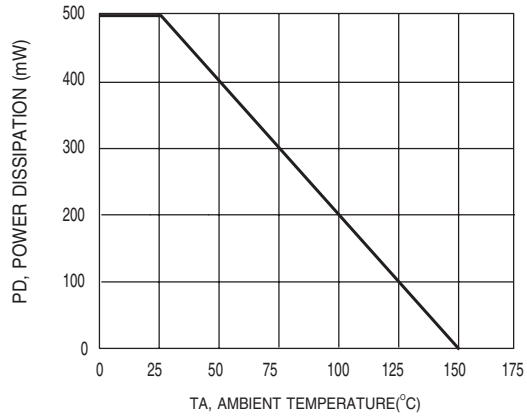


FIG.1 FORWARD DERATING CURVE

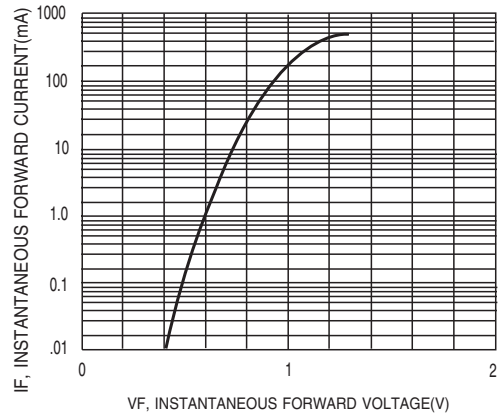


FIG.2 FORWARD CHARACTERISTICS

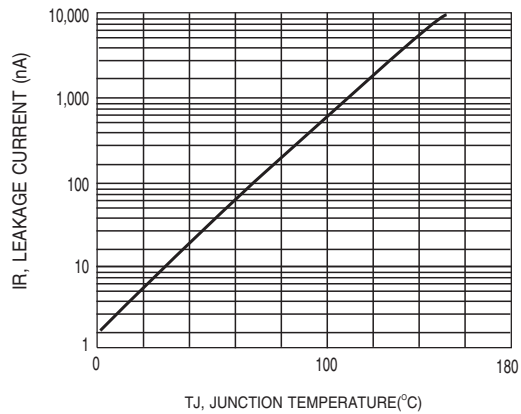


FIG.3 LEAKAGE CURRENT VS. JUNCTION TEMPERATURE

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru