

FEATURES

Low Insertion Loss and On Resistance: 2.2 Ω Typical
On Resistance Flatness 0.5 Ω Typical
Automotive Temperature Range
 -40°C to +125°C
-3 dB Bandwidth = 240 MHz
Single 3 V/5 V Supply Operation
Rail-to-Rail Operation
Very Low Distortion: 0.5%
Low Quiescent Supply Current (1 nA Typical)
Fast Switching Times
 t_{ON} 7 ns
 t_{OFF} 4 ns
TTL/CMOS Compatible

APPLICATIONS

USB 1.1 Signal Switching Circuits
Cell Phones
PDA's
Battery-Powered Systems
Communications Systems
Data Acquisition Systems
Token Ring 4 Mbps/16 Mbps
Audio and Video Switching
Relay Replacement

GENERAL DESCRIPTION

The ADG774 is a monolithic CMOS device comprising four 2:1 multiplexer/demultiplexers with high impedance outputs. The CMOS process provides low power dissipation yet gives high switching speed and low on resistance. The on resistance variation is typically less than 0.5 Ω with an input signal ranging from 0 V to 5 V.


The bandwidth of the ADG774 is greater than 200 MHz; this, coupled with low distortion (typically 0.5%), makes the part suitable for switching USB 1.1 data signals and fast Ethernet signals.

The on resistance profile is very flat over the full analog input range ensuring excellent linearity and low distortion when switching audio signals. Fast switching speed, coupled with high signal bandwidth, also makes the parts suitable for video signal switching. CMOS construction ensures ultralow power dissipation, making the parts ideally suited for portable and battery-powered instruments.

REV. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

FUNCTIONAL BLOCK DIAGRAM

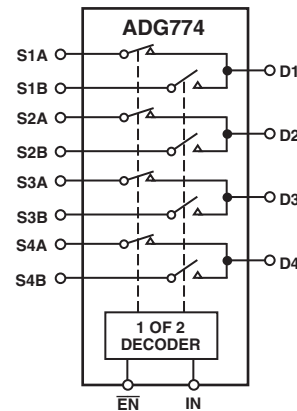

The ADG774 operates from a single 3.3 V/5 V supply and is TTL logic compatible. The control logic for each switch is shown in the Truth Table.

These switches conduct equally well in both directions when ON, and have an input signal range that extends to the supplies. In the OFF condition, signal levels up to the supplies are blocked. The ADG774 switches exhibit break-before-make switching action.

PRODUCT HIGHLIGHTS

1. Wide -3 dB Bandwidth, 240 MHz.
2. Ultralow Power Dissipation.
3. Extended Signal Range.
The ADG774 is fabricated on a CMOS process giving an increased signal range that fully extends to the supply rails.
4. Low Leakage Over Temperature.
5. Break-Before-Make Switching.
This prevents channel shorting when the switches are configured as a multiplexer.
6. Crosstalk Typically -70 dB @ 30 MHz.
7. Off Isolation Typically -60 dB @ 10 MHz.

ADG774—SPECIFICATIONS

SINGLE SUPPLY ($V_{DD} = 5\text{ V} \pm 10\%$, $GND = 0\text{ V}$. All specifications T_{MIN} to T_{MAX} unless otherwise noted.)

Parameter	B Version ¹			Unit	Test Conditions/Comments
	+25°C	–40°C to +85°C	–40°C to +125°C		
ANALOG SWITCH					
Analog Signal Range			0 V to V _{DD}	V	V _D = 0 V to V _{DD} , I _S = –10 mA
On Resistance (R _{ON})	2.2			Ω typ	
		5	7	Ω max	
On Resistance Match between Channels (ΔR _{ON})	0.15			Ω typ	V _D = 0 V to V _{DD} , I _S = –10 mA
		0.5	0.5	Ω max	
On Resistance Flatness (R _{FLAT(ON)})	0.5			Ω typ	V _D = 0 V to V _{DD} , I _S = –1 mA
		1	1	Ω max	
LEAKAGE CURRENTS					
Source OFF Leakage I _S (OFF)	±0.01			nA typ	V _D = 4.5 V, V _S = 1 V; V _D = 1 V, V _S = 4.5 V; Test Circuit 2
	±0.5	±1	±1.5	nA max	
Drain OFF Leakage I _D (OFF)	±0.01			nA typ	V _D = 4.5 V, V _S = 1 V; V _D = 1 V, V _S = 4.5 V; Test Circuit 2
	±0.5	±1	±1.5	nA max	
Channel ON Leakage I _D , I _S (ON)	±0.01			nA typ	V _D = V _S = 4.5 V; V _D = V _S = 1 V; Test Circuit 3
	±0.5	±1	±1.5	nA max	
DIGITAL INPUTS					
Input High Voltage, V _{INH}			2.0	V min	V _{IN} = V _{INL} or V _{INH}
Input Low Voltage, V _{INL}			0.8	V max	
Input Current					
I _{INL} or I _{INH}	0.001			μA typ	
			±0.5	μA max	
DYNAMIC CHARACTERISTICS ²					
t _{ON}	7			ns typ	R _L = 100 Ω, C _L = 35 pF, V _S = +3 V; Test Circuit 4
	15		20	ns max	
t _{OFF}	4			ns typ	R _L = 100 Ω, C _L = 35 pF, V _S = +3 V; Test Circuit 4
	8		9	ns max	
Break-Before-Make Time Delay, t _D	5			ns typ	R _L = 100 Ω, C _L = 35 pF, V _{S1} = V _{S2} = +5 V; Test Circuit 5
	1			ns min	
Off Isolation	–65			dB typ	R _L = 100 Ω, f = 10 MHz; Test Circuit 7
Channel-to-Channel Crosstalk	–75			dB typ	
Bandwidth –3 dB	240			MHz typ	R _L = 100 Ω; Test Circuit 6
Distortion	0.5			% typ	
Charge Injection	10			pC typ	C _L = 1 nF; Test Circuit 9
C _S (OFF)	10			pF typ	
C _D (OFF)	20			pF typ	f = 1 kHz
C _D , C _S (ON)	30			pF typ	
POWER REQUIREMENTS					
I _{DD}		1	1	μA max	V _{DD} = +5.5 V Digital Inputs = 0 V or V _{DD}
	0.001			μA typ	
I _{IN}		1	1	μA typ	V _{IN} = +5 V V _S /V _D = 0 V
I _O		100		mA max	

NOTES

¹Temperature range: B Version, –40°C to +125°C.

²Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

SINGLE SUPPLY (V_{DD} = 3 V ± 10%, GND = 0 V. All specifications T_{MIN} to T_{MAX} unless otherwise noted.)

Parameter	B Version ¹			Unit	Test Conditions/Comments
	+25°C	+85°C	+125°C		
ANALOG SWITCH					
Analog Signal Range	4		0 V to V _{DD}	V	V _D = 0 V to V _{DD} , I _S = –10 mA
On Resistance (R _{ON})				Ω typ	
		8	9	Ω max	
On Resistance Match between Channels (ΔR _{ON})	0.15			Ω typ	V _D = 0 V to V _{DD} , I _S = –10 mA
		0.5	0.5	Ω max	
On Resistance Flatness (R _{FLAT(ON)})	2			Ω typ	
		4	4	Ω max	V _D = 0 V to V _{DD} , I _S = –10 mA
LEAKAGE CURRENTS					
Source OFF Leakage I _S (OFF)	±0.01			nA typ	V _D = 3 V, V _S = 1 V; V _D = 1 V, V _S = 3 V; Test Circuit 2
	±0.5	±1	±1.5	nA max	
Drain OFF Leakage I _D (OFF)	±0.01			nA typ	V _D = 3 V, V _S = 1 V; V _D = 1 V, V _S = 3 V; Test Circuit 2
	±0.5	±1	±1.5	nA max	
Channel ON Leakage I _D , I _S (ON)	±0.01			nA typ	V _D = V _S = 3 V; V _D = V _S = 1 V; Test Circuit 3
	±0.5	±1	±1.5	nA max	
DIGITAL INPUTS					
Input High Voltage, V _{INH}			2.0	V min	V _{IN} = V _{INL} or V _{INH}
Input Low Voltage, V _{INL}			0.8	V max	
Input Current	0.001				
I _{INL} or I _{INH}				μA typ	
			±0.5	μA max	
DYNAMIC CHARACTERISTICS ²					
t _{ON}		8		ns typ	R _L = 100 Ω, C _L = 35 pF, V _S = +1.5 V; Test Circuit 4
		16	21	ns max	
t _{OFF}		5		ns typ	R _L = 100 Ω, C _L = 35 pF, V _S = +1.5 V; Test Circuit 4
		10	11	ns max	
Break-Before-Make Time Delay, t _D		5		ns typ	R _L = 100 Ω, C _L = 35 pF, V _{S1} = V _{S2} = 3 V; Test Circuit 5
		1		ns min	
Off Isolation		–65		dB typ	R _L = 50 Ω, f = 10 MHz; Test Circuit 7
Channel-to-Channel Crosstalk		–75		dB typ	
Bandwidth –3 dB		240		MHz typ	R _L = 50 Ω; Test Circuit 6
Distortion		2		% typ	R _L = 50 Ω
Charge Injection		3		pC typ	C _L = 1 nF; Test Circuit 9
C _S (OFF)		10		pF typ	f = 1 kHz
C _D (OFF)		20		pF typ	f = 1 kHz
C _D , C _S (ON)		30		pF typ	f = 1 MHz
POWER REQUIREMENTS					
I _{DD}	0.001	1	1	μA max	V _{DD} = +3.3 V Digital Inputs = 0 V or V _{DD}
				μA typ	
I _{IN}		1	1	μA typ	
I _O		100		mA max	V _{IN} = +3 V V _S /V _D = 0 V

NOTES

¹Temperature range: B Version, –40°C to +125°C.²Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

Table I. Truth Table

$\overline{\text{EN}}$	IN	D1	D2	D3	D4	Function
1	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	DISABLE
0	0	S1A	S2A	S3A	S4A	IN = 0
0	1	S1B	S2B	S3B	S4B	IN = 1

ADG774

ABSOLUTE MAXIMUM RATINGS¹

(T_A = 25°C unless otherwise noted.)

V _{DD} to GND	−0.3 V to +6 V
Analog, Digital Inputs ²	−0.3 V to V _{DD} + 0.3 V or 30 mA, Whichever Occurs First
Continuous Current, S or D	100 mA
Peak Current, S or D	300 mA (Pulsed at 1 ms, 10% Duty Cycle max)
Operating Temperature Range	
Industrial (B Version)	−40°C to +125°C
Storage Temperature Range	−65°C to +150°C
Junction Temperature	150°C
SOIC Package, Power Dissipation	600 mW
θ _{JA} Thermal Impedance	100°C/W

QSOP Package, Power Dissipation	566 mW
θ _{JA} Thermal Impedance	149.97°C/W
Lead Temperature, Soldering (10 sec)	300°C
I R Reflow, Peak Temperature (<20 sec)	235°C
ESD	2 kV

NOTES

¹Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Only one absolute maximum rating may be applied at any one time.

²Overvoltages at IN, S, or D will be clamped by internal diodes. Current should be limited to the maximum ratings given.

ORDERING GUIDE

Model	Temperature Range	Package Descriptions	Package Options
ADG774BR	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BR-REEL	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BR-REEL7	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BRZ*	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BRZ-REEL*	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BRZ-REEL7*	−40°C to +125°C	Standard Small Outline Package (SOIC)	R-16
ADG774BRQ	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16
ADG774BRQ-REEL	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16
ADG774BRQ-REEL7	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16
ADG774BRQZ*	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16
ADG774BRQZ-REEL*	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16
ADG774BRQZ-REEL7*	−40°C to +125°C	Shrink Small Outline Package (QSOP)	RQ-16


*Z = Pb-free part.

CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADG774 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




PIN CONFIGURATION (SOIC/QSOP)




TERMINOLOGY

V_{DD}	Most Positive Power Supply Potential.
GND	Ground (0 V) Reference.
S	Source Terminal. May be an input or output.
D	Drain Terminal. May be an input or output.
IN	Logic Control Input.
$\overline{EN}$	Logic Control Input.
R_{ON}	Ohmic Resistance between D and S.
ΔR_{ON}	On Resistance Match between any Two Channels, i.e., $R_{ON\ max} - R_{ON\ min}$.
$R_{FLAT(ON)}$	Flatness is defined as the difference between the maximum and minimum value of on resistance as measured over the specified analog signal range.
I_S (OFF)	Source Leakage Current with the Switch OFF.
I_D (OFF)	Drain Leakage Current with the Switch OFF.
I_D, I_S (ON)	Channel Leakage Current with the Switch ON.
V_D (V_S)	Analog Voltage on Terminals D, S.
C_S (OFF)	OFF Switch Source Capacitance.
C_D (OFF)	OFF Switch Drain Capacitance.
C_D, C_S (ON)	ON Switch Capacitance.
t_{ON}	Delay between Applying the Digital Control Input and the Output Switching on. See Test Circuit 4.
t_{OFF}	Delay between Applying the Digital Control Input and the Output Switching Off.
t_D	OFF Time or ON Time Measured between the 90% Points of Both Switches, When Switching from One Address State to Another. See Test Circuit 5.
Crosstalk	A Measure of Unwanted Signal that is Coupled through from One Channel to Another as a Result of Parasitic Capacitance.
Off Isolation	A Measure of Unwanted Signal Coupling through an OFF Switch.
Bandwidth	Frequency Response of the Switch in the ON State Measured at 3 dB Down.
Distortion	$R_{FLAT(ON)}/R_L$


ADG774—Typical Performance Characteristics

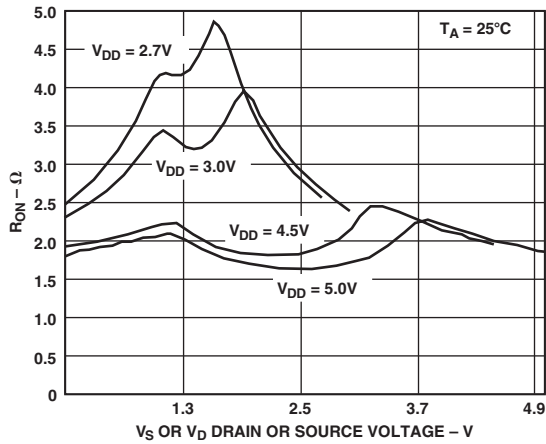


TPC 1. On Resistance as a Function of V_D (V_S) for Various Single Supplies

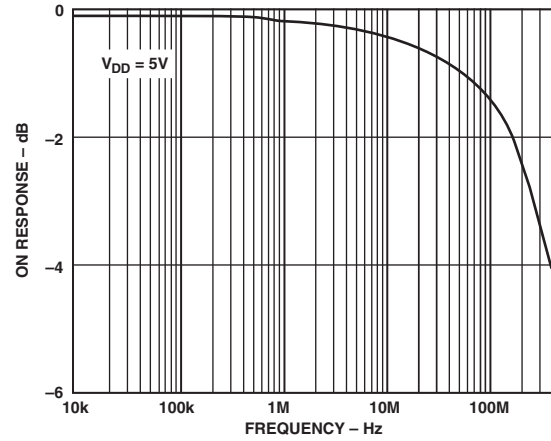


TPC 4. On Response vs. Frequency

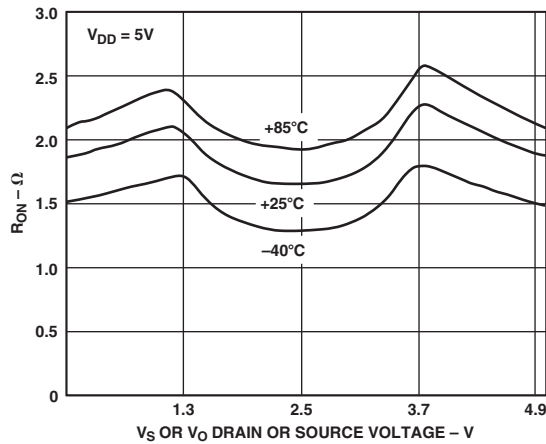


TPC 2. On Resistance as a Function of V_D (V_S) for Different Temperatures with 5 V Single Supplies

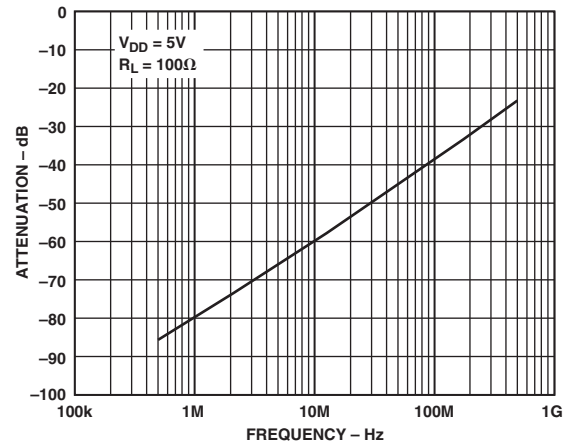


TPC 5. Off Isolation vs. Frequency

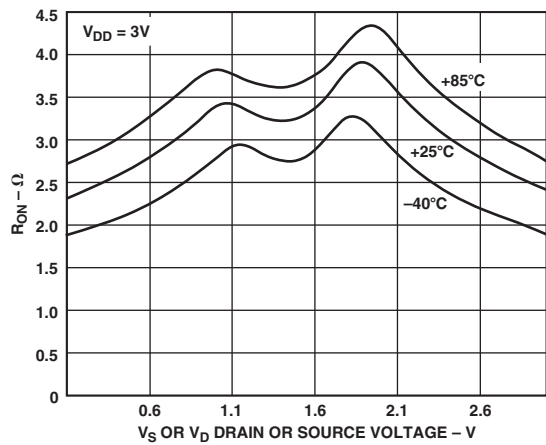

TPC 3. On Resistance as a Function of V_D (V_S) for Different Temperatures with 3 V Single Supplies

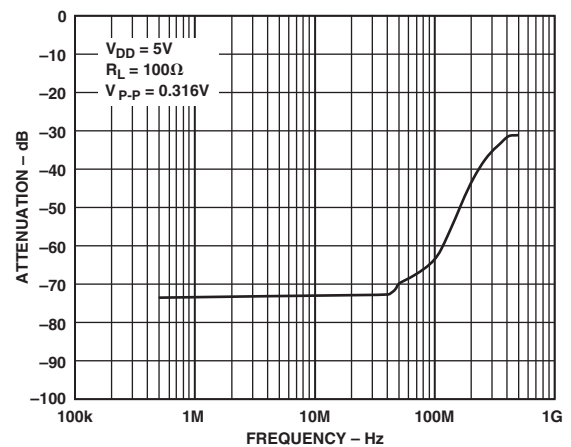

TPC 6. Crosstalk vs. Frequency

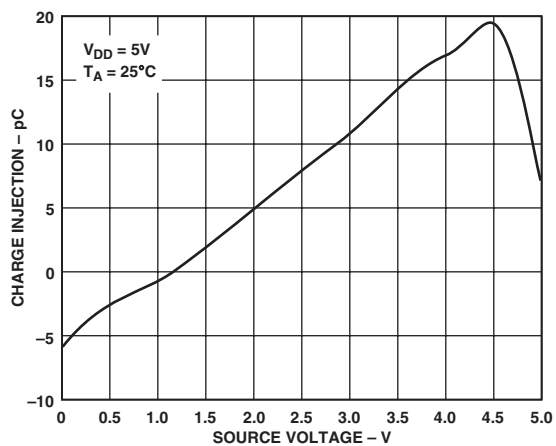

TPC 7. Charge Injection vs. Source Voltage




Figure 1. Loop Back




Figure 2. Line Termination










Figure 3. Line Clamp


ADG774

Test Circuits

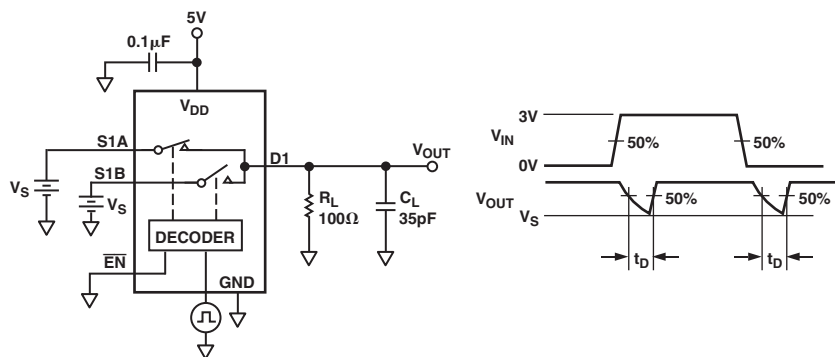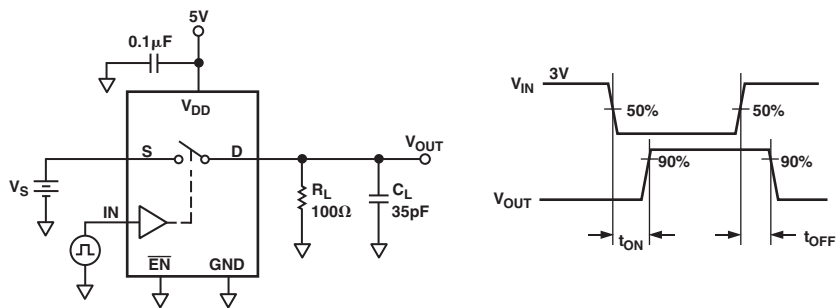


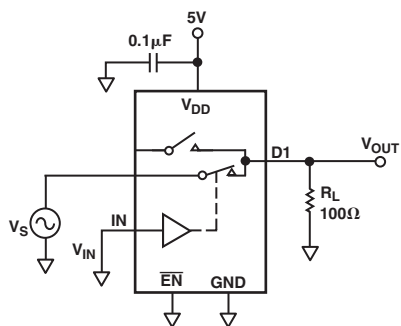


Test Circuit 6. Bandwidth

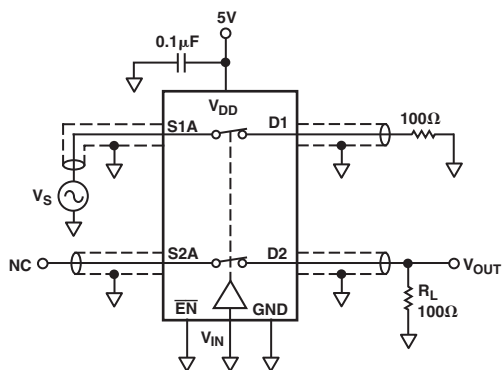


Test Circuit 7. Channel-to-Channel Crosstalk

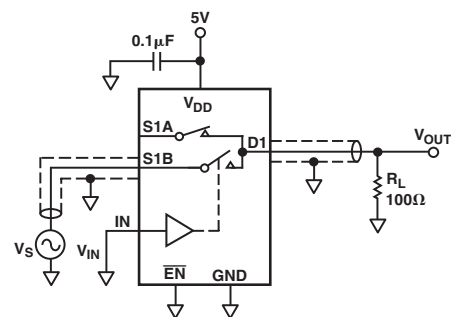

Test Circuit 8. Off Isolation

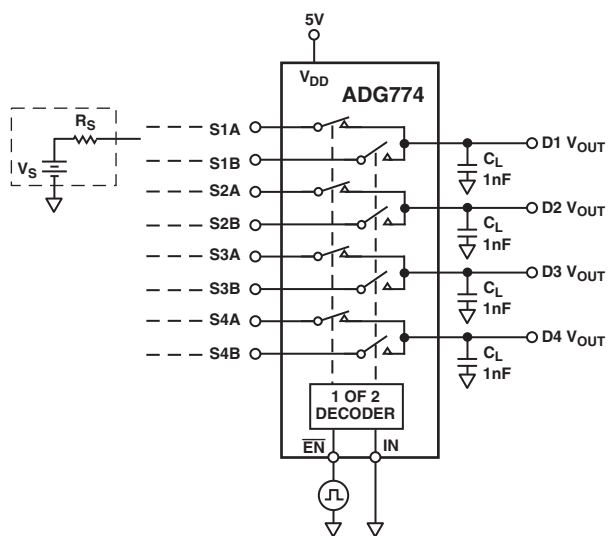


Test Circuit 9. Charge Injection



OUTLINE DIMENSIONS

16-Lead Standard Small Outline Package [SOIC]
Narrow Body
(R-16)

Dimensions shown in millimeters and (inches)

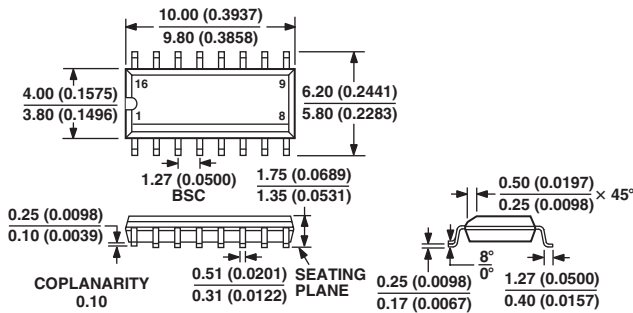


COMPLIANT TO JEDEC STANDARDS MS-012AC

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

16-Lead Shrink Small Outline Package [QSOP]
(RQ-16)

Dimensions shown in inches

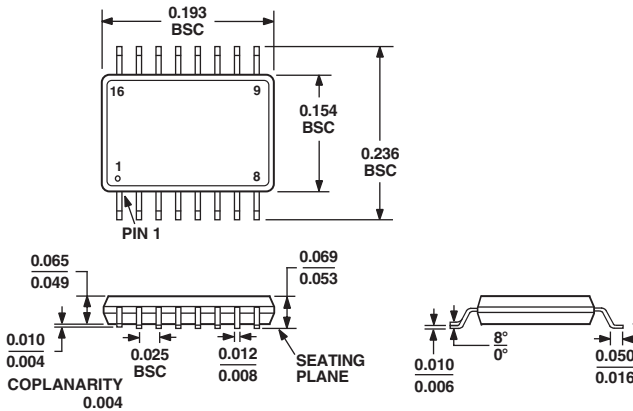

COMPLIANT TO JEDEC STANDARDS MO-137AB

Revision History

Location	Page
3/04—Data Sheet changed from REV. B to REV. C.	
Added APPLICATIONS	1
Changes to ORDERING GUIDE	4
10/03—Data Sheet changed from REV. A to REV. B.	
Updated formatting	Universal
Renumbered TPCs and Figures	Universal
Changes to FEATURES	1
Changes to APPLICATIONS	1
Changes to PRODUCT HIGHLIGHTS	1
Changes to SPECIFICATIONS	2
Changes to ABSOLUTE MAXIMUM RATINGS	4
Updated ORDERING GUIDE	4
Delete Figure 2	7
Updated OUTLINE DIMENSIONS	10
4/03—Data Sheet changed from REV. 0 to REV. A.	
Renumbered TPCs and Figures	Universal
Updated OUTLINE DIMENSIONS	8

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru