


# HDSP-Ax11

## Black Surface Seven Segment Displays



### Data Sheet

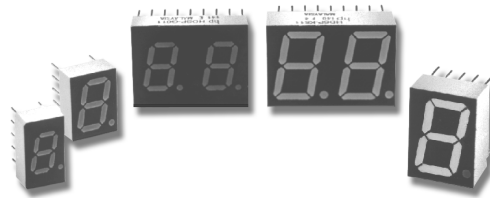

#### HDSP-AX11/-AX13 Series, HDSP-FX11/-FX13 Series HDSP-GX11/-GX13 Series, HDSP-HX11/-HX13 Series HDSP-KX11/-KX13 Series

#### Description

These devices use industry standard size package and pinout. Available with black surface finish. All devices are available as either common anode or common cathode.

Typical applications include appliances, channel indicators of TV, CATV converters, game machines, and point of sale terminals.

#### Features

- **Black surface and color tinted epoxy**
- **Industry standard size**
- **Industry standard pinout**
- **Choice of character size**  
7.6 mm (0.30 in.), 10 mm (0.40 in.), 14.2 mm (0.56 in.)
- **Choice of colors**  
AlGaAs Red, High Efficiency Red (HER), Green, Orange
- **Excellent appearance**  
Evenly lighted segments  
± 50° Viewing angle
- **Design flexibility**  
Common anode or common cathode  
Single and two digit
- **Categorized for luminous intensity**  
Categorized for color: Green  
Use of like categories yields a uniform display
- **Excellent for long digit string multiplexing**

#### Devices

| Orange HDSP- | AlGaAs Red HDSP- | HER HDSP- | Green HDSP- | Description   | Package Drawing |
|--------------|------------------|-----------|-------------|---|-----------------|
| A411         | A111             | A211      | A511        | 7.6 mm Common Anode Right Hand Decimal              | A               |
| A413         | A113             | A213      | A513        | 7.6 mm Common Cathode Right Hand Decimal            | B               |
| F411         | F111             | F211      | F511        | 10 mm Common Anode Right Hand Decimal               | C               |
| F413         | F113             | F213      | F513        | 10 mm Common Cathode Right Hand Decimal             | D               |
| G411         | G111             | G211      | G511        | 10 mm Two Digit Common Anode Right Hand Decimal     | E               |
| G413         | G113             | G213      | G513        | 10 mm Two Digit Common Cathode Right Hand Decimal   | F               |
| H411         | H111             | H211      | H511        | 14.2 mm Common Anode Right Hand Decimal             | G               |
| H413         | H113             | H213      | H513        | 14.2 mm Common Cathode Right Hand Decimal           | H               |
| K411         | K111             | K211      | K511        | 14.2 mm Two Digit Common Anode Right Hand Decimal   | I               |
| K413         | K113             | K213      | K513        | 14.2 mm Two Digit Common Cathode Right Hand Decimal | J               |

## Part Numbering System

5082 - X X X X-X X X X X

HDSP-X X X X-X X X X X



### Notes:

1. For codes not listed in the figure above, please refer to the respective datasheet or contact your nearest Avago representative for details.
2. Bin options refer to shippable bins for a part number. Color and Intensity Bins are typically restricted to 1 bin per tube (exceptions may apply). Please refer to respective datasheet for specific bin limit information.


### Package Dimensions (7.6 mm Series)



A, B



A, B

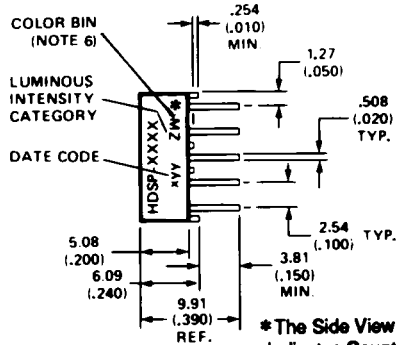


\*The Side View of package indicates Country of Origin.

| PIN | FUNCTION             |                        |
|-----|----------------------|------------------------|
|     | A                    | B                      |
| 1   | ANODE <sup>[4]</sup> | CATHODE <sup>[5]</sup> |
| 2   | CATHODE f            | ANODE f                |
| 3   | CATHODE g            | ANODE g                |
| 4   | CATHODE e            | ANODE e                |
| 5   | CATHODE d            | ANODE d                |
| 6   | ANODE <sup>[4]</sup> | CATHODE <sup>[5]</sup> |
| 7   | CATHODE DP           | ANODE DP               |
| 8   | CATHODE c            | ANODE c                |
| 9   | CATHODE b            | ANODE b                |
| 10  | CATHODE a            | ANODE a                |

**NOTES:**

1. ALL DIMENSIONS IN MILLIMETERS (INCHES).
2. MAXIMUM.
3. ALL UNTOLERANCED DIMENSIONS ARE FOR REFERENCE ONLY.
4. REDUNDANT ANODES.
5. REDUNDANT CATHODES.
6. FOR HDSP-A511/-A513 ONLY.


### Internal Circuit Diagram

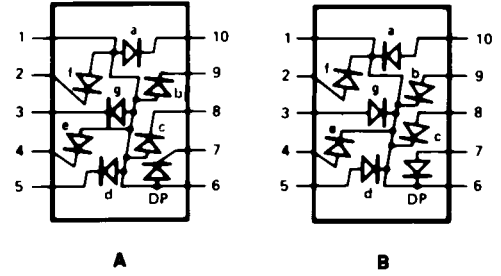

A

B


### Package Dimensions (10 mm Series: Single)

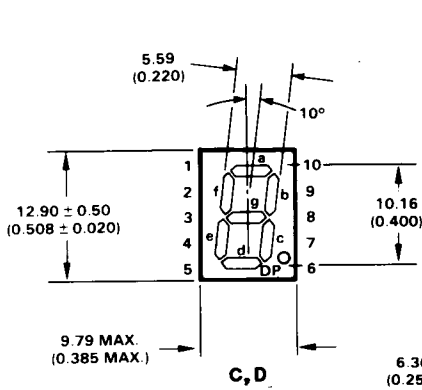

C, D



C, D

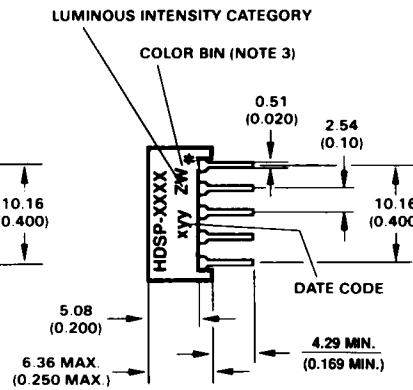

C, D


\*The Side View of package indicates Country of Origin.

| PIN | FUNCTION             |                        |
|-----|----------------------|------------------------|
|     | C                    | D                      |
| 1   | ANODE <sup>[4]</sup> | CATHODE <sup>[5]</sup> |
| 2   | CATHODE f            | ANODE f                |
| 3   | CATHODE g            | ANODE g                |
| 4   | CATHODE e            | ANODE e                |
| 5   | CATHODE d            | ANODE d                |
| 6   | ANODE <sup>[4]</sup> | CATHODE <sup>[5]</sup> |
| 7   | CATHODE DP           | ANODE DP               |
| 8   | CATHODE c            | ANODE c                |
| 9   | CATHODE b            | ANODE b                |
| 10  | CATHODE a            | ANODE a                |

**NOTES:**

1. ALL DIMENSIONS IN MILLIMETERS (INCHES).
2. ALL UNTOLERANCED DIMENSIONS ARE FOR REFERENCE ONLY.
3. FOR HDSP-F511/-F513 ONLY.
4. REDUNDANT ANODES.
5. REDUNDANT CATHODES.


### Internal Circuit Diagram

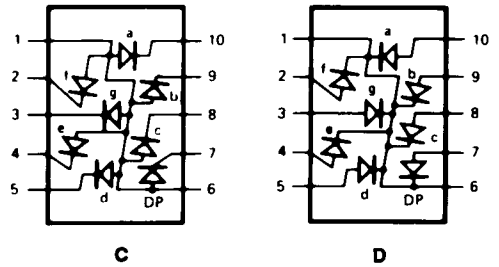

C

D

Package Dimensions (10 mm Series: Two Digit)

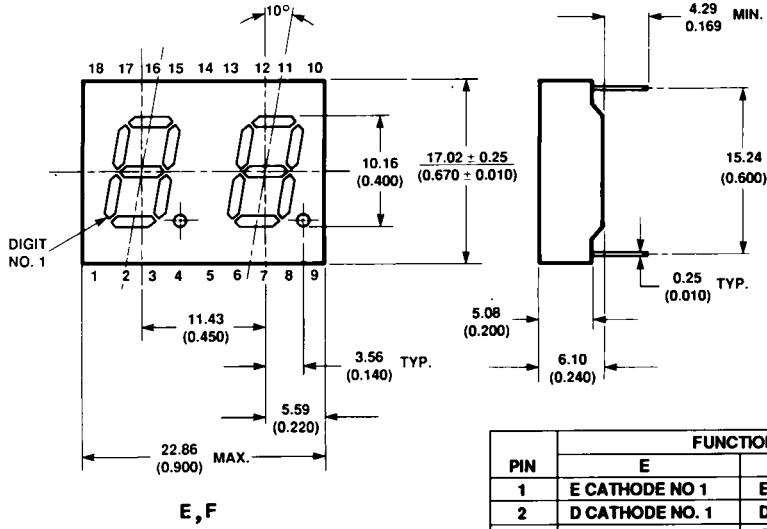


E, F




E, F

\* The Side View of package indicates Country of Origin.

Internal Circuit Diagram

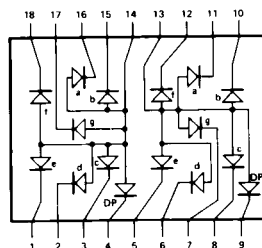


E

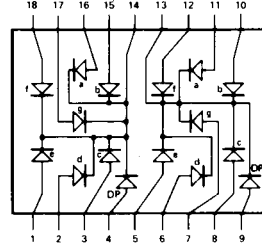

F

| PIN | FUNCTION          |                     |
|-----|-------------------|---------------------|
|     | E                 | F                   |
| 1   | E CATHODE NO. 1   | E ANODE NO. 1       |
| 2   | D CATHODE NO. 1   | D ANODE NO. 1       |
| 3   | C CATHODE NO. 1   | C ANODE NO. 1       |
| 4   | DP CATHODE NO. 1  | DP ANODE NO. 1      |
| 5   | E CATHODE NO. 2   | E ANODE NO. 2       |
| 6   | D CATHODE NO. 2   | D ANODE NO. 2       |
| 7   | G CATHODE NO. 2   | G ANODE NO. 2       |
| 8   | C CATHODE NO. 2   | C ANODE NO. 2       |
| 9   | CP CATHODE NO. 2  | DP ANODE NO. 2      |
| 10  | B CATHODE NO. 2   | B ANODE NO. 2       |
| 11  | A CATHODE NO. 2   | A ANODE NO. 2       |
| 12  | F CATHODE NO. 2   | F ANODE NO. 2       |
| 13  | DIGIT NO. 2 ANODE | DIGIT NO. 2 CATHODE |
| 14  | DIGIT NO. 1 ANODE | DIGIT NO. 1 CATHODE |
| 15  | B CATHODE NO. 1   | B ANODE NO. 1       |
| 16  | A CATHODE NO. 2   | A ANODE NO. 1       |
| 17  | G CATHODE NO. 1   | G ANODE NO. 1       |
| 18  | F CATHODE NO. 1   | F ANODE NO. 1       |

NOTES:  
 1. DIMENSIONS ARE IN MILLIMETERS (INCHES).  
 2. ALL UNTOLERANCED DIMENSIONS ARE FOR REFERENCE ONLY.  
 3. FOR HDSP-G511/G513 ONLY.

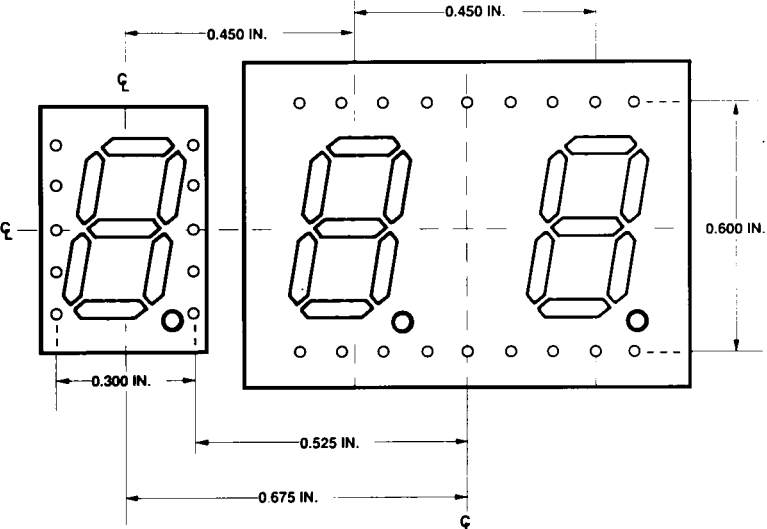

HOLE PATTERN FOR PCB LAYOUT TO ACHIEVE UNIFORM 0.450 DIGIT TO DIGIT PITCH. FOR HDSP-FXXX TO HDSP-GXXX.

Package Dimensions (14.2 mm Series: Single)



G, H

\*The End View of package indicates Country of Origin.

| PIN | FUNCTION             |                        |
|-----|----------------------|------------------------|
|     | G                    | H                      |
| 1   | CATHODE e            | ANODE e                |
| 2   | CATHODE d            | ANODE d                |
| 3   | ANODE <sup>(3)</sup> | CATHODE <sup>(4)</sup> |
| 4   | CATHODE c            | ANODE c                |
| 5   | CATHODE DP           | ANODE DP               |
| 6   | CATHODE b            | ANODE b                |
| 7   | CATHODE a            | ANODE a                |
| 8   | ANODE <sup>(3)</sup> | CATHODE <sup>(4)</sup> |
| 9   | CATHODE f            | ANODE f                |
| 10  | CATHODE g            | ANODE g                |

- NOTES:  
 1. ALL DIMENSIONS IN MILLIMETERS (INCHES).  
 2. ALL UNTOLERANCED DIMENSIONS ARE FOR REFERENCE ONLY.  
 3. REDUNDANT ANODES.  
 4. REDUNDANT CATHODES.  
 5. FOR HDSP-H511/H513 ONLY.

Internal Circuit Diagram




G



H

Package Dimensions (14.2 mm Series: Two Digit)

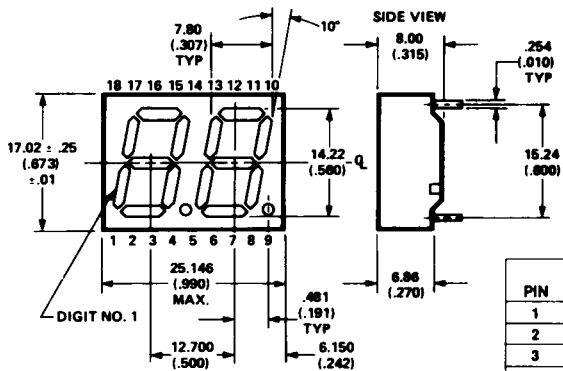

I, J



\*The Side View of package indicates Country of Origin.

| PIN | FUNCTION          |                     |
|-----|-------------------|---------------------|
|     | I                 | J                   |
| 1   | E CATHODE NO. 1   | E ANODE NO. 1       |
| 2   | D CATHODE NO. 1   | D ANODE NO. 1       |
| 3   | C CATHODE NO. 1   | C ANODE NO. 1       |
| 4   | DP CATHODE NO. 1  | DP ANODE NO. 1      |
| 5   | E CATHODE NO. 2   | E ANODE NO. 2       |
| 6   | D CATHODE NO. 2   | D ANODE NO. 2       |
| 7   | G CATHODE NO. 2   | G ANODE NO. 2       |
| 8   | C CATHODE NO. 2   | C ANODE NO. 2       |
| 9   | DP CATHODE NO. 2  | DP ANODE NO. 2      |
| 10  | B CATHODE NO. 2   | B ANODE NO. 2       |
| 11  | A CATHODE NO. 2   | A ANODE NO. 2       |
| 12  | F CATHODE NO. 2   | F ANODE NO. 2       |
| 13  | DIGIT NO. 2 ANODE | DIGIT NO. 2 CATHODE |
| 14  | DIGIT NO. 1 ANODE | DIGIT NO. 1 CATHODE |
| 15  | B CATHODE NO. 1   | B ANODE NO. 1       |
| 16  | A CATHODE NO. 1   | A ANODE NO. 1       |
| 17  | G CATHODE NO. 1   | G ANODE NO. 1       |
| 18  | F CATHODE NO. 1   | F ANODE NO. 1       |

- NOTES:  
 1. ALL DIMENSIONS IN MILLIMETERS (INCHES).  
 2. ALL UNTOLERANCED DIMENSIONS ARE FOR REFERENCE ONLY.  
 3. FOR HDSP-K511/K513 ONLY.

Internal Circuit Diagram



I



J

## Absolute Maximum Ratings

| Description  | AlGaAs Red<br>HDSP-X11X<br>Series | HER/Orange<br>HDSP-X21X/X41X<br>Series | Green<br>HDSP-X51X<br>Series | Units |
|--|-----------------------------------|--|------------------------------|-------|
| Average Power per Segment or DP  | 37                                | 105                                    | 105                          | mW    |
| Peak Forward Current per Segment or DP                                       | 45                                | 90 <sup>[1]</sup>                      | 90 <sup>[3]</sup>            | mA    |
| DC Forward Current per Segment or DP   | 15 <sup>[5]</sup>                 | 30 <sup>[2]</sup>                      | 30 <sup>[4]</sup>            | mA    |
| Operating Temperature Range  | -20 to +100                       | -40 to +100                            |                              | °C    |
| Storage Temperature Range  | -55 to +100                       |  |                              | °C    |
| Reverse Voltage per Segment or DP  | 3.0                               |  |                              | V     |
| Wave Soldering Temperature for 3 Seconds<br>(1.60 mm [0.063 in.] below Body) | 250                               |  |                              | °C    |

### Notes:

1. See Figure 5 to establish pulsed conditions.
2. Derate above 53°C at 0.45 mA/°C (see Figure 7).
3. See Figure 6 to establish pulsed conditions.
4. Derate above 39°C at 0.37 mA/°C (see Figure 7).
5. Derate above 91°C at 0.53 mA/°C (see Figure 1).

## Electrical/Optical Characteristics at T<sub>A</sub> = 25°C AlGaAs Red

| Device Series<br>HDSP- | Parameter  | Symbol                | Min.                  | Typ. | Max.                  | Units         | Test Conditions             |
|------------------------|--|-----------------------|-----------------------|------|-----------------------|---------------|-----------------------------|
| A11X                   | Luminous Intensity/Segment <sup>[1,2]</sup><br>(Digit Average) | I <sub>V</sub>        | 315                   | 600  |                       | μcd           | I <sub>F</sub> = 1 mA       |
| F11X, G11X             |  |                       |                       | 3600 |                       |               | I <sub>F</sub> = 5 mA       |
|                        |  |                       |                       | 330  |                       |               | 650                         |
| H11X, K11X             | 3900   | I <sub>F</sub> = 5 mA |                       |      |                       |               |                             |
|                        | 400  | 700                   | I <sub>F</sub> = 1 mA |      |                       |               |                             |
| All Devices            | Forward Voltage/Segment or DP                                  | V <sub>F</sub>        | 3.0                   | 1.6  | 2.0                   | V             | I <sub>F</sub> = 1 mA       |
|                        |  |                       |                       | 1.7  | I <sub>F</sub> = 5 mA |               |                             |
|                        |  |                       |                       | 1.8  | 22                    |               | I <sub>F</sub> = 20 mA Peak |
|                        | Peak Wavelength  | λ <sub>PEAK</sub>     |                       | 645  |                       | nm            |                             |
|                        | Dominant Wavelength <sup>[3]</sup>                             | λ <sub>d</sub>        |                       | 637  |                       | nm            |                             |
|                        | Reverse Voltage/Segment or DP <sup>[4]</sup>                   | V <sub>R</sub>        | 3.0                   | 15   |                       | V             | I <sub>R</sub> = 100 μA     |
|                        | Temperature Coefficient of<br>V <sub>F</sub> /Segment or DP    | ΔV <sub>F</sub> /°C   |                       | -2   |                       | mV/°C         |                             |
| A11X                   | Thermal Resistance LED<br>Junction-to-Pin                      | Rθ <sub>J-PIN</sub>   |                       | 255  |                       | °C/W/<br>Seg. |                             |
| F11X, G11X             |  |                       |                       | 320  |                       |               |                             |
| H11X, K12X             |  |                       |                       | 400  |                       |               |                             |

## Orange

| Device Series<br>HDSP- | Parameter  | Symbol                        | Min. | Typ. | Max. | Units                              | Test Conditions         |
|------------------------|--|-------------------------------|------|------|------|------------------------------------|-------------------------|
| A41X                   | Luminous Intensity/Segment<br>(Segment Average) <sup>[1,2]</sup> | $I_V$                         |      | 0.70 |      | mcd                                | $I_F = 5 \text{ mA}$    |
| F41X, G41X             |  |                               |      | 1.0  |      |                                    | $I_F = 5 \text{ mA}$    |
| H41X, K41X             |  |                               |      | 2.37 |      |                                    | $I_F = 10 \text{ mA}$   |
| All<br>Devices         | Forward Voltage/Segment or DP                                    | $V_F$                         |      | 2.0  | 2.5  | V                                  | $I_F = 20 \text{ mA}$   |
|                        | Peak Wavelength  | $\lambda_{PEAK}$              |      | 600  |      | nm                                 |                         |
|                        | Dominant Wavelength <sup>[3]</sup>                               | $\lambda_d$                   |      | 603  |      | nm                                 |                         |
|                        | Reverse Voltage/Segment or DP <sup>[4]</sup>                     | $V_R$                         | 3.0  | 30   |      | V                                  | $I_R = 100 \mu\text{A}$ |
|                        | Temperature Coefficient of<br>$V_F$ /Segment or DP               | $\Delta V_F / ^\circ\text{C}$ |      | -2   |      |                                    | mV/ $^\circ\text{C}$    |
| A41X                   | Thermal Resistance LED<br>Junction-to-Pin                        | $R\theta_{J-PIN}$             |      | 200  |      | $^\circ\text{C}/\text{W}/$<br>Seg. |                         |
| F41X, G41X             |  |                               |      | 320  |      |                                    |                         |
| H41X, K41X             |  |                               |      | 345  |      |                                    |                         |

## High Efficiency Red

| Device Series<br>HDSP- | Parameter  | Symbol                        | Min. | Typ. | Max. | Units                              | Test Conditions                                |
|------------------------|--|-------------------------------|------|------|------|------------------------------------|--|
| A21X                   | Luminous Intensity/Segment <sup>[1,2]</sup><br>(Digit Average) | $I_V$                         |      | 360  | 980  | $\mu\text{cd}$                     | $I_F = 5 \text{ mA}$                           |
| F21X, G21X             |  |                               |      | 5390 |      |                                    | $I_F = 20 \text{ mA}$                          |
|                        |  |                               |      | 420  | 1200 |                                    | $I_F = 5 \text{ mA}$                           |
| H21X, K21X             |  |                               |      | 900  | 2800 |                                    | $I_F = 10 \text{ mA}$                          |
|                        |  |                               |      | 3700 |      |                                    | $I_F = 60 \text{ mA Peak};$<br>1/6 Duty Factor |
| All<br>Devices         | Forward Voltage/Segment or DP                                  | $V_F$                         |      | 2.0  | 2.5  | V                                  | $I_F = 20 \text{ mA}$                          |
|                        | Peak Wavelength  | $\lambda_{PEAK}$              |      | 635  |      | nm                                 |  |
|                        | Dominant Wavelength <sup>[3]</sup>                             | $\lambda_d$                   |      | 626  |      | nm                                 |  |
|                        | Reverse Voltage/Segment or DP <sup>[4]</sup>                   | $V_R$                         | 3.0  | 30   |      | V                                  | $I_R = 100 \mu\text{A}$                        |
|                        | Temperature Coefficient of<br>$V_F$ /Segment or DP             | $\Delta V_F / ^\circ\text{C}$ |      | -2   |      |                                    | mV/ $^\circ\text{C}$                           |
| A21X                   | Thermal Resistance LED<br>Junction-to-Pin                      | $R\theta_{J-PIN}$             |      | 200  |      | $^\circ\text{C}/\text{W}/$<br>Seg. |  |
| F21X, G21X             |  |                               |      | 320  |      |                                    |  |
| H21X, K21X             |  |                               |      | 345  |      |                                    |  |

## High Performance Green

| Device Series |  | Parameter                     | Symbol               | Min. | Typ. | Max. | Units                              | Test Conditions                               |
|---------------|--|-------------------------------|----------------------|------|------|------|------------------------------------|---|
| HDSP-         |  |                               |                      |      |      |      |                                    |   |
| A51X          | Luminous Intensity/Segment <sup>[1,2]</sup><br>(Digit Average) |                               | $I_V$                | 860  | 3000 |      | $\mu\text{cd}$                     | $I_F = 10 \text{ mA}$                         |
|               |  |                               |                      |      | 6800 |      |                                    | $I_F = 20 \text{ mA}$                         |
| F51X, G51X    |  |                               |                      | 1030 | 3500 |      | $I_F = 10 \text{ mA}$              |   |
| H51X, K51X    |  |                               |                      | 900  | 2500 |      | $I_F = 10 \text{ mA}$              |   |
|               |  |                               |                      |      | 3100 |      |                                    | $I_F = 60 \text{ mA Peak}$<br>1/6 Duty Factor |
| All Devices   | Forward Voltage/Segment or DP                                  | $V_F$                         |                      | 2.1  | 2.5  |      | V                                  | $I_F = 10 \text{ mA}$                         |
|               | Peak Wavelength  | $\lambda_{\text{PEAK}}$       |                      | 566  |      |      | nm                                 |   |
|               | Dominant Wavelength <sup>[3,5]</sup>                           | $\lambda_d$                   |                      | 571  | 577  |      | nm                                 |   |
|               | Reverse Voltage/Segment or DP <sup>[4]</sup>                   | $V_R$                         | 3.0                  | 50   |      |      | V                                  | $I_R = 100 \mu\text{A}$                       |
|               | Temperature Coefficient of<br>$V_F$ /Segment or DP             | $\Delta V_F / ^\circ\text{C}$ |                      | -2   |      |      | mV/ $^\circ\text{C}$               |   |
| A51X          | Thermal Resistance LED<br>Junction-to-Pin                      |                               | $R_{\theta_{J-PIN}}$ |      | 200  |      | $^\circ\text{C}/\text{W}/$<br>Seg. |   |
| F51X, G51X    |  |                               |                      |      | 320  |      |                                    |   |
| H51X, K51X    |  |                               |                      |      | 345  |      |                                    |   |

### Notes:

- Case temperature of device immediately prior to the intensity measurement is 25°C.
- The digits are categorized for luminous intensity. The intensity category is designated by a letter on the side of the package.
- The dominant wavelength,  $\lambda_d$ , is derived from the CIE chromaticity diagram and is that single wavelength which defines the color of the device.
- Typical specification for reference only. Do not exceed absolute maximum ratings.
- Green (HDSP-A51X/F51X/G51X/H512X/K51X) series displays are categorized for dominant wavelength. The category is designated by a number adjacent to the luminous intensity category letter.



# AlGaAs Red



Figure 1. Maximum allowable average or dc current vs. ambient temperature.



Figure 2. Forward current vs. forward voltage.



Figure 3. Relative luminous intensity vs. dc forward current.

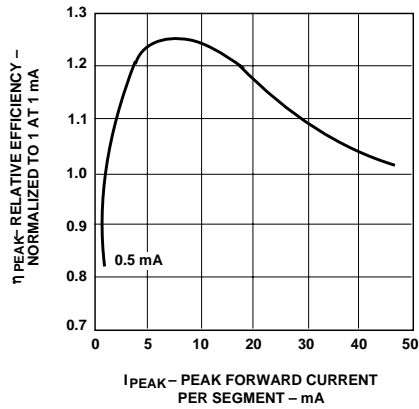


Figure 4. Relative efficiency (luminous intensity per unit current) vs. peak current.

HER, Green, Orange



Figure 5. Maximum tolerable peak current vs. pulse duration – HER, Orange.



Figure 6. Maximum tolerable peak current vs. pulse duration – Green.



Figure 7. Maximum allowable dc current vs. ambient temperature.



Figure 8. Forward current vs. forward voltage characteristics.



Figure 9. Relative luminous intensity vs. dc forward current.

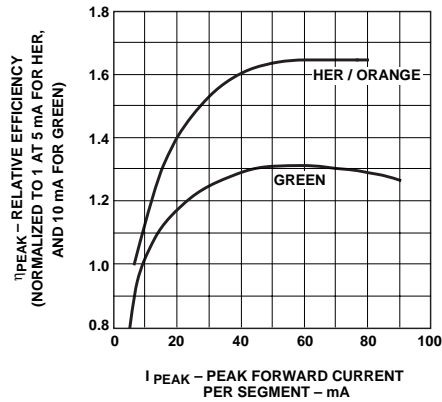


Figure 10. Relative efficiency (luminous intensity per unit current) vs. peak current.

**Intensity Bin Limits (mcd)****AlGaAs Red****HDSP-A1xx**

| IV Bin Category | Min.  | Max.  |
|-----------------|-------|-------|
| E               | 0.315 | 0.520 |
| F               | 0.428 | 0.759 |
| G               | 0.621 | 1.16  |
| H               | 0.945 | 1.71  |
| I               | 1.40  | 2.56  |
| J               | 2.10  | 3.84  |
| K               | 3.14  | 5.75  |
| L               | 4.70  | 8.55  |

**HDSP-F1xx/G1xx**

| IV Bin Category | Min.  | Max.  |
|-----------------|-------|-------|
| D               | 0.391 | 0.650 |
| E               | 0.532 | 0.923 |
| F               | 0.755 | 1.39  |
| G               | 1.13  | 2.08  |
| H               | 1.70  | 3.14  |

**HDSP-H1xx/K1xx**

| IV Bin Category | Min.  | Max.  |
|-----------------|-------|-------|
| C               | 0.415 | 0.690 |
| D               | 0.565 | 0.990 |
| E               | 0.810 | 1.50  |
| F               | 1.20  | 2.20  |
| G               | 1.80  | 3.30  |
| H               | 2.73  | 5.00  |
| I               | 4.09  | 7.50  |

**Orange****HDSP-A41X**

| IV Bin Category | Min   | Max   |
|-----------------|-------|-------|
| A               | 0.284 | 0.433 |
| B               | 0.354 | 0.541 |
| C               | 0.443 | 0.677 |
| D               | 0.554 | 0.846 |
| E               | 0.692 | 1.057 |
| F               | 0.856 | 1.322 |
| G               | 1.082 | 1.652 |
| H               | 1.352 | 2.066 |
| I               | 1.692 | 2.581 |
| J               | 2.114 | 3.227 |
| K               | 2.641 | 4.034 |
| L               | 3.300 | 5.042 |
| M               | 4.127 | 6.303 |
| N               | 5.157 | 7.878 |

**HDSP-F41X/G41X**

| IV Bin Category | Min   | Max   |
|-----------------|-------|-------|
| C               | 0.485 | 0.890 |
| D               | 0.728 | 1.333 |
| E               | 1.091 | 2.000 |
| F               | 1.636 | 3.000 |
| G               | 2.454 | 4.500 |
| H               | 3.682 | 6.751 |

**HDSP-H41X/K41X**

| IV Bin Category | Min  | Max  |
|-----------------|------|------|
| B               | 0.77 | 1.17 |
| C               | 0.95 | 1.45 |
| D               | 1.19 | 1.82 |
| E               | 1.49 | 2.27 |
| F               | 1.85 | 2.89 |
| G               | 2.32 | 3.54 |
| H               | 2.90 | 4.43 |

**Intensity Bin Limits (mcd), continued  
HER**

---

**HDSP-A2xx**

---

| <b>IV Bin Category</b> | <b>Min.</b> | <b>Max.</b> |
|------------------------|-------------|-------------|
| B                      | 0.342       | 0.630       |
| C                      | 0.516       | 0.946       |
| D                      | 0.774       | 1.418       |
| E                      | 1.160       | 2.127       |
| F                      | 1.740       | 3.190       |
| G                      | 2.610       | 4.785       |
| H                      | 3.915       | 7.177       |

---

---

**HDSP-F2xx/G2xx**

---

| <b>IV Bin Category</b> | <b>Min.</b> | <b>Max.</b> |
|------------------------|-------------|-------------|
| C                      | 0.485       | 0.890       |
| D                      | 0.728       | 1.333       |
| E                      | 1.091       | 2.000       |
| F                      | 1.636       | 3.000       |
| G                      | 2.454       | 4.500       |
| H                      | 3.682       | 6.751       |

---

---

**HDSP-H2xx/K2xx**

---

| <b>IV Bin Category</b> | <b>Min.</b> | <b>Max.</b> |
|------------------------|-------------|-------------|
| E                      | 0.91        | 1.67        |
| F                      | 1.37        | 2.51        |
| G                      | 2.05        | 3.76        |
| H                      | 3.08        | 5.64        |
| I                      | 4.62        | 8.64        |
| J                      | 6.93        | 12.70       |
| K                      | 10.39       | 19.04       |

---

## Intensity Bin Limits (mcd), continued Green

| HDSP-A5xx       |      |      |
|-----------------|------|------|
| IV Bin Category | Min. | Max. |
| H               | 0.86 | 1.58 |
| I               | 1.29 | 2.37 |
| J               | 1.94 | 3.55 |
| K               | 2.90 | 5.33 |
| L               | 4.37 | 8.01 |

| HDSP-F5xx/G5xx  |      |       |
|-----------------|------|-------|
| IV Bin Category | Min. | Max.  |
| H               | 1.54 | 2.82  |
| I               | 2.31 | 4.23  |
| J               | 3.46 | 6.34  |
| K               | 5.18 | 9.50  |
| L               | 7.78 | 14.26 |

| HDSP-H5xx/K5xx  |      |      |
|-----------------|------|------|
| IV Bin Category | Min. | Max. |
| E               | 0.91 | 1.67 |
| F               | 1.37 | 2.51 |
| G               | 2.05 | 3.76 |
| H               | 3.08 | 5.64 |
| I               | 4.61 | 8.46 |

## Color Categories

| Color | Bin | Dominant Wavelength (nm) |        |
|-------|-----|--------------------------|--------|
|       |     | Min.                     | Max.   |
| Green | 2   | 573.00                   | 577.00 |
|       | 3   | 570.00                   | 574.00 |
|       | 4   | 567.00                   | 571.00 |
|       | 5   | 564.00                   | 568.00 |

### Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your Avago representatives for further clarification/information.

## Contrast Enhancement

For information on contrast enhancement, please see Application Note 1015.

## Soldering/Cleaning

For information on soldering LEDs, please refer to Application Note 1029.

## Electrical/Optical

For more information on electrical/optical characteristics, please see Application Note 1005.

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.  
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved. Obsoletes 5988-4433EN  
5989-2795EN April 10, 2006



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)