

3.3V Precision Audio Clock Synthesizer

Features

- Precision clock generator for digital audio application
- One copy of Reference clock at 27 MHz
- Supports various audio sampling rates: 128x, 256x, 384x, 512x and 768x
- Support Crystal or Reference clock signal input
- Low Phase Noise: -75 dBc @ 100Hz
- Low Short Term Jitter: 175ps (typical)
- Low Long Term Jitter: 1.1ns (typical)
- Industrial Temperature Range (-40°C ~ +85°C)
- Packaging (Pb-Free & Green):
—16-pin TSSOP


Description

The PI6C6612 is a precision clock generator designed to provide synchronous clock signals for digital audio applications with sampling clock rates derived from an MPEG stream. The device can also be used as a standalone clock source with a 27 MHz crystal.

Split power supply pins and ground pins help to provide excellent phase noise and long term jitter performance for superior synchronization and Signal-to-Noise ratio.


PI6C6612 is one example of Pericom’s multimedia clock products, if you have other applications for custom clock designs, either with different clock input or output that is not specified here, please contact Pericom.

Block Diagram

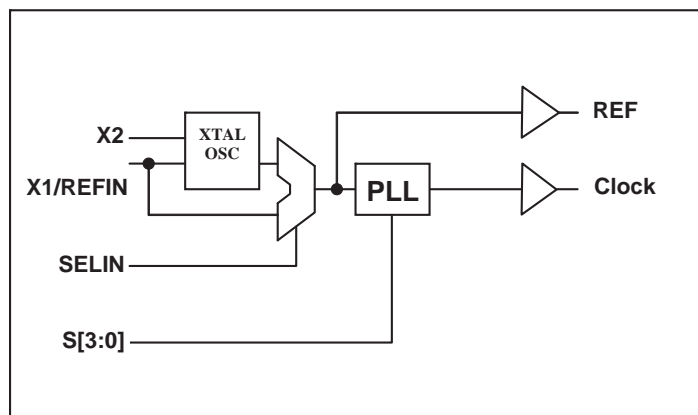

Output Clock Selection Table from 27 MHz input

| S3 | S2 | S1 | S0 | Clock (MHz) |
|----------|----------|----------|----------|---------------|
| 0 | 0 | 0 | 0 | 8.192 |
| 0 | 0 | 0 | 1 | 11.2896 |
| 0 | 0 | 1 | 0 | 12.288 |
| 0 | 0 | 1 | 1 | 24.576 |
| 0 | 1 | 0 | 0 | 9.216 |
| 0 | 1 | 0 | 1 | 16.9344 |
| 0 | 1 | 1 | 0 | 18.432 |
| 0 | 1 | 1 | 1 | 36.864 |
| 1 | 0 | 0 | 0 | 16.384 |
| 1 | 0 | 0 | 1 | 22.5792 |
| 1 | 0 | 1 | 0 | 5.6448 |
| 1 | 0 | 1 | 1 | 49.152 |
| 1 | 1 | 0 | 0 | 6.1440 |
| 1 | 1 | 0 | 1 | 33.8688 |
| 1 | 1 | 1 | 0 | 8.4672 |
| 1 | 1 | 1 | 1 | 73.728 |

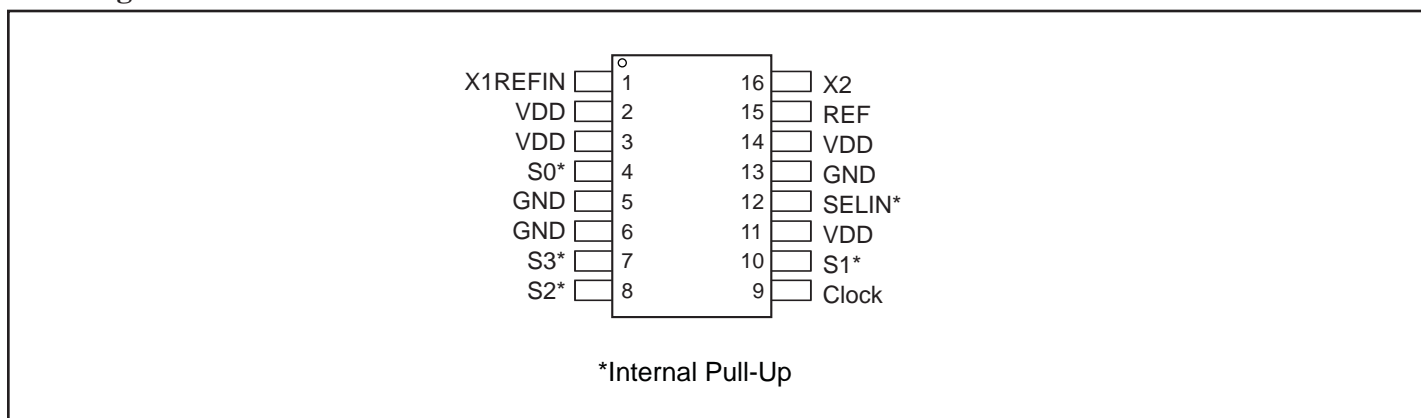Pin Assignment

Pin Description

| Pin Name | Pin No | I/O Type | Pin Description |
|----------------------|--------------|----------|---|
| X1/REF _{IN} | 1 | I | Crystal or Reference clock input. See "Recommended Crystal Specifications" for details. |
| V _{DD} | 2, 3, 11, 14 | Power | Power supply |
| S ₀ * | 4 | I | Output clock selection |
| GND | 5, 6, 13 | Ground | Ground |
| S ₃ * | 7 | I | Output clock selection |
| S ₂ * | 8 | I | Output clock selection |
| Clock | 9 | O | Clock output |
| S ₁ * | 10 | I | Output clock selection |
| SELIN* | 12 | I | Input clock selection. Low: reference clock input; High: crystal clock input |
| REF | 15 | O | Reference clock input |
| X ₂ | 16 | I | Crystal clock input; leave open if SELIN=Low |

* Internally Pulled High

Electrical Specifications

Maximum Ratings

| Item | Rating |
|------------------------------------|-------------------------------|
| Supply Voltage to Ground Potential | 5.5V |
| All Inputs and Outputs | -0.5 to V _{DD} +0.5V |
| Ambient Operating Temperature | -40 to +85°C |
| Storage Temperature | -65 to +150°C |
| Junction Temperature | 150°C |
| Soldering Temperature | 260°C |

Note: Beyond maximum ratings may cause device damage

Recommended Operation Conditions

| Parameter | Min. | Typ. | Max. | Unit |
|---|------|------|------|------|
| Ambient Operating Temperature | -40 | | +85 | °C |
| Power Supply Voltage (measured in respect to GND) | +3.0 | | +3.6 | V |

DC Electrical Characteristics

V_{DD} = 3.3V ±10%, Ambient Temperature -40 to +85°C

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------|---------------------------|-------------------------|----------------------|------|------|------|
| V _{DD} | Operating Voltage | | 3.0 | | 3.6 | V |
| V _{IH} | Input High Voltage | | 2 | | | V |
| V _{IL} | Input Low Voltage | | | | 0.8 | V |
| V _{OH} | Output High Voltage | I _{OH} = -4mA | V _{DD} -0.4 | | | V |
| V _{OH} | Output High Voltage | I _{OH} = -12mA | 2.4 | | | V |
| V _{OL} | Output Low Voltage | I _{OL} = +12mA | | | 0.4 | V |
| I _{DD} | Supply Current | No Load | | 25 | | mA |
| I _{OS} | Short Circuit Current | Each output | | ±65 | | mA |
| Z _{OUT} | Nominal Output Impedance | | | 20 | | Ω |
| Z _{IN} | Input Capacitance | Input pins | | 7 | | pF |
| R _{Pullup} | Internal pull-up resistor | | | 120 | | KΩ |

AC Electrical Characteristics

V_{DD} = 3.3V ±10%, Ambient Temperature -40 to +85°C

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-------------------|------------------------|---|------|------|------|------|
| F _{cry} | Crystal Frequency | | | 27 | 28 | MHz |
| t _{Rise} | Output Clock Rise Time | 20% to 80%, 15pF load | | | 1.5 | ns |
| t _{Fall} | Output Clock Fall Time | 80% to 20%, 15pF load | | | 1.5 | ns |
| t _{DC} | Output Duty Cycle | Measured at V _{DD} /2, 15pF load | 45 | 50 | 55 | % |

| | | | | | | |
|----------------------|---|---------------------------------|--|------|--|--------|
| T _{j_short} | Short term jitter | Reference clock off | | 175 | | ps p-p |
| T _{j_short} | Short term jitter | Reference clock on | | 175 | | ps p-p |
| T _{j_long} | Long term jitter | Reference clock off; 10 μ delay | | 1100 | | ps p-p |
| T _{j_long} | Long term jitter | Reference clock on; 10 μ delay | | 1100 | | ps p-p |
| Phase Noise | Single sideband phase noise | 33 MHz; 10Hz offset | | -50 | | dBc |
| Phase Noise | Single sideband phase noise | 33 MHz; 100Hz offset | | -75 | | dBc |
| Phase Noise | Single sideband phase noise | 33 MHz; 1kHz offset | | -80 | | dBc |
| Phase Noise | Single sideband phase noise | 33 MHz; 10kHz offset | | -75 | | dBc |
| FERROR | Actual mean frequency error versus target | | | 0 | | ppm |

Thermal Characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------|--|--------------------|------|------|------|------|
| θJA | Thermal Resistance Junction to Ambient | Still air | | 78 | | °C/W |
| θJA | | 1 min m/s air flow | | 70 | | °C/W |
| θJA | | 3 min m/s air flow | | 68 | | °C/W |
| θJC | Thermal Resistance Junction to Case | | | 37 | | °C/W |


Recommended Crystal Specification

Pericom's 49SMLB27.0000 MHz parallel resonance crystal is recommended.

Recommended Crystal Specification

| Parameter | Value | Units |
|---------------------------------|----------------|-------|
| Mode of oscillation | Fundamental AT | |
| Frequency | 27 | MHz |
| Frequency Tolerance | ±50 | PPM |
| Temperature and aging stability | ±50 | PPM |
| C0/C1 ratio | 240 | |
| Load cap | 18 | pF |
| Equivalent series resistance | 30 | Ω |

Packaging Mechanical: 16-pin TSSOP (L16)

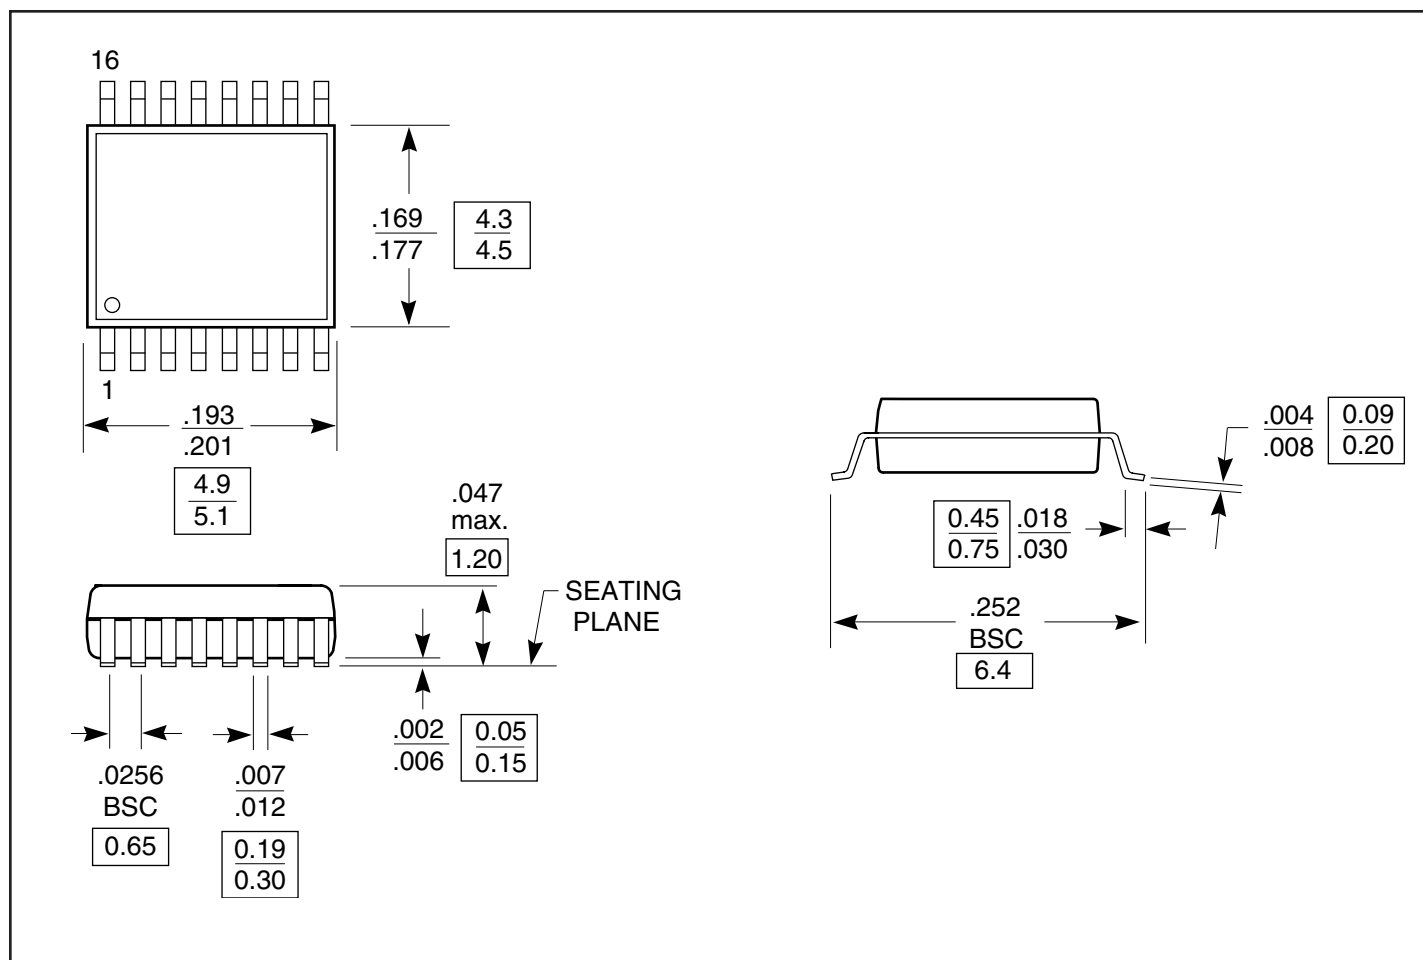

Ordering Information

| Ordering Code | Package Code | Package Type | Operating Range |
|---------------|--------------|------------------------------|-----------------|
| PI6C6612LE | L | Pb-free & Green 16-pin TSSOP | Industrial |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru