

SS/SA/SB High Capacitance (φ6.3) series



FPCAP



- Low ESR, High Capacitance, High ripple current.
- Load life of 2000 hours at 105°C.
- SMD type : Lead free reflow soldering condition at 260°C peak correspondence.
- Compliant to the RoHS directive (2011/65/EU).



■ Specifications

| Item | Performance Characteristics | |
|-------------------------------|--|---|
| Category Temperature Range | -55 to +105°C | |
| Rated Voltage Range | 2.5 to 35V | |
| Rated Capacitance Range | 10 to 560μF | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | |
| Tangent of loss angle (tan δ) | Less than or equal to the specified value at 120Hz, 20°C | |
| ESR (*1) | Less than or equal to the specified value at 100kHz, 20°C | |
| Leakage Current (*2) | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C | |
| Endurance | Test condition | 105°C, rated voltage 2000Hrs. |
| | Capacitance change | Within ±20% of initial value before test |
| | tan δ | 150% or less than the initial specified value |
| | ESR(*1) | 150% or less than the initial specified value |
| | Leakage current (*2) | Less than or equal to the initial specified value |


※1 ESR should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform.

※2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

■ Size List (ESR)

[Upper value : φDxL(mm), Lower value : ESR(mΩ)]

| Cap [μF] | R.V.(V) | | 4.0 | | 6.3 | | 10 | | 16 | | 25 | | 35 | |
|----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|----|
| | SS | SA | SA | SB | SS | SA | SB | SA | SS | SA | SS | SS | SS | SS |
| 10 | | | | | | | | | | | | 6.3x5.7 (60) | 6.3x5.7 (60) | |
| 22 | | | | | | | | | | | | 6.3x5.7 (40) | | |
| 27 | | | | | | | | | | | | 6.3x5.7 (40) | | |
| 47 | | | | | | | | | | | | 6.3x5.7 (30) | | |
| 56 | | | | | | | | | | | | 6.3x5.7 (30) | | |
| 68 | | | | | | | | | | | | 6.3x5.7 (30) | | |
| 100 | | | | | | 6.3x5.7 (25) | | | | 6.3x5.7 (24) | 6.3x7.7 (24) | | | |
| 120 | | | | | | | | | 6.3x5.7 (18) | | | | | |
| 180 | | | | | | | | | | | 6.3x5.7 (22) | | | |
| 220 | | | | | | 6.3x5.7 (25) | 6.3x5.7 (15) | 6.3x5.7 (12) | | | | | | |
| 270 | | | | | | | 6.3x5.7 (14) | | | | | | | |
| 330 | | 6.3x5.7 (14) | | 6.3x5.7 (14) | 6.3x5.7 (11) | 6.3x5.7 (25) | 6.3x5.7 (14) | | | | | | | |
| 390 | | 6.3x5.7 (14) | 6.3x5.7 (10) | 6.3x5.7 (14) | | | | | | | | | | |
| 470 | | 6.3x5.7 (13) | | | | | | | | | | | | |
| 560 | 6.3x5.7 (25) | 6.3x5.7 (13) | 6.3x5.7 (10) | | | | | | | | | | | |

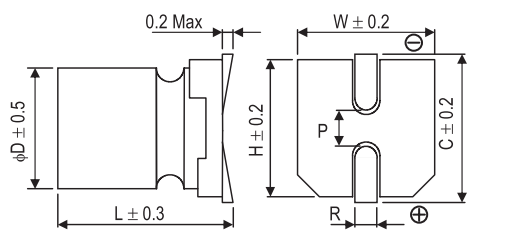

| φDxL | W | H | C | R | P |
|---------|-----|-----|-----|------------|-----|
| 6.3x5.7 | 6.5 | 6.5 | 7.2 | 0.5 to 0.9 | 2.1 |
| 6.3x7.7 | 6.5 | 6.5 | 7.2 | 0.5 to 0.9 | 2.1 |

SS / SA / SB series

Standard Ratings

| Rated Voltage (V) (code) | Surge Voltage (V) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA, 2min.) | ESR (mΩ, 100kHz) | Rated Ripple Current (mA rms) | NICHICON | FPCAP |
|--------------------------|-------------------|------------------------|---------------------|-------|-----------------------------|------------------|-------------------------------|----------------|------------------|
| 2.5 (0E) | 2.8 | 330 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0E331MCN1GS | FP-2R5ME331M-SAR |
| | | 390 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0E391MCN1GS | FP-2R5ME391M-SAR |
| | | 390 | 6.3×5.7 | 0.12 | 700 | 10 | 3650 | RSB0E391MCN1GS | FP-2R5ME391M-SBR |
| | | 470 | 6.3×5.7 | 0.12 | 700 | 13 | 3600 | RSA0E471MCN1GS | FP-2R5ME471M-SAR |
| | | 560 | 6.3×5.7 | 0.12 | 700 | 25 | 2500 | RSS0E561MCN1GS | FP-2R5ME561M-SSR |
| | | 560 | 6.3×5.7 | 0.12 | 700 | 13 | 3600 | RSA0E561MCN1GS | FP-2R5ME561M-SAR |
| | | 560 | 6.3×5.7 | 0.12 | 700 | 10 | 3800 | RSB0E561MCN1GS | FP-2R5ME561M-SBR |
| 4.0 (0G) | 4.6 | 330 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0G331MCN1GS | FP-4R0ME331M-SAR |
| | | 330 | 6.3×5.7 | 0.12 | 700 | 11 | 3700 | RSB0G331MCN1GS | FP-4R0ME331M-SBR |
| | | 390 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0G391MCN1GS | FP-4R0ME391M-SAR |
| 6.3 (0J) | 7.2 | 100 | 6.3×5.7 | 0.12 | 700 | 25 | 2500 | RSS0J101MCN1GS | FP-6R3ME101M-SSR |
| | | 220 | 6.3×5.7 | 0.12 | 700 | 25 | 2500 | RSS0J221MCN1GS | FP-6R3ME221M-SSR |
| | | 220 | 6.3×5.7 | 0.12 | 700 | 15 | 3160 | RSA0J221MCN1GS | FP-6R3ME221M-SAR |
| | | 220 | 6.3×5.7 | 0.12 | 700 | 12 | 3500 | RSB0J221MCN1GS | FP-6R3ME221M-SBR |
| | | 270 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0J271MCN1GS | FP-6R3ME271M-SAR |
| | | 330 | 6.3×5.7 | 0.12 | 700 | 25 | 2500 | RSS0J331MCN1GS | FP-6R3ME331M-SSR |
| | | 330 | 6.3×5.7 | 0.12 | 700 | 14 | 3160 | RSA0J331MCN1GS | FP-6R3ME331M-SAR |
| 10 (1A) | 11.5 | 120 | 6.3×5.7 | 0.12 | 700 | 18 | 2900 | RSA1A121MCN1GS | FP-010ME121M-SAR |
| 16 (1C) | 18.4 | 100 | 6.3×5.7 | 0.12 | 700 | 24 | 2490 | RSS1C101MCN1GS | FP-016ME101M-SSR |
| | | 100 | 6.3×7.7 | 0.12 | 700 | 24 | 2700 | RSA1C101MCN1GS | FP-016ME101M-SAR |
| | | 180 | 6.3×5.7 | 0.12 | 576 | 22 | 3300 | RSA1C181MCN1GS | FP-016ME181M-SAR |
| 25 (1E) | 28.7 | 10 | 6.3×5.7 | 0.12 | 100 | 60 | 1700 | RSS1E100MCN1GS | FP-025ME100M-SSR |
| | | 22 | 6.3×5.7 | 0.12 | 110 | 40 | 2100 | RSS1E220MCN1GS | FP-025ME220M-SSR |
| | | 27 | 6.3×5.7 | 0.12 | 135 | 40 | 2600 | RSS1E270MCN1GS | FP-025ME270M-SSR |
| | | 47 | 6.3×5.7 | 0.12 | 235 | 30 | 2800 | RSS1E470MCN1GS | FP-025ME470M-SSR |
| | | 56 | 6.3×5.7 | 0.12 | 280 | 30 | 2800 | RSS1E560MCN1GS | FP-025ME560M-SSR |
| | | 68 | 6.3×5.7 | 0.12 | 340 | 30 | 2800 | RSS1E680MCN1GS | FP-025ME680M-SSR |
| 35 (1V) | 40.2 | 10 | 6.3×5.7 | 0.12 | 100 | 60 | 1700 | RSS1V100MCN1GS | FP-035ME100M-SSR |

Frequency Characteristics (The frequency characteristics are typical and not a guaranteed value.)



- Taping specifications are given in page 28.
- Recommended land size, soldering by reflow are given in page 25.
- Please refer to page 3 for the minimum order quantity.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru