



## **TS418-1N426**

### THERMOPILE SENSOR

#### SPECIFICATIONS

- **Thermopile IR-Sensor**
- **Filter for NDIR CO2 Gas Detection**
- **Single Element**
- **Very High Signal**
- **Flat Filter**
- **Small Package**
- **Accurate Reference Sensor**

Thermopiles are mainly used for contactless temperature or non-dispersive infrared measurement in many applications. Their function is to transfer the heat radiation emitted from the objects or other infrared sources into a voltage output.

## FEATURES

Very High Signal  
Accurate Reference Sensor  
4.26 $\mu$ m Narrow Band Pass  
Small TO-18 package

## APPLICATIONS

NDIR CO<sub>2</sub> Gas Detection

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typical	Max	Unit	Description
Storage Temperature	T <sub>S</sub>	-20	+20	+85	°C	permanent
Storage Temperature	T <sub>S</sub>	-20	+20	+100	°C	non permanent

## PERFORMANCE SPECS

Parameter	Symbol	Value	Unit	Condition
Operating Ambient Temperature	T <sub>Amb</sub>	-20 to +85	°C	permanent
Operating Ambient Temperature	T <sub>Amb</sub>	-20 to +100	°C	non permanent
Package		TO-18		
Absorber Area	A	1.4 × 1.4	mm <sup>2</sup>	
Thermopile Resistance	R <sub>TP</sub>	180 ± 60	kΩ	T <sub>Amb</sub> = +25°C
Temperature Coefficient of Thermopile Resistance	TCR <sub>TP</sub>	-0.06 ± 0.04	%/K	T <sub>Amb</sub> = +25°C to +75°C
Voltage Response	V <sub>TP</sub>	depends on light source	mV	
Temperature Coefficient of Voltage Response	TCV <sub>TP</sub>	-0.45 ± 0.08	%/K	T <sub>Amb</sub> = +25°C to +75°C
Noise Equivalent Voltage	NEV	130	nV/Hz <sup>1/2</sup>	T <sub>Amb</sub> = +25°C
Rise Time	τ <sub>63</sub>	22 ± 5	ms	
Ambient Temperature Sensor		Ni-RTD		
Ambient Temperature Sensor Resistance	R <sub>Ni-RTD</sub>	1000 ± 4	Ω	T <sub>Amb</sub> = 0°C
Temperature Coefficient of Ni-RTD	TC <sub>Ni-RTD</sub>	6178 ± 150	ppm/K	T <sub>Amb</sub> = 0°C to +100°C

## TYPICAL PERFORMANCE CURVES

The typical performance of a CO<sub>2</sub>-sensor depends on many external parameters.

These can be the for example:

- infrared light source
- optics (lens, mirror waveguide)
- length of the absorbing path

Therefore a typical performance curve cannot be shown.

## OPTICAL CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Field of View	FOV	110	deg	at 50% of maximum signal

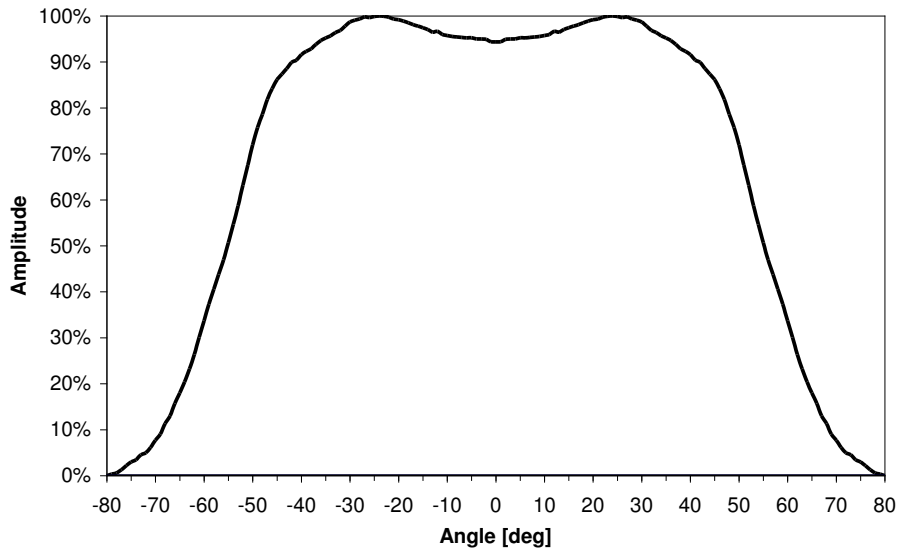


Figure 2: Field of View Curve

## FILTER CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Filter Type	NBP	4.26 ±0.18	µm	Narrow Band Pass

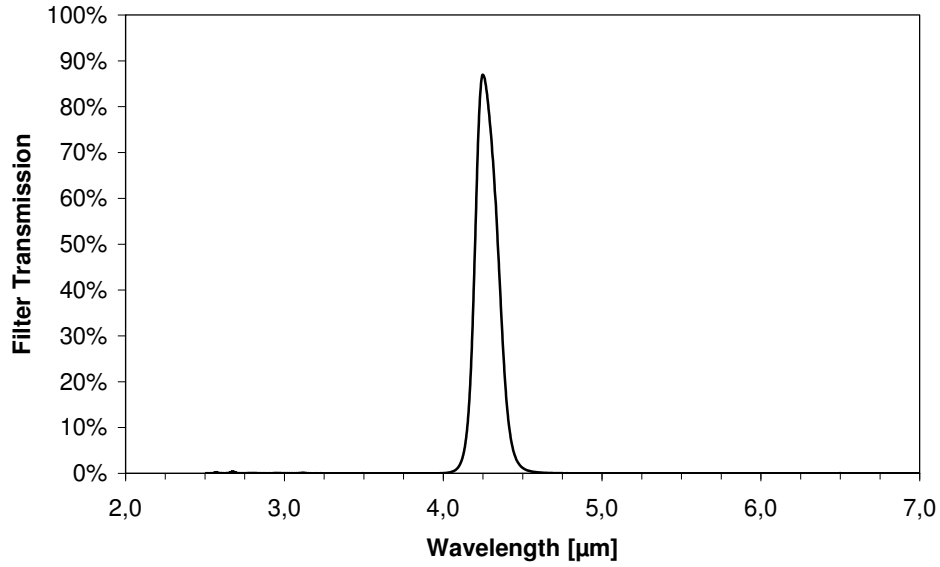


Figure 3: Filter transmission curve

## ELECTRICAL CONNECTIONS

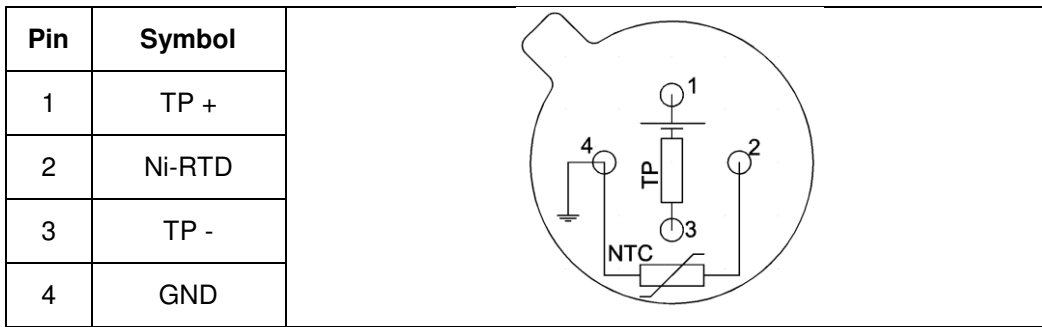


Figure 4: Electrical connections - bottom view of thermopile

## MECHANICAL DIMENSIONS

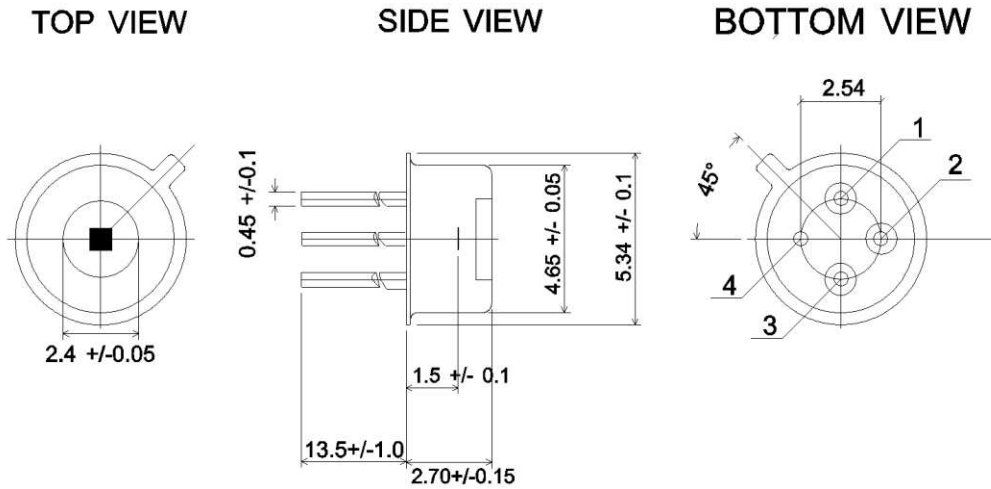


Figure 5: Mechanical dimensions of thermopile

## Ordering INFORMATION

<b>Part Description</b>	TS418-1N426
<b>Part No.</b>	G-TPCO-035

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
910 Turnpike Road  
Shrewsbury, MA 01545  
United States  
Phone: +1-508-842-0516  
Fax: +1-508-842-0342  
Email: [temperature.sales.amer@meas-spec.com](mailto:temperature.sales.amer@meas-spec.com)  
Web: [www.meas-spec.com](http://www.meas-spec.com)

### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Deutschland GmbH  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: [info.de@meas-spec.com](mailto:info.de@meas-spec.com)  
Web: [www.meas-spec.com](http://www.meas-spec.com)

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
Email:  
[temperature.sales.asia@meas-spec.com](mailto:temperature.sales.asia@meas-spec.com)  
Web: [www.meas-spec.com](http://www.meas-spec.com)

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)