

66126

**SINGLE/DUAL CHANNEL, HERMETICALLY SEALED
OPTOCOUPLER, SIMILAR TO 4N55**

Mii

**OPTOELECTRONIC PRODUCTS
DIVISION**

Features:

- DSCC Approved 8767902PX (Dual) and 9085401HPX (Single)
- 1500 Vdc isolation test voltage
- TTL and CMOS compatible
- 2 MHz bandwidth typical
- Faraday shield to provide high common mode rejection

Applications:

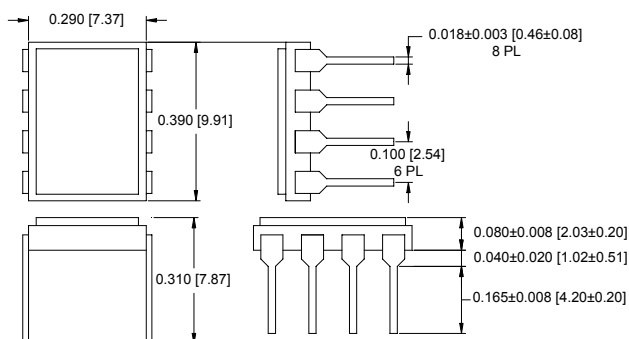
- Military and space
- Voltage level shifting
- Isolated receiver input
- Communication systems
- Medical systems

DESCRIPTION

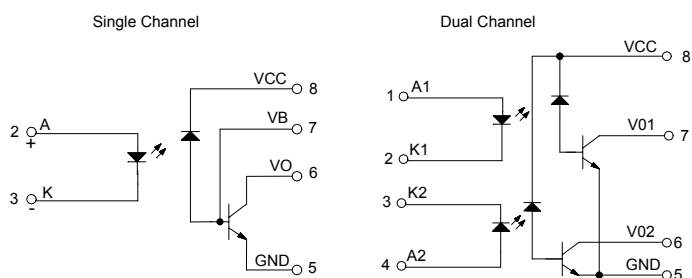
The **66126** single/dual channel optocouplers utilize infrared LEDs optically coupled to high gain photon detectors. These unique optocouplers provide high switching speeds while providing high isolation (1500Vmin) over the full military temperature range (-55° to +125°C). The 66126 is available in standard and MIL-PRF-38534 screened versions or tested to customer specifications.

ABSOLUTE MAXIMUM RATINGS

Storage Temperature.....	-65°C to +150°C
Operating Free-Air Temperature Range	-55°C to +125°C
Lead Solder Temperature.....	260°C for 10s (1.6mm below seating plane)
Peak Forward Input Current	40mA (1ms duration)
Average Forward Input Current	20mA
Input Power Dissipation	36mW
Reverse Input Voltage (each channel)	5V
Supply voltage - V_{CC} (each channel)	7V (1 minute maximum)
Current - I_O (each channel)	25mA
Output Power Dissipation (each channel)..(derate linearly at a rate of 1.4mW/°C above 100°C)	50mW
Output Voltage - V_O (each channel)	7V
Base Current (each channel)	5mA

Package Dimensions

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

Schematic Diagram

ELECTRICAL CHARACTERISTICS $T_a = -55^{\circ}\text{C}$ to 125°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Current Transfer Ratio	CTR	9	20		%	$I_F = 16\text{mA}$, $V_O = 0.4\text{V}$, $V_{CC} = 4.5\text{V}$	1, 2
Output Leakage Current	I_{OH1}		70	250	μA	$I_F = 250\mu\text{A}$, $V_{CC} = V_O = 18\text{V}$ I_F (other channel) = 20mA	1
Logic High Output Current	I_{OH}		20	100	μA	$I_F = 250\mu\text{A}$, $V_{CC} = V_O = 18\text{V}$ I_F (other channel) = 20mA	1
High Level Output Current	I_{CCH}		0.2	10	μA	$I_F = 0$, $V_{CC} = 18\text{V}$ I_F (other channel) = 20mA	1
Low Level Supply Current	I_{CCL}		35	200	μA	$I_{F1} = I_{F2} = 20\text{mA}$, $V_{CC} = 18\text{V}$	1
Input Forward Voltage	V_F		1.5	1.8	V	$I_F = 20\text{mA}$	1
Input Reverse Breakdown Voltage	BV_R	3			V	$I_R = 10\mu\text{A}$	1
Input-Output Insulation Leakage Current	I_{I-O}			1.0	μA	$V_{I-O} = 1500\text{Vdc}$, Relative Humidity = 45% $t_A = 25^{\circ}\text{C}$, $t = 5\text{s}$	3
Propagation Delay Time To High Output Level	t_{PLH}		2	6	μs	$I_F = 16\text{mA}$, $V_{CC} = 5\text{V}$, $R_L = 8.2\text{k}\Omega$ $C_L = 50\text{pF}$	1
Propagation Delay Time To Low Output Level	t_{PHL}		0.4	2	μs	$I_F = 16\text{mA}$, $V_{CC} = 5\text{V}$, $R_L = 8.2\text{k}\Omega$ $C_L = 50\text{pF}$	1

TYPICAL CHARACTERISTICS $T_a = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$ Each Channel

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Capacitance	C_{IN}		120		pF	$V_F = 0$, $f = \text{MHz}$	1
Capacitance (Input-Output)	C_{I-O}		1.5		pF	$f = 1\text{MHz}$, $V_F = 0$	1, 4
Capacitance (Input-Input)	C_{I-I}		0.55		pF	$f = 1\text{MHz}$	
Input Diode Temperature Coefficient	$\frac{\Delta V_F}{\Delta T_A}$		-1.9		mV/ $^{\circ}\text{C}$	$I_F = 18\text{mA}$	1
Resistance (Input-Output)	R_{I-O}		10^{12}		Ω	$V_{I-O} = 500\text{Vdc}$	1
Input-Input Insulation Leakage Current	I_{I-I}		1		pA	Relative Humidity = 45% $V_{I-I} = 500\text{Vdc}$, $t = 5\text{s}$	3
Common Mode Transient immunity at High Output Level	CM_H	500	1000		V/ μs	$V_{CM} = 50\text{V p-p}$, $R_L = 8.2\text{k}\Omega$, $I_F = 0\text{mA}$	1, 5
Common Mode Transient Immunity at Low Output Level	CM_L	500	1000		V/ μs	$V_{CM} = 50\text{V p-p}$, $R_L = 8.2\text{k}\Omega$, $I_F = 16\text{mA}$	1, 6

NOTES:

- Each channel.
- CURRENT TRANSFER RATIO is defined as the ratio of output collector current, I_O , to the forward LED input current, I_F , times 100%.
- Measured between each input pair shorted together.
- Measured between input pins shorted together and the output pins for that channel shorted together.
- CM_H is the maximum tolerable common mode transient to assure that the output will remain in a high logic state (ie. $V_O > @.0\text{V}$).
- CM_L is the maximum tolerable common mode transient to assure that the output will remain in a low logic state (ie. $V_O < 0.8\text{V}$).

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I_{FL}	0	2	μA
Supply Voltage	V_{CC}	2.0	18	V

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66126-001	Single Channel optocoupler tested over full military temperature range (-55° to $+125^{\circ}\text{C}$)
66126-011	Single Channel optocoupler, Commercial (0° to 70°C)
66126-105	DSCC Dwg 5962-9085401HPX Single Channel Optocoupler
66126-002	Dual Channel optocoupler tested over full military temperature range (-55° to $+125^{\circ}\text{C}$)
66126-012	Dual Channel optocoupler, Commercial (0° to 70°C)
66126-103	DSCC Dwg 5962-8767902PX Dual Channel Optocoupler

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru