

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0784920001](#)
Status: **Active**
Overview: [micro_sata](#)
Description: 1.27mm (.050") Pitch Micro Serial ATA Device Receptacle for 1.8" SSD/HDD, SMT, Vertical, with Pegs and Kapton Tape, 16 Circuits, EmbossedTape on Reel, Lead free

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-78492-001 \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179


General

Product Family PCB Receptacles
Series [78492](#)
Application Board-to-Board
Comments Rimmed connector base; connector width: 4.38mm (.163")

Overview [micro_sata](#)
Product Name Micro Serial ATA, Serial ATA

Physical

Circuits (Loaded) 16
Circuits (maximum) 16
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part Yes
Lock to Mating Part No
Material - Metal Copper Alloy
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 1
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface (in) 0.050 In, 0.052 In
Pitch - Mating Interface (mm) 1.27 mm, 1.32 mm
Pitch - Term. Interface (in) 0.050 In, 0.052 In
Pitch - Term. Interface (mm) 1.27 mm, 1.32 mm
Plating min: Mating (µin) 5
Plating min: Mating (µm) 0.127
Plating min: Termination (µin) 100
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes
Polarized to PCB Yes
Stackable No
Temperature Range - Operating 0°C to +55°C
Termination Interface: Style Surface Mount

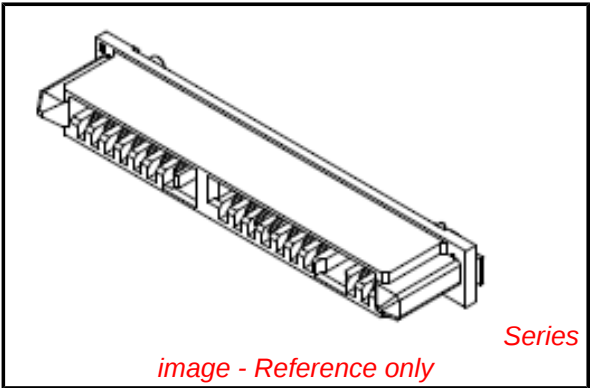

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[78492Series](#)

Mates With
[78103](#) , [78283](#) and [78285](#) Micro SATA Device Plugs

Electrical

Current - Maximum per Contact	1.5A
Grounding to PCB	Yes
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	3
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Packaging Specification	PK-78492-001
Product Specification	PS-78492-001
Sales Drawing	SD-78492-001



This document was generated on 05/21/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION




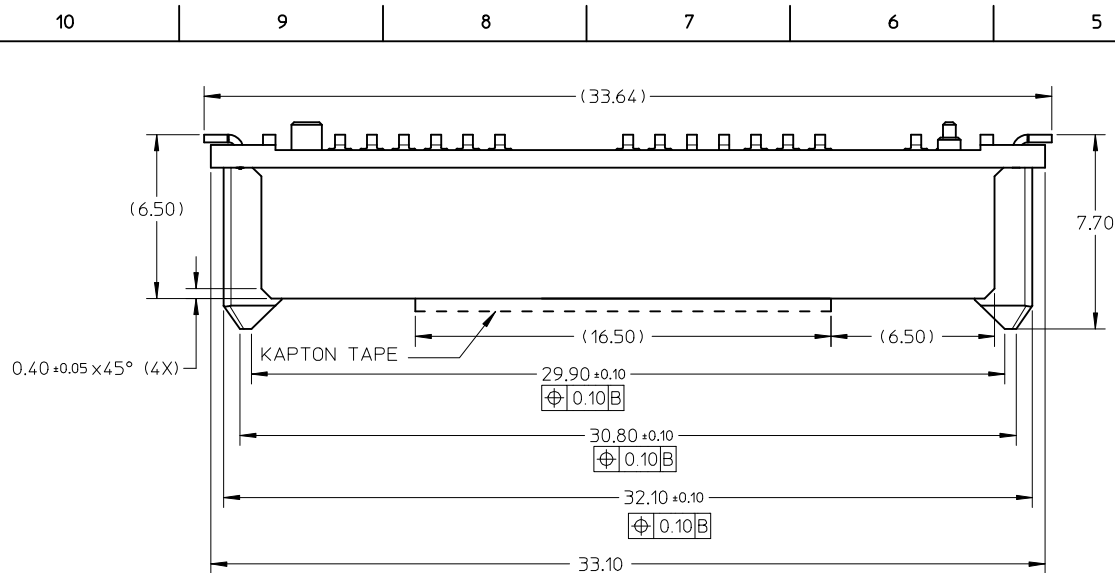


NOTES:

1. MATERIAL : LCP, GLASS FILLED, UL 94V-0, BLACK
TERMINAL/SOLDER TAB : COPPER ALLOY
2. FINISHES: SEE TABLE
3. PRODUCT SPECIFICATION : SEE TABLE
4. PACKAGING SPECIFICATION : TAPE AND REEL
5. MATES WITH : MOLEX MICRO SATA PLUG
6. THIS PRODUCT IS COMPLIANT TO RoHS DIRECTIVE WITH THE FOLLOWING BANNED SUBSTANCES - LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS AND POLYBROMINATED DIPHENYLS ETHERS.
7. MOLEX LOGO AND CAVITY NUMBER LOCATED APPROXIMATELY AS SHOWN
8. NON FUNCTIONAL CORING MAY VARY

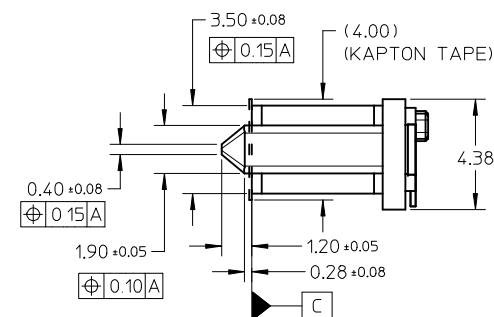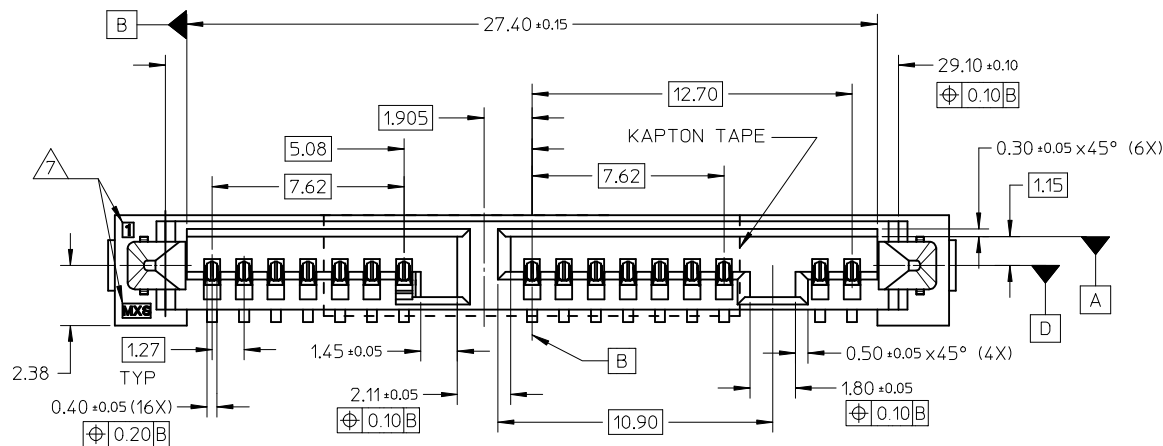


SEE SHEET 4 EC NO: S2009-0967 DRAWN: GMENARLY CHKD: CGOH APPR: BOKOK	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		DESCRIPTION REV	DRAWN BY GMENARLY CHECKED BY CGOH APPROVED BY BOKOK MATERIAL NO. SEE TABLE	DATE 2009/03/17 2009/05/20 2009/05/20	TITLE MICRO SATA RECEPTACLE VERTICAL SMT 1.8 INCH SSD/HDD MOLEX INCORPORATED	DOCUMENT NO. SD-78492-001	SHEET NO. 1 OF 4		

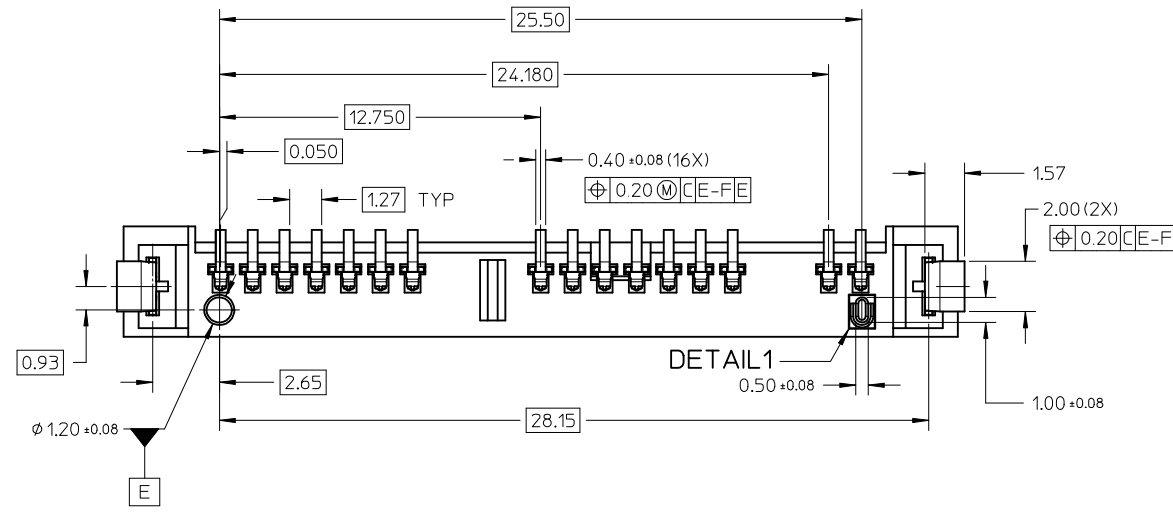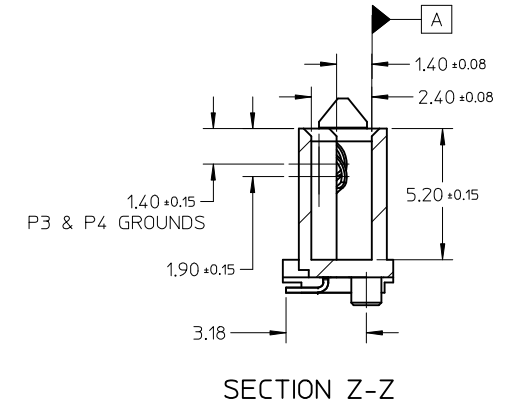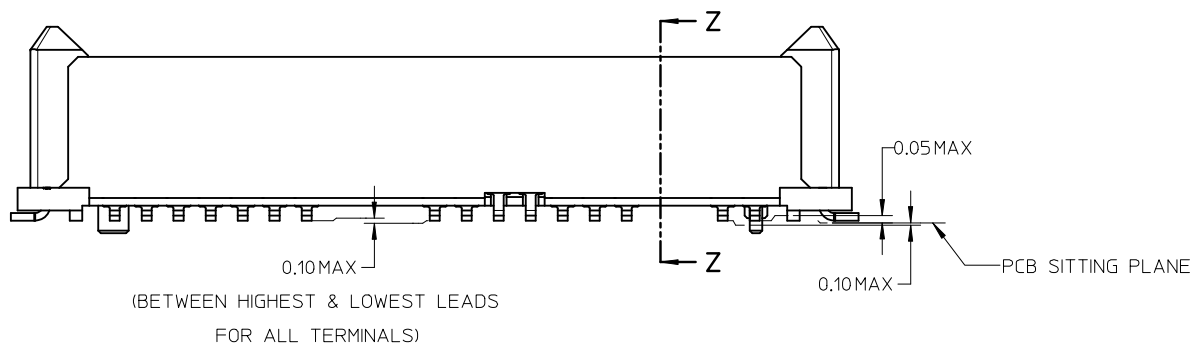


SEE SHEET 4 EC NO: S2009-0967 DRWN:GMENARLY CHKD:CGOH APPR:BOKOK A1	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY GMENARLY	DATE 2009/03/17	TITLE MICRO SATA RECEPTACLE VERTICAL SMT 1.8 INCH SSD/HDD				
			4 PLACES	± ---	± ---	CHECKED BY CGOH	DATE 2009/05/20	MOLEX INCORPORATED				
			3 PLACES	± ---	± ---	APPROVED BY BOKOK	DATE 2009/05/20					
			2 PLACES	± 0.20	± ---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-78492-001	SHEET NO. 2 OF 4			
			1 PLACE	± ---	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
			ANGULAR ± 3 °									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												

PACKAGING INFORMATION

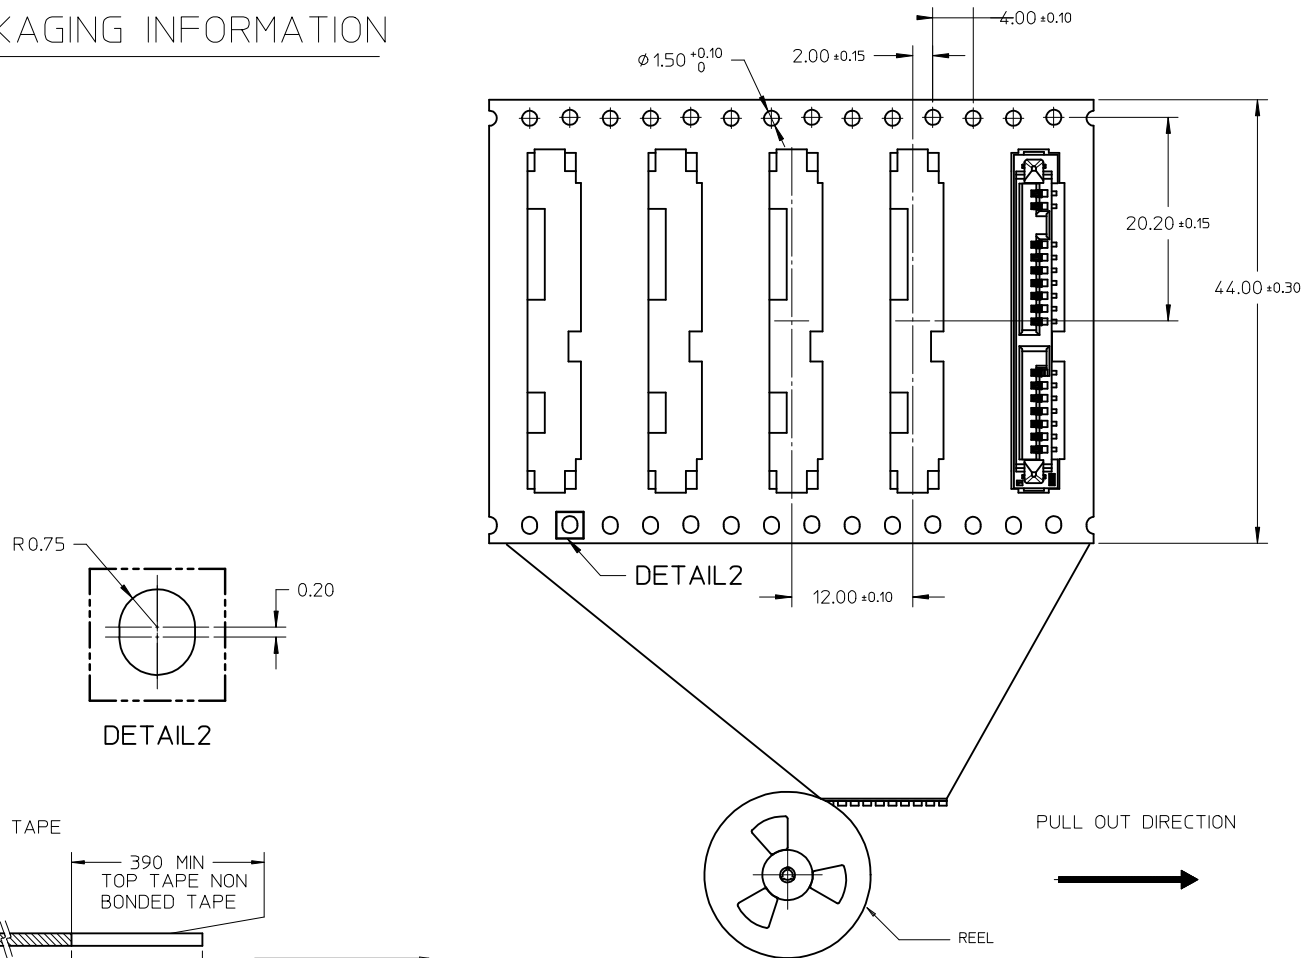


NOTES:

1. LEADER AND TRAILER TAPE

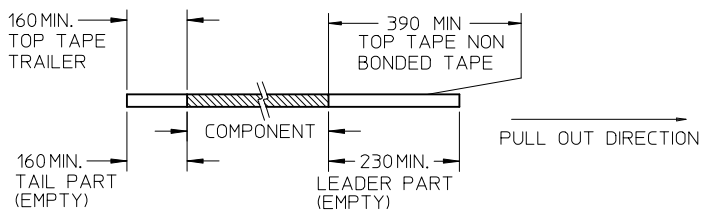

2. PEELING OFF FORCE OF THE TOP TAPE: 20 - 80gf. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. TAPE AND REEL SPECIFICATION IS AS PER EIA-481.

4. TAPE AND REEL QUANTITY : 550 PCS/ REEL.

5. THE TAPE IS TREATED FOR ANTI-STATIC.

REV. CARRIER TAPE EC NO: S2009-0967 DRWNG:GMENARLY CHKD:CGOH APPR:BOKOK	2009/08/04 2009/08/04 2009/08/05	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY GMENARLY	DATE 2009/03/17	TITLE MICRO SATA RECEPTACLE VERTICAL SMT 1.8 INCH SSD/HDD		
					± ---	± ---	CHECKED BY CGOH	DATE 2009/05/20			
					± 0.20	± ---	APPROVED BY BOKOK	DATE 2009/05/20			
					± ---	± ---	MATERIAL NO.				
				ANGULAR ± 3 °		SEE TABLE		DOCUMENT NO. SD-78492-001			SHEET NO. 4 OF 4
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru