

VSSC4 SL FG 48VAC/DC Ex**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Overvoltage coupling along the conductor path may disturb or destroy sensitive signal inputs. It is important to provide protection in the immediate vicinity of I&C devices. Weidmüller's broad product range for the I&C sector offers products in a 2-piece, pluggable design and modular terminals for tension clamp or screw connection. These products are suitable for both binary and analogue signals. Weidmüller also offers other designs with integrated components such as gas discharge tubes or varistors. VARITECTOR stands for flexible and variable surge protection by Weidmüller, tested according to product standard IEC61643-21. The VARITECTOR series can be used in applications according to IEC 61643-22 / VDE 0845-3 for classes C1, C2, C3 and D1. The VARITECTOR SPC, SSC and MCZ OVP product families optimally combine electrical and mechanical properties. Size and easy handling play an important role. This surge protection is suited for confined spaces in industrial and process automation as well as in building automation applications.

General ordering data

Order No.	1063940000
Type	VSSC4 SL FG 48VAC/DC Ex
Version	Surge protection for instrumentation and control
GTIN (EAN)	4032248829361
Qty.	5 pc(s).

VSSC4 SL FG 48VAC/DC Ex**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Width	12.2 mm	Height	76 mm
Depth	58.5 mm	Net weight	27 g

Temperatures

Humidity	5...96 %	Operating temperature	-40 °C...+70 °C
Storage temperature	-40 °C...+80 °C		

Probability of failure

PFH in $1 \cdot 10^{-9}$ per hour	0.9	SFF	97.91 %
SIL in compliance with IEC 61508	3		

General data

Colour	Light Blue	Isolating function	No
Mounting rail	TS 35	Optical function display	No
Protection degree		Segment	Instrumentation and Control
	IP 20		
UL 94 flammability rating	V-0		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

technical data

Rated voltage (AC)	48 V	Rated voltage (DC)	68 V
Rated current	300 mA	Max. continuous voltage, U_c (AC)	60 V
Max. continuous voltage, U_c (DC)	85 V	Discharge current I_n (8/20 μ s) wire-PE	2.5 kA
Discharge current I_n (8/20 μ s) GND-PE	2.5 kA	Discharge current I_{max} (8/20 μ s) GND-PE	10 kA
Discharge current I_{max} (8/20 μ s) wire-PE	10 kA	Discharge current, max. (8/20 μ s)	10 kA
Protection level U_p (typ.)		Standards	IEC61643-21:2009, DIN EN 60079-0:2009, DIN EN 60079-26:2007, DIN EN 61241-11:2006
	160 V		
Colour	Light Blue	Humidity	5...96 %
Requirements category acc. to IEC 61643-21	C2, C3, D1	Lightning test current I_{imp} (10/350 μ s)	1 kA
Volume resistance	1.8 Ω 10 %	Residual voltage, U_p typical	160 V
Dielectric strength at FG against PE	≥ 500 V	Overload - failure mode	Modus 2

Connection data

Clamping range, rated connection, min.	0.5 mm ²	Clamping range, rated connection, max.	4 mm ²
Wire connection cross section, stranded, rated connection, min.	0.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm

VSSC4 SL FG 48VAC/DC Ex**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**EX protection data**

Input power, max. P_i	0.75 W	Internal capacitance, max. C_i	1 nF
Internal inductance, max. L_i	0 μ H	Temperature class T4/135°C (-40°C ... +120 °C) li	300 mA
Temperature class T5/100°C (-40 °C ... +85 °C) li	300 mA	Temperature class T6/85 °C (-40 °C ... +70 °C) li	300 mA

Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

Rated data UL

UL certificate	UL Zertifikat
----------------	---------------

Ratings IECEx/ATEX

ATEX certificate	ATEX Certificate	IEC Ex certificate	IECEX Zertifikat
------------------	------------------	--------------------	------------------

Classifications

ETIM 3.0	EC000943	UNSPSC	30-21-19-21
eClass 4.1	27-13-08-01	eClass 5.1	27-13-08-01
eClass 6.2	27-13-08-02	eClass 7.1	27-13-08-02

Approvals

Approvals



ROHS

Conform

Probability of failure

SIL PAPER	SIL Paper
3-D model	

Downloads

Package insert	Instruction sheet VSSC
Declaration of Conformity	K378_02_11.pdf
PDF	Type examination certificate
3-D model	

VSSC4 SL FG 48VAC/DC Ex**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 16

D-32758 Detmold


Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com**Drawings**

Similar to illustration

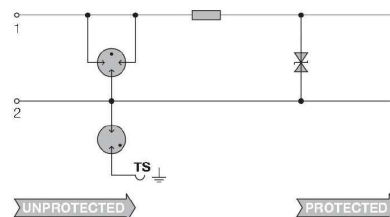

Circuit diagram



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru