


# Type 225P, Orange Drop<sup>®</sup>, Polyester Film/Foil Capacitors

## Features

- Radial-lead. Pressed profile.
- Non-inductively wound, extended foil construction.
- Over 35 years of proven dependability.
- Wide availability through CDE Distribution.

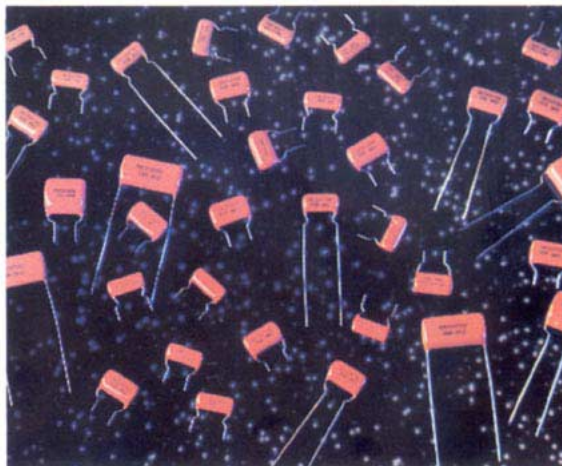

## Specifications

### Capacitance Range:

.00 to 1.0  $\mu\text{F}$

### Capacitance Tolerance:

$\pm 5\%$ ,  $\pm 10\%$ ,  $\pm 20\%$

### Voltage Ratings:

100 to 600 Volts D-C

70 to 200 Volts A-C

### Operating Temperature Range:

-55°C to +85°C (at full voltage)

### Voltage Derating:

At +105°C, 70% of +85°C rating.

At +125°C, 50% of +85°C rating.

### Lead Wire:

Tinned copper-clad steel,

.032 (0.8) diameter, #20 AWG

### Insulation Resistance:

At +25°C: 100,000  $\text{M}\Omega$  for  $\leq .25 \mu\text{F}$   
25,000  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > .25 \mu\text{F}$

At +85°C: 10,000  $\text{M}\Omega$  for  $C \leq .15 \mu\text{F}$   
1,500  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > .15 \mu\text{F}$

At +105°C: 1,500  $\text{M}\Omega$  for  $C \leq .17 \mu\text{F}$   
250  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > .17 \mu\text{F}$

At +125°C: 200  $\text{M}\Omega$  for  $C \leq .13 \mu\text{F}$   
25  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > .13 \mu\text{F}$

### Dissipation Factor:

0.75% Maximum @ 1 KHz, +25°C

### Encapsulation:

Conformal coating of orange, flame retardant epoxy. Meets UL94V-0 specifications.

### Dielectric/Construction:

Polyester film, single section design.

Non-inductively wound with extended aluminum foil.

Dimensions in inches, metric (mm) in parenthesis.

# Type 225P, Orange Drop®, Polyester Film/Foil Capacitors

## General Specifications

The Type 225P Orange Drop® is designed and manufactured for operation in a wide range of demanding environments and applications. Type 225P capacitors are wound from the most reliable polyester film and aluminum foil available and are protected by a rugged conformal coating of orange epoxy. They may be operated up to +125°C with proper derating.

The combination of proven dependability and extensive availability through CDE distribution make the 225P an ideal choice for many commercial and industrial electronic applications, from power supplies and instrumentation to audio amplifiers and test equipment.

### Operating Temperature Range:

The standard operating temperature range for polyester film is -55°C to +85°C. The 225P may be operated at full voltage within this temperature range.

The 225P may be operated up to +105°C provided the DC working voltage is reduced to 70% of the +85°C rating (full rating), and up to +125°C with a 50% reduction from the +85°C rating (full rating).

For more specific details regarding operation above +85°C please contact our design engineering department.

The maximum operating temperature for the 225P polyester film capacitors is +125°C.

### Dielectric Withstanding Voltage:

Units shall withstand a DC potential of 250% of rated voltage applied between terminals for not more than 5 seconds.

### AC Voltage Applications:

The A-C component of the 225P's voltage rating has been specified to assure that corona will not be encountered when the capacitor is operated within the noted specifications. We encourage you to contact us if you have any concerns about operating voltage, temperature limits, etc.

### Lead Bend Test:

After 3 consecutive 180° bends. No damage.


### Humidity Testing:

Units subjected to 95% relative humidity for 72 hours with no voltage applied at +75°C. After 4 hours of drying minimum product of insulation resistance and capacitance shall be 5,000 MΩ-μF.

### DC Voltage Life Test:


500 hours at +85°C at 150% of rated voltage. After test; capacitance shall not have changed by more than ±5% of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have increased to more than 1.0%. In addition, there should be no open or short circuits, and no sign of visible damage.

### Typical Temperature Characteristics:

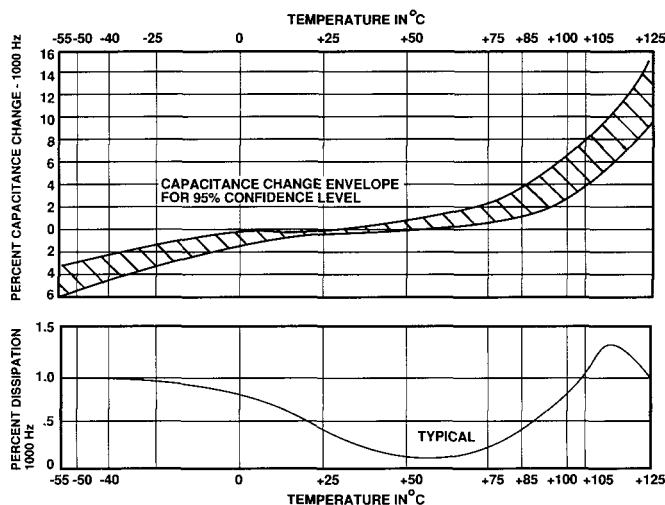

# Type 225P, Orange Drop®, Polyester Film/Foil Capacitors

## Ordering/Part Number information

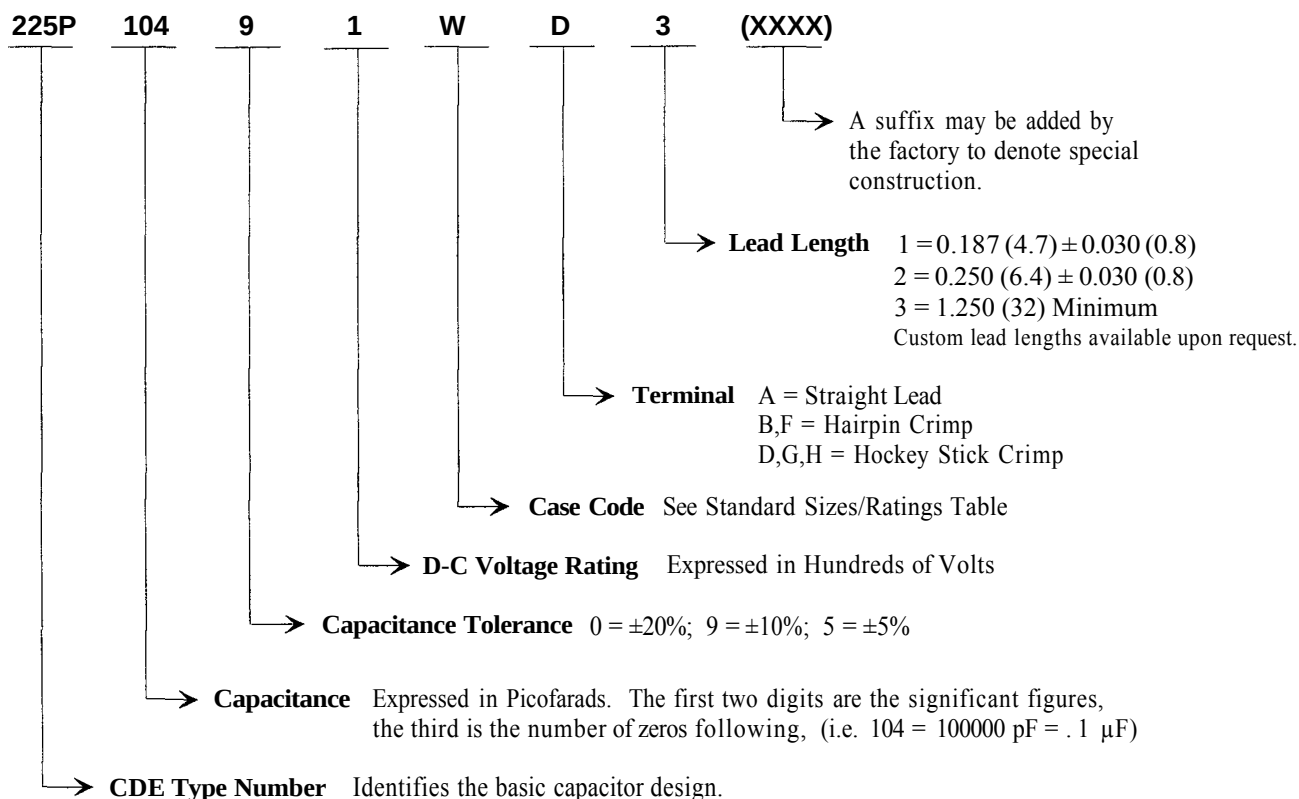

## Standard Marking Format

### Sample Marking on unit

CDE225P100V  
104K 9810

### Description


CDE - CDE Electronics identification  
225P - Type number  
100V - D-C Voltage rating, Volts  
104K - Capacitance and tolerance code  
9810 - Weekly date code  
(i.e. 10th week of 1998)

### Tolerance codes per EIA Standards

J     $\pm 5\%$   
K     $\pm 10\%$   
M     $\pm 20\%$

# Type 225P, Orange Drop<sup>®</sup>, Polyester Film/Foil Capacitors

## Standard Lead Styles

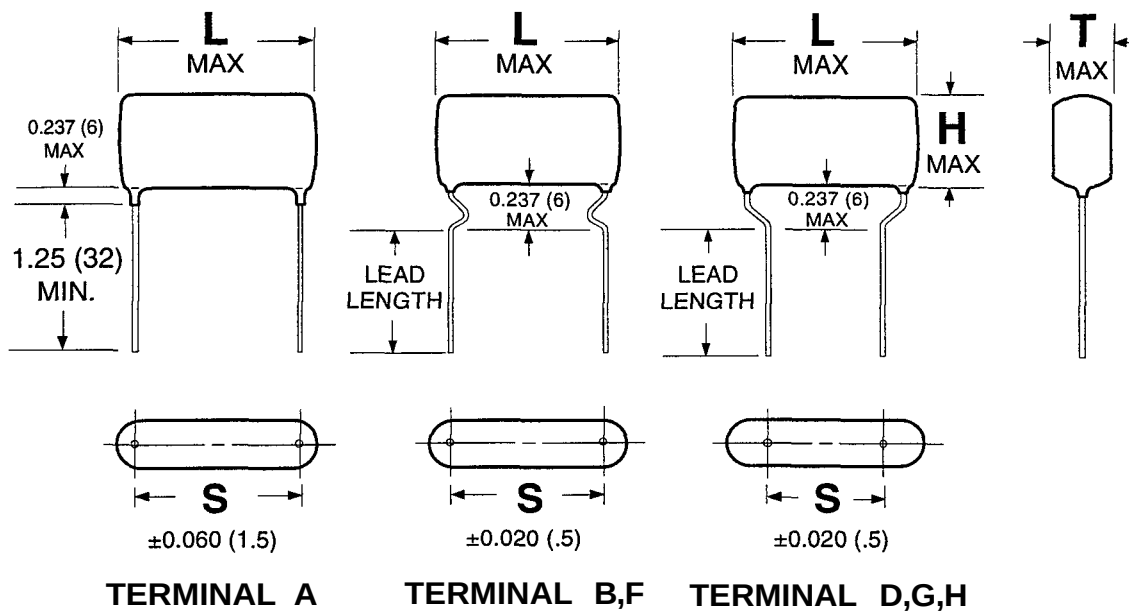

## Standard Lead Spacings

| CASE CODE | S            |              |              |              |             |             |
|-----------|--------------|--------------|--------------|--------------|-------------|-------------|
|           | Term. A      | Term. B      | Term. D      | Term. F      | Term. G     | Term. H     |
| W         | 0.562 (14.3) | 0.562 (14.3) | 0.375 (9.5)  | 0.394 (10)   | 0.295 (7.5) | 0.197 (5)   |
| X         | 0.613 (15.6) | 0.613 (15.6) | 0.375 (9.5)  | 0.590 (15)   | 0.394 (10)  | 0.295 (7.5) |
| Y         | 0.969 (24.6) | 0.969 (24.6) | 0.719 (18.3) | 0.886 (22.5) | 0.590 (15)  | ---         |

Dimensions in inches, metric (mm) in parenthesis.

# Type 225P, Orange Drop®, Polyester Film/Foil Capacitors

## Type 225P Standard Sizes/Ratings<sup>2</sup>

| Value, $\mu$ F    | Part Number <sup>1</sup> | L MAX       | T MAX      | H MAX      | Value, $\mu$ F     | Part Number <sup>1</sup> | L MAX       | T MAX      | H MAX       |
|-------------------|--------------------------|-------------|------------|------------|--------------------|--------------------------|-------------|------------|-------------|
| 100 VDC / 70 VAC* |                          |             |            |            | 200 VDC / 140 VAC* |                          |             |            |             |
| .001              | 225P10291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .001               | 225P10292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0012             | 225P12291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0012              | 225P12292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0015             | 225P15291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0015              | 225P15292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0018             | 225P18291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0018              | 225P18292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0022             | 225P22291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0022              | 225P22292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0027             | 225P27291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0027              | 225P27292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0033             | 225P33291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0033              | 225P33292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0039             | 225P39291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0039              | 225P39292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0047             | 225P47291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0047              | 225P47292 X              | .80 (20.3)  | .25 (6.4)  | .55 (14.0)  |
| .0056             | 225P56291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0056              | 225P56292 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .0068             | 225P68291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0068              | 225P68292 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .0082             | 225P82291 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .0082              | 225P82292 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .01               | 225P10391 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .01                | 225P10392 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .012              | 225P12391 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .012               | 225P12392 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .015              | 225P15391 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .015               | 225P15392 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .018              | 225P18391 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .018               | 225P18392 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .022              | 225P22391 W              | .70 (17.8)  | .25 (6.4)  | .35 (8.9)  | .022               | 225P22392 X              | .80 (20.3)  | .25 (6.4)  | .58 (14.7)  |
| .027              | 22SP27391 W              | .70 (17.8)  | .27 (6.9)  | .37 (9.4)  | .027               | 225P27392 X              | .80 (20.3)  | .28 (7.1)  | .61 (15.5)  |
| .033              | 225P33391 W              | .70 (17.8)  | .27 (6.9)  | .37 (9.4)  | .033               | 225P33392 X              | .80 (20.3)  | .28 (7.1)  | .61 (15.5)  |
| .039              | 225P39391 W              | .70 (17.8)  | .30 (7.6)  | .42 (10.7) | .039               | 225P39392 X              | .80 (20.3)  | .28 (7.1)  | .61 (15.5)  |
| .047              | 225P47391 W              | .70 (17.8)  | .30 (7.6)  | .42 (10.7) | .047               | 225P47392 X              | .80 (20.3)  | .28 (7.1)  | .61 (15.5)  |
| .056              | 225P56391 W              | .70 (17.8)  | .34 (8.6)  | .49 (12.4) | .056               | 225P56392 X              | .80 (20.3)  | .31 (7.9)  | .64 (16.3)  |
| .068              | 225P68391 W              | .70 (17.8)  | .34 (8.6)  | .49 (12.4) | .068               | 225P68392 X              | .80 (20.3)  | .31 (7.9)  | .64 (16.3)  |
| .082              | 225P82391 W              | .70 (17.8)  | .40 (10.2) | .55 (14.0) | .082               | 225P82392 X              | .80 (20.3)  | .34 (8.6)  | .67 (17.0)  |
| .1                | 225P10491 W              | .70 (17.8)  | .40 (10.2) | .55 (14.0) | .1                 | 225P10492 X              | .80 (20.3)  | .37 (9.4)  | .71 (18.0)  |
| .12               | 225P12491 X              | .80 (20.3)  | .37 (9.4)  | .57 (14.5) | .12                | 225P12492 X              | .80 (20.3)  | .39 (9.9)  | .72 (18.3)  |
| .15               | 225P15491 X              | .80 (20.3)  | .40 (10.2) | .62 (15.7) | .15                | 225P15492 X              | .80 (20.3)  | .41 (10.4) | .74 (18.8)  |
| .18               | 225P18491 X              | .80 (20.3)  | .43 (10.9) | .66 (16.8) | .18                | 225P18492 X              | .80 (20.3)  | .46 (11.7) | .75 (19.1)  |
| .22               | 225P22491 X              | .80 (20.3)  | .46 (11.7) | .70 (17.8) | .22                | 225P22492 X              | .80 (20.3)  | .48 (12.2) | .77 (19.6)  |
| .27               | 225P27491 X              | .80 (20.3)  | .49 (12.4) | .74 (18.8) | .27                | 225P27492 Y              | 1.25 (31.8) | .39 (9.9)  | .71 (18.0)  |
| .33               | 225P33491 X              | .80 (20.3)  | .52 (13.2) | .77 (19.6) | .33                | 225P33492 Y              | 1.25 (31.8) | .41 (10.4) | .71 (18.0)  |
| .39               | 225P39491 X              | .80 (20.3)  | .55 (14.0) | .81 (20.6) | .39                | 225P39492 Y              | 1.25 (31.8) | .45 (11.4) | .77 (19.6)  |
| .47               | 225P47491 X              | .80 (20.3)  | .60 (15.2) | .86 (21.8) | .47                | 225P47492 Y              | 1.25 (31.8) | .50 (12.7) | .83 (21.1)  |
| .56               | 225P56491 Y              | 1.25 (31.8) | .55 (14.0) | .88 (22.4) | .56                | 225P56492 Y              | 1.25 (31.8) | .67 (17.0) | .99 (25.1)  |
| .68               | 225P68491 Y              | 1.25 (31.8) | .58 (14.7) | .90 (22.9) | .68                | 225P68492 Y              | 1.25 (31.8) | .84 (21.3) | 1.14 (29.0) |
| .82               | 225P82491 Y              | 1.25 (31.8) | .65 (16.5) | .94 (23.9) |                    |                          |             |            |             |
| 1.0               | 225P10591 Y              | 1.25 (31.8) | .72 (18.3) | .98 (24.9) |                    |                          |             |            |             |

\* 60 Hz., RMS

<sup>1</sup> To complete part number for specific tolerance, terminal style and lead length please refer to Ordering/Part Number Information page.

<sup>2</sup> Shaded part numbers, when ordered as  $\pm 10\%$  tolerance with the D3 terminal style and lead length, are Standard Stock items available through the CDE Distribution Network. For complete part number please add the D3 suffix to the above part numbers in accordance with the Ordering Information (i.e. 225P10491WD3). Other part numbers are available on special order.

Dimensions in inches, metric (mm) in parenthesis.

# Type 225P, Orange Drop®, Polyester Film/Foil Capacitors

## Type 225P Standard Sizes/Ratings<sup>2</sup>

| Value, $\mu$ F     | Part Number <sup>1</sup> | L MAX      | T MAX      | H MAX      | Value, $\mu$ F     | Part Number <sup>1</sup> | L MAX      | T MAX      | H MAX       |
|--------------------|--------------------------|------------|------------|------------|--------------------|--------------------------|------------|------------|-------------|
| 400 VDC / 200 VAC* |                          |            |            |            | 600 VDC / 200 VAC* |                          |            |            |             |
| .001               | 225P10294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .001               | 225P10296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0012              | 225P12294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0012              | 225P12296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0015              | 225P15294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0015              | 225P15296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0018              | 225P18294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0018              | 225P18296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0022              | 225P22294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0022              | 225P22296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0027              | 225P27294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0027              | 225P27296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0033              | 225P33294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0033              | 225P33296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0039              | 225P39294X               | .80 (20.3) | .25 (6.4)  | .55(14.0)  | .0039              | 225P39296X               | .80 (20.3) | .25 (6.4)  | .55 (14.0)  |
| .0047              | 225P47294X               | .80 (20.3) | .25(6.4)   | .55 (14.0) | .0047              | 225P47296X               | .80 (20.3) | .25 (6.4)  | .58 (14.7)  |
| .0056              | 225P56294X               | .80 (20.3) | .25 (6.4)  | .58(14.7)  | .0056              | 225P56296X               | .80 (20.3) | .25 (6.4)  | .58 (14.7)  |
| .0068              | 225P68294X               | .80 (20.3) | .25 (6.4)  | .58(14.7)  | .0068              | 225P68296X               | .80 (20.3) | .25 (6.4)  | .58 (14.7)  |
| .0082              | 225P82294X               | .80 (20.3) | .25 (6.4)  | .58(14.7)  | .0082              | 225P82296X               | .80 (20.3) | .31 (7.9)  | .64 (16.3)  |
| .01                | 225P10394X               | .80 (20.3) | .25 (6.4)  | .58 (14.7) | .01                | 225P10396X               | .80 (20.3) | .31 (7.9)  | .64 (16.3)  |
| .012               | 225P12394X               | .80 (20.3) | .25 (6.4)  | .58 (14.7) | .012               | 225P12396X               | .80 (20.3) | .34 (8.6)  | .67 (17.0)  |
| .015               | 225P15394X               | .80 (20.3) | .28 (7.1)  | .58(14.7)  | .015               | 225P15396X               | .80 (20.3) | .34 (8.6)  | .67 (17.0)  |
| .018               | 225P18394X               | .80 (20.3) | .31 (7.9)  | .58 (14.7) | .018               | 225P18396X               | .80 (20.3) | .37 (9.4)  | .74 (18.8)  |
| .022               | 225P22394X               | .80 (20.3) | .31 (7.9)  | .58(14.7)  | .022               | 225P22396X               | .80 (20.3) | .37 (9.4)  | .74 (18.8)  |
| .027               | 225P27394X               | .80 (20.3) | .34 (8.6)  | .65(16.5)  | .027               | 225P27396X               | .80 (20.3) | .44 (11.2) | .77 (19.6)  |
| .033               | 225P33394X               | .80 (20.3) | .34 (8.6)  | .65(16.5)  | .033               | 225P33396X               | .80 (20.3) | .44 (11.2) | .77 (19.6)  |
| .039               | 225P39394X               | .80 (20.3) | .41 (10.4) | .65(16.5)  | .039               | 225P39396X               | .80 (20.3) | .50 (12.7) | .83 (21.1)  |
| .047               | 225P47394X               | .80 (20.3) | .41 (10.4) | .65(16.5)  | .047               | 225P47396X               | .80 (20.3) | .50 (12.7) | .83 (21.1)  |
| .056               | 225P56394X               | .80 (20.3) | .47(11.9)  | .80 (20.3) | .056               | 225P56396Y               | 1.25(31.8) | .47 (11.9) | .82 (20.8)  |
| .068               | 225P68394X               | .80 (20.3) | .47(11.9)  | .80 (20.3) | .068               | 225P68396Y               | 1.25(31.8) | .47 (11.9) | .82 (20.8)  |
| .082               | 225P82394X               | .80 (20.3) | .50 (12.7) | .82 (20.8) | .082               | 225P82396Y               | 1.25(31.8) | .53 (13.5) | .88 (22.4)  |
| .1                 | 225P10494X               | .80 (20.3) | .52(13.2)  | .84(21.3)  | .1                 | 225P10496Y               | 1.25(31.8) | .56 (14.2) | .91 (23.1)  |
| .12                | 225P12494Y               | 1.25(31.8) | .44(11.2)  | .77(19.6)  | .12                | 225P12496Y               | 1.25(31.8) | .60 (15.2) | .92 (23.4)  |
| .15                | 225P15494Y               | 1.25(31.8) | .47(11.9)  | .80 (20.3) | .15                | 225P15496Y               | 1.25(31.8) | .62 (15.7) | .94 (23.9)  |
| .18                | 225P18494Y               | 1.25(31.8) | .52(13.2)  | .84(21.3)  | .18                | 225P18496Y               | 1.25(31.8) | .70 (17.8) | 1.02 (25.9) |
| .22                | 225P22494Y               | 1.25(31.8) | .56(14.2)  | .89 (22.6) | .22                | 225P22496Y               | 1.25(31.8) | .76 (19.3) | 1.10 (27.9) |
| .27                | 225P27494Y               | 1.25(31.8) | .69 (17.5) | .91 (23.1) |                    |                          |            |            |             |
| .33                | 225P33494Y               | 1.25(31.8) | .72 (18.3) | .99 (25.1) |                    |                          |            |            |             |
| .39                | 225P39494Y               | 1.25(31.8) | .75(19.1)  | 1.10(27.9) |                    |                          |            |            |             |
| .47                | 225P47494Y               | 1.25(31.8) | .84(21.3)  | 1.14(29.0) |                    |                          |            |            |             |

\* 60 Hz., RMS

<sup>1</sup> To complete part number for specific tolerance, terminal style and lead length please refer to Ordering/Part Number Information page.

<sup>2</sup> Shaded part numbers, when ordered as  $\pm 10\%$  tolerance with the D3 terminal style and lead length, are Standard Stock items available through the CDE Distribution Network. For complete part number please add the D3 suffix to the above part numbers in accordance with the Ordering Information (i.e. 225P10491WD3). Other part numbers are available on special order.

Dimensions in inches, metric (mm) in parenthesis.

# Type 225P, Orange Drop®, Polyester Film/Foil Capacitors

---

## dV/dt Specifications

**Maximum Pulse Rise Time (dV/dt) in Volts/μsec**

| Cap Value (μF) | 100V  | 200V  | 400V  | 600V  |
|----------------|-------|-------|-------|-------|
| .001           | 12200 | 14800 | 21000 | 23300 |
| .0012          | 11100 | 13500 | 19100 | 21300 |
| .0015          | 9900  | 12100 | 17100 | 19000 |
| .0018          | 9100  | 11100 | 15600 | 17400 |
| .0022          | 8200  | 10000 | 14100 | 15700 |
| .0027          | 7400  | 9000  | 12800 | 14200 |
| .0033          | 6700  | 8200  | 11500 | 12800 |
| .0039          | 6200  | 7500  | 10600 | 11800 |
| .0047          | 5600  | 6800  | 9700  | 10700 |
| .0056          | 5100  | 6300  | 8900  | 9800  |
| .0068          | 4700  | 5700  | 8000  | 8900  |
| .0082          | 4200  | 5200  | 7300  | 8100  |
| .01            | 3800  | 4700  | 6600  | 7400  |
| .012           | 3500  | 4300  | 6100  | 6700  |
| .015           | 3100  | 3800  | 5400  | 6000  |
| .018           | 2900  | 3500  | 4900  | 5500  |
| .022           | 2600  | 3200  | 4500  | 5000  |
| .027           | 2300  | 2900  | 4000  | 4500  |
| .033           | 2100  | 2600  | 3700  | 4100  |
| .039           | 1900  | 2400  | 3400  | 3700  |
| .047           | 1800  | 2200  | 3100  | 3400  |
| .056           | 1600  | 2000  | 2800  | 3100  |
| .068           | 1500  | 1800  | 2500  | 2800  |
| .082           | 1300  | 1600  | 2300  | 2300  |
| .1             | 1200  | 1500  | 2100  | 2100  |
| .12            | 1000  | 1400  | 1900  | 1900  |
| .15            | 900   | 1200  | 1500  | 1700  |
| .18            | 800   |       | 1400  | 1600  |
| .22            | 700   | 1000  | 1300  | 1400  |
| .27            | 700   | 800   | 1200  |       |
| .33            | 600   | 700   | 1000  |       |
| .39            | 600   | 700   | 1000  |       |
| .47            | 500   | 600   | 900   |       |
| .56            | 400   | 600   |       |       |
| .68            | 400   | 500   |       |       |
| .82            | 400   |       |       |       |
| 1.0            | 300   |       |       |       |

Note: dV/dt ratings based on measurements made at the junction of the wire leads and capacitor body.

**Notice and Disclaimer:** All product drawings, descriptions, specifications, statements, information and data (collectively, the “Information”) in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements (“Cornell Dubilier”) has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)