
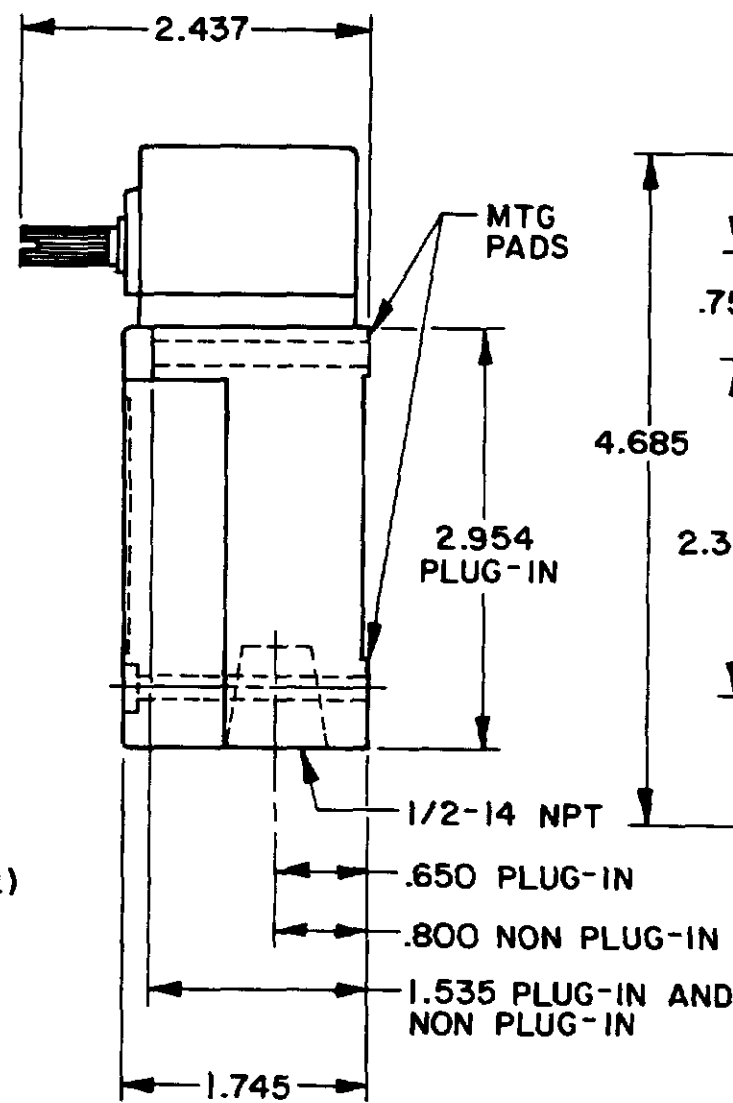


OPERATING CHARACTERISTICS	LSYA MOMENTARY	LSYR MOMENTARY LOW TORQUE	LSYN MAINTAINED	LSYP MOMENTARY LOW PRETRAVEL AND DIFF. TRAVEL	LSYH MOMENTARY LOW PRETRAVEL AND LOW TORQUE	LSYL SEQUENCE DOUBLE POLE ONLY	LSYM CENTER NEUTRAL DOUBLE POLE ONLY	LSYS GRAVITY RETURN	LSYU LOW PRETRAVEL
PRETRAVEL(MAX)	15°	15°	65°	9°	9°	1ST STEP 15° 2ND STEP 10° ADD'L	18°	NOT APPLICABLE	5°
OVERTRAVEL(MIN)	60°	60°	20°	68°	68°	48°	57°	NOT APPLICABLE	70°
DIFFERENTIAL TRAVEL(MAX)	SINGLE POLE 5° DOUBLE POLE 7°	SINGLE POLE 5° DOUBLE POLE 7°	40°	SINGLE POLE 3° DOUBLE POLE 4°	SINGLE POLE 3° DOUBLE POLE 4°	5°	10°	12°	SGL POLE 3° DBL POLE 4°
TOTAL TRAVEL (REF)	75°	75°	90°	75°	75°	75°	75°	360°	75°
OPERATING TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS
FULL TRAVEL TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS		4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS

SIDE ROTARY



SINGLE POLE

DOUBLE POLE

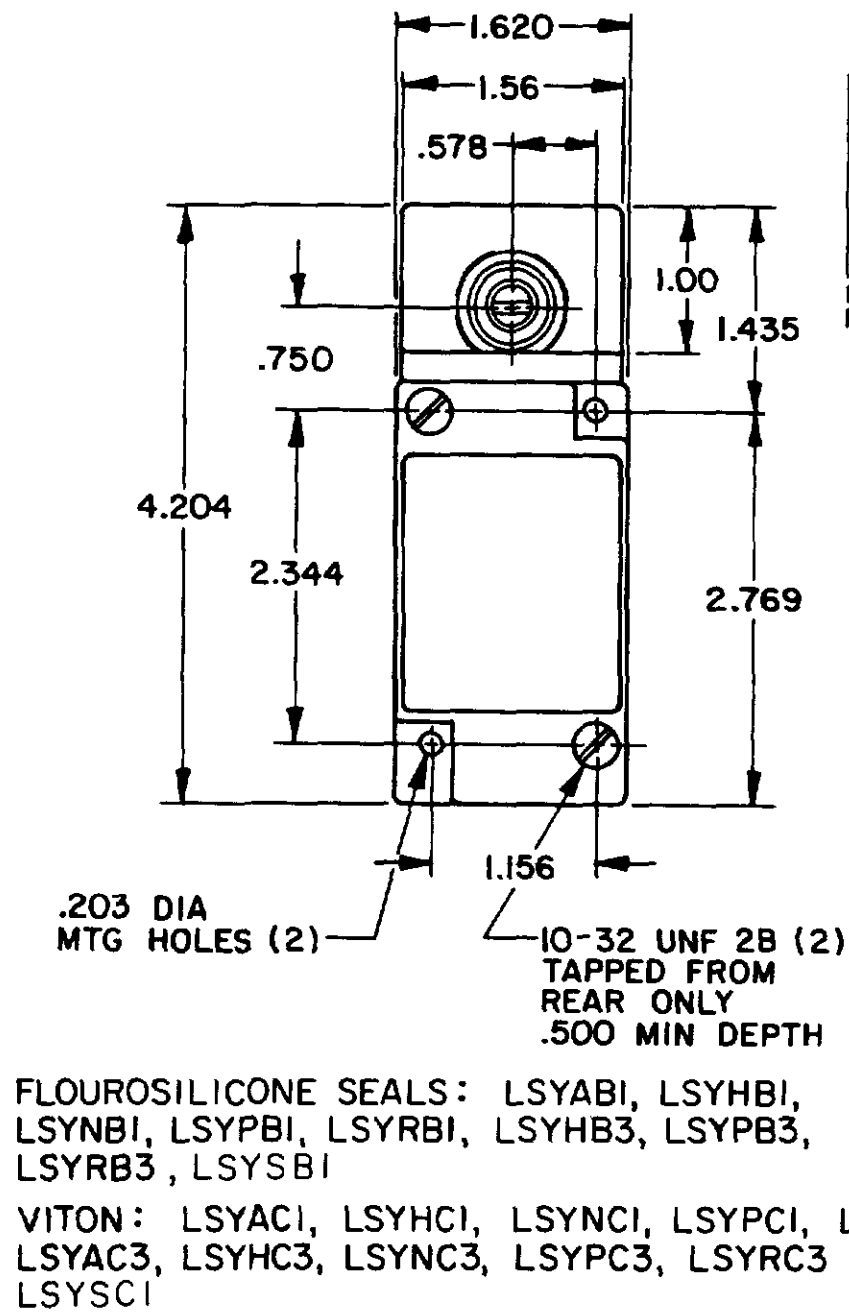


FLOUROSILICONE SEALS: LSYAB2, LSYHB2, LSYMB2, LSYNB2, LSYPB2, LSYRB2, LSYAB4, LSYHB4, LSYMB4, LSYNB4, LSYPB4, LSYRB4

* (LSYAB6, LSYHB6, LSYMB6, LSYNB6, LSYPB6, LSYRB6, LSYAB7, LSYHB7, LSYMB7, LSYNB7, LSYPB7, LSYRB7 HAVE 1/2-14 CONDUIT HOLE)

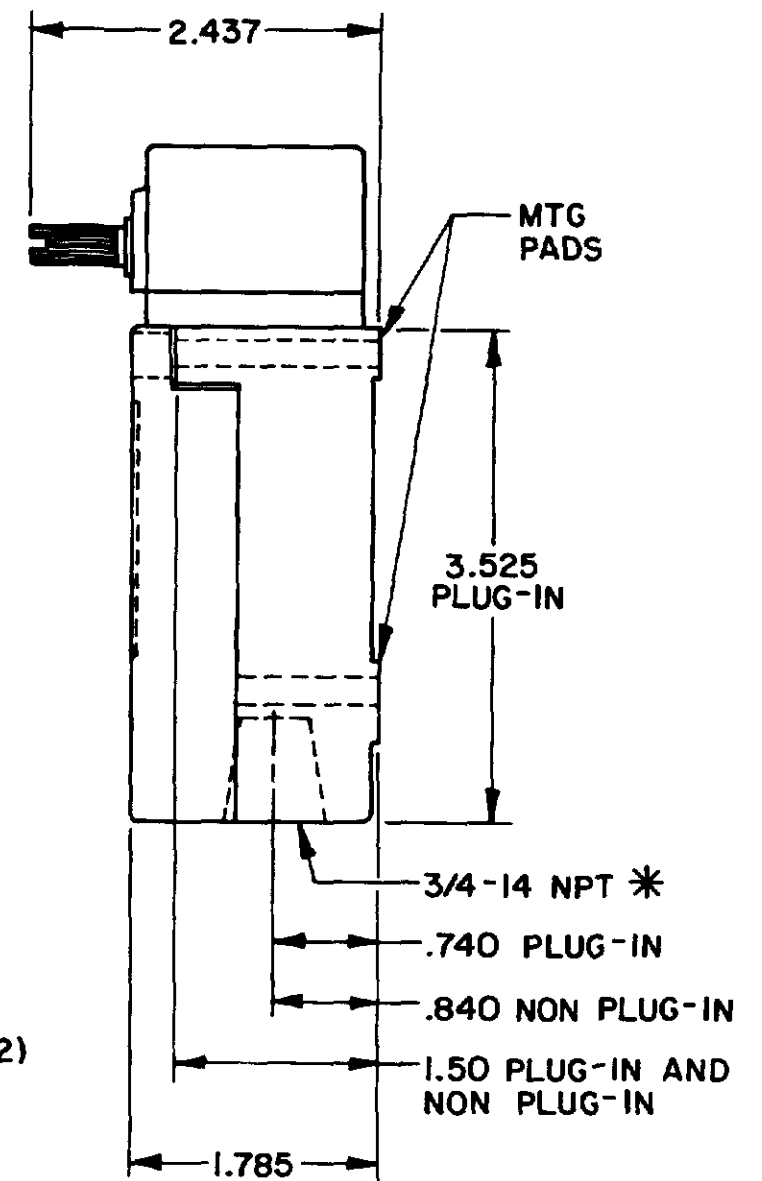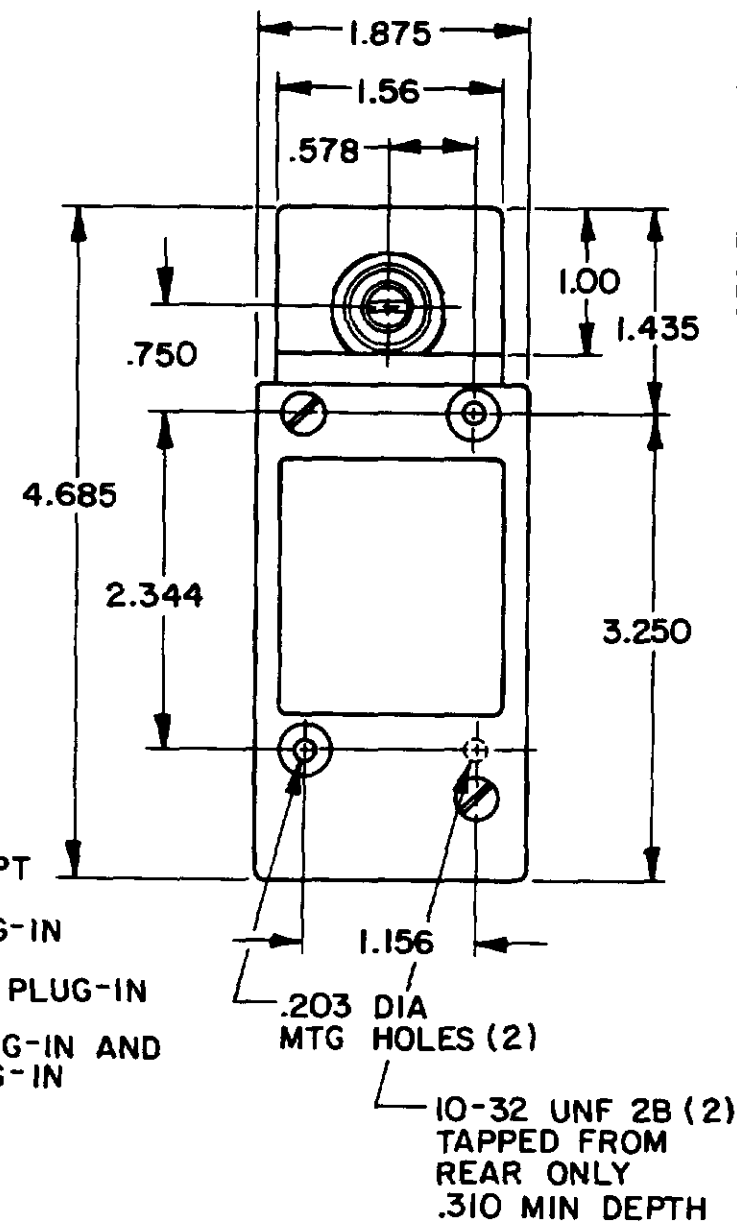


VITON SEALS: LSYAC2, LSYHC2, LSYNC2, LSYPC2, LSYRC2, LSYAC4, LSYHC4, LSYNC4, LSYPC4, LSYRC4, LSYMC2, LSYMC4, LSYMC6, LSYMC7, LSYLC2, LSYLC4, LSYLC6, LSYLC7

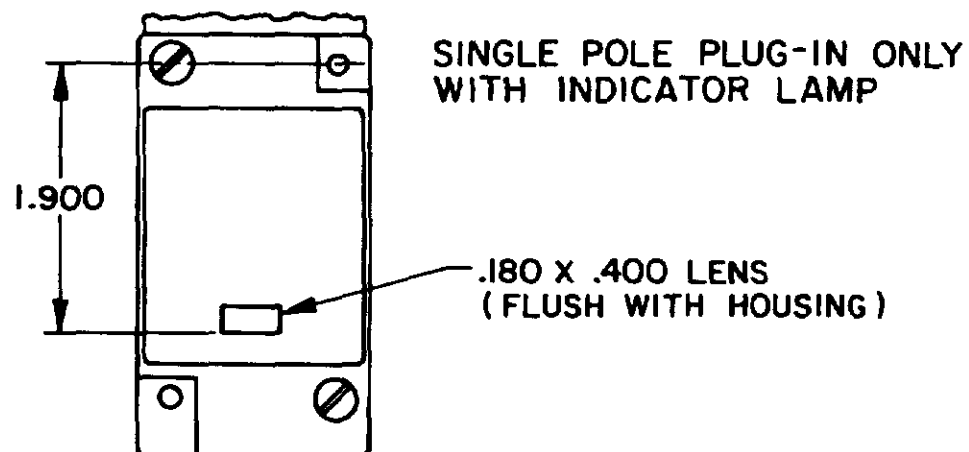


120 LAMP VOLTAGE -
TYPE LSYAB5, LSYHB5, LSYNB5, LSYPB5, LSYRB5, LSYAC5, LSYHC5, LSYNC5, LSYPC5, LSYRC5

240 LAMP VOLTAGE -
TYPE LSYAB8, LSYHB8, LSYNB8, LSYPB8, LSYRB8, LSYAC8, LSYHC8, LSYNC8, LSYPC8, LSYRC8

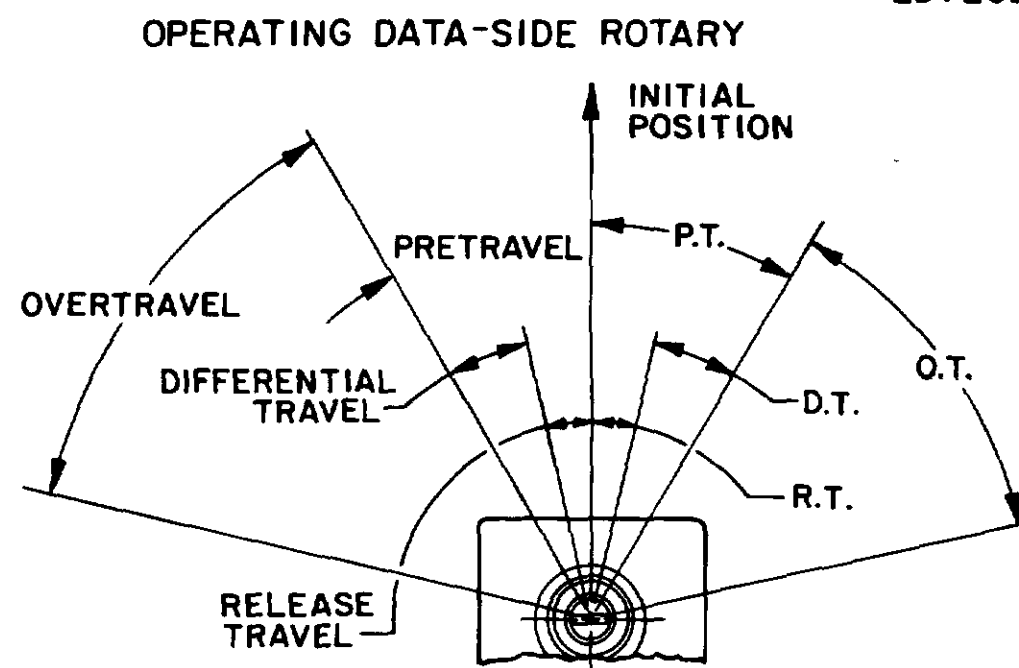

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

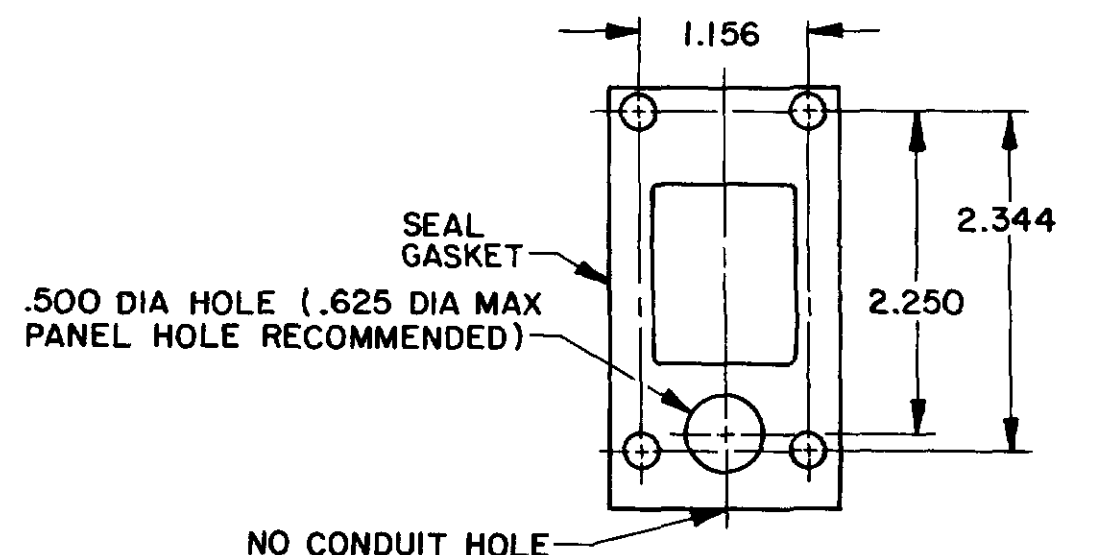

NOTE
1 - ALL UNITS AVAILABLE WITH
FLUOROSILICONE AND VITON SEALS

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.
A DIVISION OF HONEYWELL
FED. REG. CODE 51429



SWITCH-ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1



LSY SERIES CHART 1
PAGE 1 OF 10

DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
INCHES	1" = 1"	
MILLIMETERS	1" = 25.4	
FEET	1" = 12"	
METERS	1" = 0.3048	
WEIGHT		


SIDE ROTARY CAM TRACKING

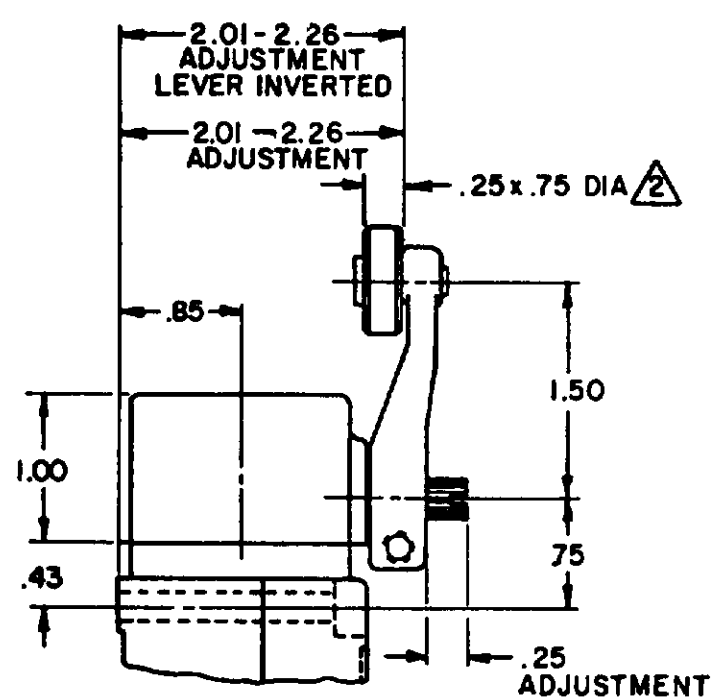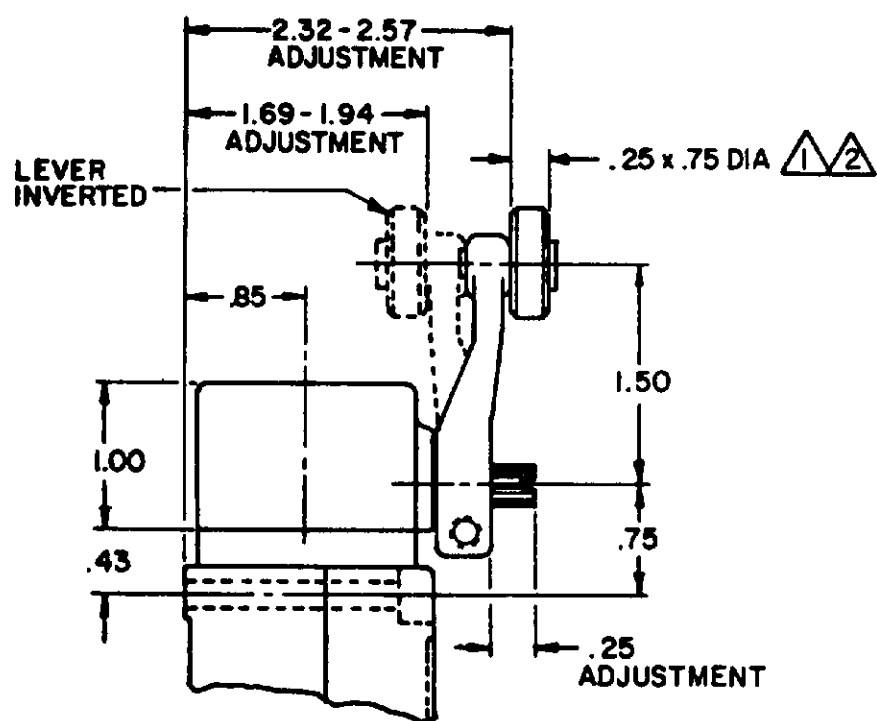


LSZ51 TYPE LEVERS

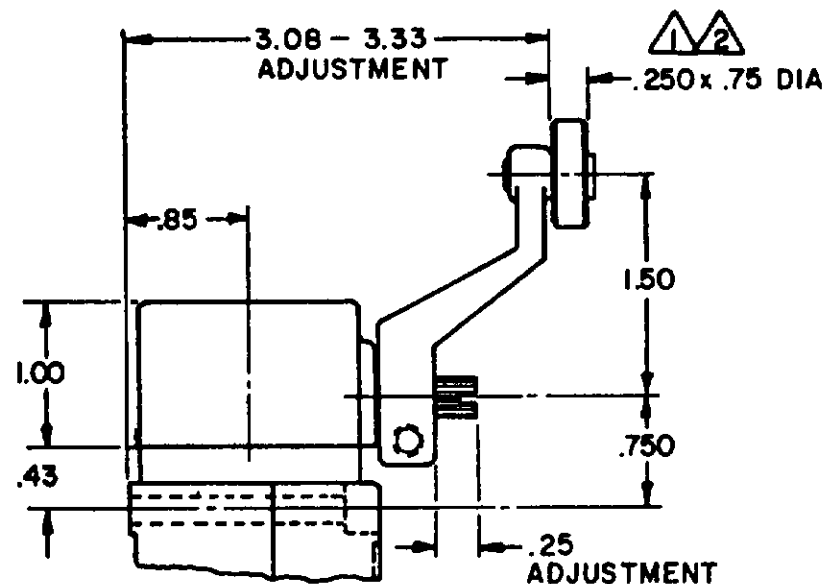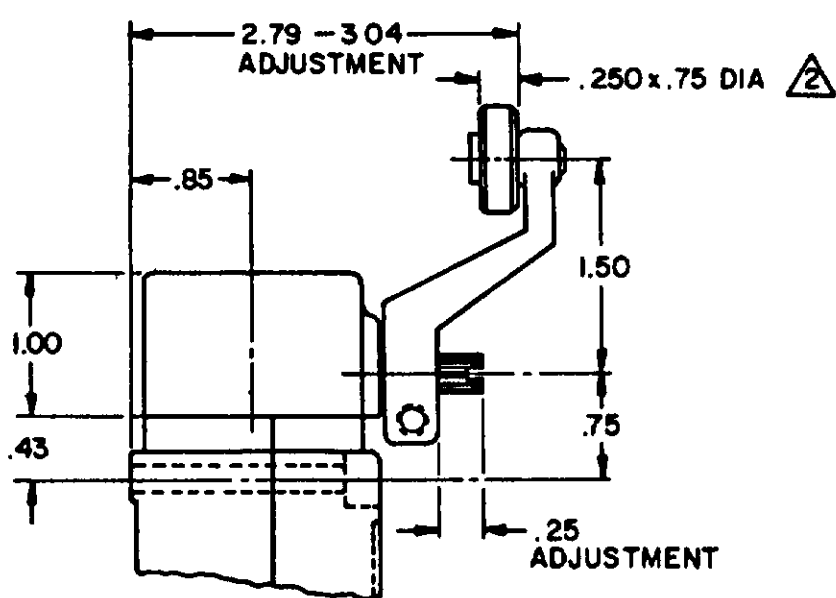



LSZ55 TYPE LEVERS

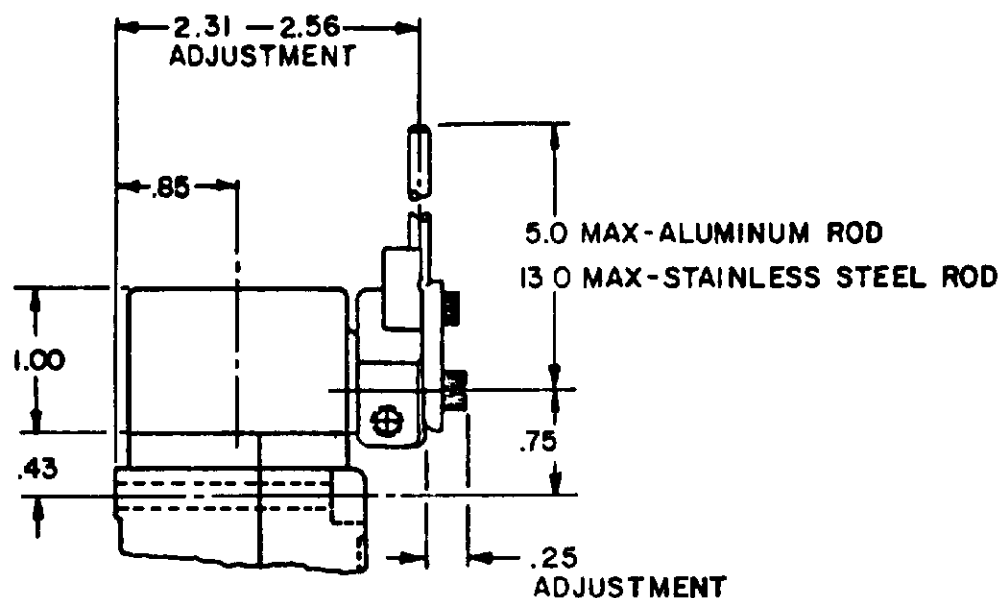

LSZ54 TYPE LEVER

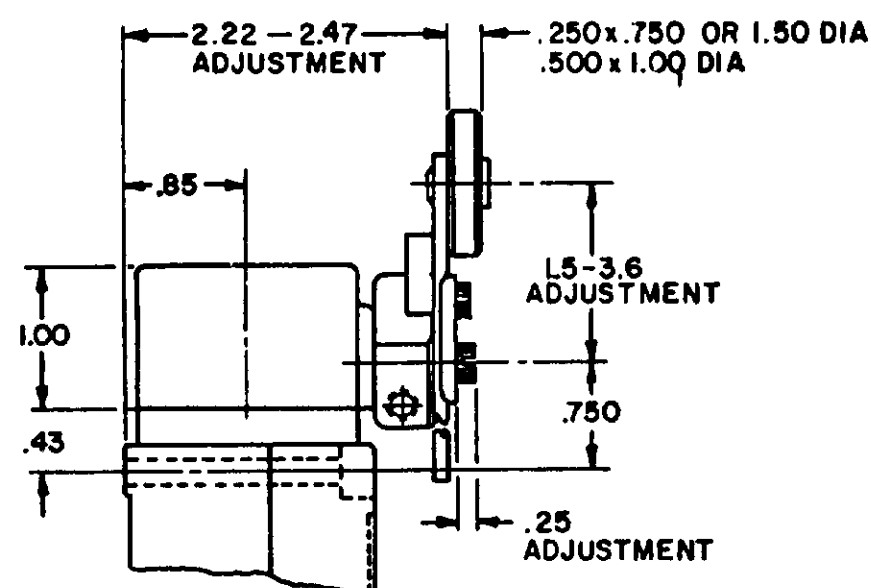

LSZ52 TYPE LEVER

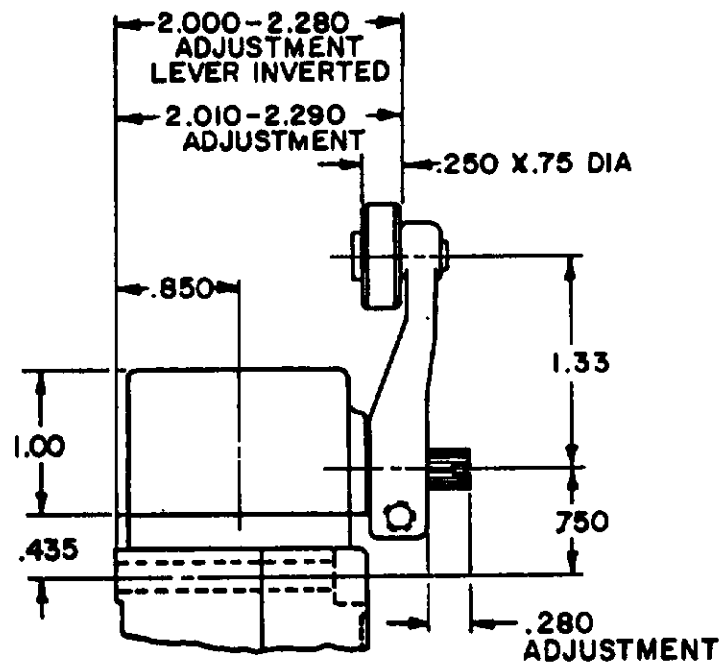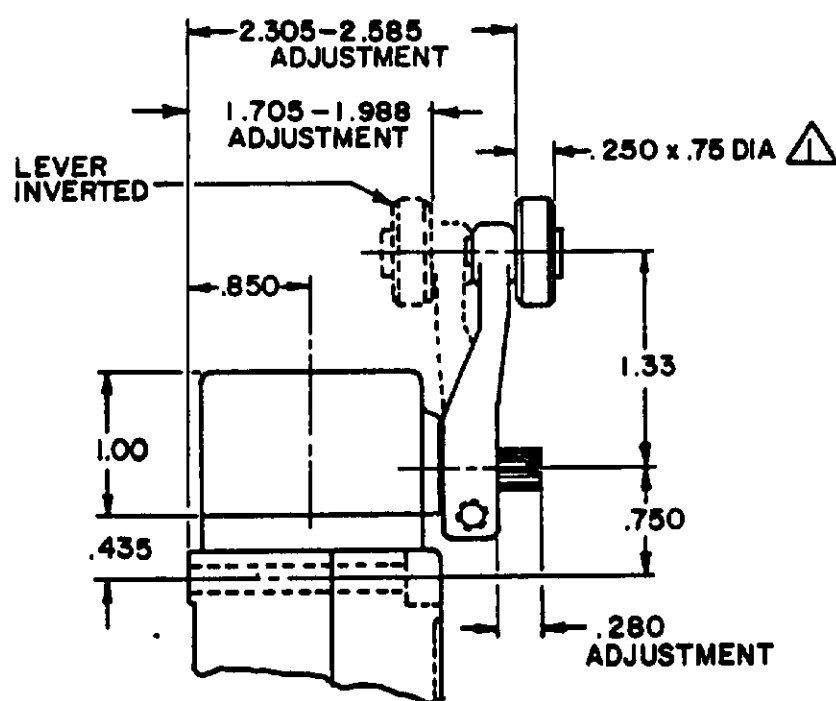

LSZ59 TYPE LEVERS

NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FEEDING CODE 31829


CHART 1

LSY SERIES

THIRD ANGLE PROJECTION
SCALE NONE
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0)
TWO PLACE (.00)
THREE PLACE (.000)
ANGLES
± .005
WEIGHT


TOP ROTARY

SINGLE POLE

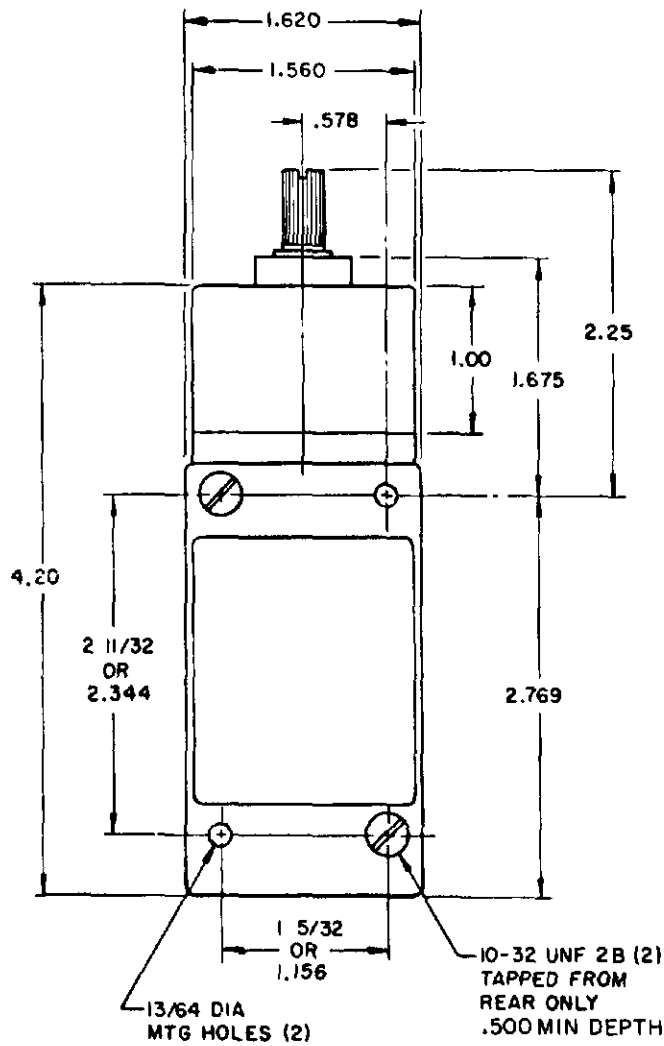


FLOUROSILICONE SEALS
LSYBB1 & LSYBB3

VITON SEALS
LSYBC1 & LSYBC3

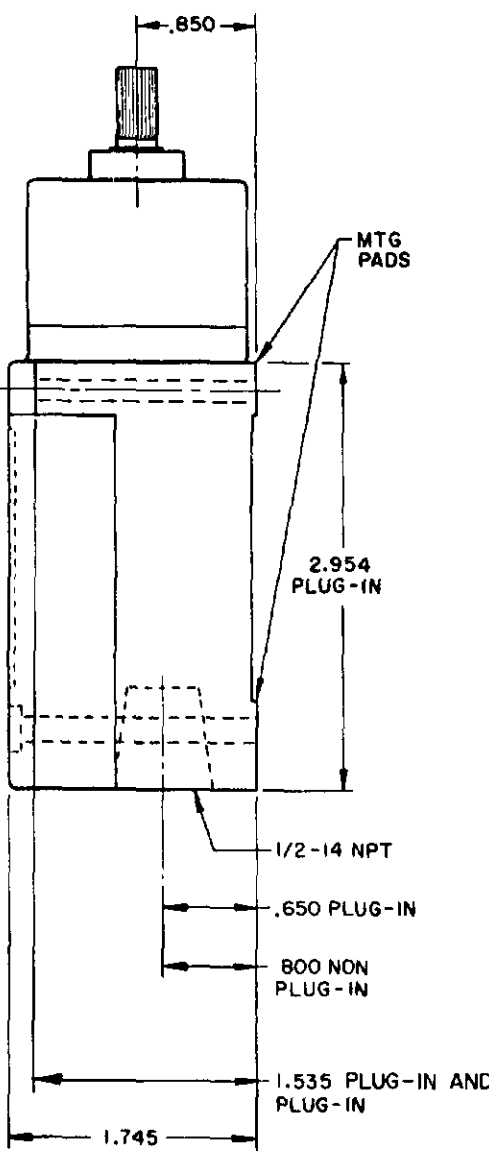

DOUBLE POLE

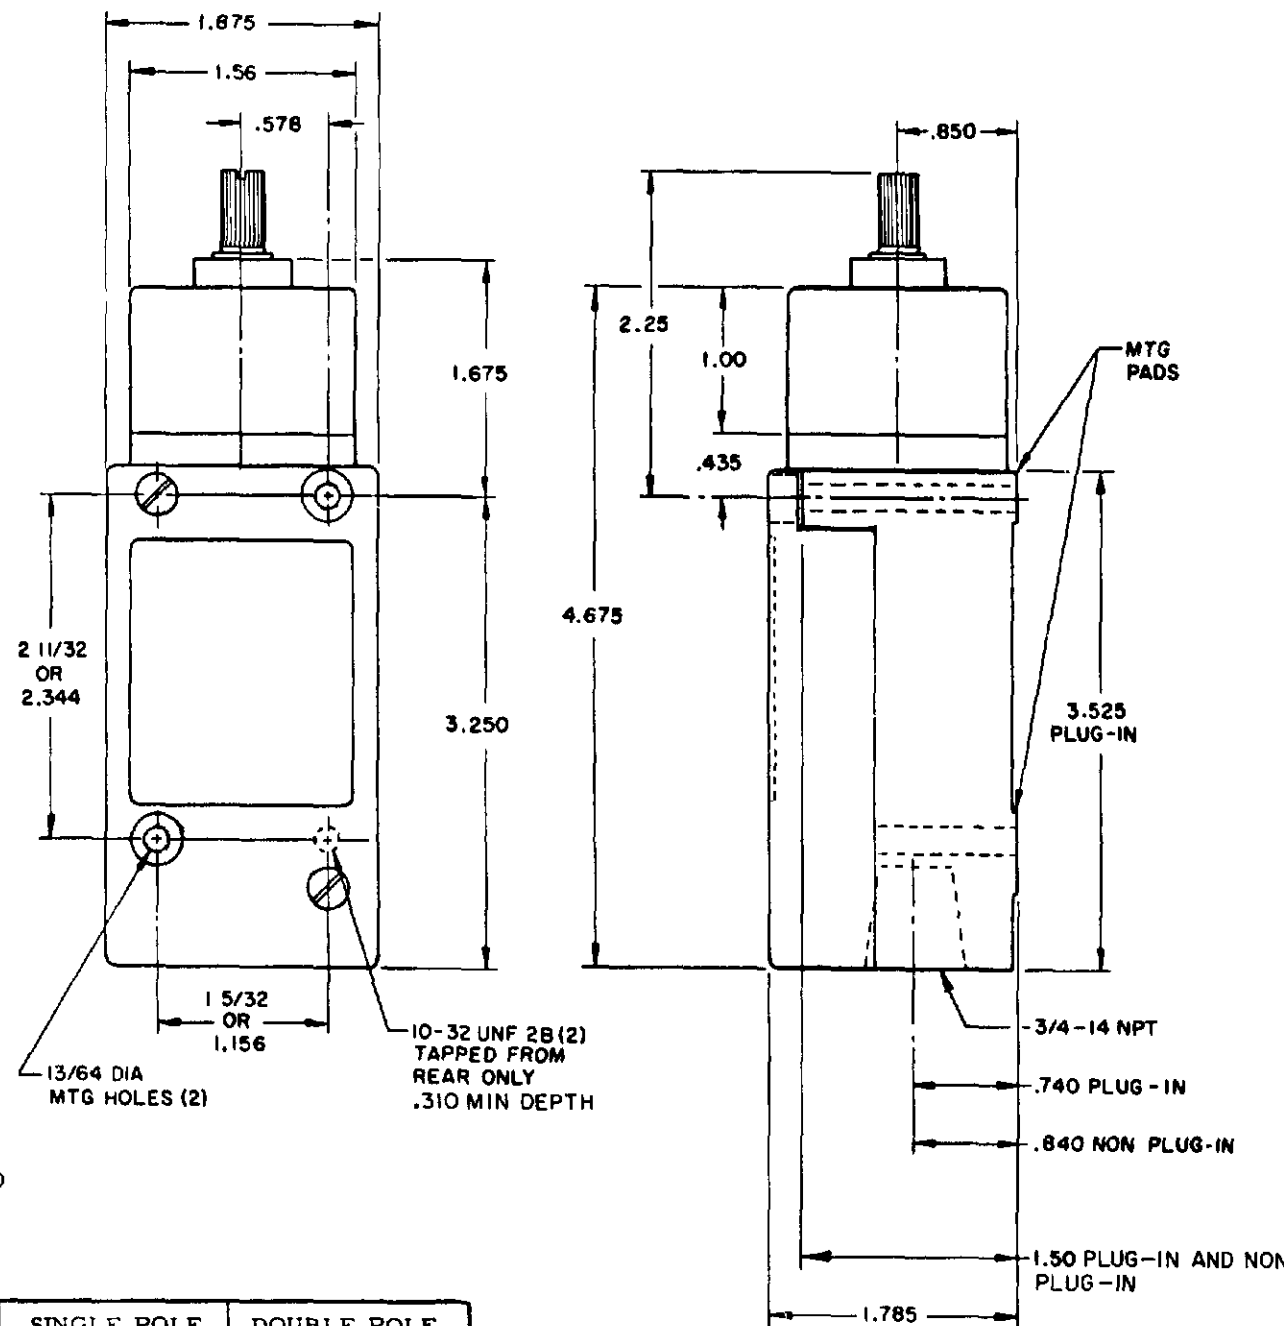

FLOUROSILICONE SEALS
LSYBB2 & LSYBB4
LSYBB6 & LSYBB7 HAVE 1/2 -14NPT
CONDUIT HOLE

VITON SEALS
LSYBC2 & LSYBC4 , LSYBC6 & LSYBC7
HAVE 1/2 -14NPT CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2.5 IN. LBS	2.5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT .35 POWER FACTOR			
	SINGL. POL.		DOUBLE POL.	
	MAKE	BREAK	MAKE	BREAK
120	60	6	10	3
240	30	3	15	1.5
480	15	1.5	7.5	.75
600	12	1.2	6	.6


D.C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT.


VOLTAGE	
5 AC OR DC MIN	.01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

SINGLE POLE
MOMENTARY

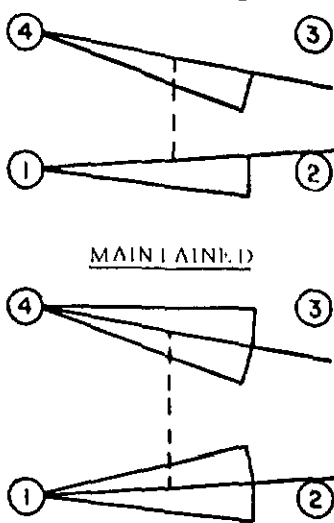

SINGLE POLE
ELECTRONIC DUTY
MOMENTARY

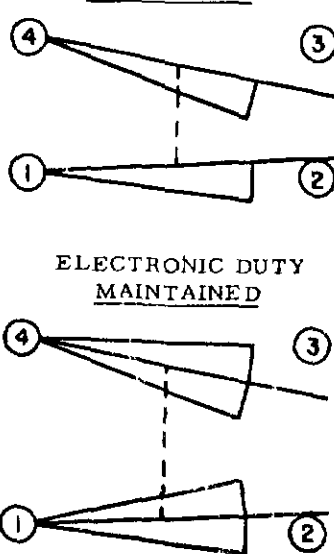


DIRECT ACTING




DOUBLE POLE

MOMENTARY

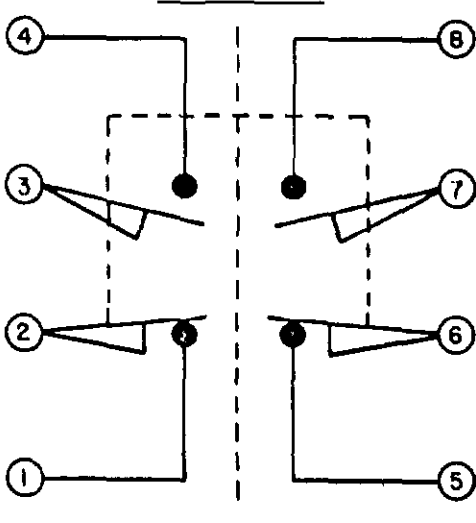

MAINTAINED

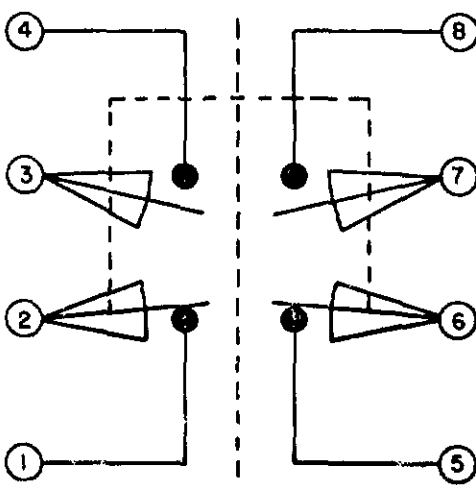

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL
OPERATING CHARACTERISTICS NOT
APPLICABLE

SCALE NONE
DO NOT SCALE PRINT


MICRO SWITCH
FREEPORT, L.I., N.Y. U.S.A.
A DIVISION OF HONEYWELL
FID. MFG. CODE 91918

SWITCH - ENCLOSED





LSY SERIES
CHART 1

PLUNGER TYPE TOP






SINGLE POLE

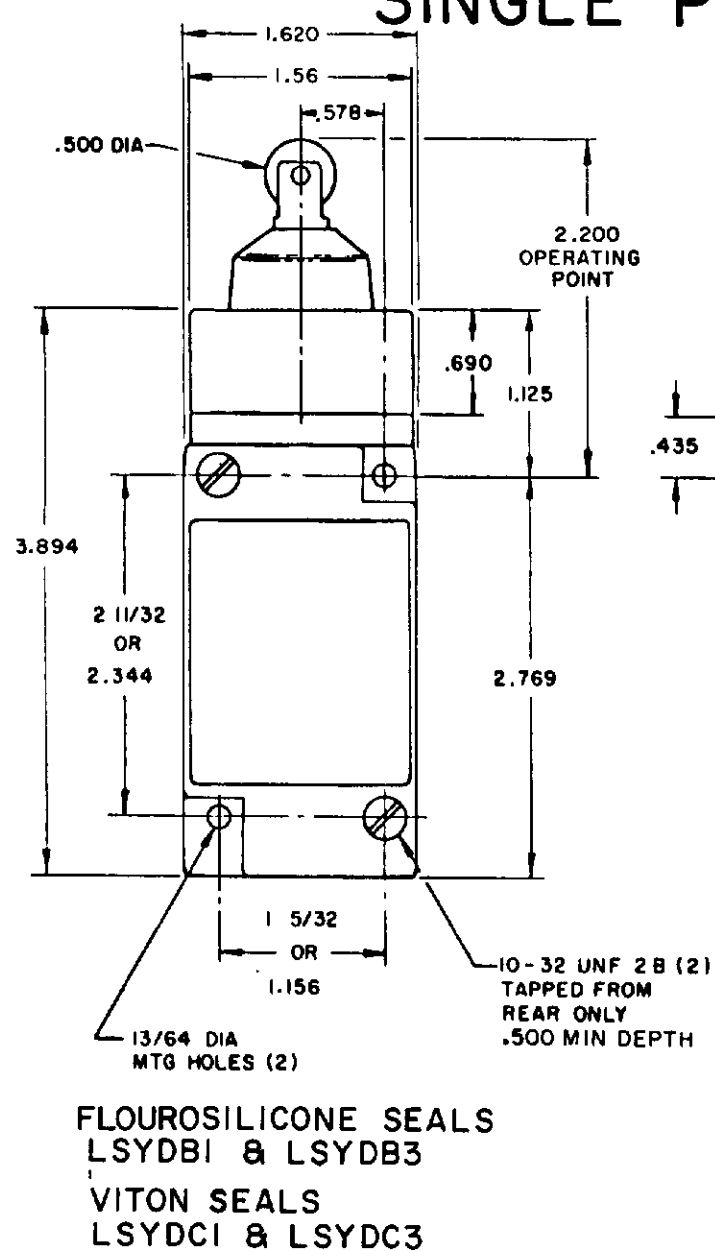

DOUBLE POLE

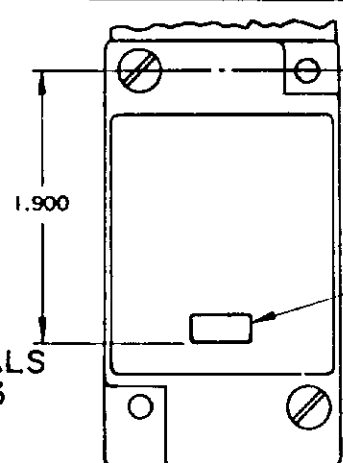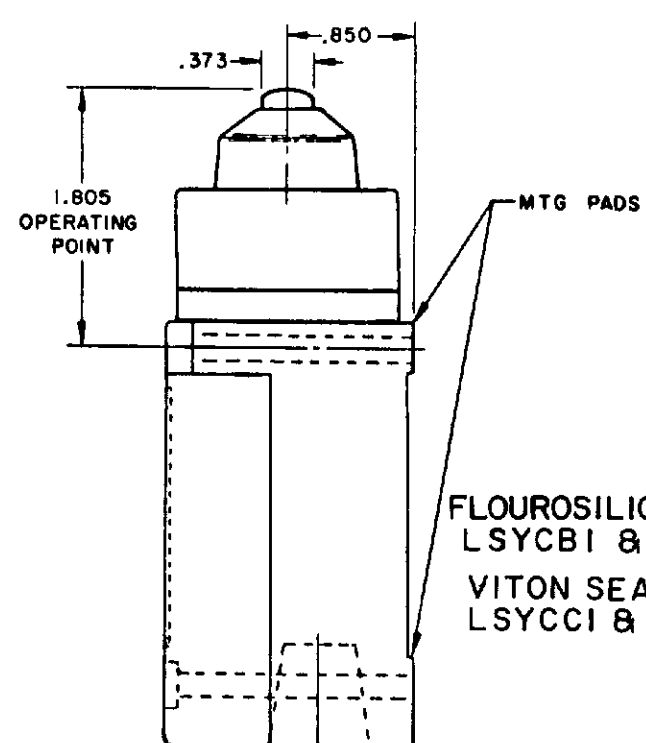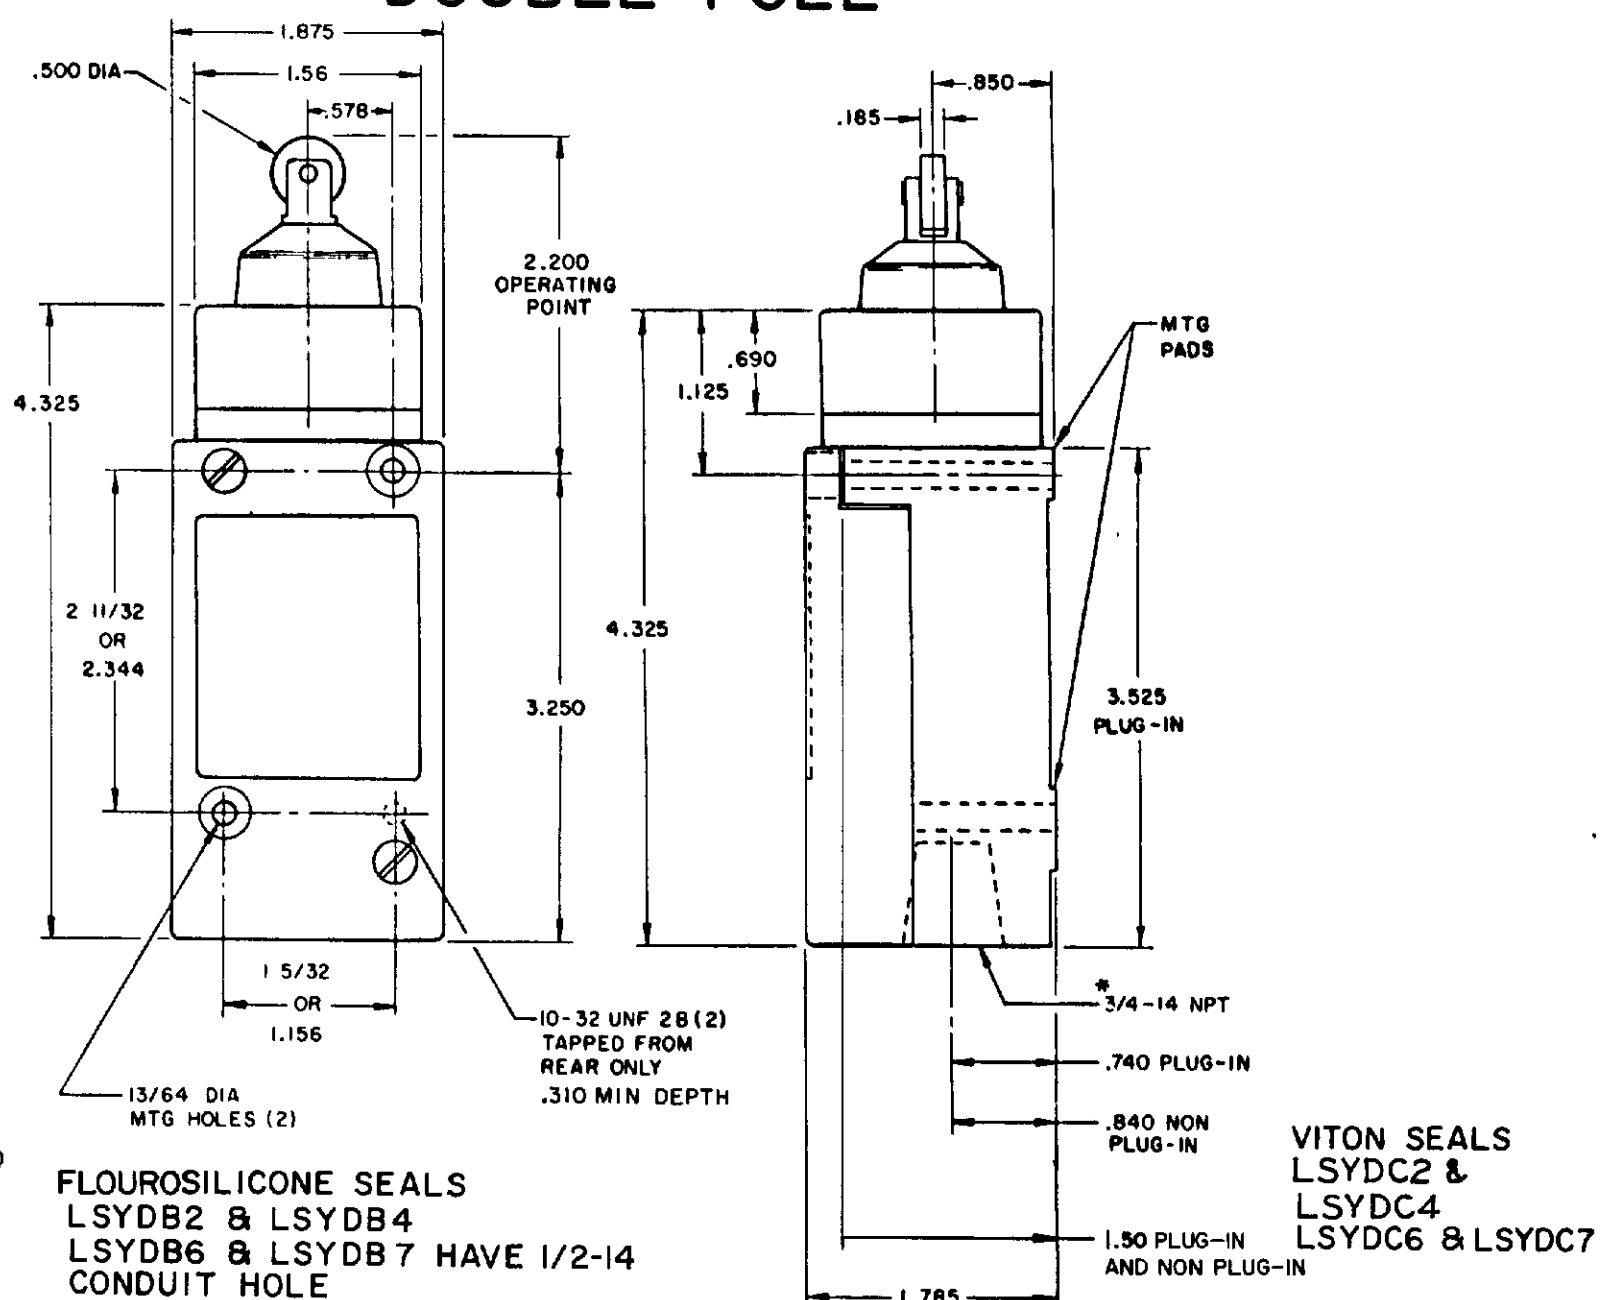

120 LAMP VOLTAGE -
LSYCB 5, LSYDB5, LSYVB5
LSYCC5, LSYDC5, LSYVC5
240 LAMP VOLTAGE -
LSYCB8, LSYDB8, LSYVB8
LSYCC8, LSYDC8, LSYVC8

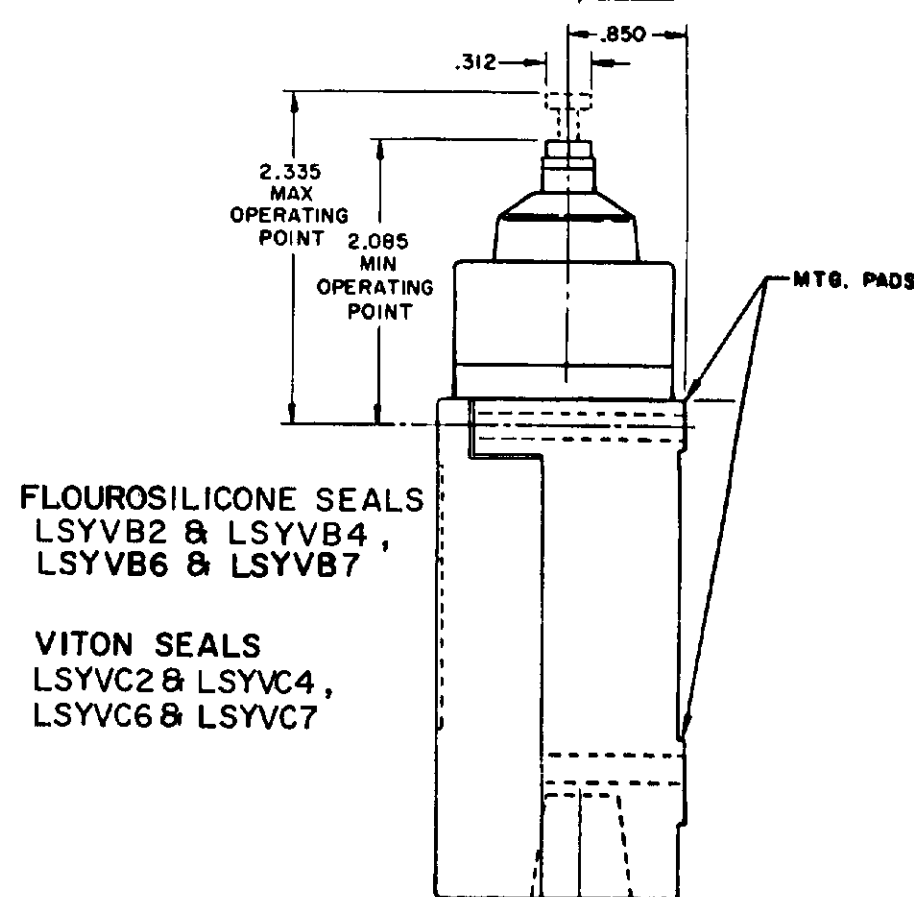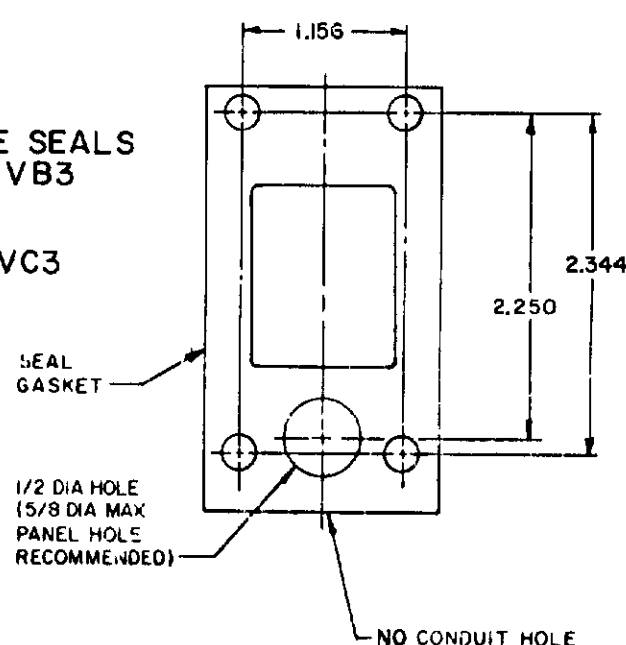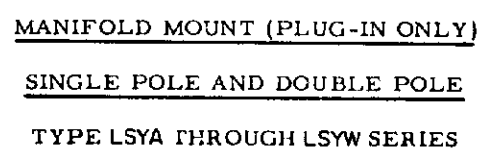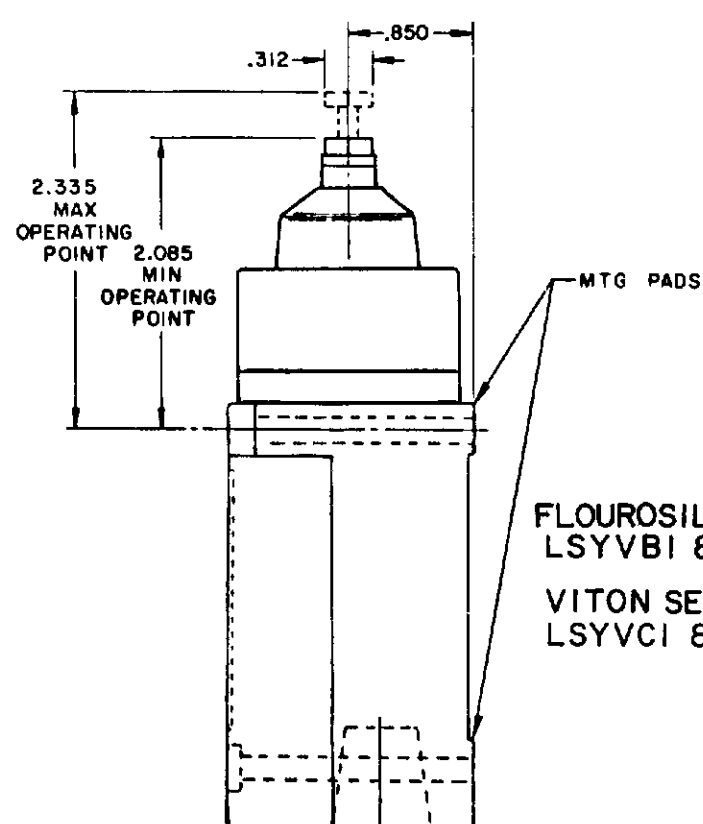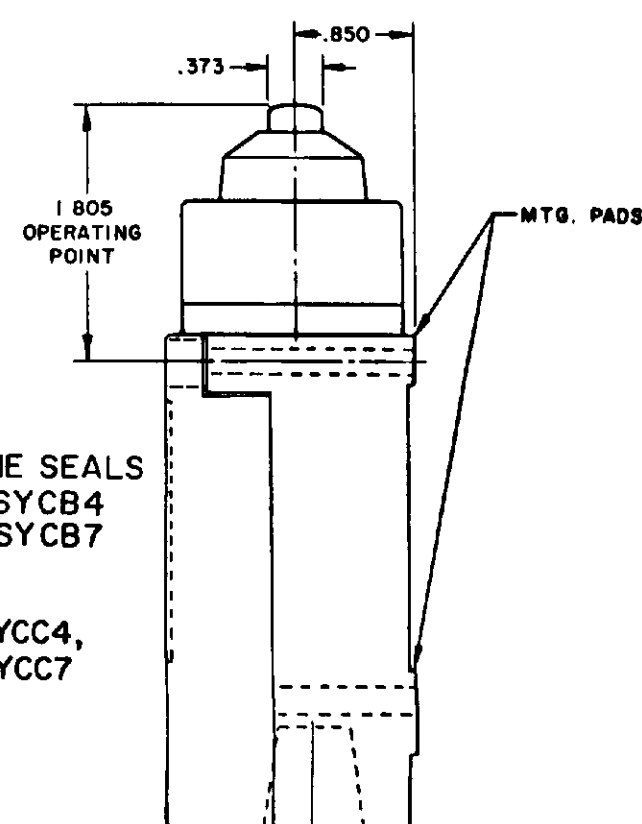

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS







MICRO SWITCH PREPARED BY: L.S.Y. USA A DIVISION OF: HONEYWELL 7410 MICRO SWITCH DRIVE	SWITCH - ENCLOSED	
	CATALOG LISTING LSY SERIES CHART 1	

M LSY SERIES CHART
PAGE 4 OF 10

SIDE PLUNGER TYPE

SINGLE POLE


DOUBLE POLE

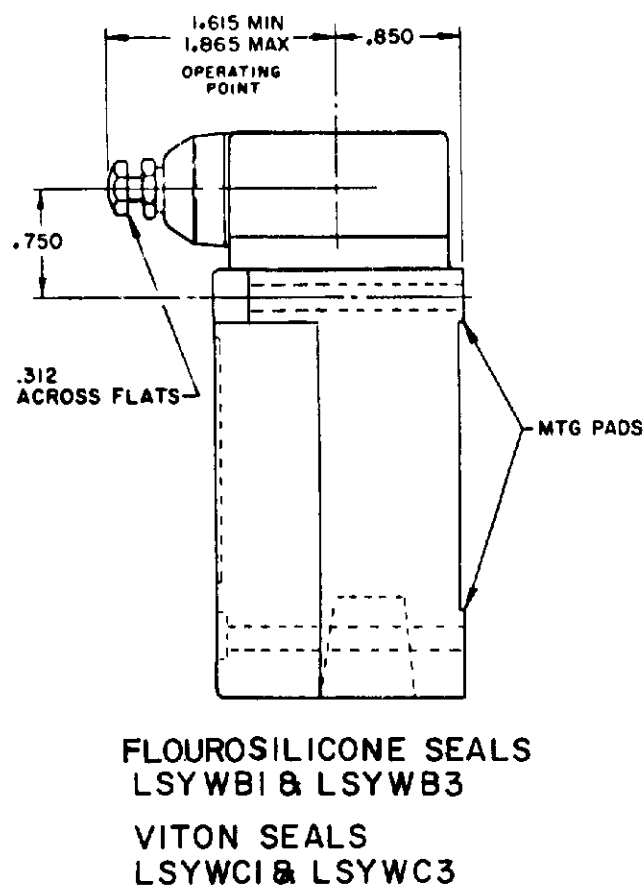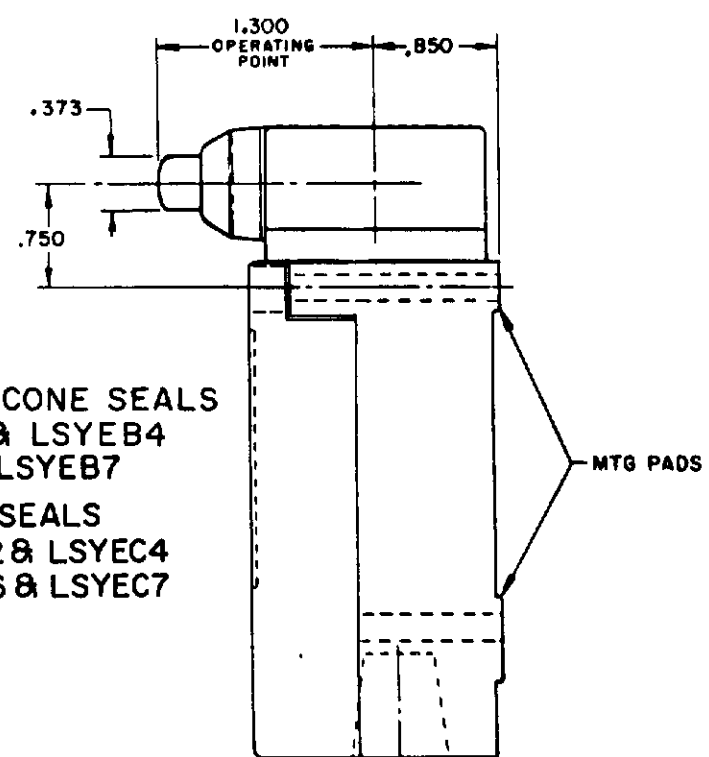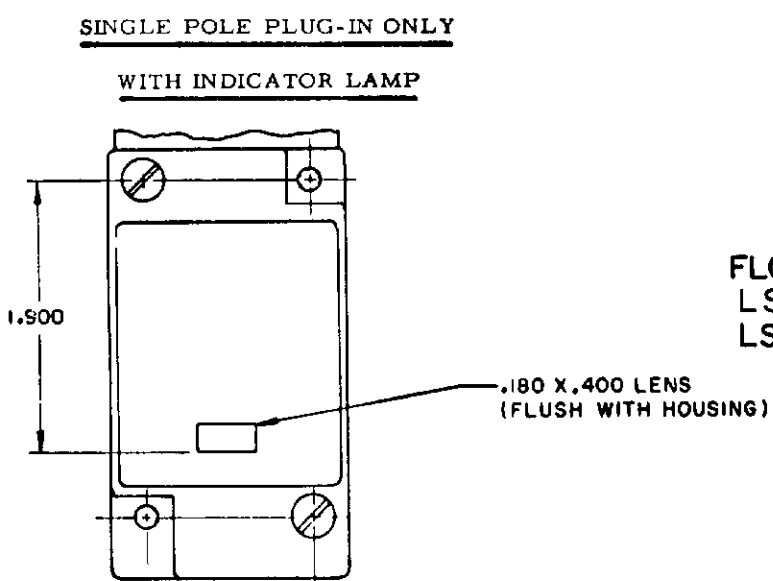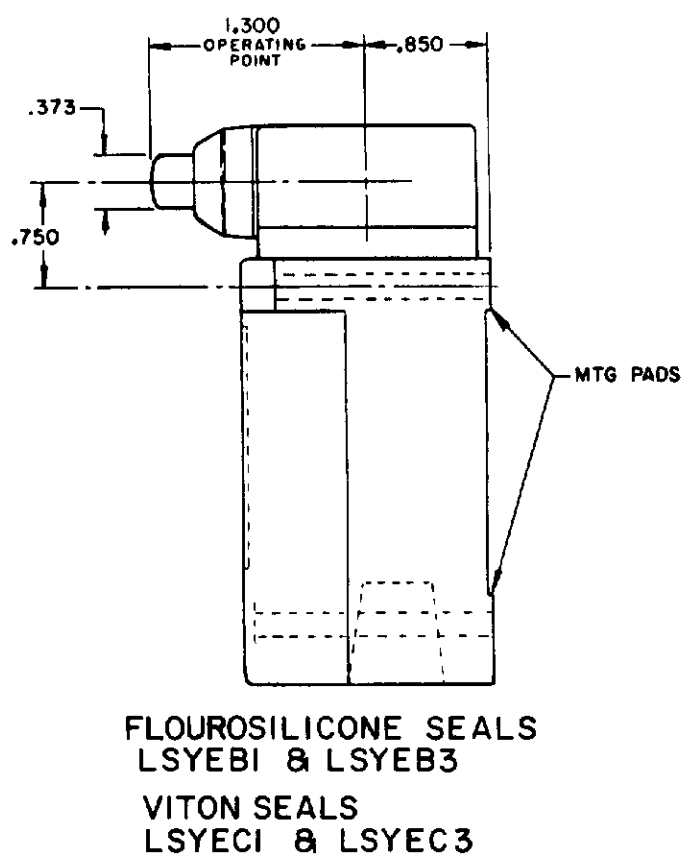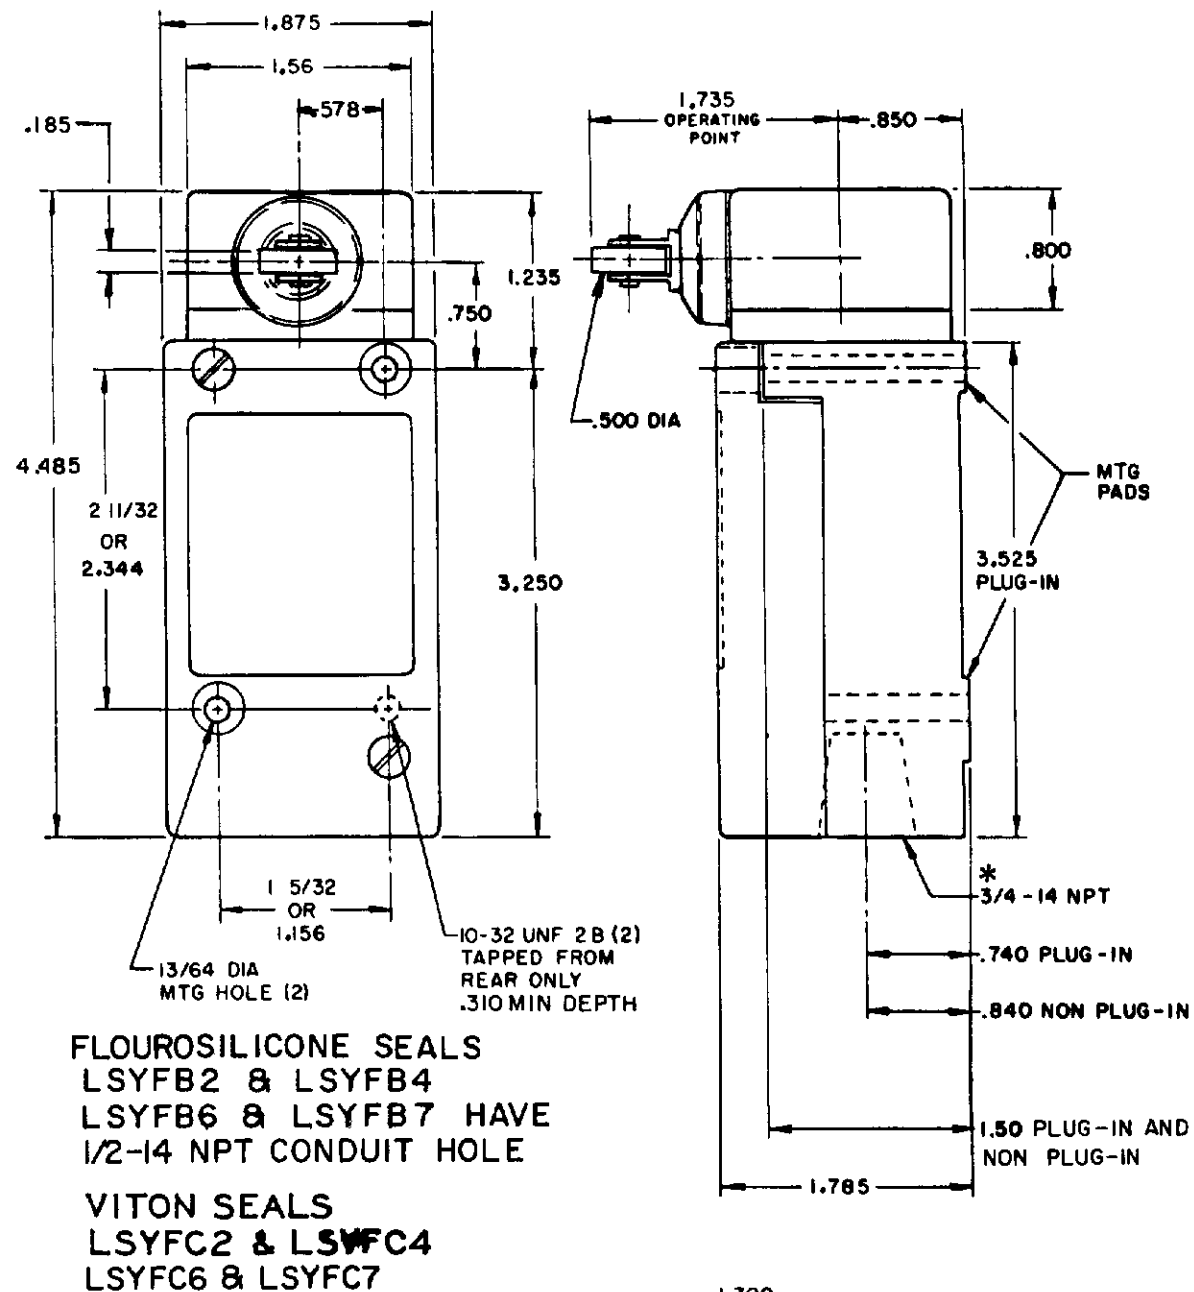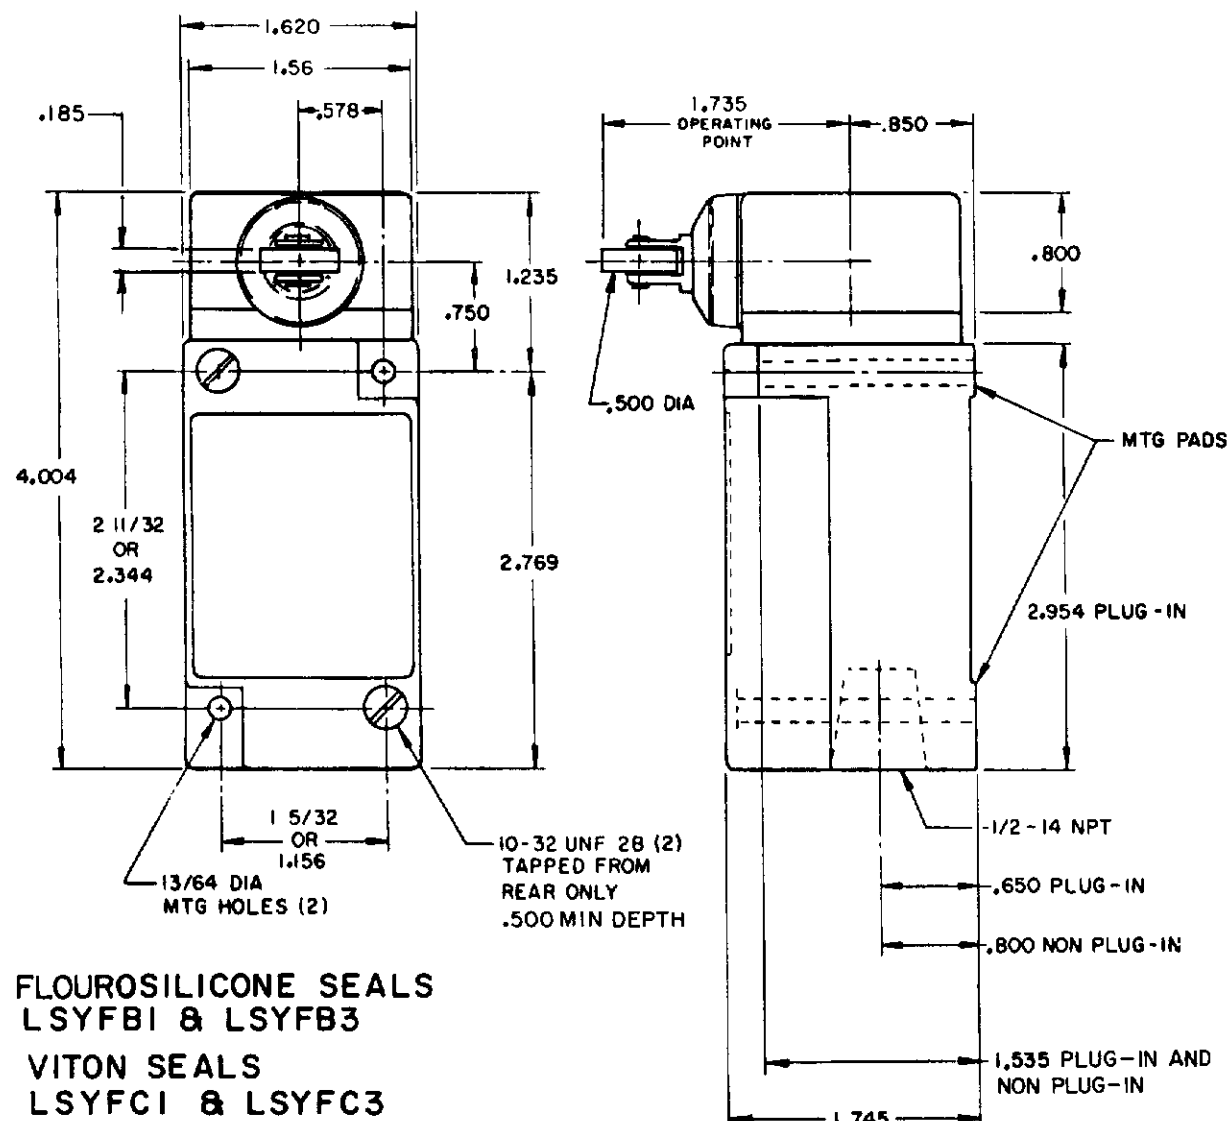


120 LAMP VOLTAGE -
LSYFB5, LSYEB5, LSYWB5
LSYFC5, LSYEC5, LSYWC5

240 LAMP VOLTAGE -
LSYFB8, LSYEB8, LSYWB8
LSYFC8, LSYEC8, LSYWC8

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

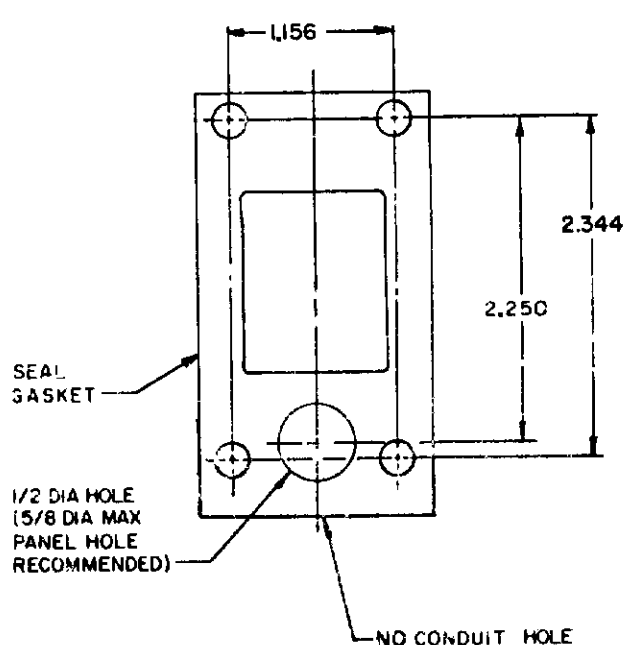

FLOUROSILICONE SEALS
LSYWB2 & LSYWB4
LSYWB6 & LSYWB7
VITON SEALS
LSYWC2 & LSYWC4
LSYWC6 & LSYWC7

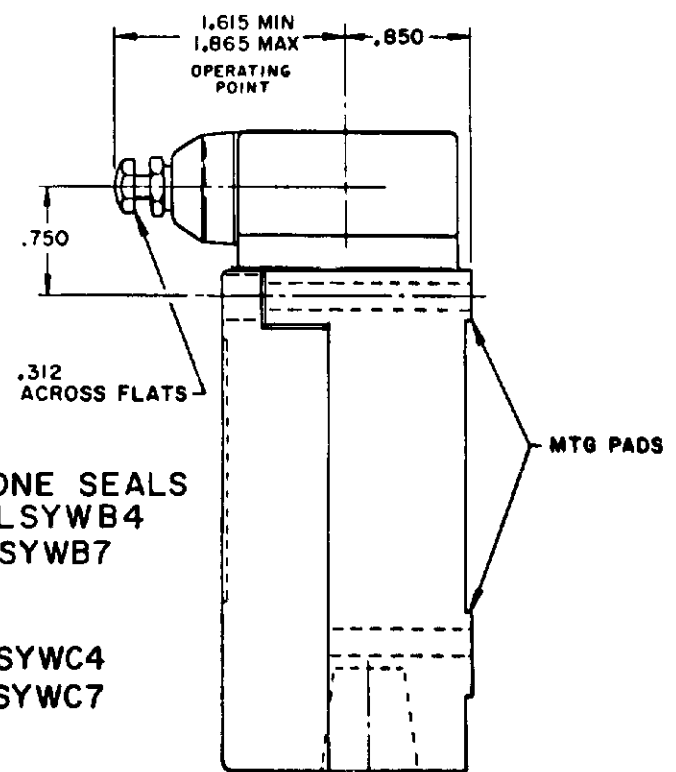


NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH, A DIVISION OF HONEYWELL.
FED. REG. CO. 9-438

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE NONE
DO NOT SCALE PRINT

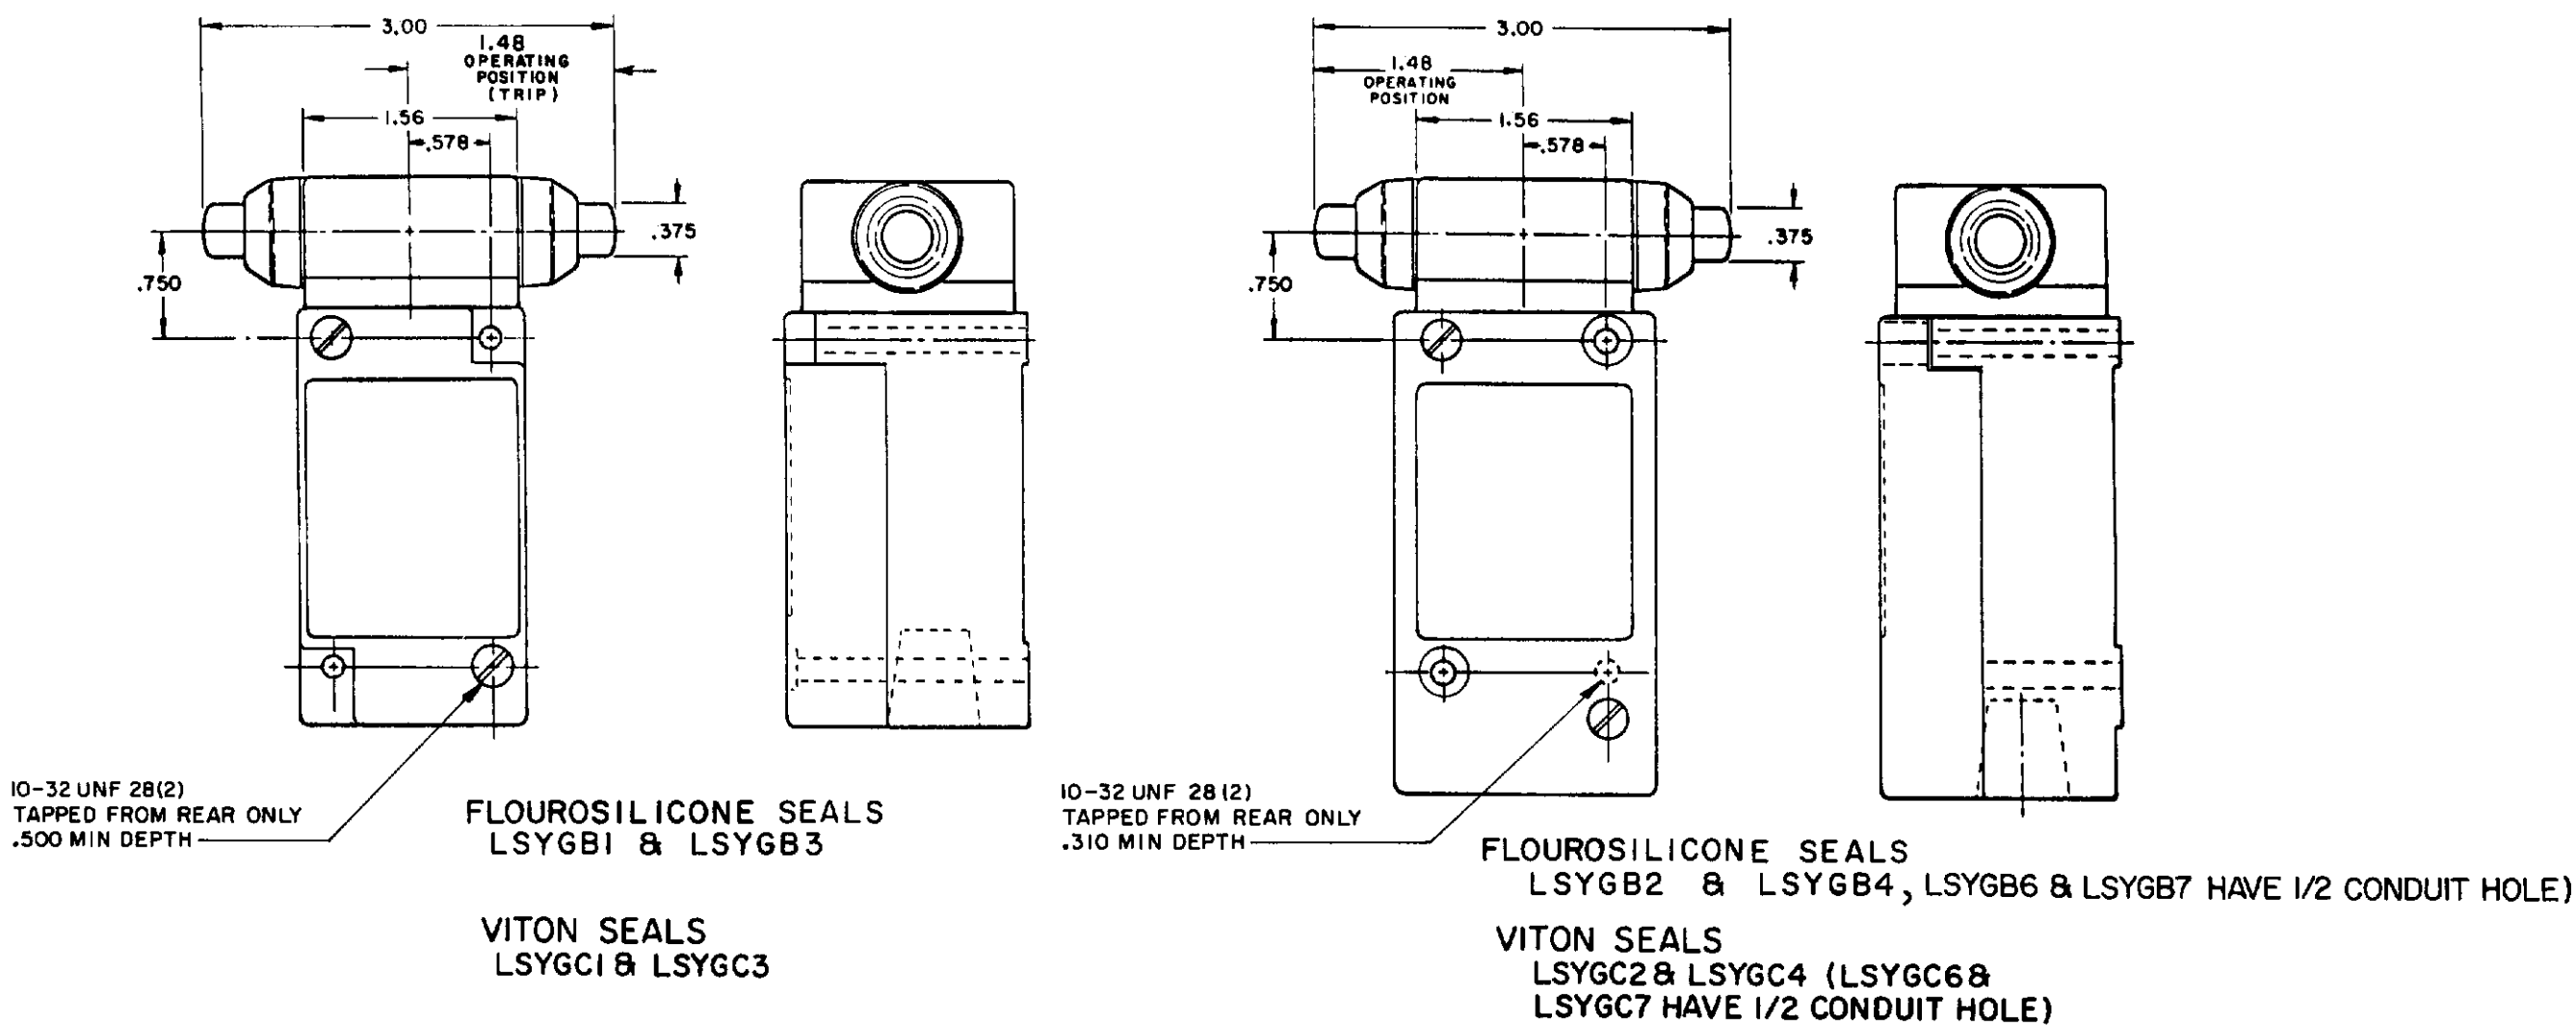


INITIAL POSITION (FREE POSITION) }
OPERATING POINT } PRETRAVEL
FULL TRAVEL } DIFFERENTIAL TRAVEL
OVERTRAVEL

OPERATING POINT GIVEN IN RELATION TO TOP MOUNTING HOLE								TOP PLUNGER TYPES			
CHARACTERISTICS	LSYC PLUNGER		LSYD ROLLER PLUNGER		LSYV ADJ PLUNGER		SEQUENCE BASIC				
							LSYC	LSYD	LSYV		
PRETRAVEL (MAX)	.070		.070		.070		1ST STEP .070 2ND STEP .016 MIN ADD'L				
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	.015 EACH STEP				
OVERTRAVEL (MIN)	.190		.190		.190		.170				
OPERATING FORCE (MAX)	4 LBS		4 LBS		4 LBS		4 LBS				
OPERATING POINT	1.805 ± .030		2.200 ± .040		2.085 MIN 2.335 MAX		1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX				
FULL OVERTRAVEL FORCE (MAX)	7 LBS		7 LBS		7 LBS		7 LBS				
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD											
SIDE PLUNGER TYPES											
CHARACTERISTICS	LSYE PLUNGER	LSYF ROLLER PLUNGER		LSYW ADJ PLUNGER		LSYG PLUNGER MAINTAINED		SEQUENCE BASIC			
							LSYE	LSYF	LSYW		
PRETRAVEL (MAX)	.100	.100		.100		.170		1ST STEP .100 2ND STEP .020 MIN ADD'L			
DIFFERENTIAL TRAVEL (MAX)	.045	.045		.045		.090		.025 EACH STEP			
OVERTRAVEL (MIN)	.190	.190		.190		.080		.170			
OPERATING FORCE (MAX)	6 LBS	6 LBS		6 LBS		10 LBS		6 LBS			
OPERATING POINT	1.300 ± .030	1.735 ± .040		1.615 MIN 1.865 MAX		1.480 ± .030		1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX			
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS		6 LBS		10 LBS		6 LBS			


WOBBLE STICK

SINGLE POLE


DOUBLE POLE

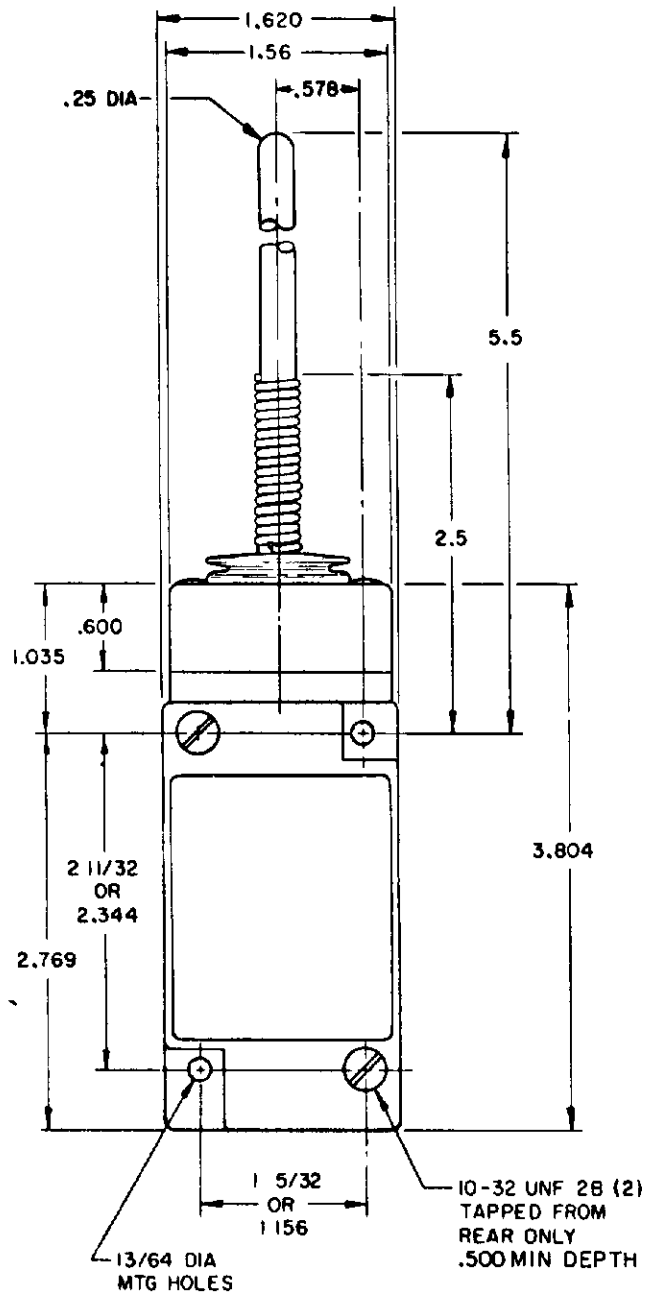


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

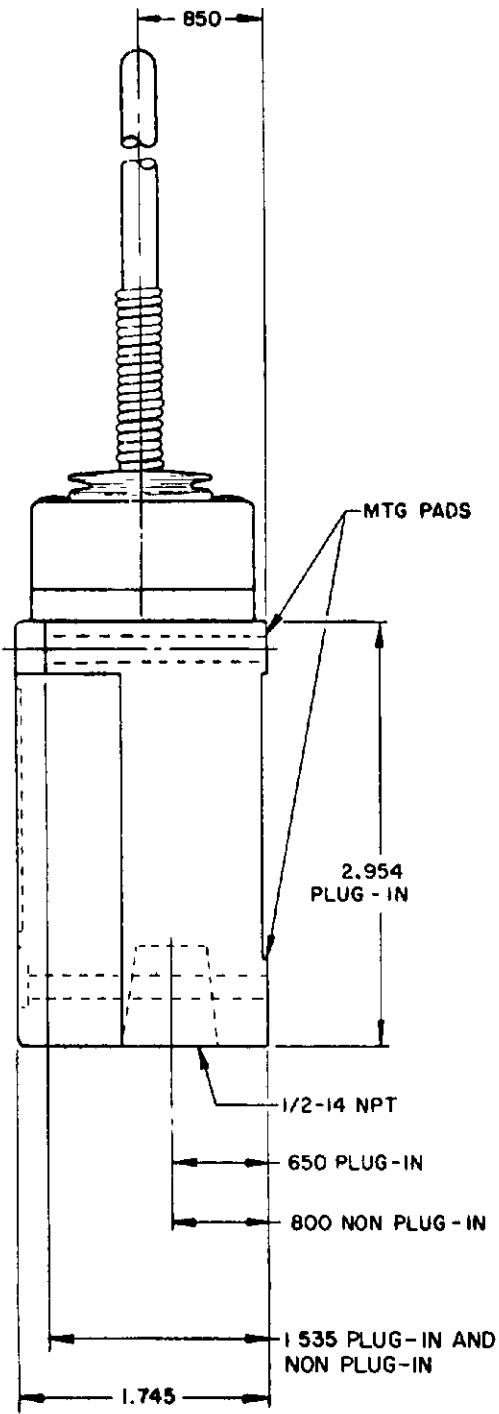


**REPLACEMENT ACTUATOR
LSZ 4009**

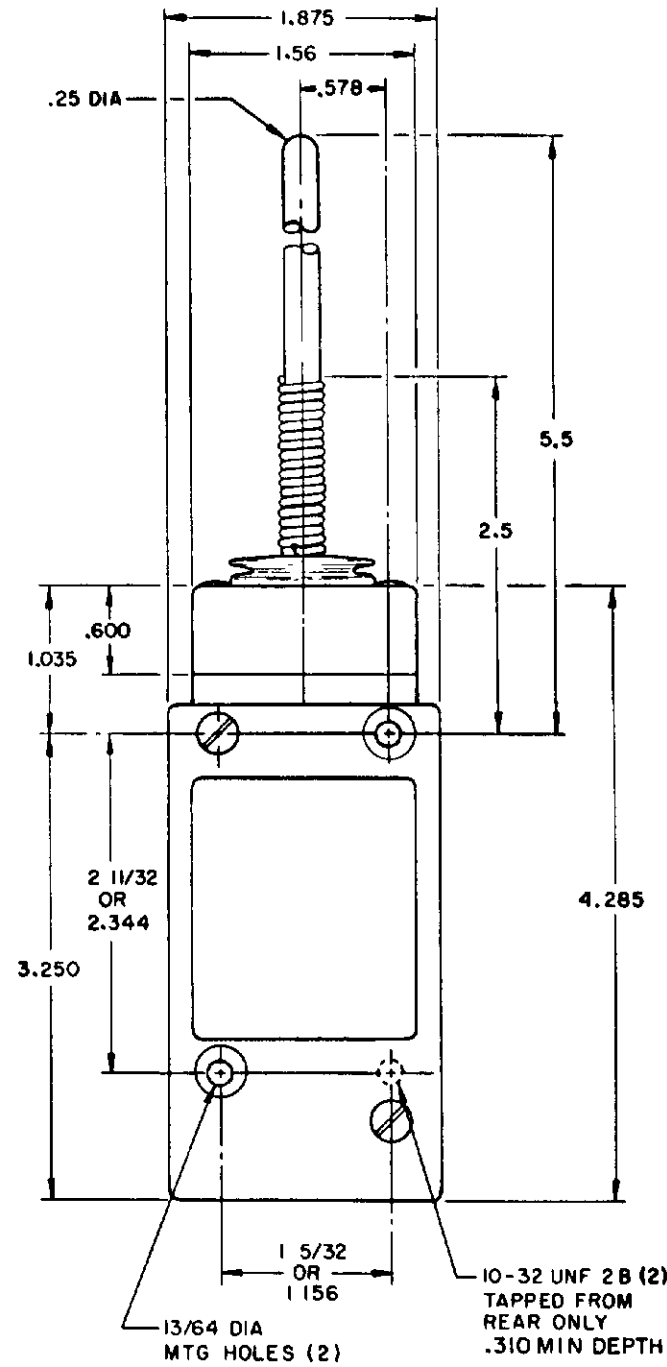


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

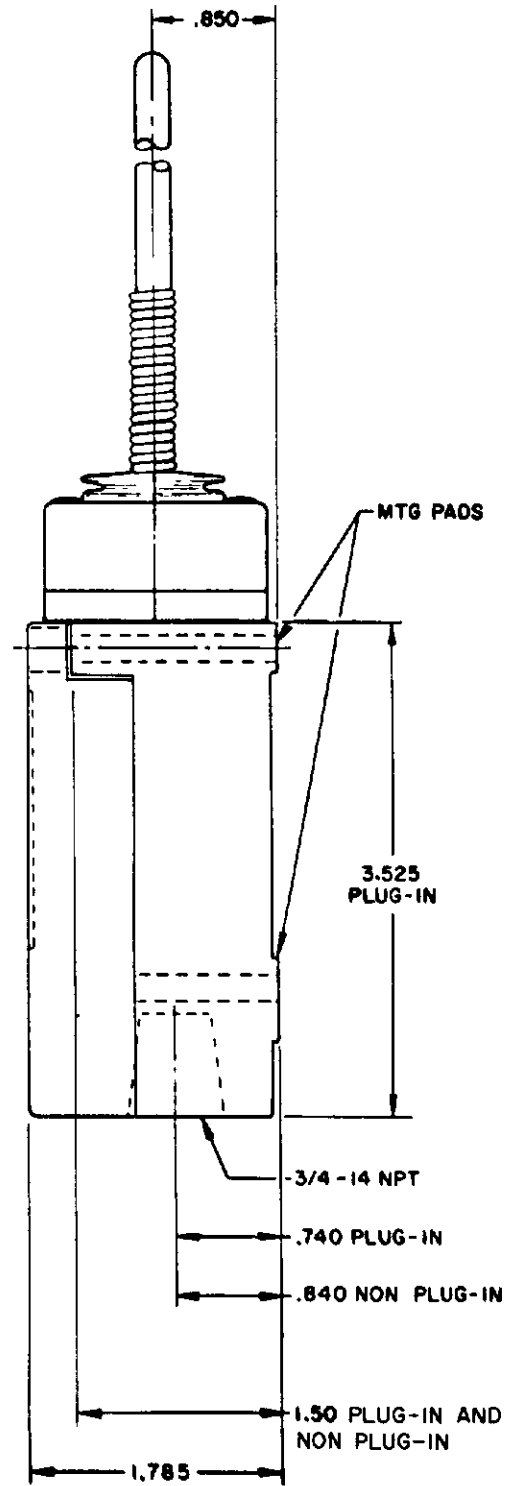

**REPLACEMENT ACTUATOR
LSZ 4011**

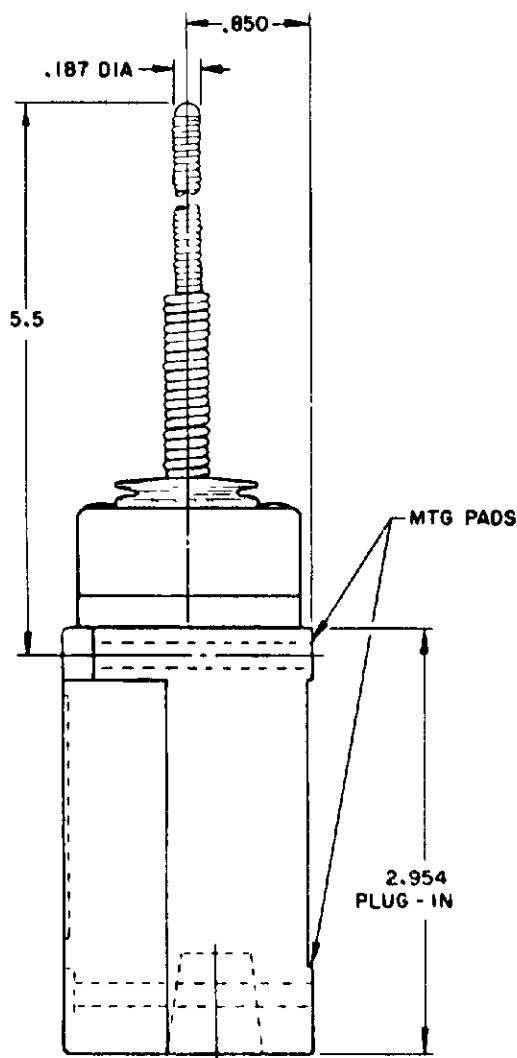


**CABLE EXTENSION
TYPE 7N ACTUATOR**

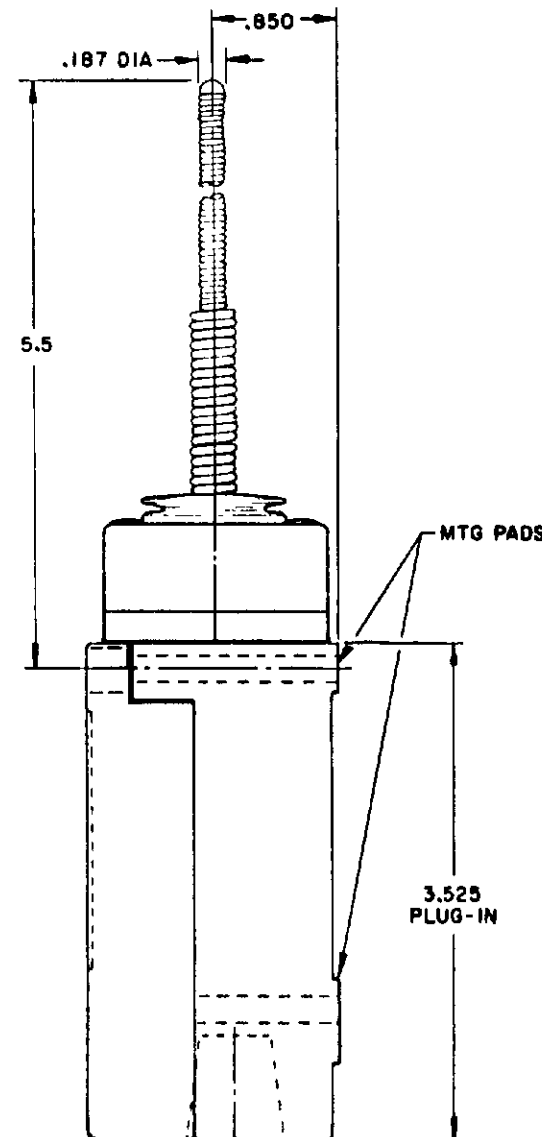

**CABLE EXTENSION
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

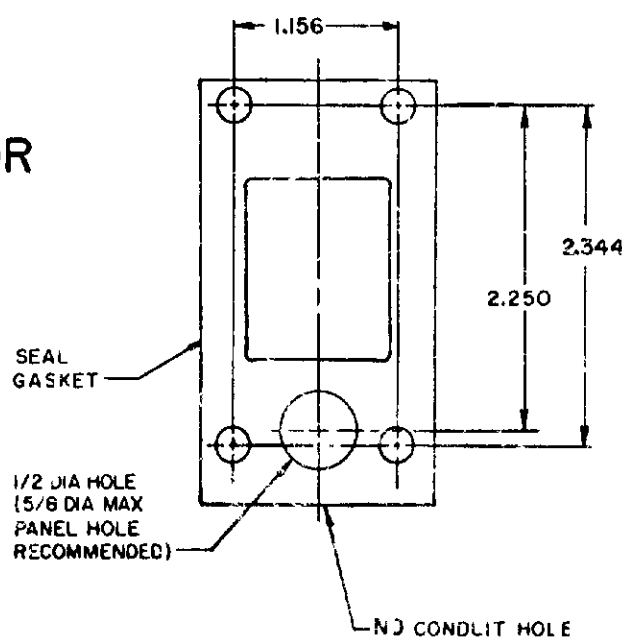

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

SWITCH-ENCLOSED


CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT


REV	DATE	BY	CHK	APP	DESCRIPTION
1	24 AUG 94	SAF	12 SEP 74	AK	19APR05
2	10 JUL 07	PSR			

ISSUE	7	CATALOG LISTING	LSY SERIES CHART 1
PAGE	8	OF	10
RELEASE NO	CO-78499	REPLACES	LSY SERIES

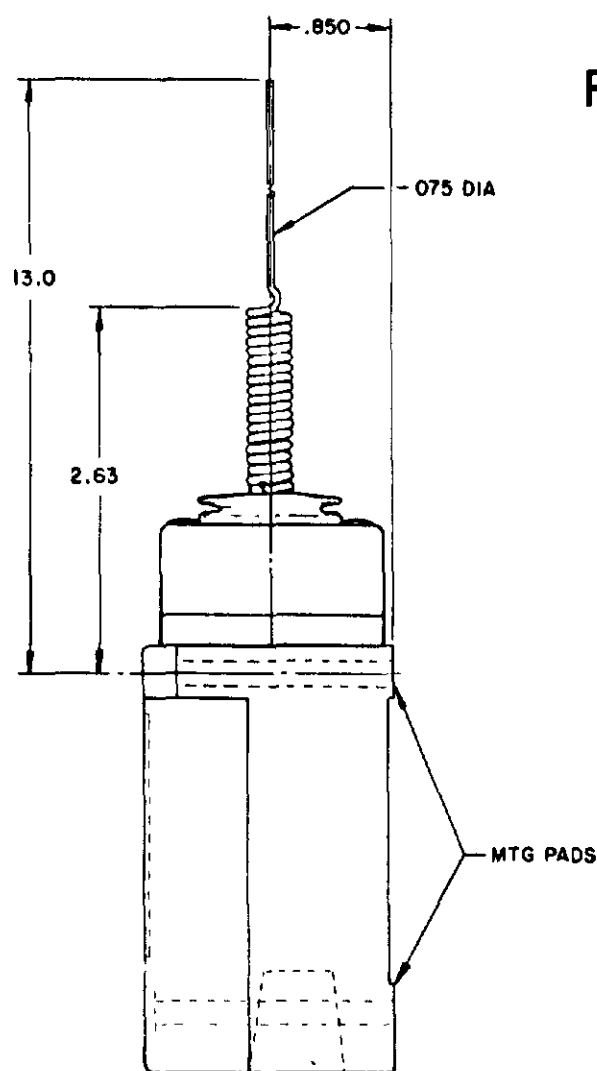


REPLACEMENT ACTUATOR LSZ4010

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

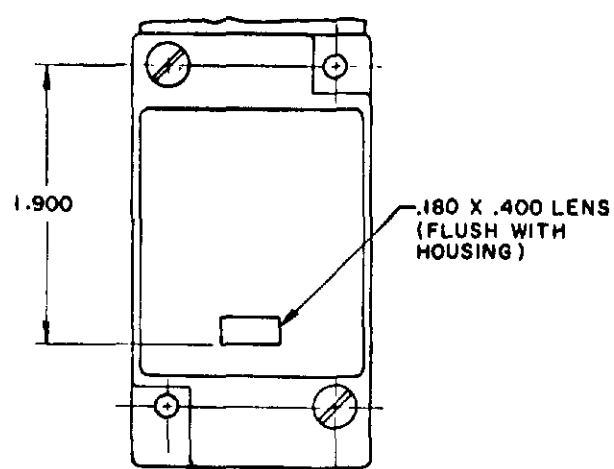

120 LAMP VOLTAGE TYPE-LSYJB5 & LSYJC5
240 LAMP VOLTAGE TYPE-LSYJB8 & LSYJC8

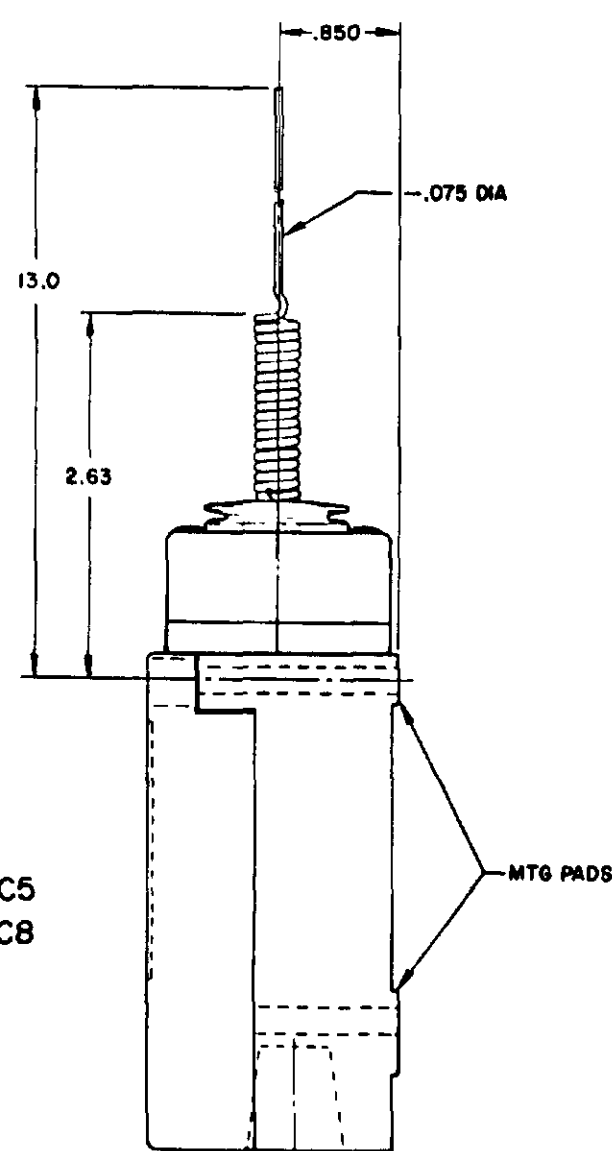

WIRE EXTENSION TYPE 7M ACTUATOR

FLOUROSILICONE SEALS
LSYJB1 & LSYJB3

VITON SEALS
LSYJC1 & LSYJC3

WIRE EXTENSION TYPE 7M ACTUATOR

FLOUROSILICONE SEALS
LSYJB2 & LSYJB4


LSYJB6 & LSYJB7 HAVE 1/2-14 NPT CONDUIT HOLE

VITON SEALS LSYJC2 & LSYJC4
LSYJC6 & LSYJC7 HAVE 1/2-14 NPT CONDUIT HOLE

REPLACEMENT ACTUATOR LSZ 4010

CAT WHISKER


SINGLE POLE

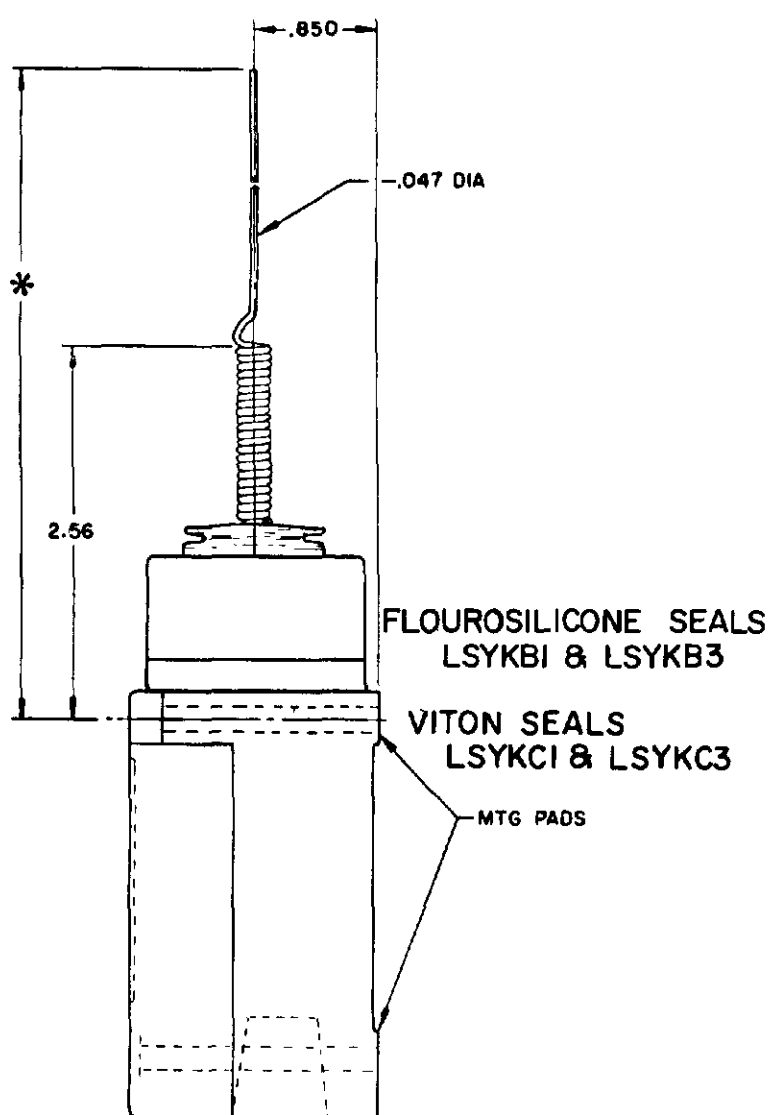

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C COIL ACTUATOR 5.5 IN


SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

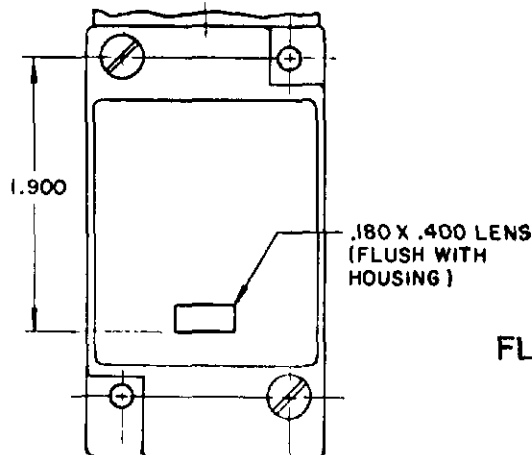

FLOUROSILICONE SEALS
120 LAMP VOLTAGE
LSYKB5 CAT WHISKER LSYBB5 TOP ROTARY
240 LAMP VOLTAGE
LSYKB8 CAT WHISKER LSYBB8 TOP RATARY

VITON SEALS
120 LAMP VOLTAGE
LSYKC5 CAT WHISKER LSYBC5 TOP ROTARY
240 LAMP VOLTAGE
LSYKC8 CAT WHISKER LSYBC8 TOP ROTARY

DOUBLE POLE

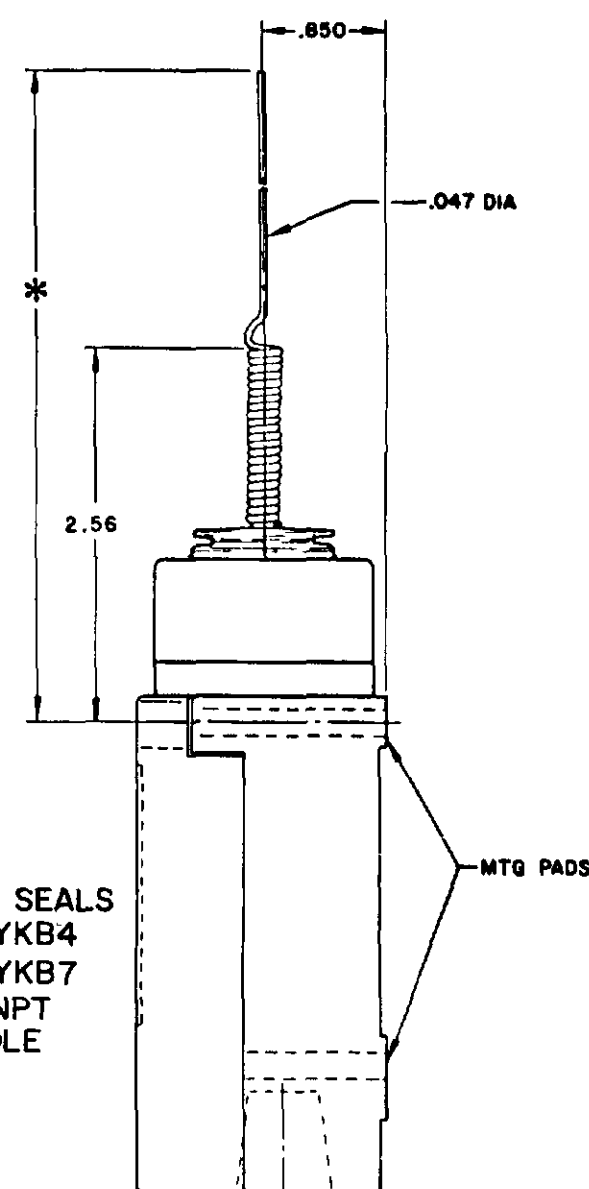

WIRE EXTENSION REPLACEMENTS

*TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013
TYPE 8C ACTUATOR 5.5 IN.-LSZ 4014

MICRO SWITCH
FREEDPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. REG. CODE 91999

SWITCH-ENCLOSED

LSY SERIES
CHART 1

SCALE NONE
DO NOT SCALE PRINT


	CAT WHISKER			WOBBLE STICK		
	5/16" COIL	5/16" WIRE	7/16" WIRE	ROD	CABLE	WIRE
PRETRAVEL (APPROX) IN. RADIUS	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

NOTE-
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS


CONVERSION BASES

SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

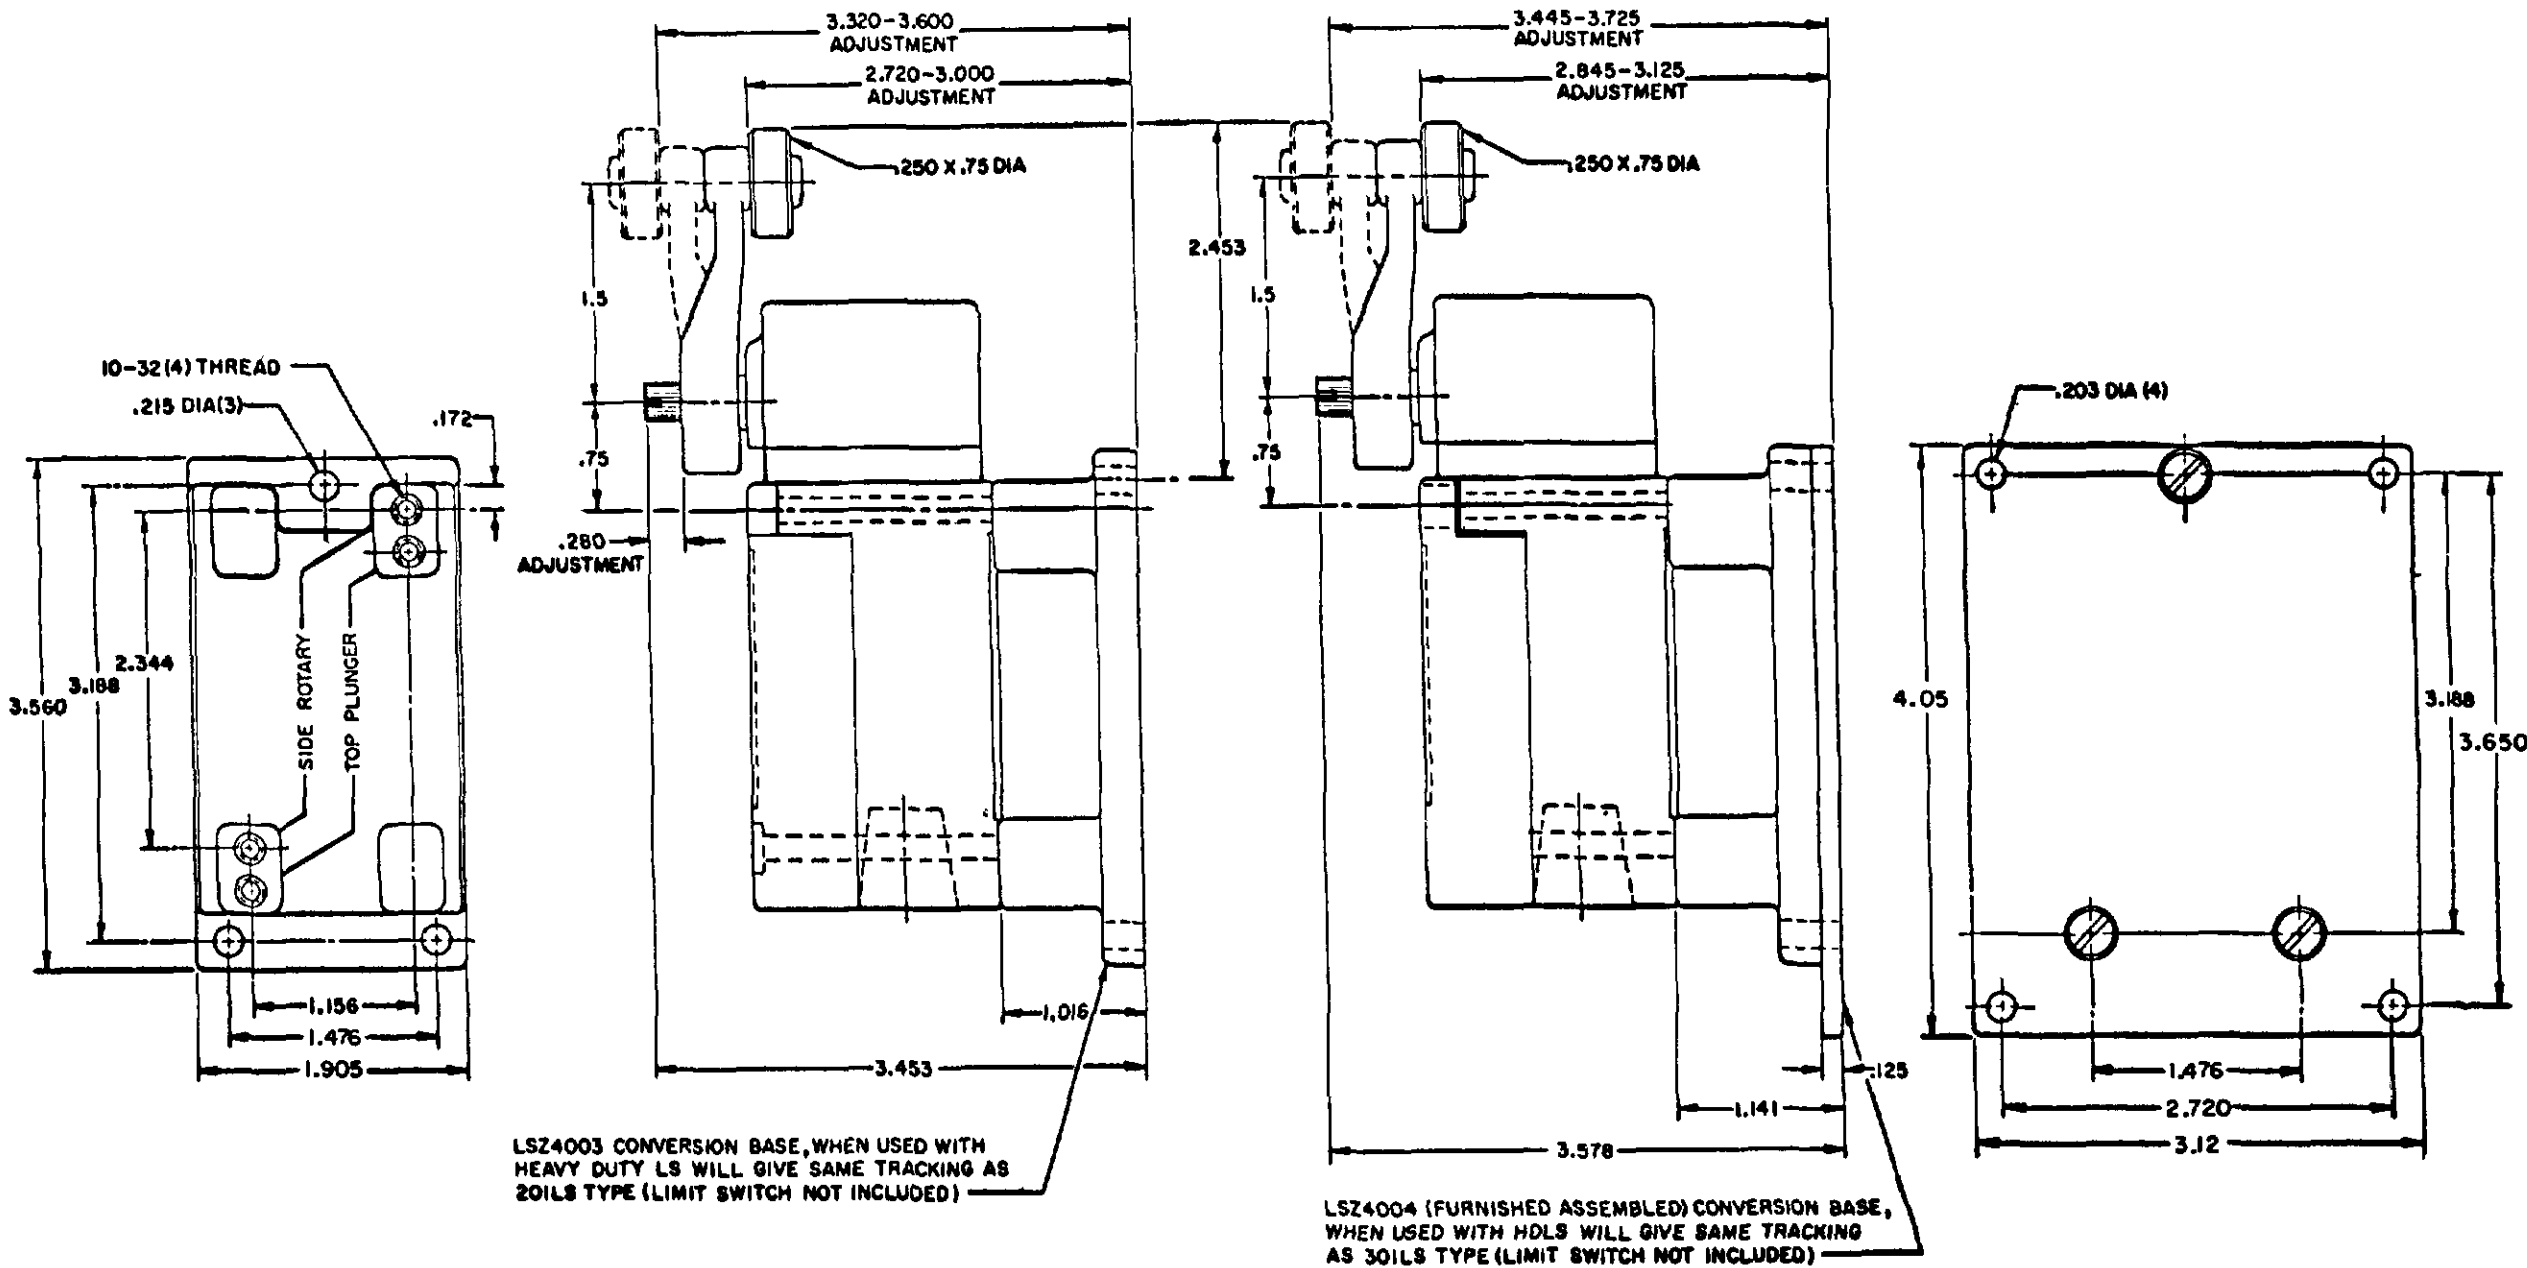

SINGLE POLE
TOP PLUNGER
LSZ4003

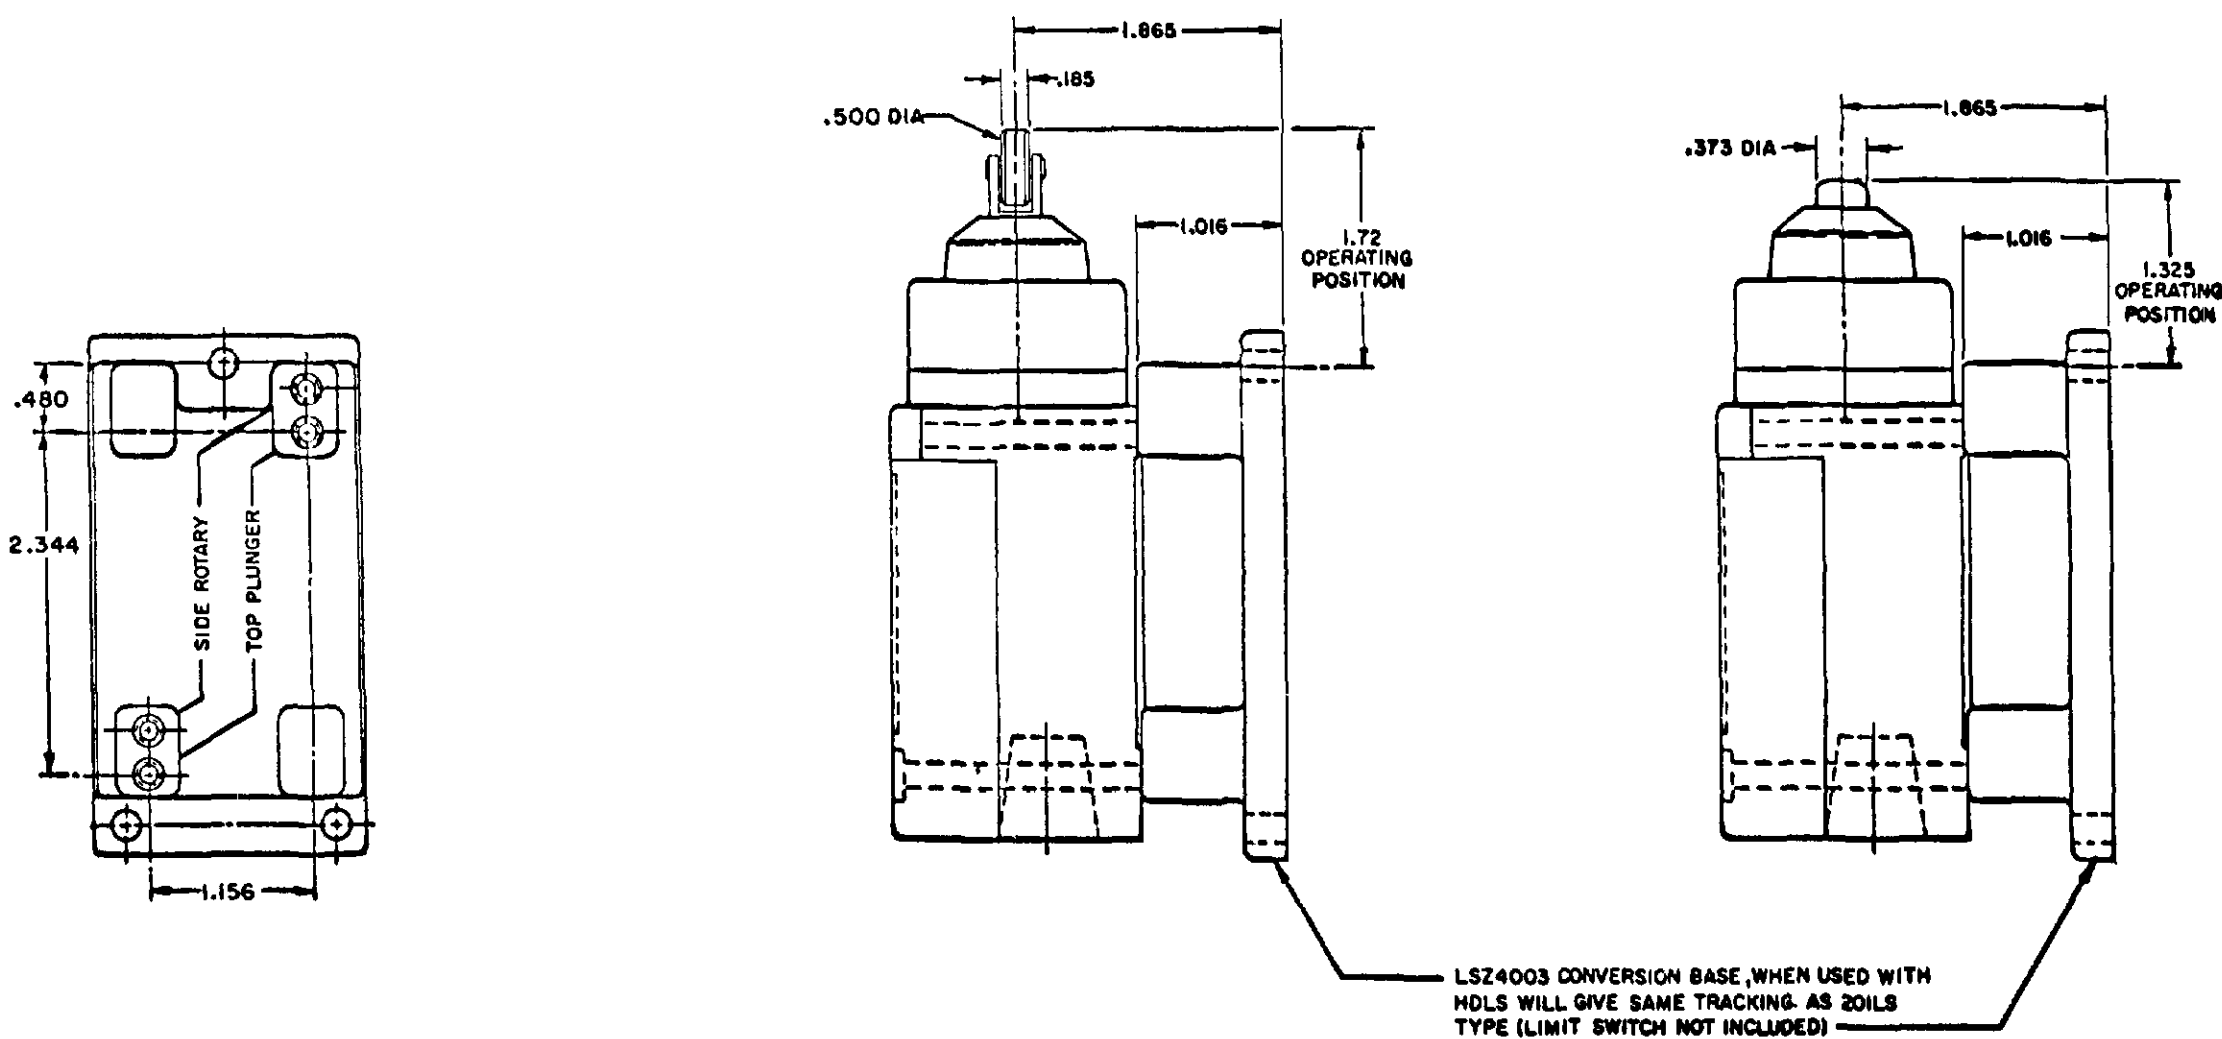

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
A DIVISION OF HONEYWELL
FID. MFG. CODE 9188

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE FULL
DO NOT SCALE PRINT

TEMPERATURE LIMITATIONS FOR
DEVICES WITH FLUORSILICONE (LSYAB**) AND VITON (LSYAC**) SEALS

[illegible]

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB**) FOR LOW TEMPERATURE APPLICATIONS
- 2 VITON SEALS (LSYAC**) FOR FIRE-RESISTANT FLUIDS
- 3 ALL EXCEPT A60

	LOW LIMIT	HIGH LIMIT
LSYAB	-40° F	+250° F
LSYAC	+10° F	+250° F
LSYBB	-20° F	+250° F
LSYBC	+30° F	+250° F
LSYCB	-40° F	+200° F
LSYCC	+10° F	+250° F
LSYDB	-40° F	+200° F
LSYDC	+10° F	+250° F
LSYEB	- 40° F	+200° F
LSYEC	+10° F	+250° F
LSYFB	- 40° F	+200° F
LSYFC	+10° F	+250° F
LSYGB	-20° F	+200° F
LSYGC	+30° F	+250° F
LSYHB	-20° F	+250° F
LSYHC	+30° F	+250° F
LSYJB	-40° F	+250° F
LSYJC	+30° F	+250° F
LSYKB	-20° F	+250° F
LSYKC	+30° F	+250° F
LSYLB	-40° F	+250° F
LSYLC	+10° F	+250° F
LSYMB	-40° F	+250° F
LSYMC	+10° F	+250° F
LSYNB	-20° F	+250° F
LSYNC	+30° F	+250° F
LSYPB	-40° F	+250° F
LSYPC	+10° F	+250° F
LSYRB	-20° F	+250° F
LSYRC	+30° F	+250° F
LSYVB	-40° F	+200° F
LSYVC	+10° F	+250° F
LSYWB	- 40° F	+200° F
LSYWC	+10° F	+250° F

SCALE

DO NOT SCALE PRINT

**(UNLESS OTHERWISE
NOTED)**

TOLERANCES ARE:

IN PLAYS	± .001	± .002
IN HOLES	± .001	± .002
SHOCK PLAYS	± .0005	± .001
KEYS		

MATERIAL

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSY SERIES
CHART 1

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		RELEASE NO CO-78499		REPLACES LSY SERIES																																																																																																																																																													
ISSUE		7						PSR		10JUL07																																																																																																																																																													
<table border="1"> <tr> <td colspan="2">REVISONS</td> <td colspan="2">CHECK</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>A</td> <td>00019948</td> <td colspan="2">C.S.T.</td> <td colspan="2">19APR05</td> <td colspan="2">AK</td> <td colspan="2">CHECK</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">10 JAN 00</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>B</td> <td>200704</td> <td colspan="2">C.S.T.</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">23 JUN 00</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>C</td> <td>200853</td> <td colspan="2">C.S.T.</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">21 JUL 00</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>D</td> <td>202198</td> <td colspan="2">C.S.T.</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">23 JAN 01</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>E</td> <td>0012601</td> <td colspan="2">SPK</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">19APR05</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>F</td> <td>10031956</td> <td colspan="2">BS</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">10JUL07</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>												REVISONS		CHECK										A	00019948	C.S.T.		19APR05		AK		CHECK				10 JAN 00												B	200704	C.S.T.										23 JUN 00												C	200853	C.S.T.										21 JUL 00												D	202198	C.S.T.										23 JAN 01												E	0012601	SPK										19APR05												F	10031956	BS										10JUL07											
REVISONS		CHECK																																																																																																																																																																					
A	00019948	C.S.T.		19APR05		AK		CHECK																																																																																																																																																															
10 JAN 00																																																																																																																																																																							
B	200704	C.S.T.																																																																																																																																																																					
23 JUN 00																																																																																																																																																																							
C	200853	C.S.T.																																																																																																																																																																					
21 JUL 00																																																																																																																																																																							
D	202198	C.S.T.																																																																																																																																																																					
23 JAN 01																																																																																																																																																																							
E	0012601	SPK																																																																																																																																																																					
19APR05																																																																																																																																																																							
F	10031956	BS																																																																																																																																																																					
10JUL07																																																																																																																																																																							
RASTER		DRAWN																																																																																																																																																																					
GJW		24 AUG 91		CHECK		JAF		12 SEP 94																																																																																																																																																															

RASTER

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru