

# RTE Series


## Low Profile Rotary DIP Switches

### Features/Benefits

- Thru-hole and surface mount models
- Miniature size with robust metal cover in black or silver nickel finish
- 4, 10, & 16 positions
- Large choice of codings
- Vertical, right angle or reverse versions
- RoHS compliant

### Typical Applications

- Timers, automation components
- Computer and peripherals
- Alarms, access control, smoke detectors, lighting, home protection
- Instrumentation

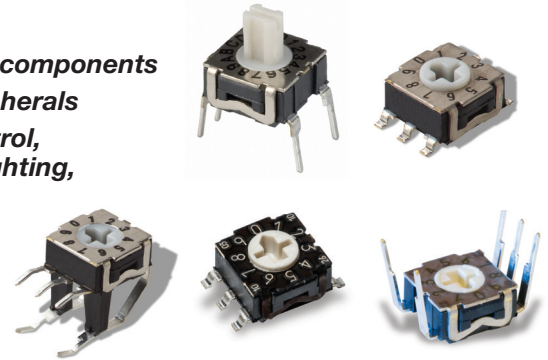

H

DIP

### Specifications

#### CONTACT RATING:

Gold: 100 mA max. 10μ A min. 30 V DC max. 20 mVDC min.

MECHANICAL LIFE: 20,000 indexations

CONTACT RESISTANCE: 100 mΩ max. initial;  
150 mΩ after life

INSULATION RESISTANCE: 10<sup>10</sup> Ω min. initial

DIELECTRIC STRENGTH: 300 Vrms 1 mn

OPERATING TEMPERATURE: -25°C to 85°C.

STORAGE TEMPERATURE: -55°C to 85°C.

#### PACKAGING:

#### Quantities

| Terminations | Actuator                | Tube | Box (in bulk) | Carrier tape | Standard Package |
|--------------|-------------------------|------|---------------|--------------|------------------|
| G            | Flush, screwdriver slot |      |               | 1250         | 1250 (1 reel)    |
|              | Shaft for button        |      |               | 750          | 750 (1 reel)     |
| N            | All versions            | 65   |               |              | 1950 (30 tubes)  |
| V            | All versions            |      | 150           |              | 1500 (10 boxes)  |
| R            | Flush, screwdriver slot | 65   |               |              | 1950 (30 tubes)  |
|              | Shaft for button        |      | 150           |              | 1500 (10 boxes)  |

### Materials

COVER: Brass, nickel plated (black or silver)

BASE: PPS

ACTUATOR: LCP

MOVABLE CONTACTS: Copper alloy, gold plated.

STATIONARY CONTACTS: Brass, gold plated.

TERMINALS: See page I-28 to I-29

O-RING: Silicone

#### SOLDERING PROCESS:

- Surface Mount Terminals: Infrared Reflow Soldering in accordance with IEC 61760-1.

- Non Reverse Thru-Hole Terminals: Lead free single or double wave soldering process according to C&K Procedure PS-LF-001

- Reverse Thru-Hole Terminals: Manual soldering: 3 sec / 350°C. Lead free single wave soldering process can be used but validation of the process must be done by customer

**Note:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

### How To Order

The Build-A Switch concept allows you to mix and match options to create the switch you need. Below is a complete listing of options shown in catalog. To order, simply select desired option from each category and place in the appropriate box.

**NOTE:** Some of the configurations may not be available or could require some development.



#### Number of Positions

RTE04

RTE10

RTE16

#### ESD Protection and top plate

0 Without ESD - standard plate

1 With ESD - standard plate <sup>2</sup>

B Without ESD - black plate

#### Actuator

0 Flush, screwdriver slot

2 Shaft for button

#### Terminations

N Thru-hole

V Right angle

G Surface mount

R Reverse, thru-hole

#### Contact/Terminal Material

4 Gold 0.5 μm/ lead free tin

7 Gold 1.0 μm

#### Switch Function


0 Single pole <sup>1</sup>

1 BCD code

3 Gray Code (for RTE 10)

4 Hexadecimal code (for RTE 16)

7 Gray Code (for RTE 16)




First Angle  
Projection

- 1 - Single pole function not available for RTE10/RTE16  
2 - ESD protection available with "N" and "R" terminations only


# RTE Series Low Profile Rotary DIP Switches

## SWITCHES WITH STANDARD OPTIONS


### PC Mount-Terminal Option N



### Right Angle Mount-Terminal Option V




### Surface Mount-Terminal Option G




## NUMBER OF POSITIONS


### RTE04 4 POSITIONS



### RTE10 10 POSITIONS



### RTE16 16 POSITIONS








# RTE Series




## Low Profile Rotary DIP Switches

### TERMINATIONS



#### N THRU-HOLE

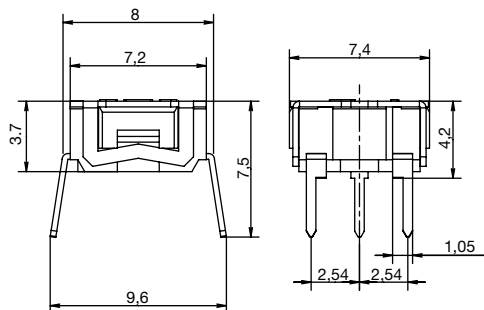



#### R REVERSE, THRU-HOLE

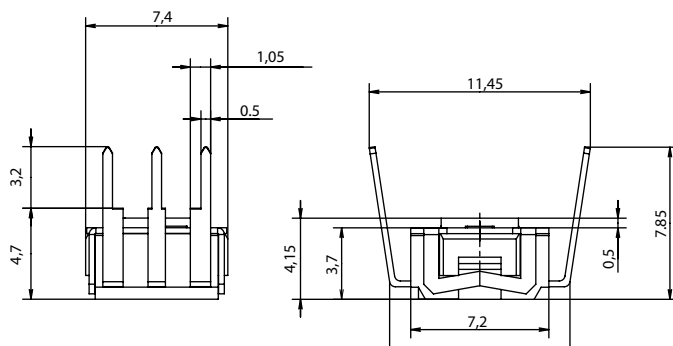

#### V RIGHT ANGLE, THRU-HOLE

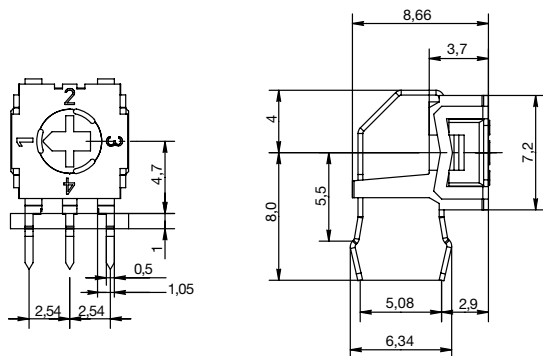

#### G SURFACE MOUNT

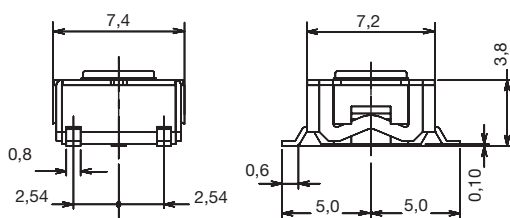

PCB layout seen component side



# RTE Series Low Profile Rotary DIP Switches



H

DIP

## SWITCH FUNCTION

### 0 SINGLE POLE

| POS. | 1 | 2 | 3 | 4 |
|------|---|---|---|---|
| C    | ● | ● | ● | ● |
| 1    | ● |   |   |   |
| 2    |   | ● |   |   |
| 3    |   |   | ● |   |
| 4    |   |   |   | ● |

### 1 BCD CODE

| POS. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|------|---|---|---|---|---|---|---|---|---|---|
| C    | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 1    |   | ● |   | ● |   | ● |   | ● |   | ● |
| 2    |   |   | ● | ● |   |   | ● | ● |   |   |
| 4    |   |   |   |   | ● | ● | ● | ● |   |   |
| 8    |   |   |   |   |   |   |   |   | ● | ● |

### 3 GRAY CODE ( for RTE10 only )

| POS. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|------|---|---|---|---|---|---|---|---|---|---|
| C    | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 1    |   | ● | ● |   |   | ● | ● |   |   | ● |
| 2    |   |   | ● | ● |   | ● | ● |   |   |   |
| 4    |   |   |   |   | ● | ● | ● | ● | ● | ● |
| 8    |   |   |   |   |   |   |   |   | ● | ● |

### 4 HEXADECIMAL CODE

| POS. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C    | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 1    |   | ● |   |   |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |
| 2    |   |   | ● | ● |   |   | ● |   |   | ● |   | ● |   | ● |   | ● |
| 4    |   |   |   |   | ● | ● | ● | ● |   |   |   | ● | ● | ● | ● | ● |
| 8    |   |   |   |   |   |   |   |   | ● | ● | ● | ● | ● | ● | ● | ● |

### 7 GRAY CODE (for RTE04 only)


| POS. | 1 | 2 | 3 | 4 |
|------|---|---|---|---|
| C    | ● | ● | ● | ● |
| 1    | ● |   |   |   |
| 2    |   | ● |   |   |
| 4    |   |   | ● |   |
| 8    |   |   |   | ● |

(for RTE16 only)

| POS. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C    | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 1    |   | ● |   |   |   | ● |   |   | ● | ● |   |   | ● | ● |   |   |
| 2    |   |   | ● | ● | ● |   | ● |   |   |   | ● | ● | ● | ● |   |   |
| 4    |   |   |   |   | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |   |   |
| 8    |   |   |   |   |   |   |   |   | ● | ● | ● | ● | ● | ● | ● | ● |

## CONTACT MATERIAL

| OPTION CODE | CONTACT MATERIAL | TERMINAL PLATING       |
|-------------|------------------|------------------------|
| 4           | Gold             | 0.5 µm / lead free tin |
| 7           | Gold             | 1.0 µm                 |




First Angle  
Projection

Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change



## H



**C&K**

H-38

[www.ckswitches.com](http://www.ckswitches.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)