


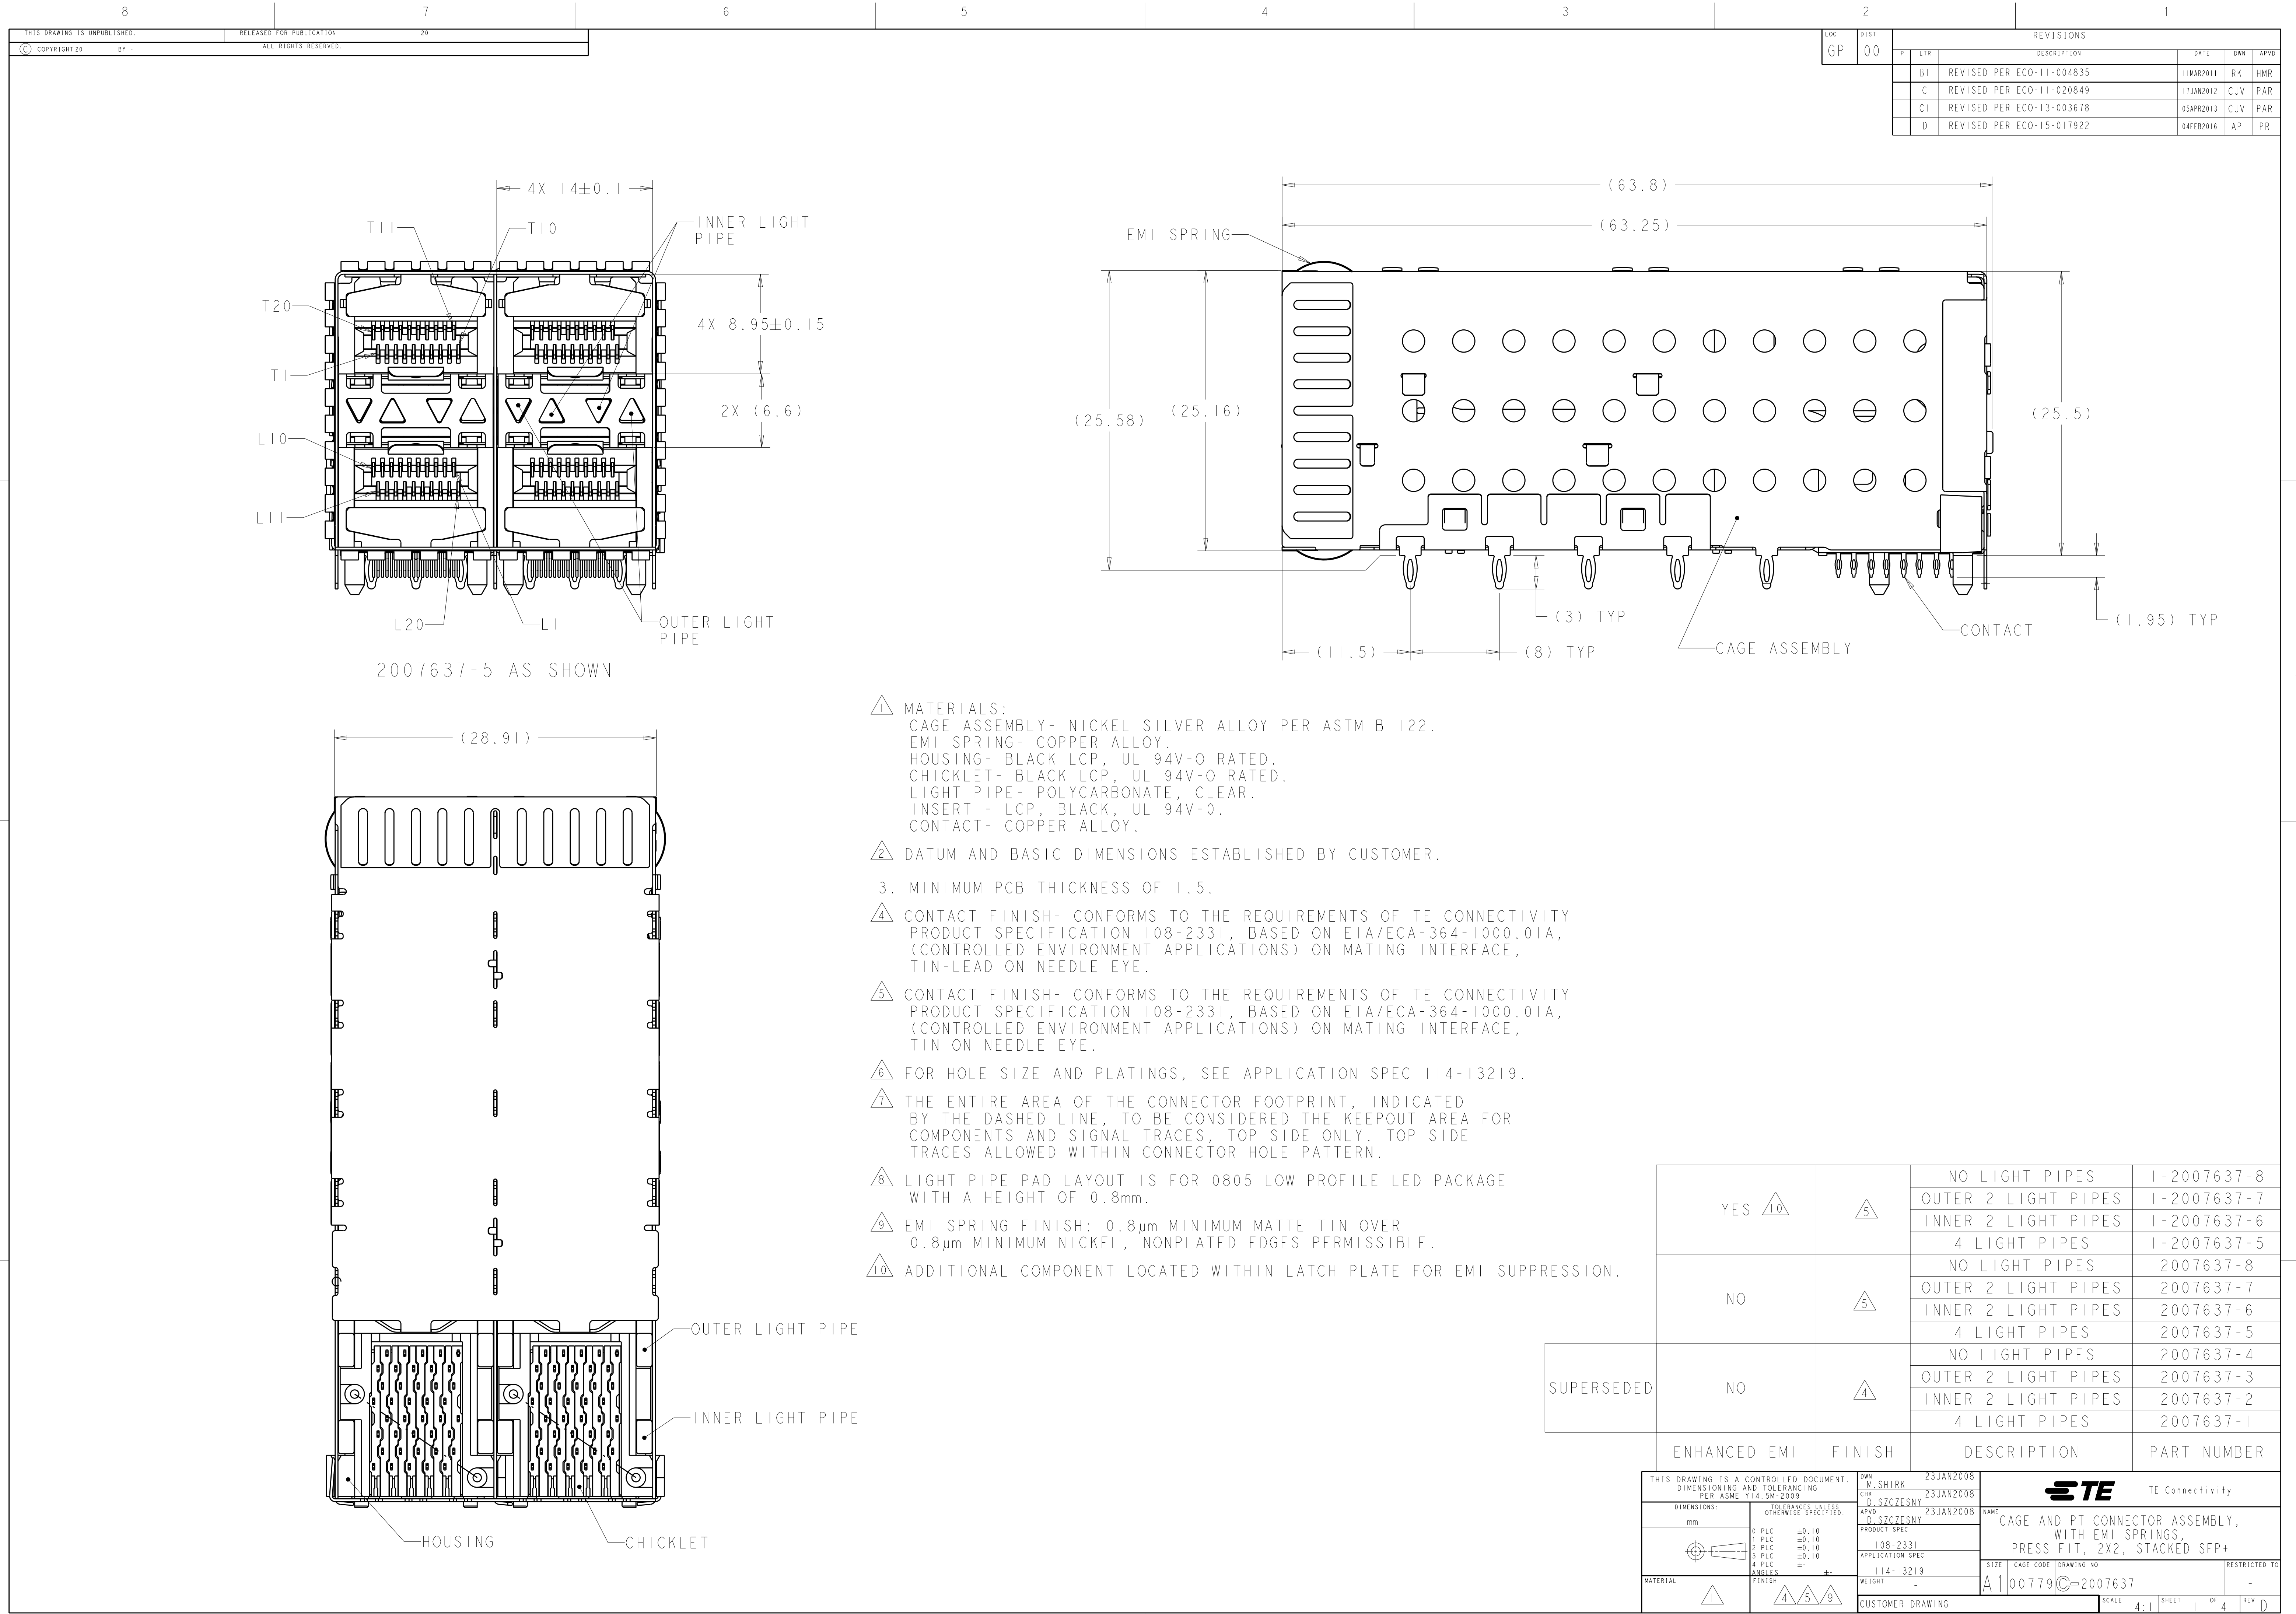


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
GP	00	B1		REVISED PER ECO-11-004835	11MAR2011	RK	HMR	
		C		REVISED PER ECO-11-020849	17JAN2012	CJV	PAR	
		C1		REVISED PER ECO-13-003678	05APR2013	CJV	PAR	
		D		REVISED PER ECO-15-017922	04FEB2016	AP	PR	

- 1 MATERIALS:
CAGE ASSEMBLY- NICKEL SILVER ALLOY PER ASTM B 122.
EMI SPRING- COPPER ALLOY.
HOUSING- BLACK LCP, UL 94V-0 RATED.
CHICKLET- BLACK LCP, UL 94V-0 RATED.
LIGHT PIPE- POLYCARBONATE, CLEAR.
INSERT - LCP, BLACK, UL 94V-0.
CONTACT- COPPER ALLOY.
- 2 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
3. MINIMUM PCB THICKNESS OF 1.5.
- 4 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-2331, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN-LEAD ON NEEDLE EYE.
- 5 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-2331, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE.
- 6 FOR HOLE SIZE AND PLATINGS, SEE APPLICATION SPEC 114-13219.
- 7 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY. TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN.
- 8 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm.
- 9 EMI SPRING FINISH: 0.8µm MINIMUM MATTE TIN OVER 0.8µm MINIMUM NICKEL, NONPLATED EDGES PERMISSIBLE.
- 10 ADDITIONAL COMPONENT LOCATED WITHIN LATCH PLATE FOR EMI SUPPRESSION.


PRESSION.	YES 		NO LIGHT PIPES	1-2007637-8
			OUTER 2 LIGHT PIPES	1-2007637-7
			INNER 2 LIGHT PIPES	1-2007637-6
			4 LIGHT PIPES	1-2007637-5
	NO		NO LIGHT PIPES	2007637-8
			OUTER 2 LIGHT PIPES	2007637-7
			INNER 2 LIGHT PIPES	2007637-6
			4 LIGHT PIPES	2007637-5
SUPERSEDED	NO		NO LIGHT PIPES	2007637-4
			OUTER 2 LIGHT PIPES	2007637-3
			INNER 2 LIGHT PIPES	2007637-2
			4 LIGHT PIPES	2007637-1
	ENHANCED EMI	FINISH	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		DWN M. SHIRK 23JAN2008	TE Connectivity	
DIMENSIONS: mm		CHK D. SZCZESNY 23JAN2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SZCZESNY 23JAN2008	NAME CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI SPRINGS, PRESS FIT, 2X2, STACKED SFP+	
0 PLC ±0.10		PRODUCT SPEC		
1 PLC ±0.10		108-2331	SIZE A100779C=2007637	
2 PLC ±0.10		APPLICATION SPEC		
3 PLC ±0.10		114-13219	RESTRICTED TO	
4 PLC ±		WEIGHT		
ANGLES FINISH		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 4 REV D	


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

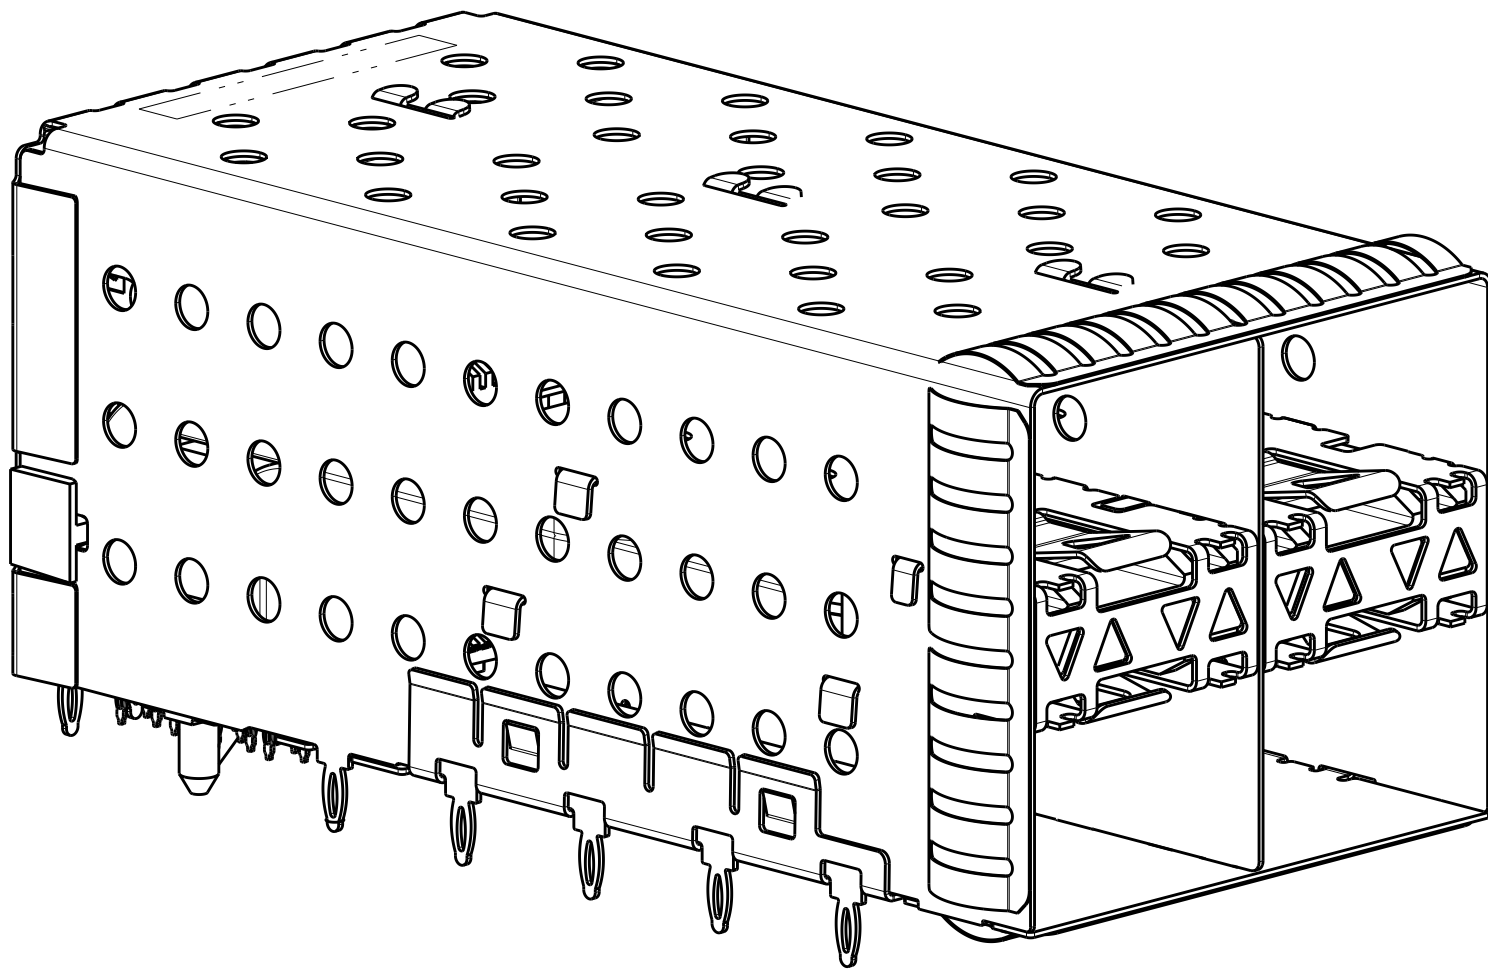


2007637-5 AND 1-2007637-5
SCALE 3:1

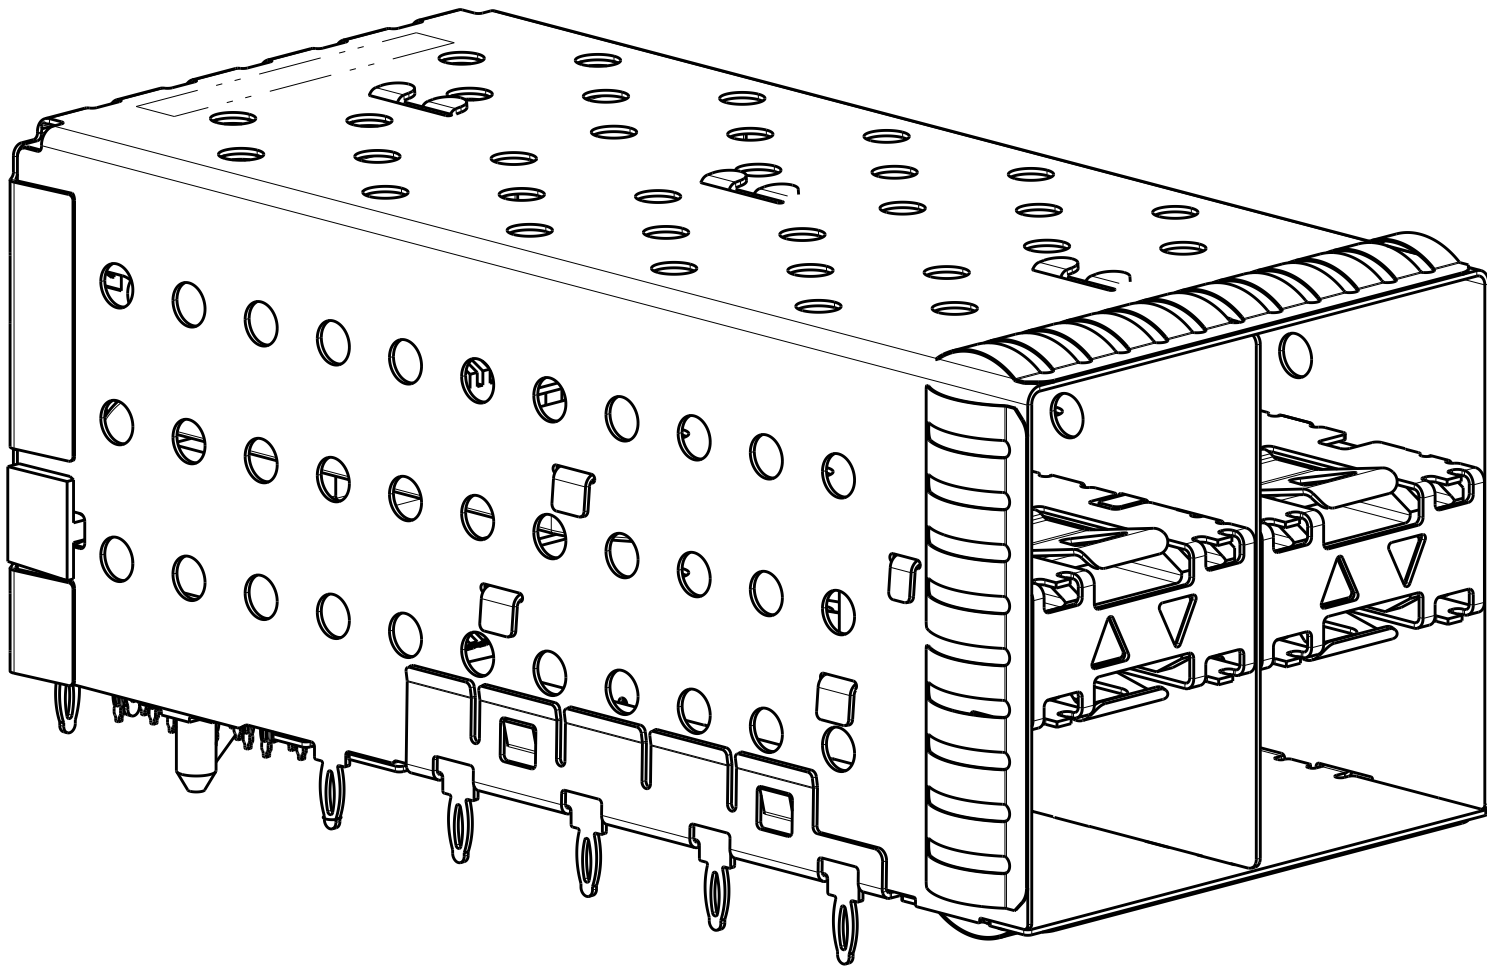

2007637-6 AND 1-2007637-6
SCALE 3:1

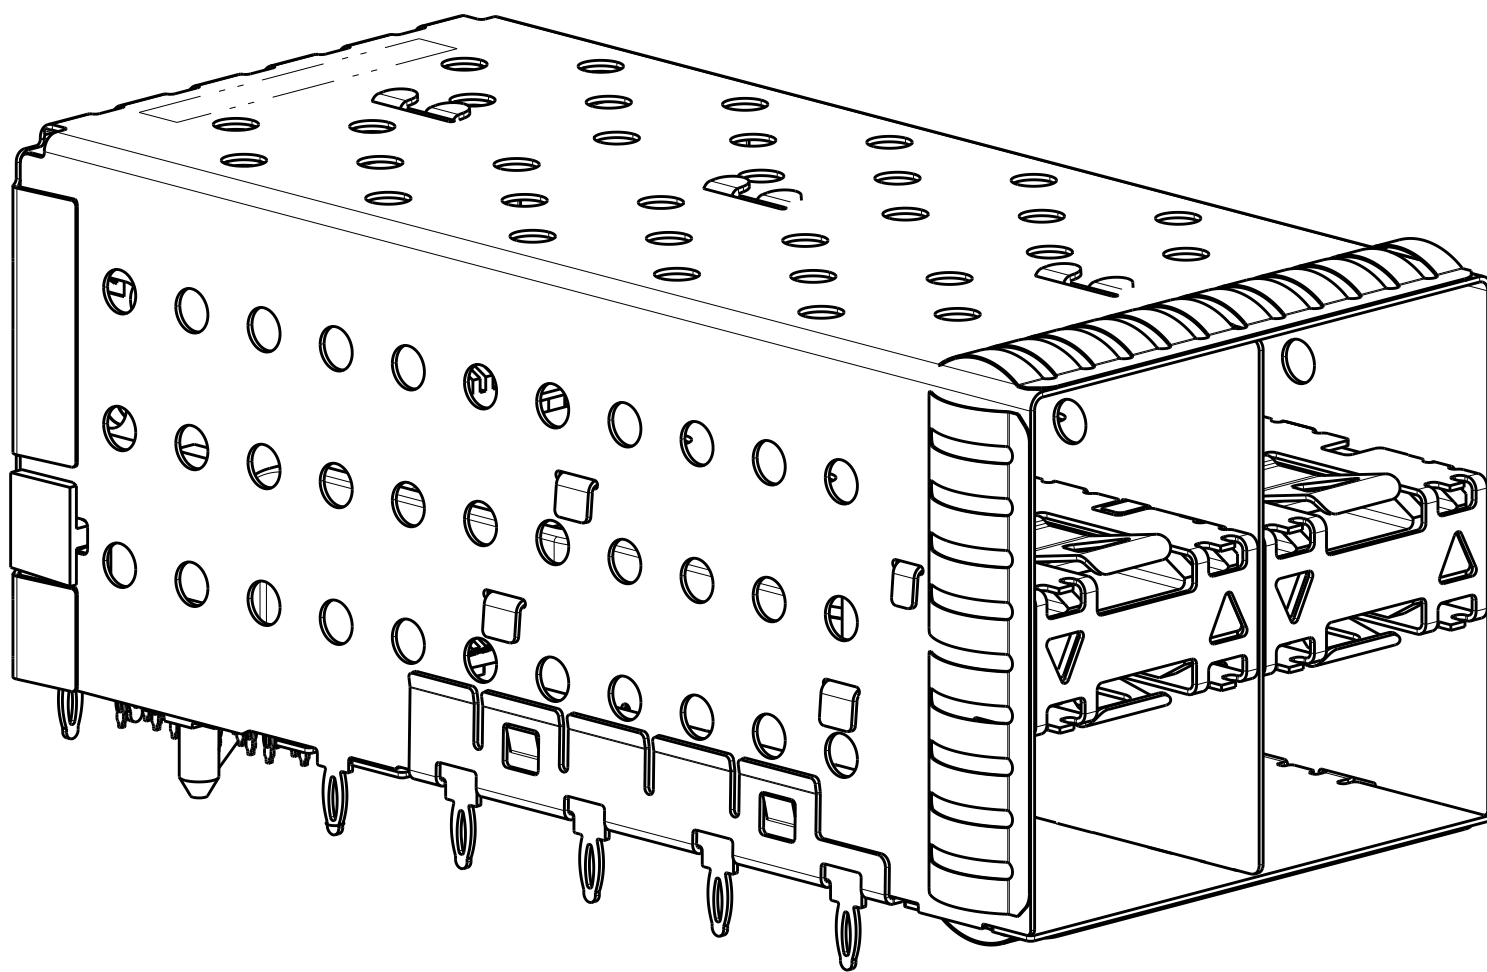

2007637-7 AND 1-2007637-7
SCALE 3:1

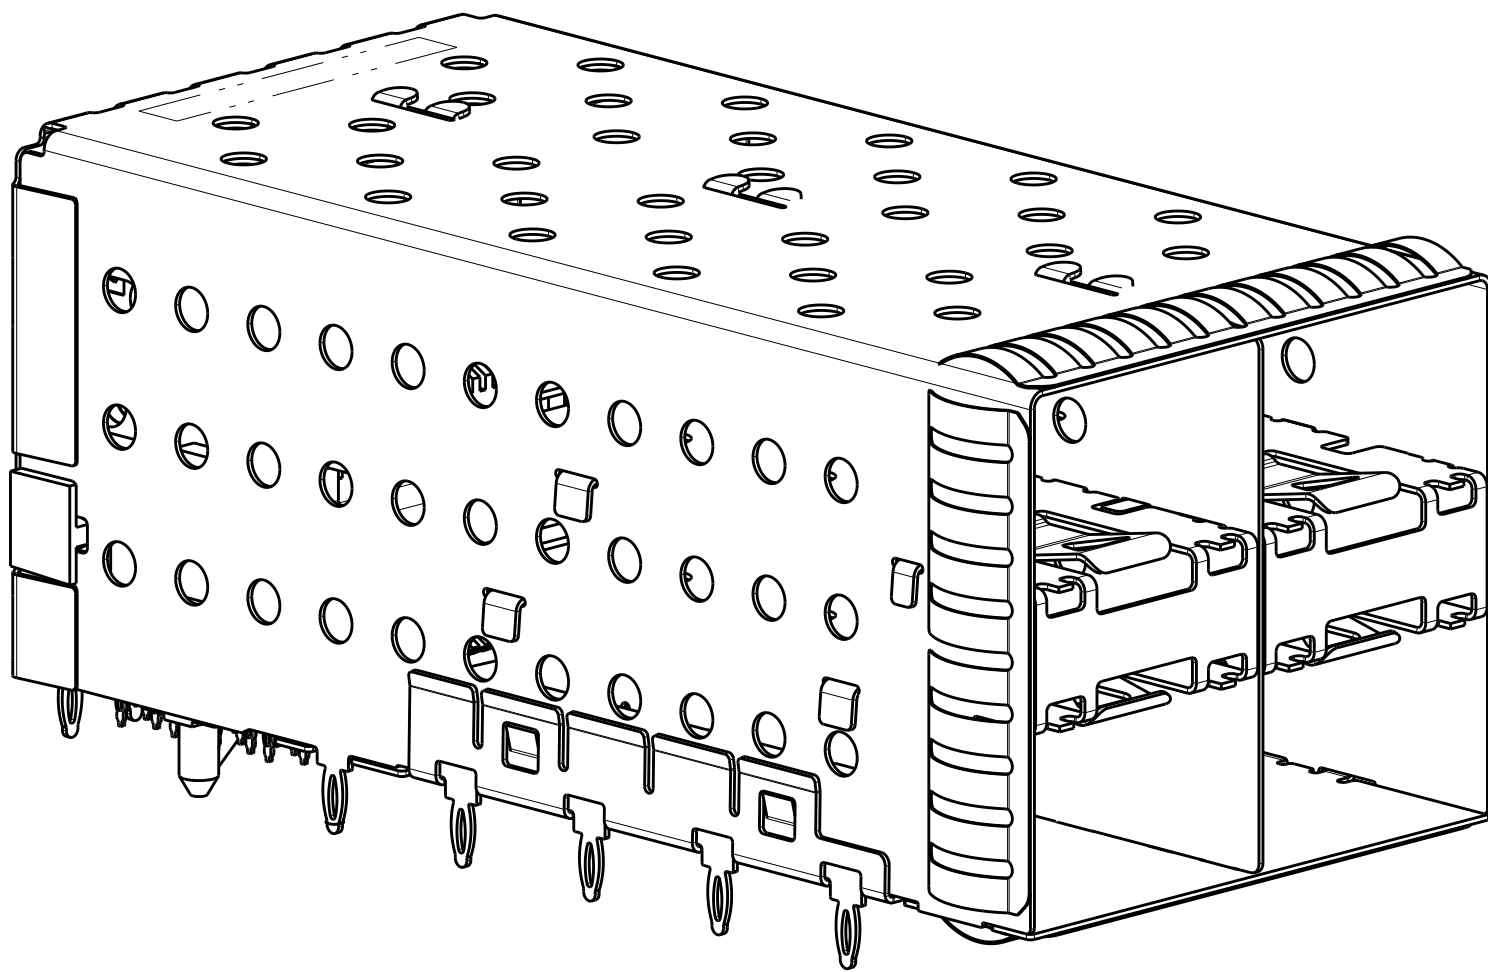

2007637-8 AND 1-2007637-8
SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING
PER ASME Y14.5M-2009

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.10
1 PLC ±0.10
2 PLC ±0.10
3 PLC ±0.10
4 PLC ±
ANGLES ±
FINISH

MATERIAL

DWN
M. SHIRK
23JAN2008

CHK
D. SZCZESNY
23JAN2008

APVD
D. SZCZESNY
23JAN2008

PRODUCT SPEC
108-2331

APPLICATION SPEC
114-13219

WEIGHT
-

CUSTOMER DRAWING

NAME
CAGE AND PT CONNECTOR ASSEMBLY,
WITH EMI SPRINGS,
PRESS FIT, 2X2, STACKED SFP+

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=2007637

RESTRICTED TO
-


SCALE
4:1

SHEET
2


OF
4

REV
D


TE Connectivity

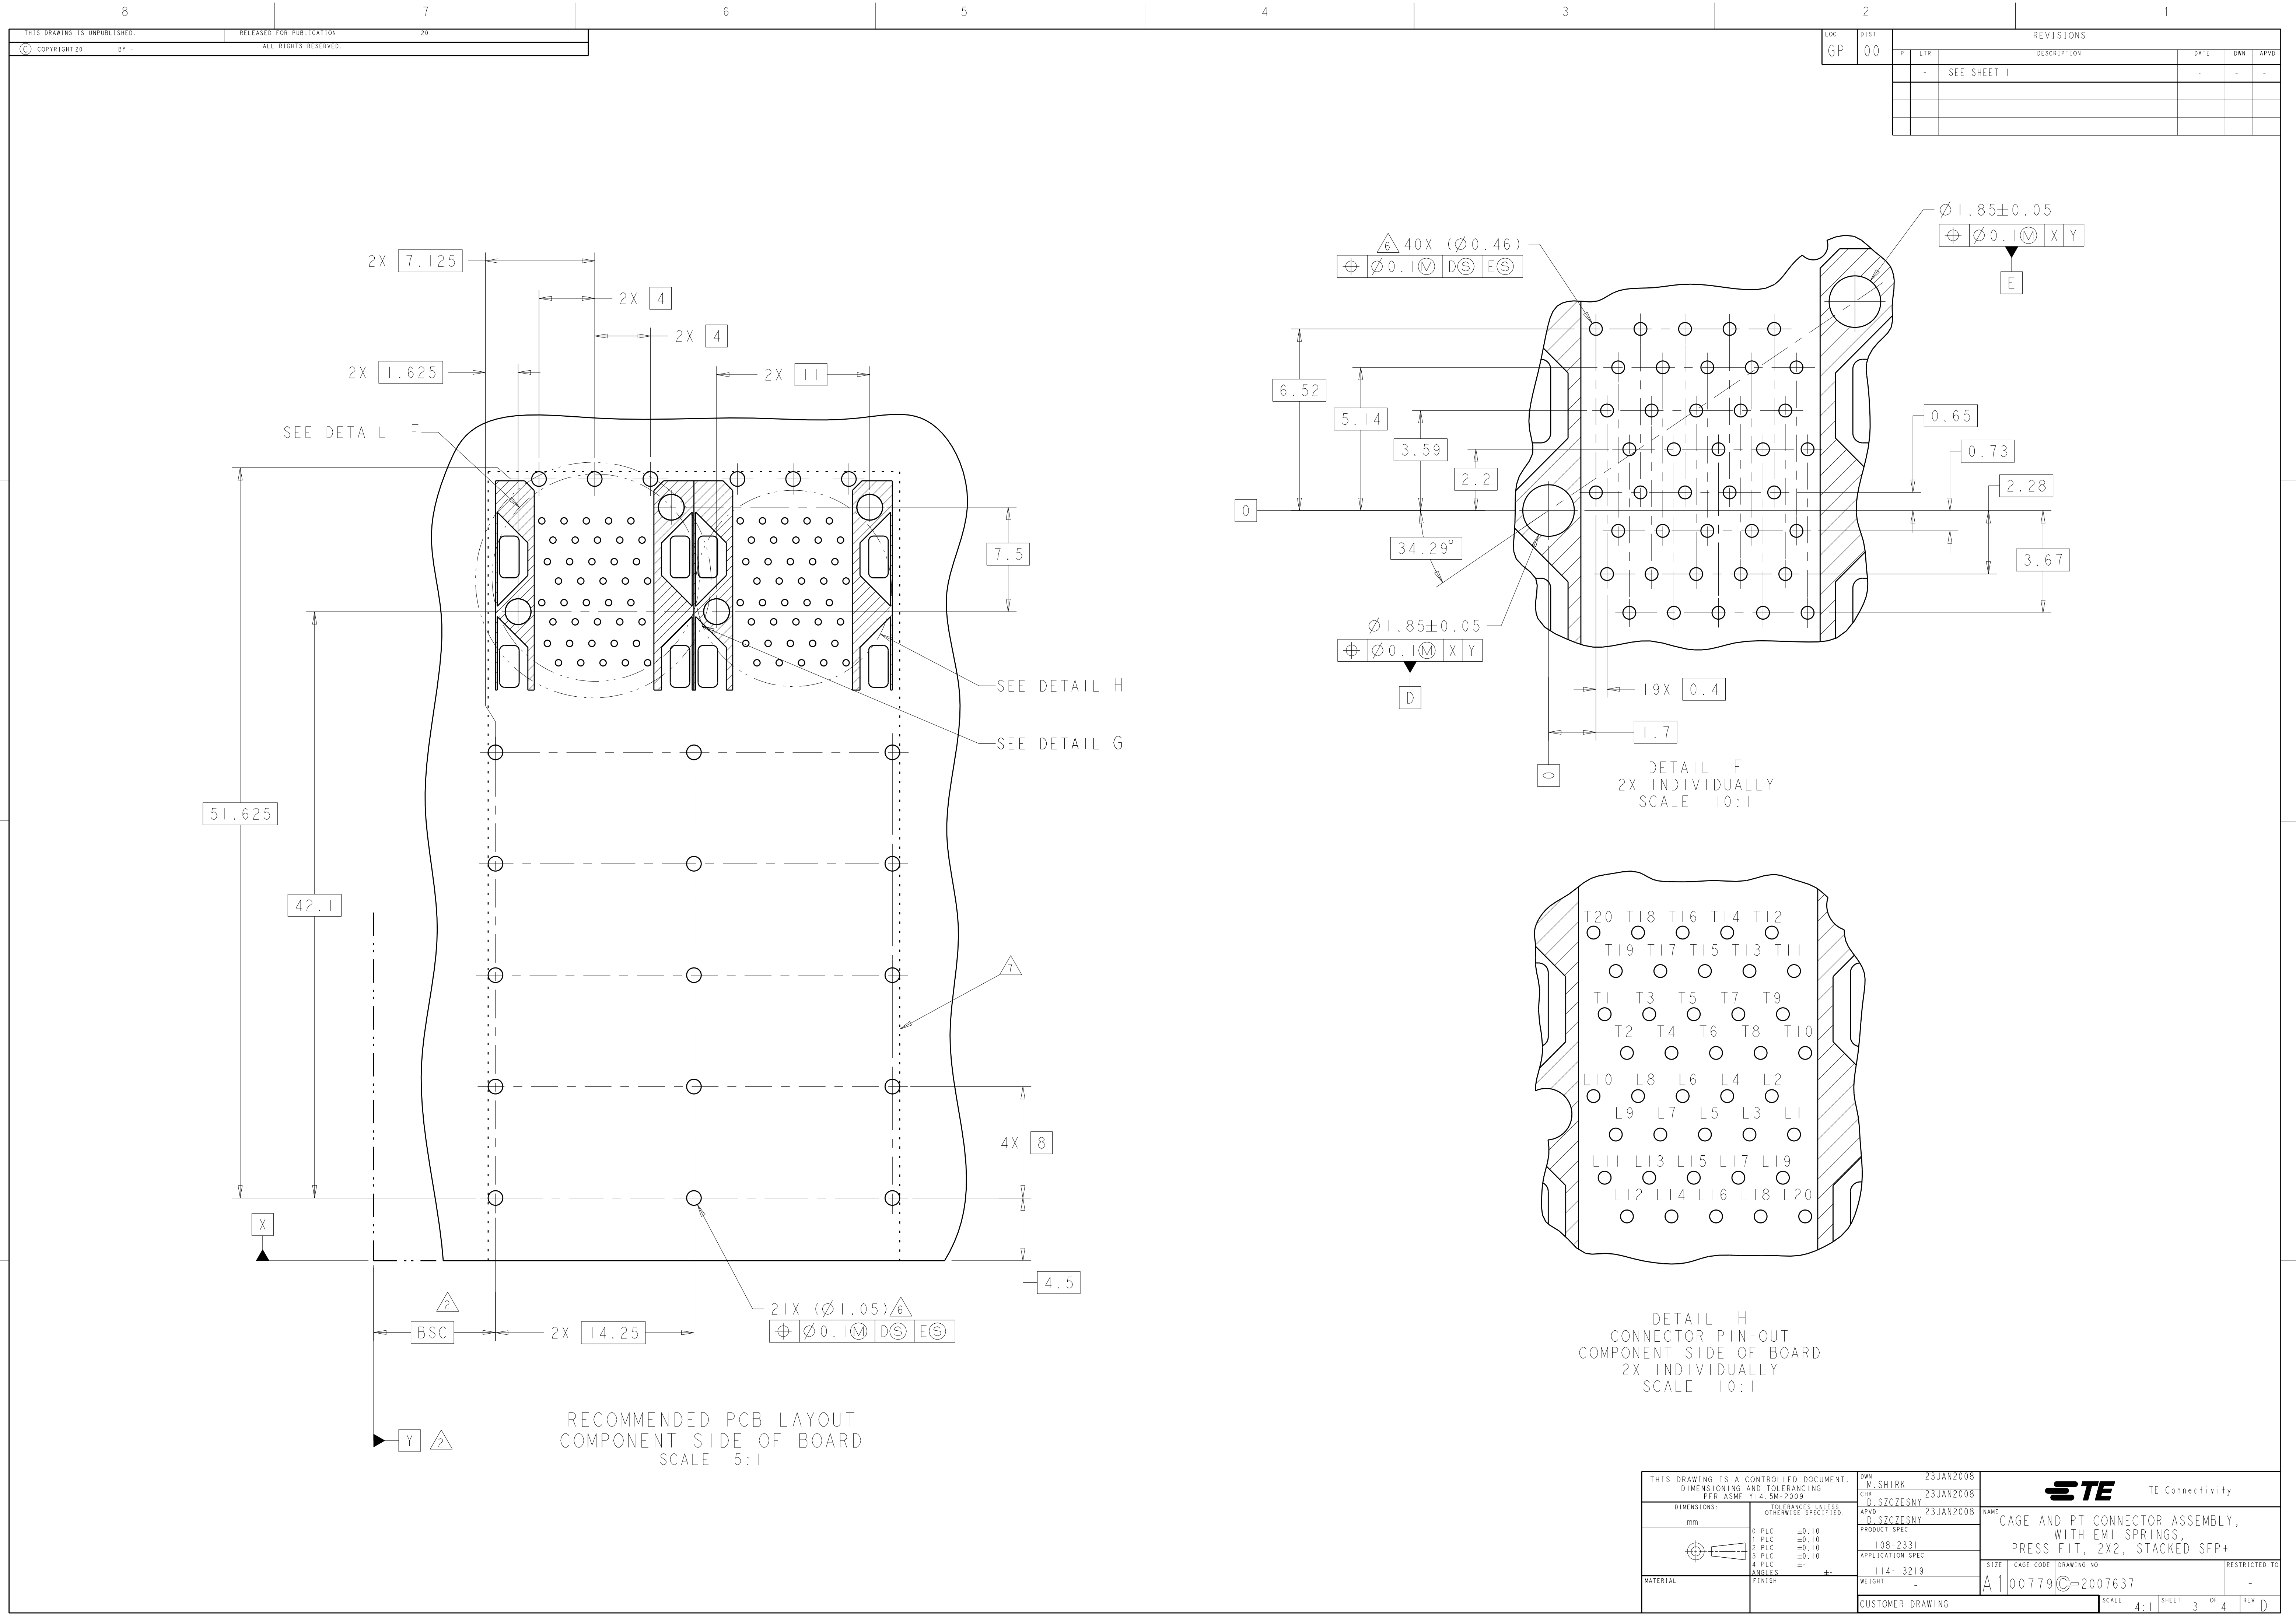


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

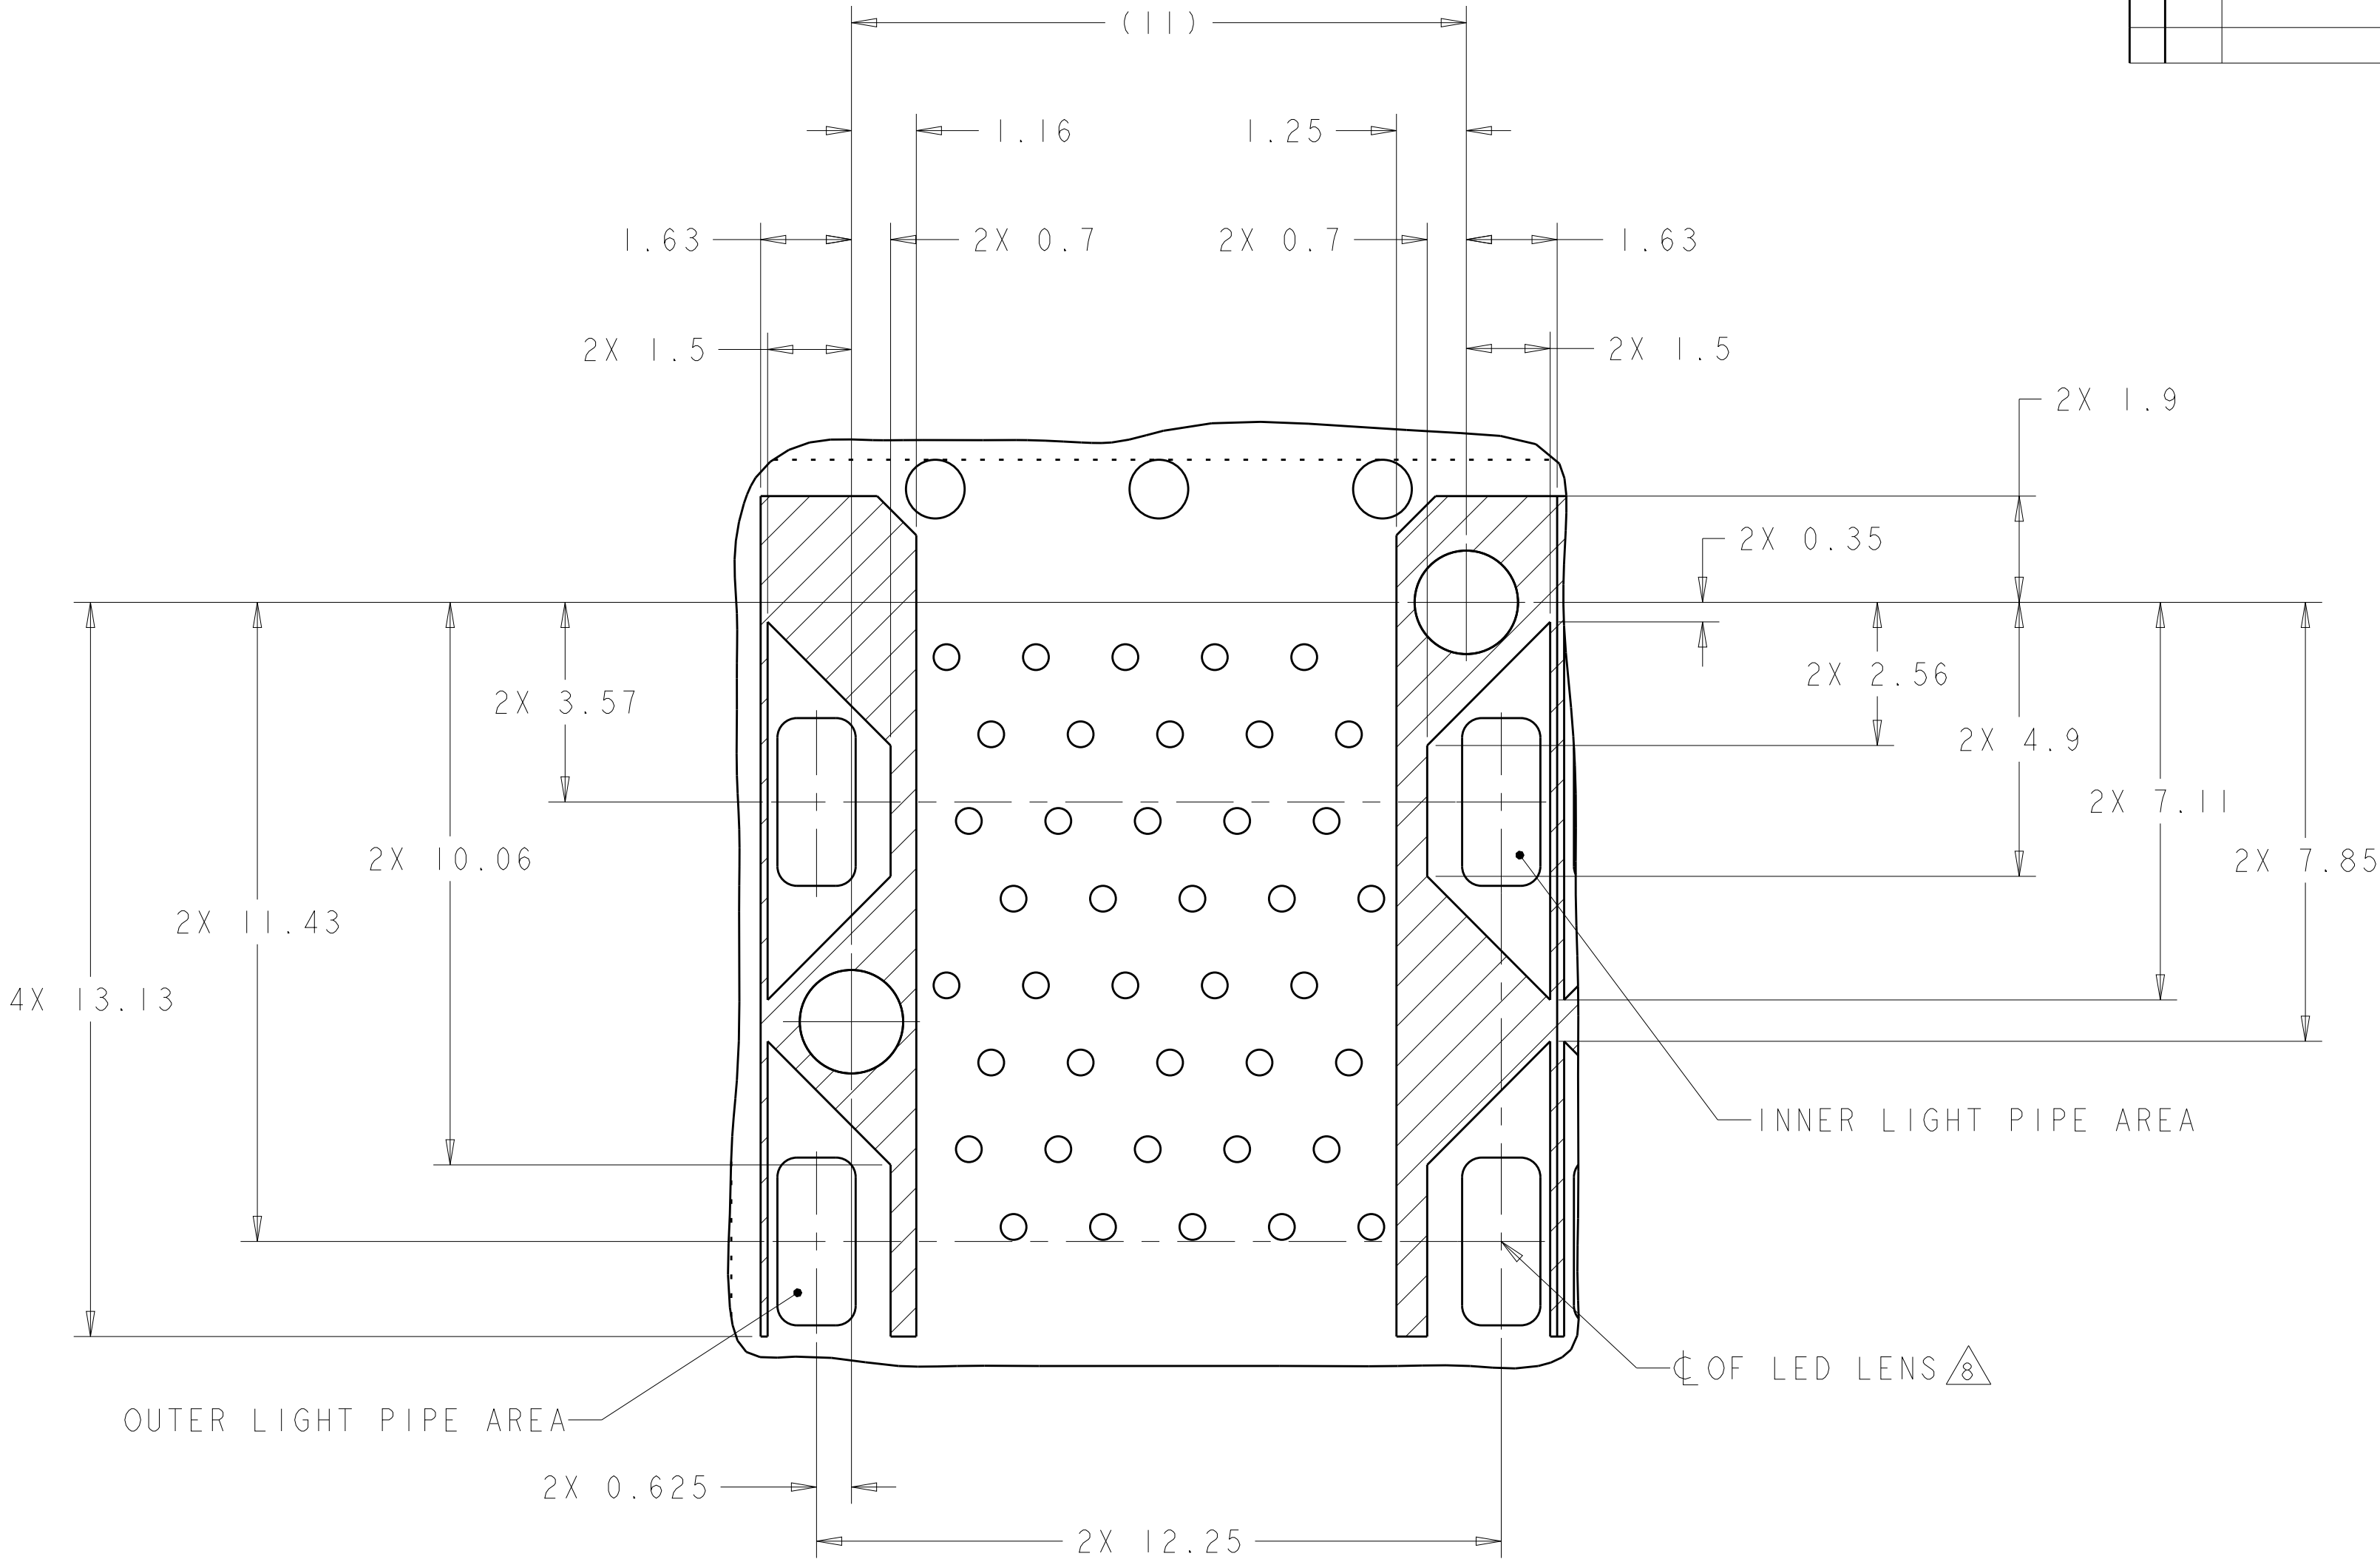

DETAIL G
CONNECTOR HOUSING
KEEPOUT ZONE
2X INDIVIDUALLY
SCALE 10:1

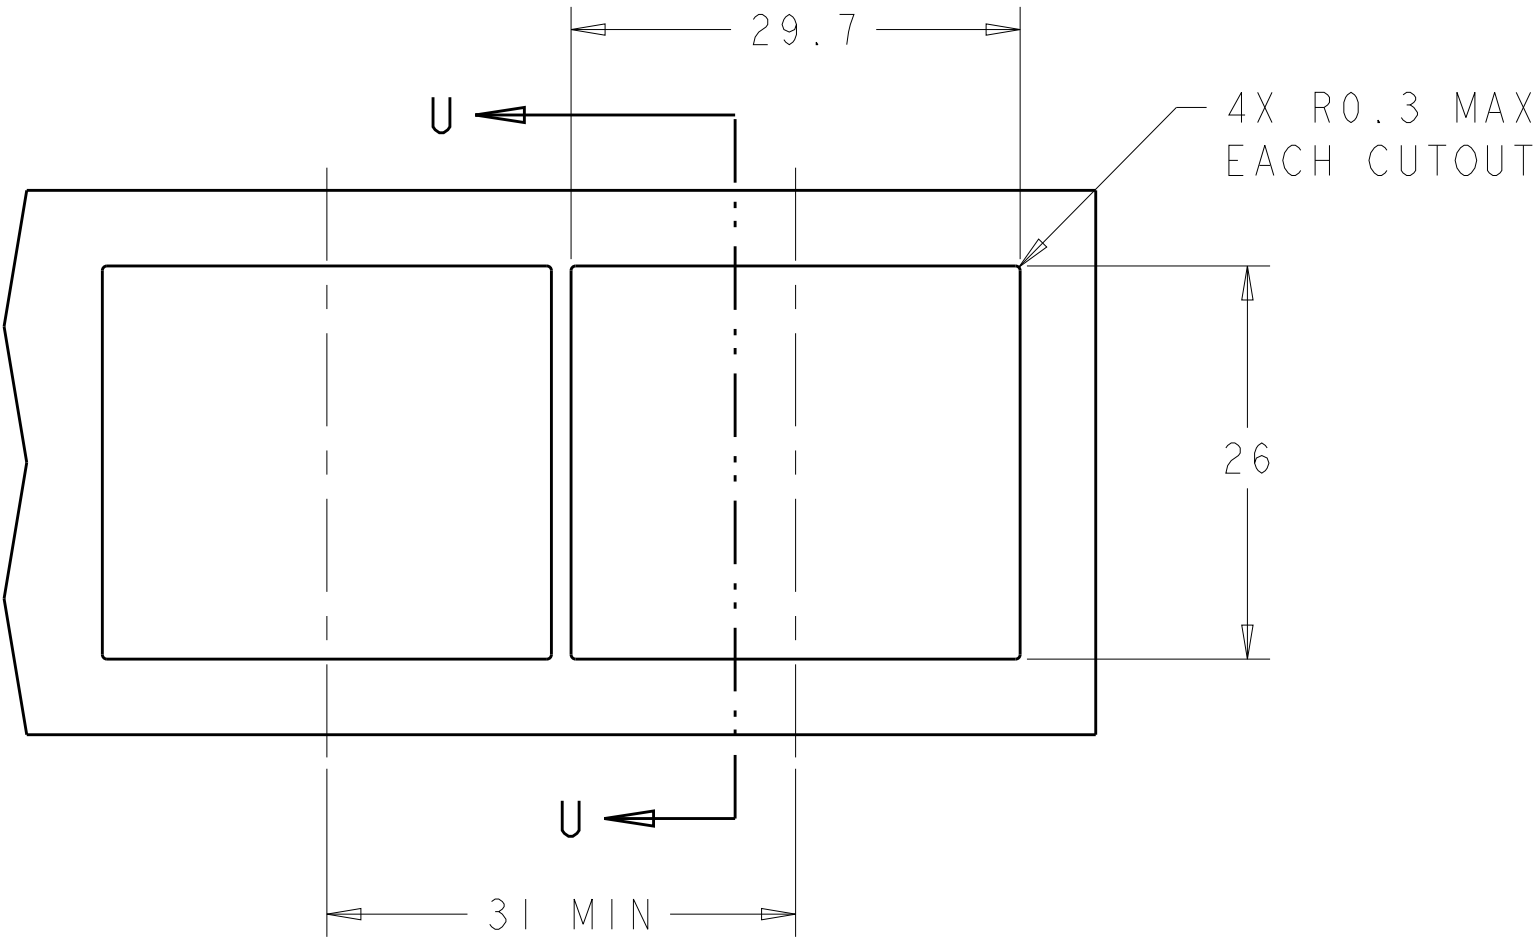

RECOMMENDED PANEL CUTOUT
AND PC BOARD, PANEL POSITION
SCALE 2:1

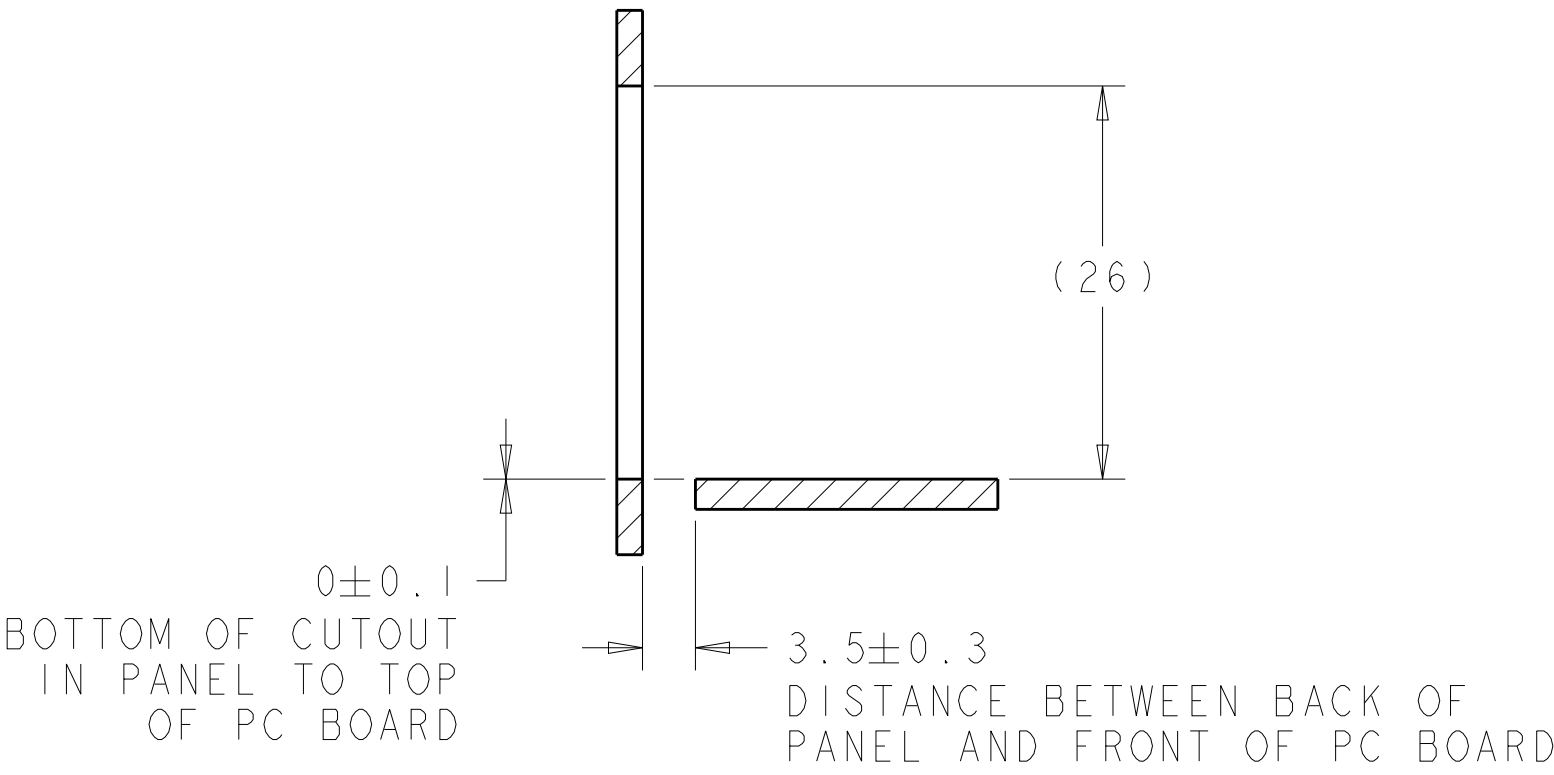

SECTION U-U

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN M. SHIRK 23JAN2008	TE Connectivity	
DIMENSIONS: mm		CHK D. SZCZESNY 23JAN2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SZCZESNY 23JAN2008	NAME CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI SPRINGS, PRESS FIT, 2X2, STACKED SFP+	
0 PLC ±0.10 1 PLC ±0.10 2 PLC ±0.10 3 PLC ±0.10 4 PLC ±		PRODUCT SPEC 108-2331		
ANGLES FINISH		APPLICATION SPEC 114-13219	SIZE A100779C=2007637	
MATERIAL		WEIGHT -		
		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 4:1	SHEET 4 OF 4	
			REV D	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru